

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	UPDATE PER NEW REQUIREMENTS	09/23/26	R.L.

NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
2. WOOD FRAMING AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. 1X BUCK OVER MASONRY/CONCRETE IS OPTIONAL.
4. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1–1/2” UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER’S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
5. WHERE WOOD BUCK THICKNESS IS 1–1/2” OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER’S PUBLISHED INSTALLATION INSTRUCTIONS.
6. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
7. BUCKS SHALL EXTEND BEYOND UNIT FRAME INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
8. SHIM AS REQUIRED AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16” OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/2”.
9. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
10. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
11. FRAME MATERIAL: FRENCH OAK.
12. UNITS MUST BE GLAZED PER ASTM E1300.
13. APPROVED IMPACT PROTECTIVE SYSTEM IS REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.
14. FOR ANCHORING THROUGH FRAME INTO WOOD FRAMING OR 2X BUCK USE 6.5MM X 82 MM WURTH AMO III TYPE 2 OR 3.9 MM X 152 MM SIMPSON STRONG–TIE WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 3/8” MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.

15. FOR ANCHORING THROUGH FRAME INTO MASONRY/CONCRETE USE 1/4” TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 3/4” MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2” MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
16. FOR ANCHORING THROUGH FRAME INTO METAL STRUCTURE USE 1/4” SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
17. ALL FASTENERS TO BE CORROSION RESISTANT.
18. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER’S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:
 - A. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42
 - B. CONCRETE: MINIMUM COMPRESSIVE STRENGTH OF 2,000 PSI.
 - C. MASONRY: GROUT/FILLED BLOCK PER ASTM C90 WITH Fm=2,000PSI MINIMUM.
 - D. METAL STRUCTURE: STEEL 18GA (.048”) FY=33KSI/FU=52KSI OR ALUMINUM 6063–T5 FU=30KSI .048” THICK MINIMUM

SIGNED: 09/23/2026

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2	ELEVATION
3 – 8	INSTALLATION DETAILS
9 – 10	COMPONENTS

ASSELIN INC.
2870 PEACHTREE RD NW #714
ATLANTA, GA 30305

TRIPLE WINDOW CA/PW/CA
NON-IMPACT
NOTES

DRAWN:
A.R.

DWG NO.
08-03318


REV
A

SCALE NTS

DATE 10/08/2020


SHEET 1 OF 10

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

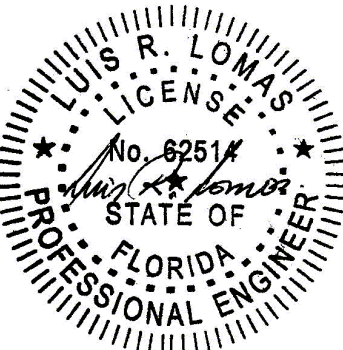

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	UPDATE PER NEW REQUIREMENTS	09/23/26	R.L.

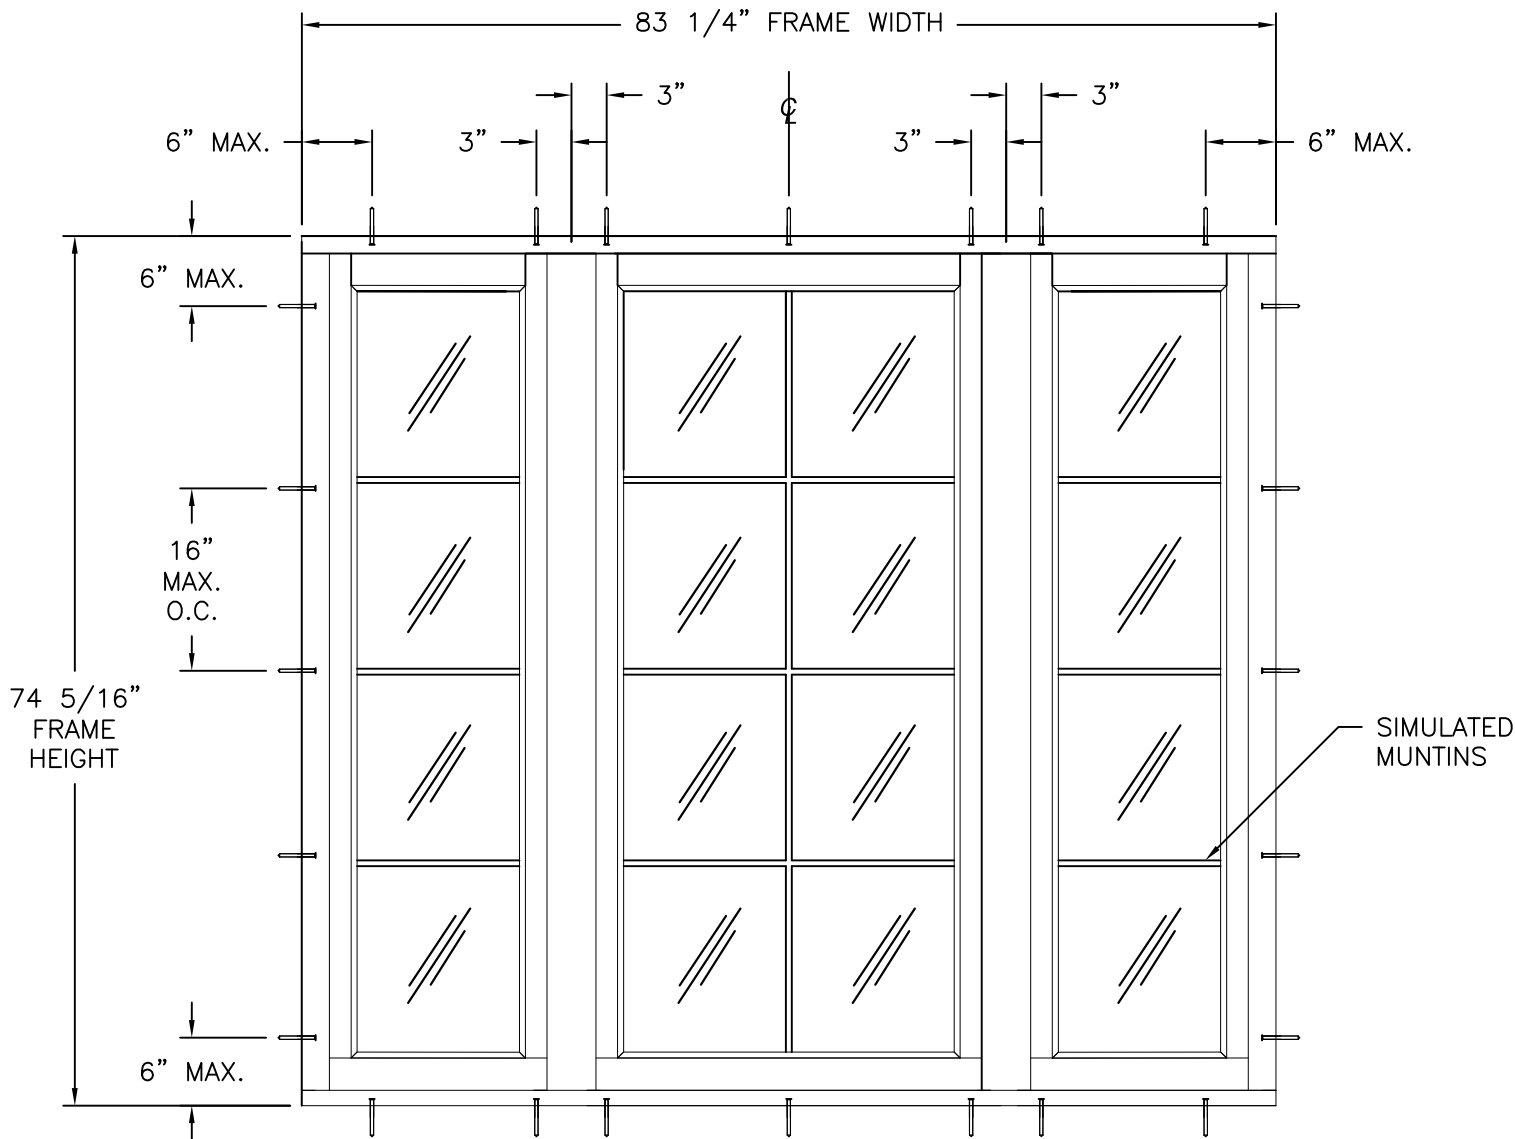

TRIPLE WINDOW CA/PW/CA
EXTERIOR VIEW

DESIGN PRESSURE RATING	IMPACT RATING
±35.0PSF	NONE

HARDWARE SCHEDULE	
A.	(2) MORTISE CREMONE WITH CAMS BY FERCO TYPE F25
B.	(8) HINGES BY FAURE ET FILS TYPE FO LASER

Anchors and anchor connectors corrosion resistance chart		
Exposure	Distance from coastal shoreline	
	0' up to 300'	>300' up to 3000'
Exterior - partially sheltered	304 or A305 or 306 Stainless steel per ASTM A240	Galvanized per ASTM A153 class D or ASTM A641 class 3S
Exterior - open exposed	304 or A305 or 306 Stainless steel per ASTM A240	Galvanized per ASTM A153 class D or ASTM A641 class 3S
Unconditioned interior-vented enclosed	Galvanized per ASTM A153 class D or ASTM A641 class 3S	Galvanized per ASTM A153 class D or ASTM A641 class 3S
Unconditioned interior-unvented enclosed	Galvanized per ASTM A153 class D or ASTM A641 class 3S	Galvanized per ASTM A153 class D or ASTM A641 class 3S

- NOTES:
- CASEMENT SASH SIZE: 20 1/4" X 70 7/8"
 - FIXED SASH SIZE: 35 3/8" X 70 7/8"
 - CASEMENT D.L.O.: 13 7/8" X 64 5/8"
 - FIXED WINDOW D.L.O.: 25 7/8" X 64 5/8"

SIGNED: 09/23/2026

ASSELIN INC.
2870 PEACHTREE RD NW #714
ATLANTA, GA 30305

TRIPLE WINDOW CA/PW/CA
NON-IMPACT
ELEVATION

DRAWN:
A.R.

DWG NO.
08-03318


REV
A

SCALE NTS

DATE 10/08/2020




SHEET 2 OF 10

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

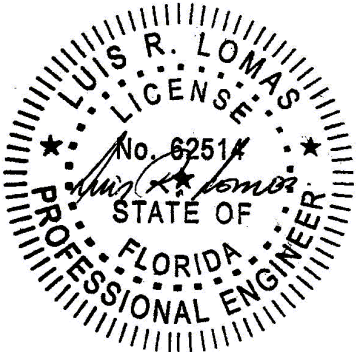

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	UPDATE PER NEW REQUIREMENTS	09/23/26	R.L.

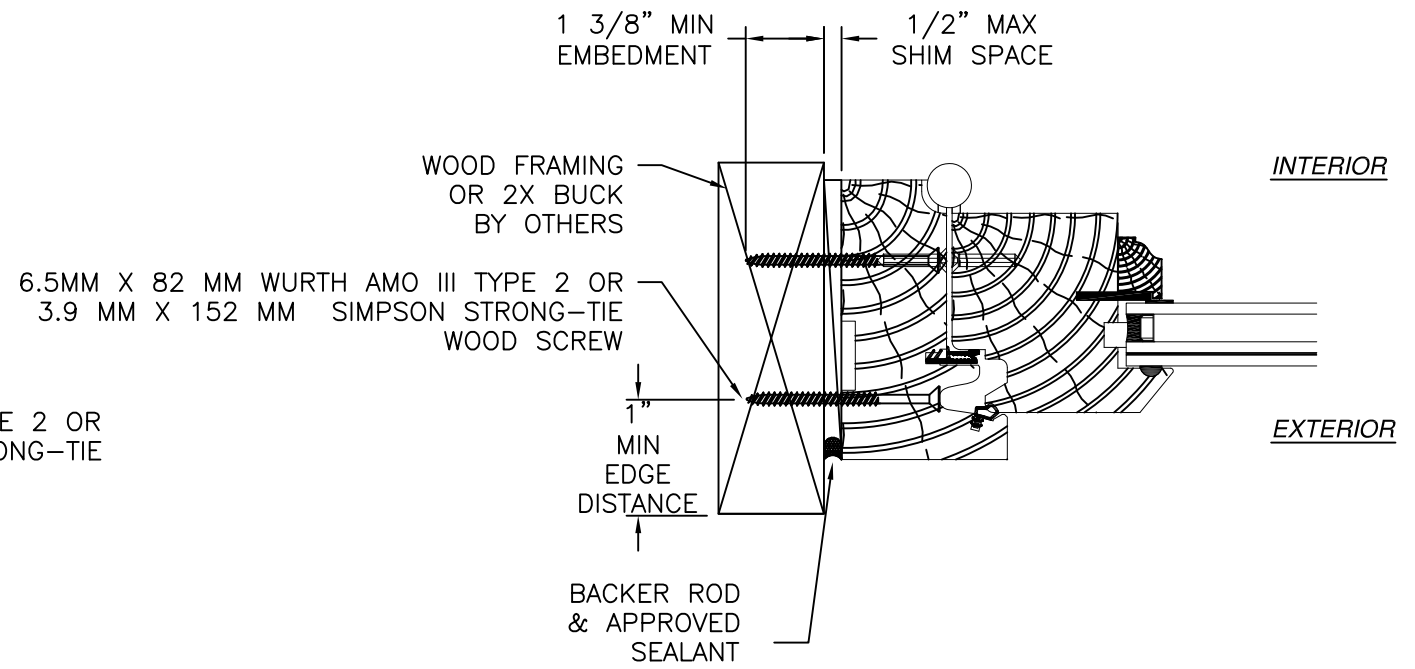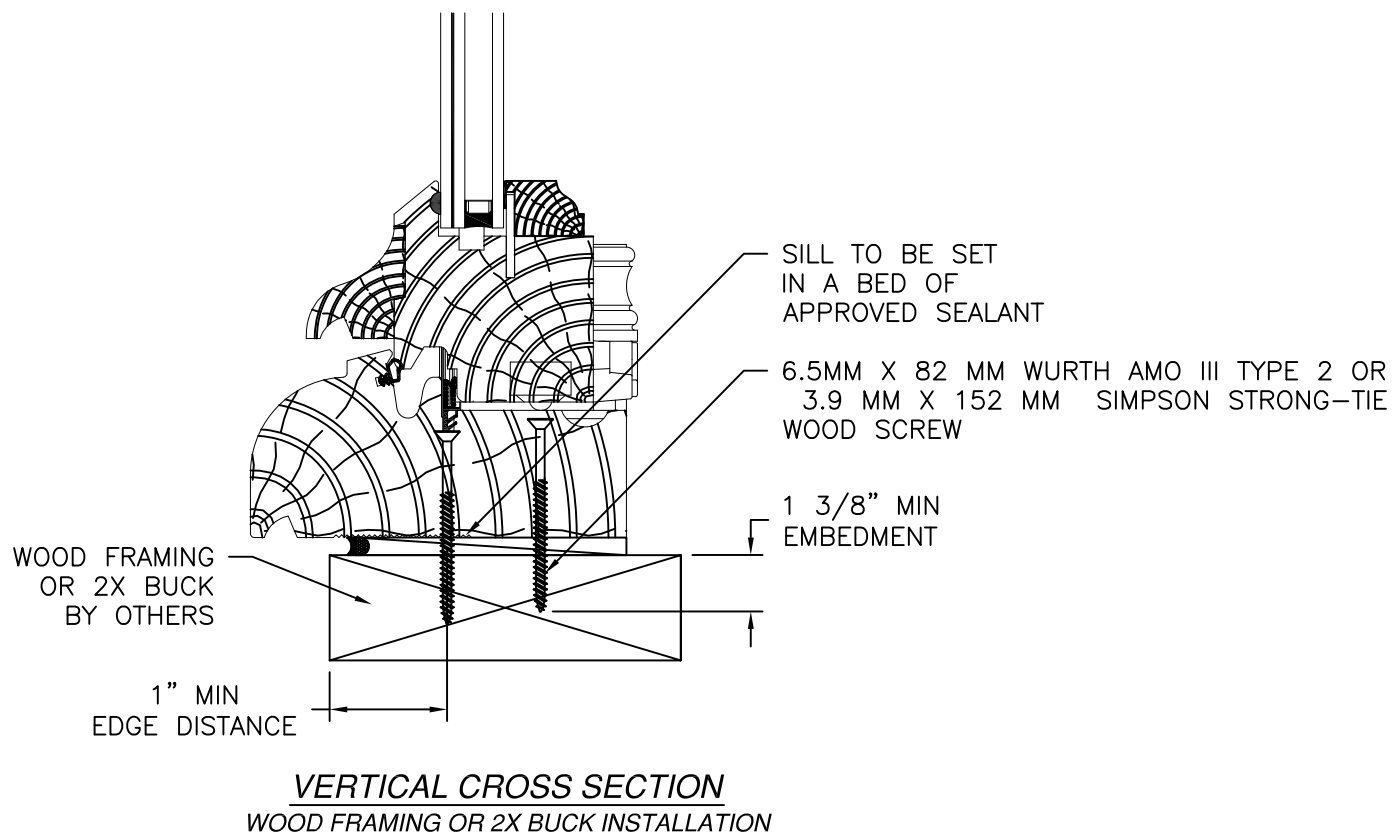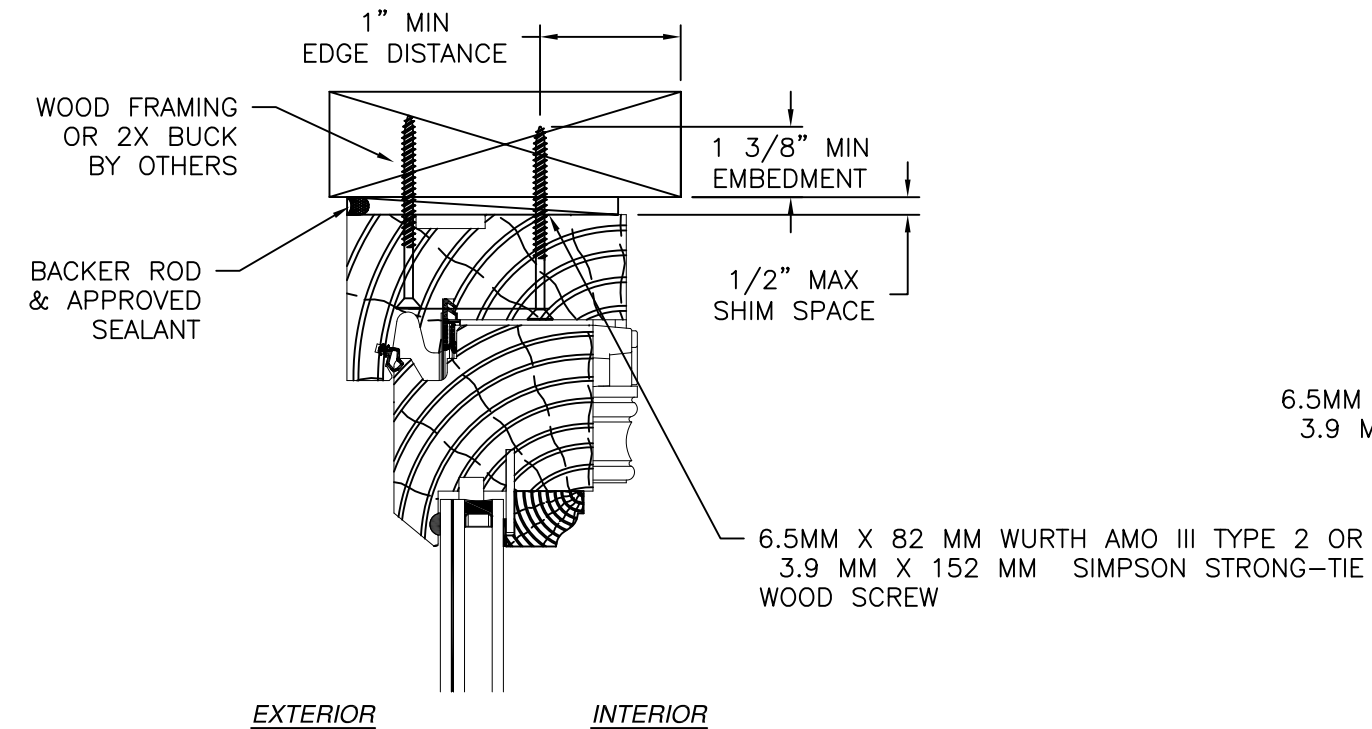

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

NOTES:



- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
- PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 09/23/2026


ASSELIN INC. 2870 PEACHTREE RD NW #714 ATLANTA, GA 30305		
TRIPLE WINDOW CA/PW/CA NON-IMPACT CASEMENT WINDOW INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03318	REV A
SCALE NTS	DATE 10/08/2020	SHEET 3 OF 10
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	UPDATE PER NEW REQUIREMENTS	09/23/26	R.L.

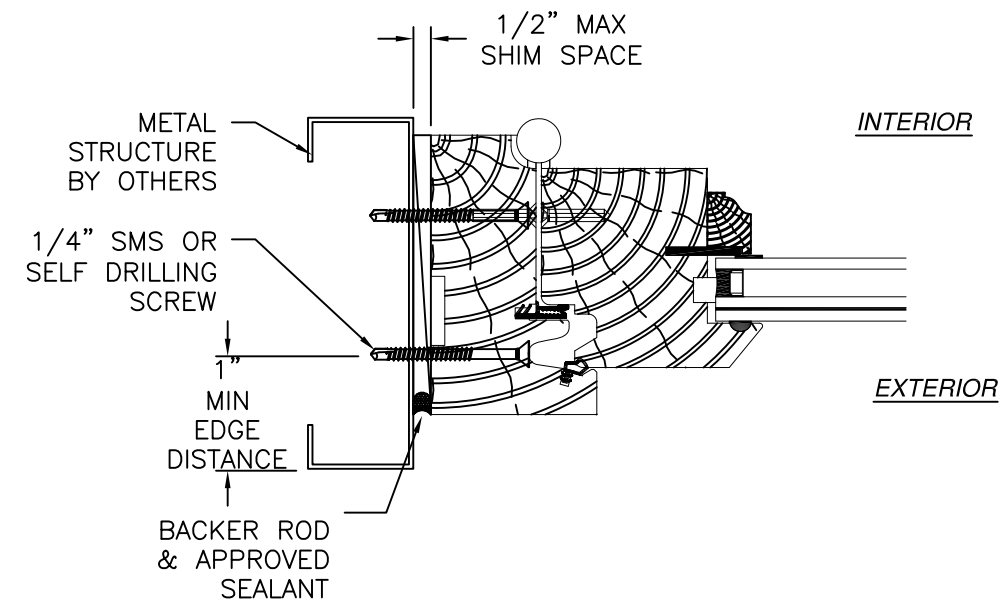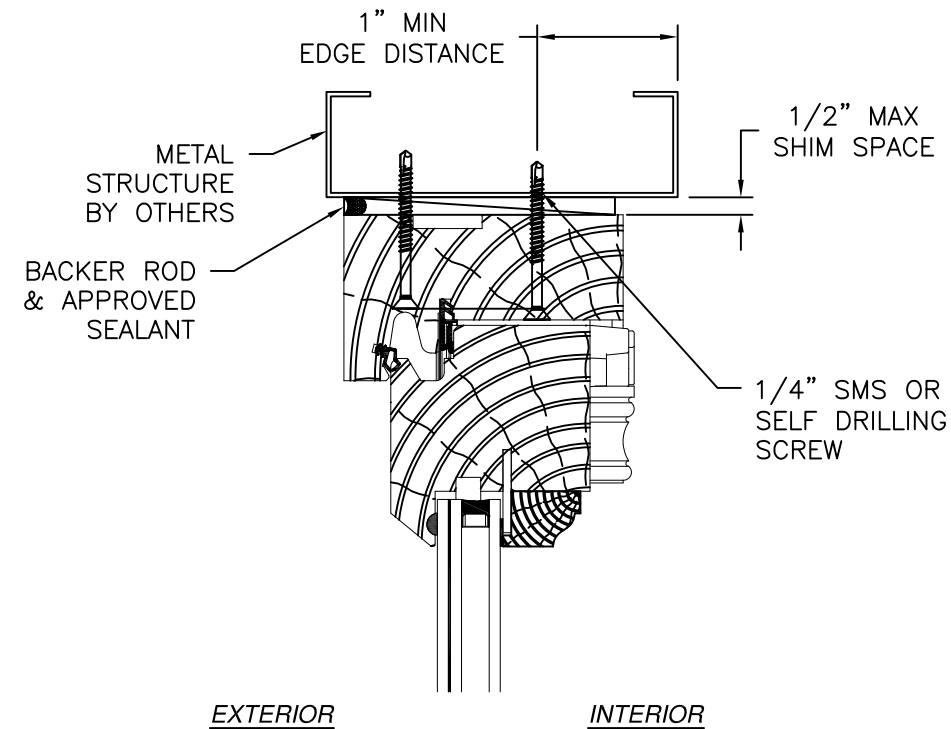

JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION



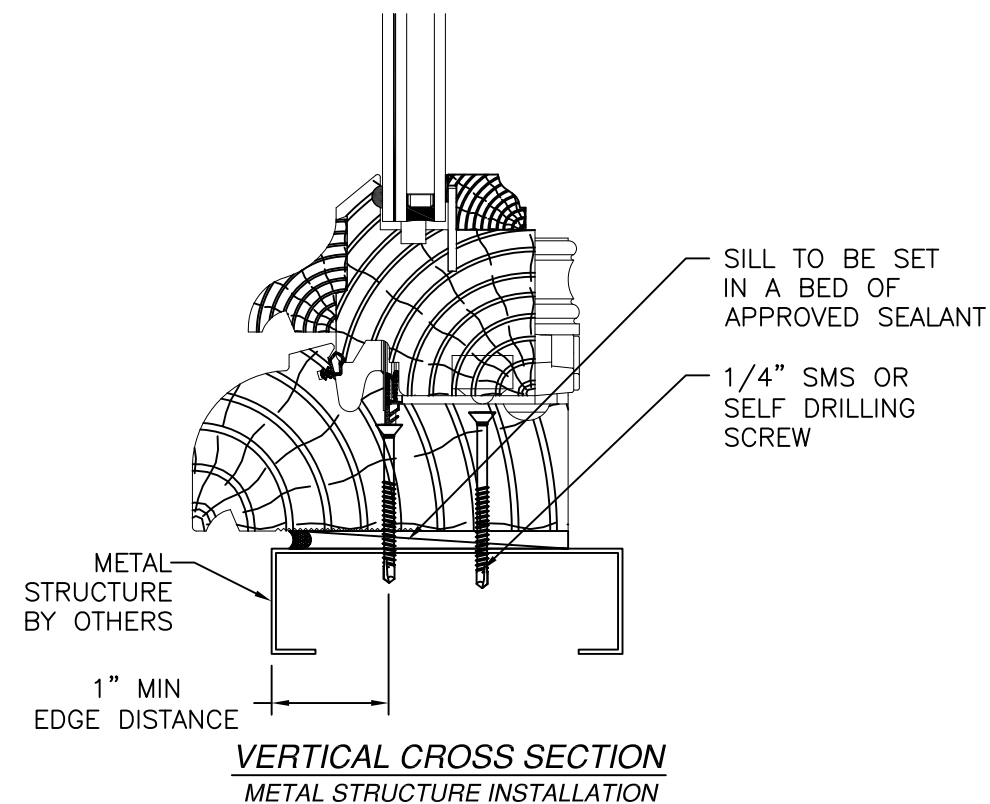


- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 09/23/2026

ASSELIN INC. 2870 PEACHTREE RD NW #714 ATLANTA, GA 30305		
TRIPLE WINDOW CA/PW/CA NON-IMPACT CASEMENT WINDOW INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03318	REV A
SCALE NTS	DATE 10/08/2020	SHEET 4 OF 10
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

Luis R. Lomas P.E.
FL No.: 62514

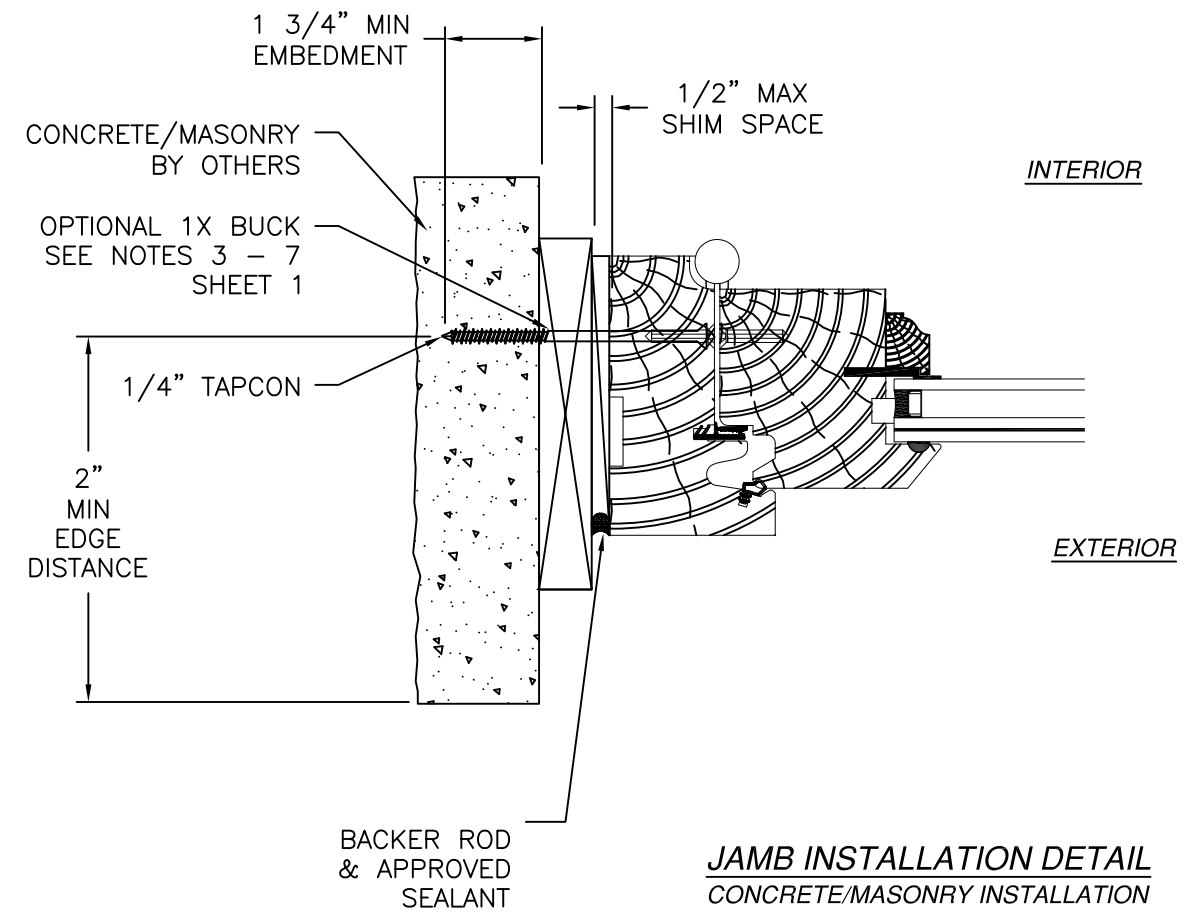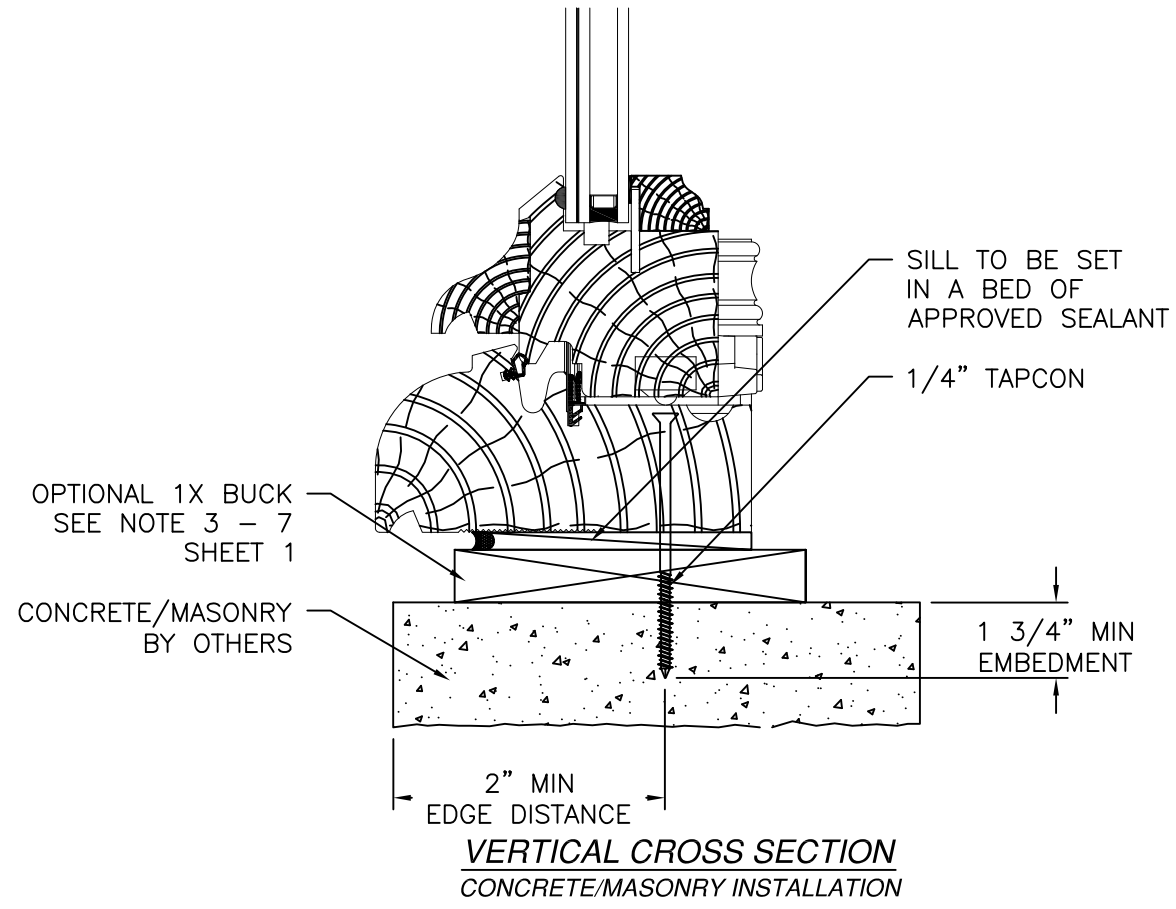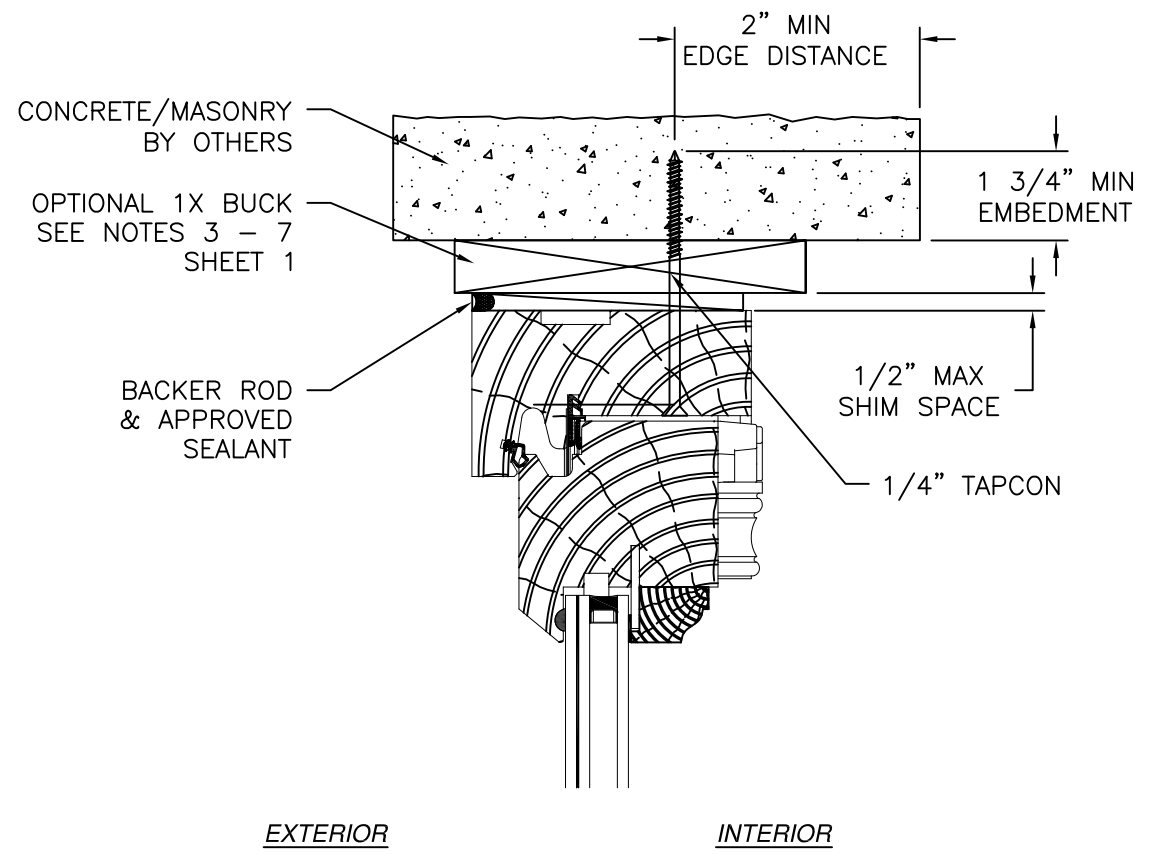

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	UPDATE PER NEW REQUIREMENTS	09/23/26	R.L.

ASSELIN INC.
 2870 PEACHTREE RD NW #714
 ATLANTA, GA 30305

TRIPLE WINDOW CA/PW/CA
 NON-IMPACT
 CASEMENT WINDOW INSTALLATION DETAILS




DRAWN: A.R.	DWG NO. 08-03318	REV A
SCALE NTS	DATE 10/08/2020	SHEET 5 OF 10

L. ROBERTO LOMAS P.E.
 208 7th Ave, INDIALANTIC, FL 32903
 434-688-0609 rllomas@lrlomaspe.com

SIGNED: 09/23/2026

Luis R. Lomas P.E.
 FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	UPDATE PER NEW REQUIREMENTS	09/23/26	R.L.

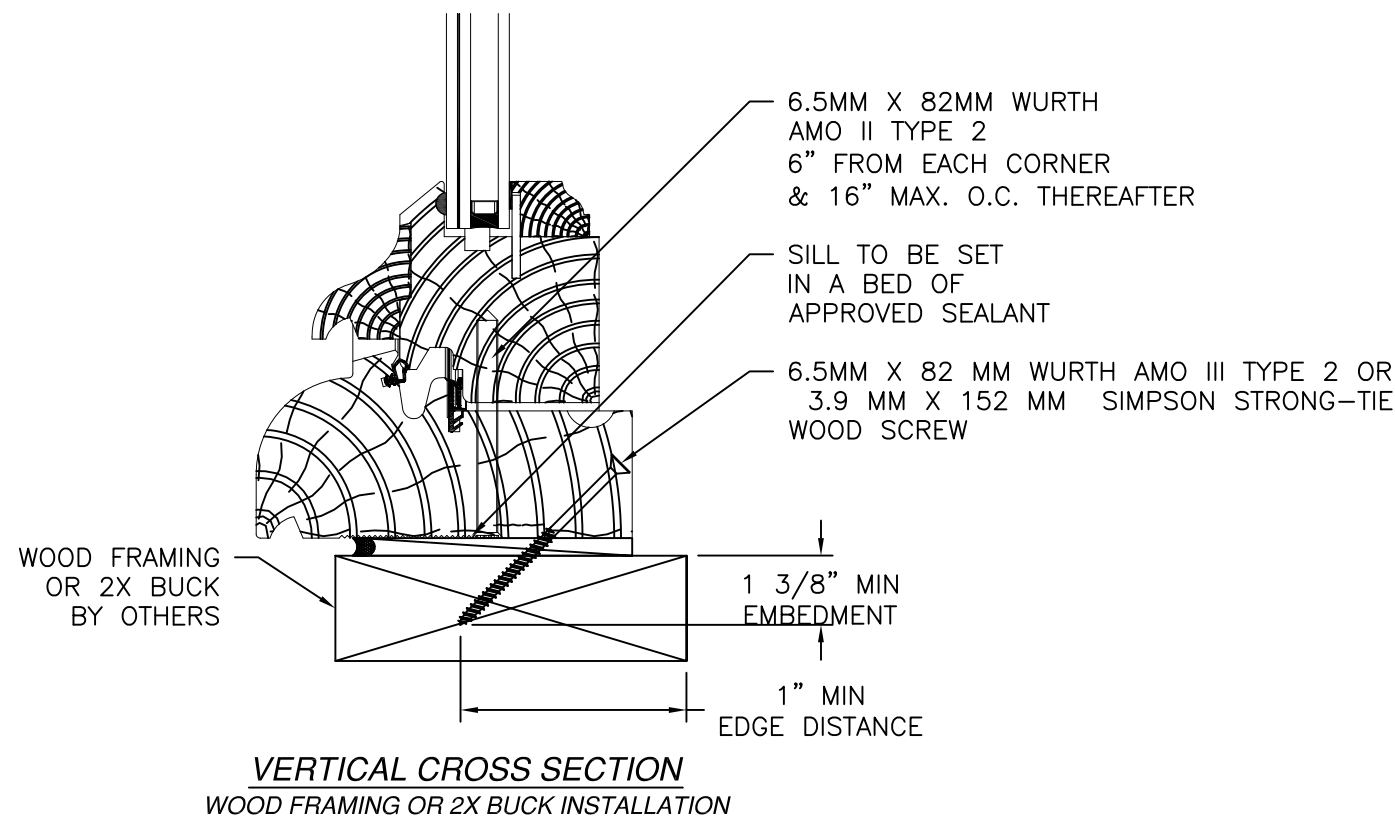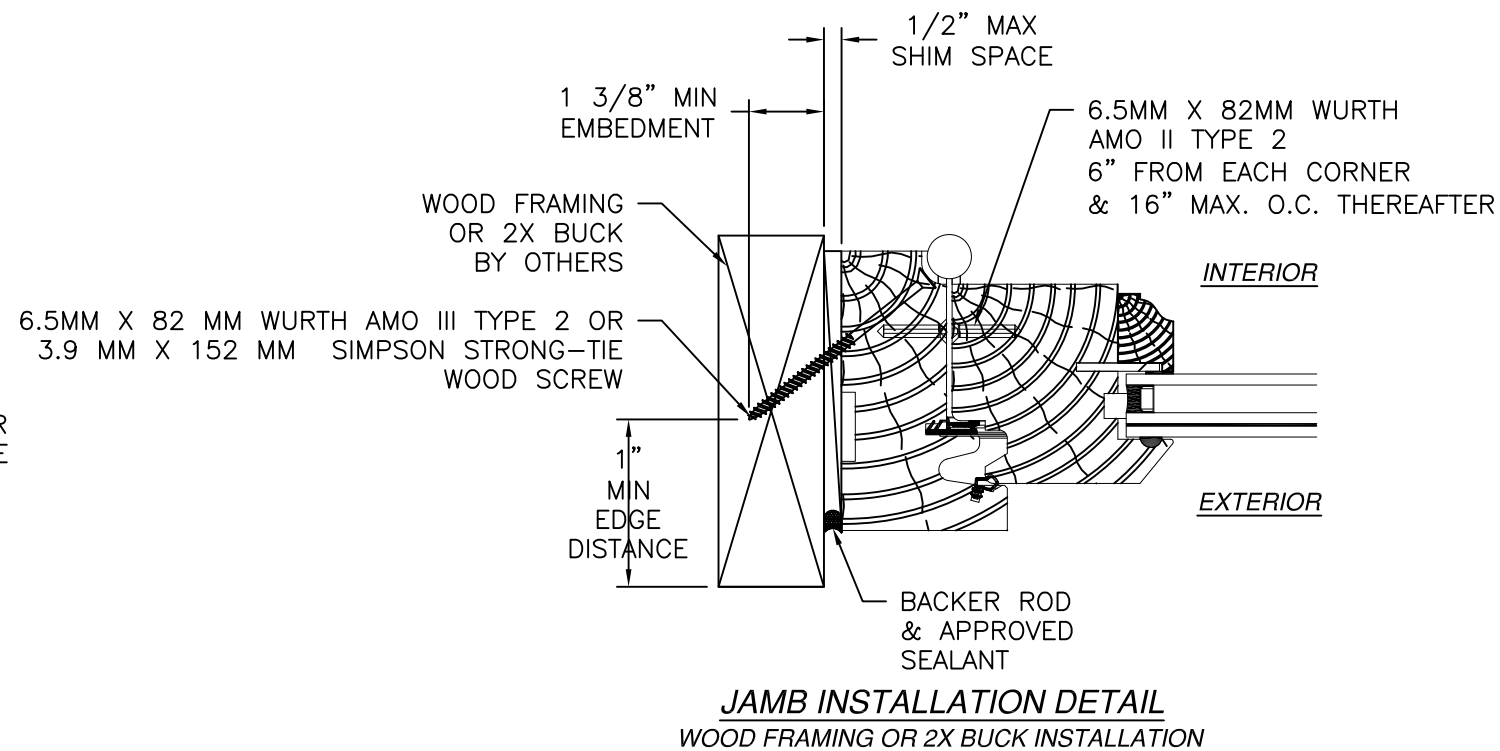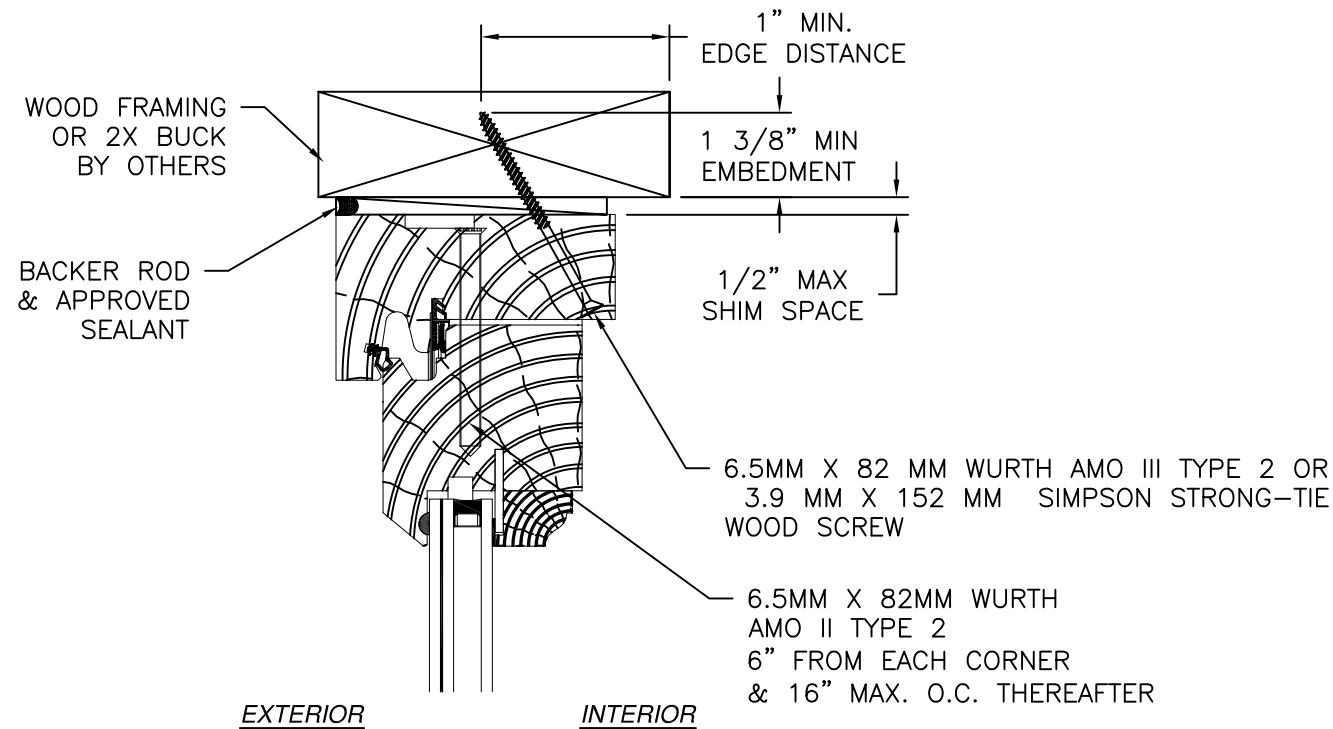




- NOTES:
- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 09/23/2026

ASSELIN INC. 2870 PEACHTREE RD NW #714 ATLANTA, GA 30305			
TRIPLE WINDOW CA/PW/CA NON-IMPACT FIXED WINDOW INSTALLATION DETAILS			
DRAWN: A.R.	DWG NO. 08-03318	REV A	
SCALE NTS	DATE 10/08/2020	SHEET 6 OF 10	
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com			

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	UPDATE PER NEW REQUIREMENTS	09/23/26	R.L.

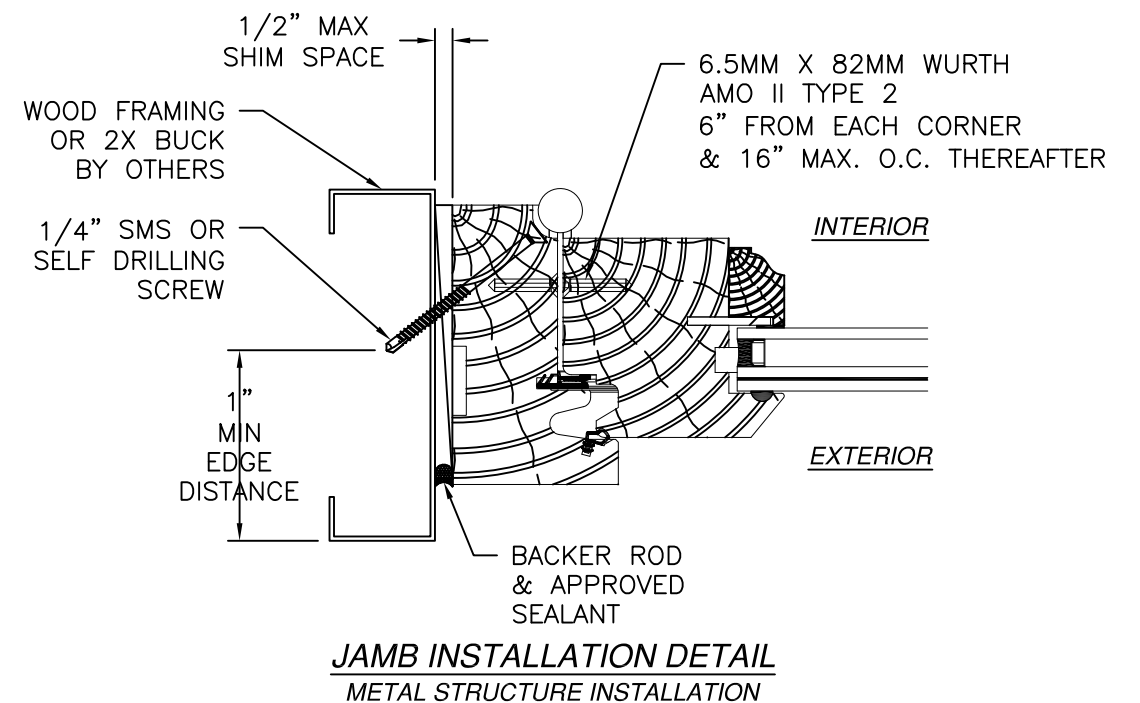
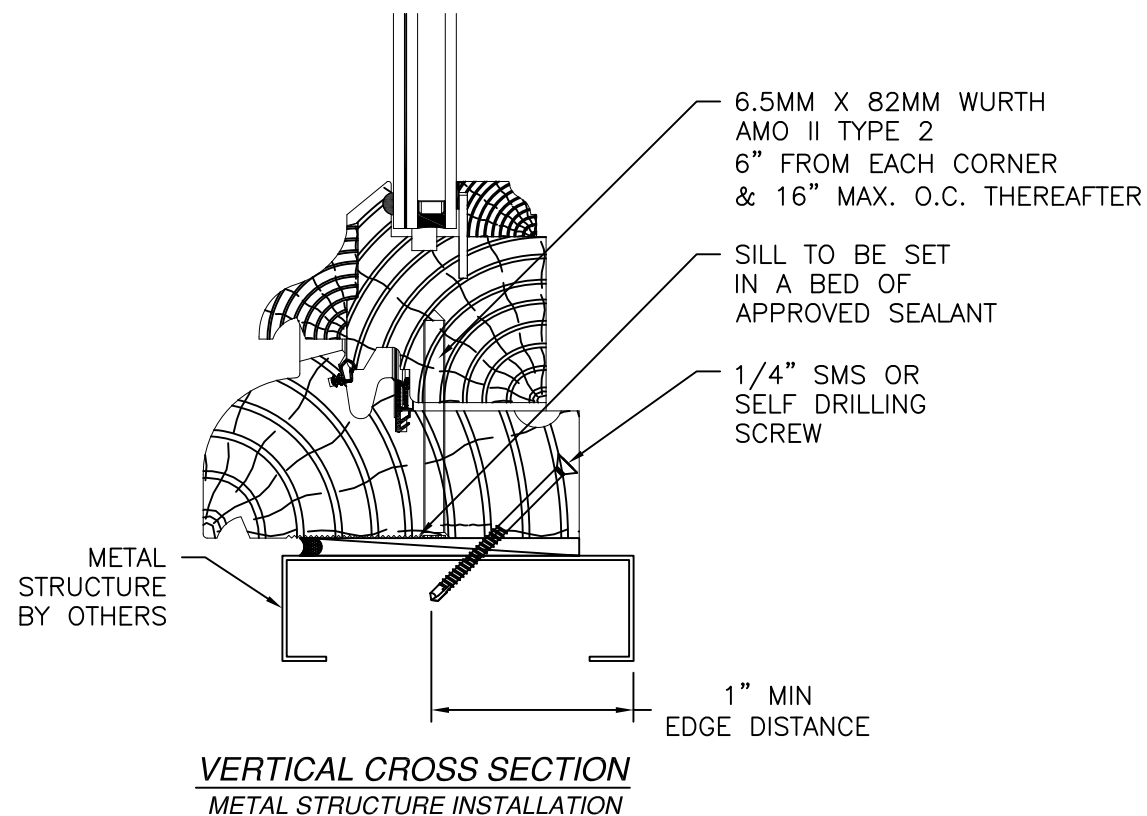
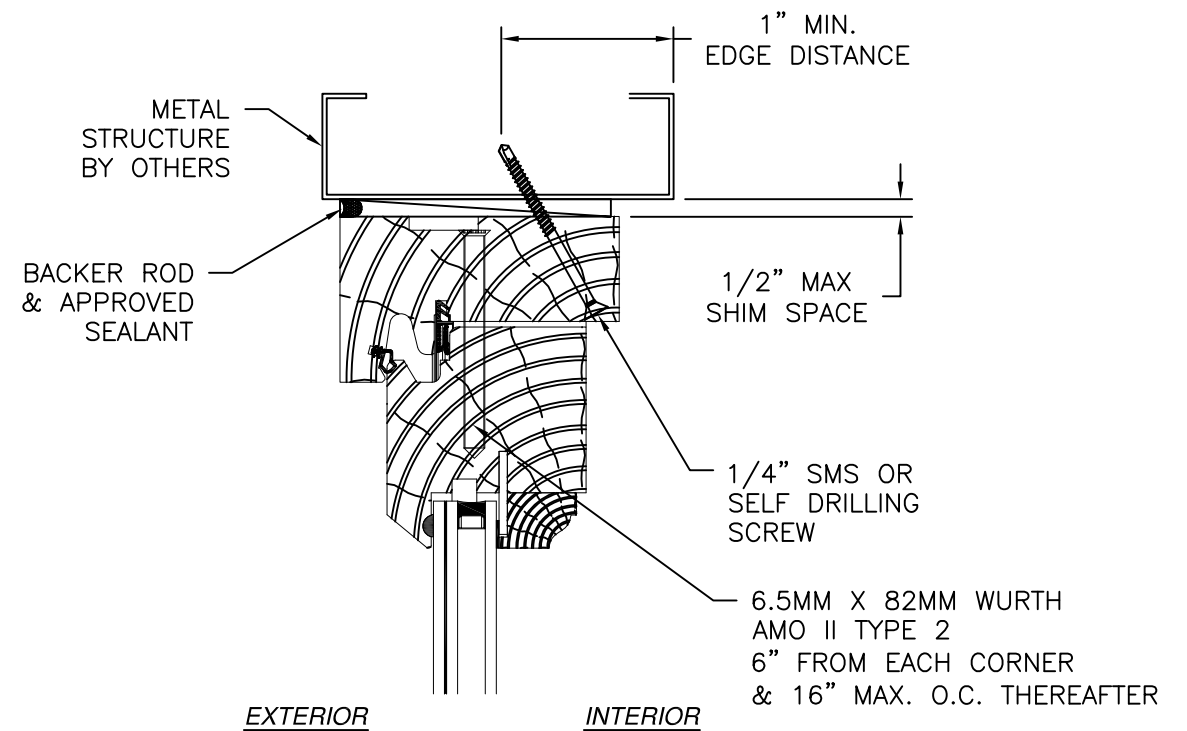


- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 09/23/2026

ASSELIN INC. 2870 PEACHTREE RD NW #714 ATLANTA, GA 30305			
TRIPLE WINDOW CA/PW/CA NON-IMPACT FIXED WINDOW INSTALLATION DETAILS			
DRAWN: A.R.	DWG NO. 08-03318	REV A	
SCALE NTS	DATE 10/08/2020	SHEET 7 OF 10	
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com			Luis R. Lomas P.E. FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	UPDATE PER NEW REQUIREMENTS	09/23/26	R.L.

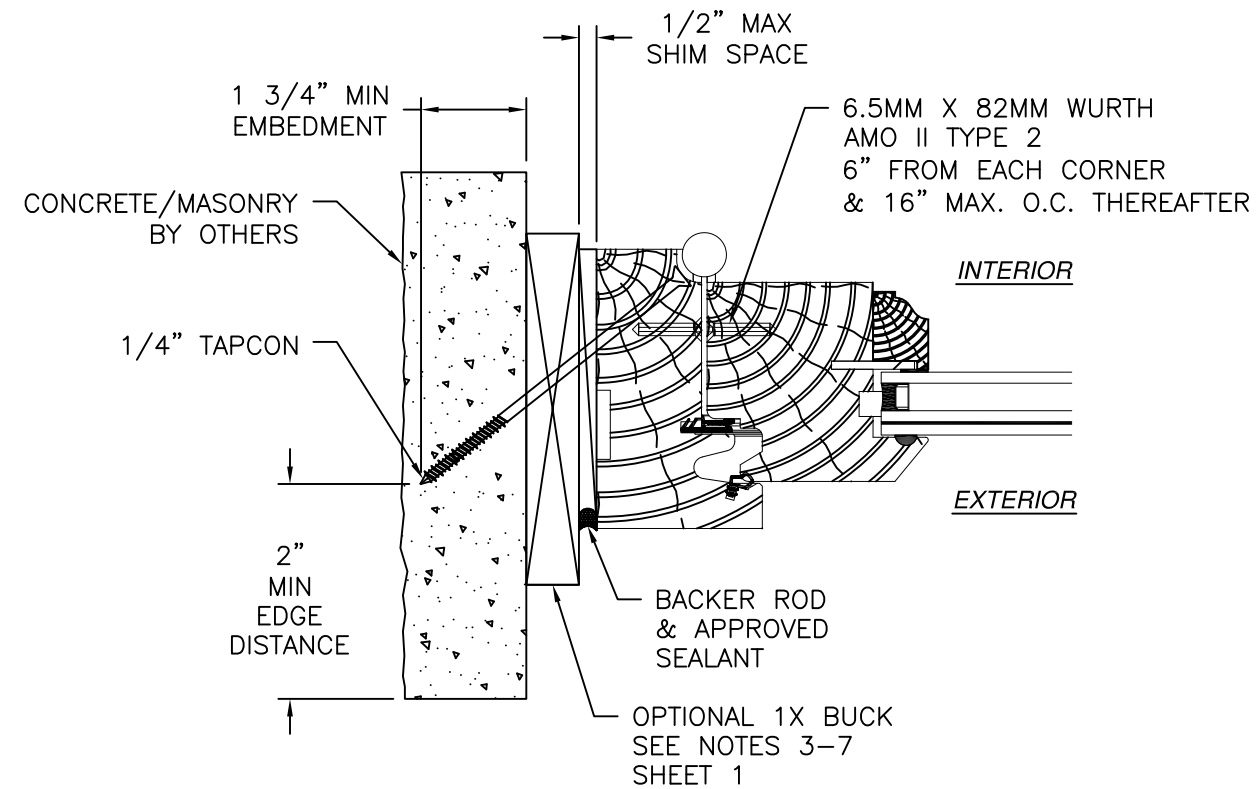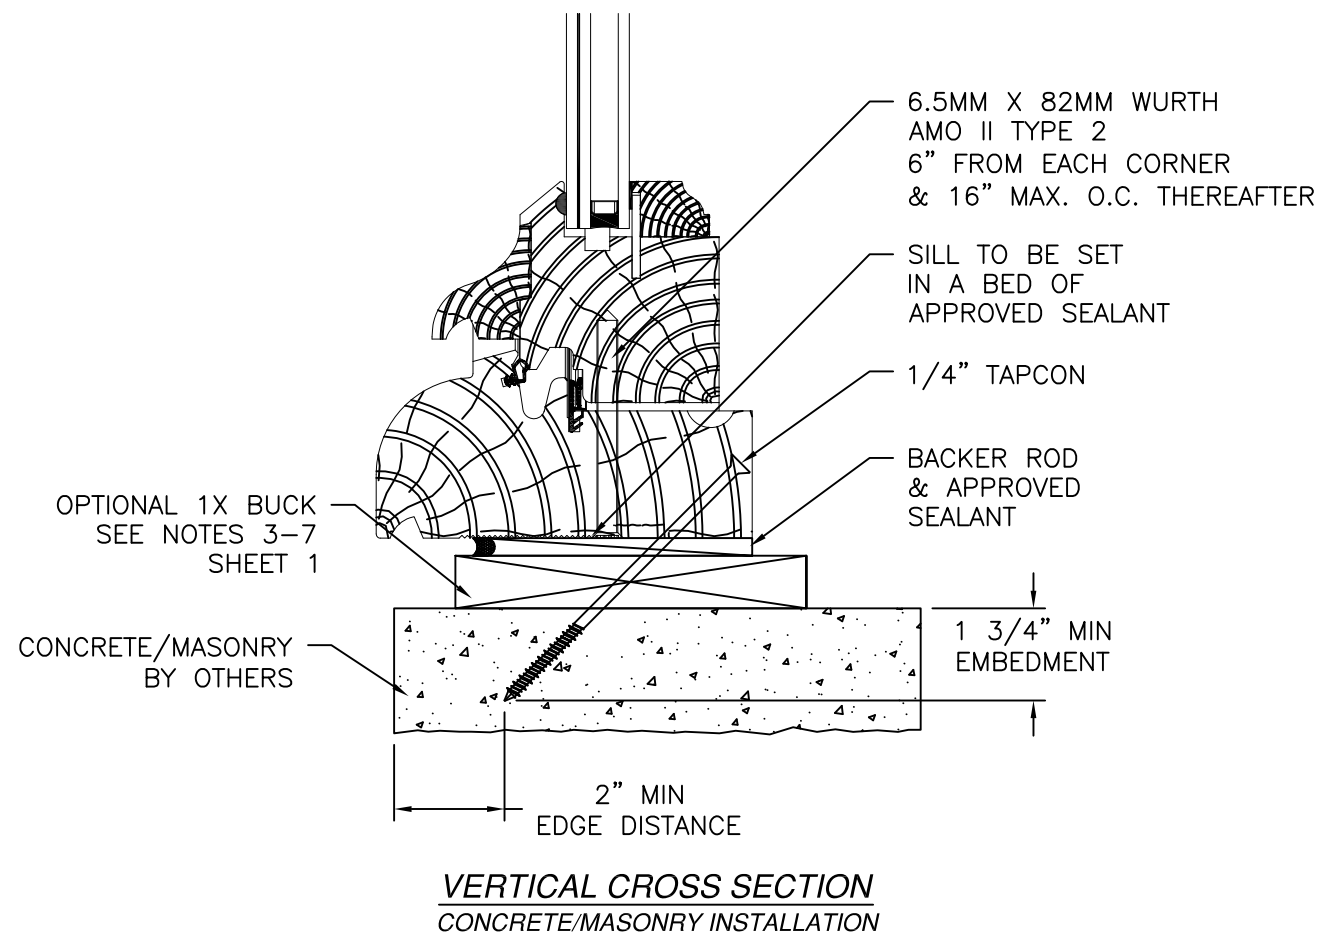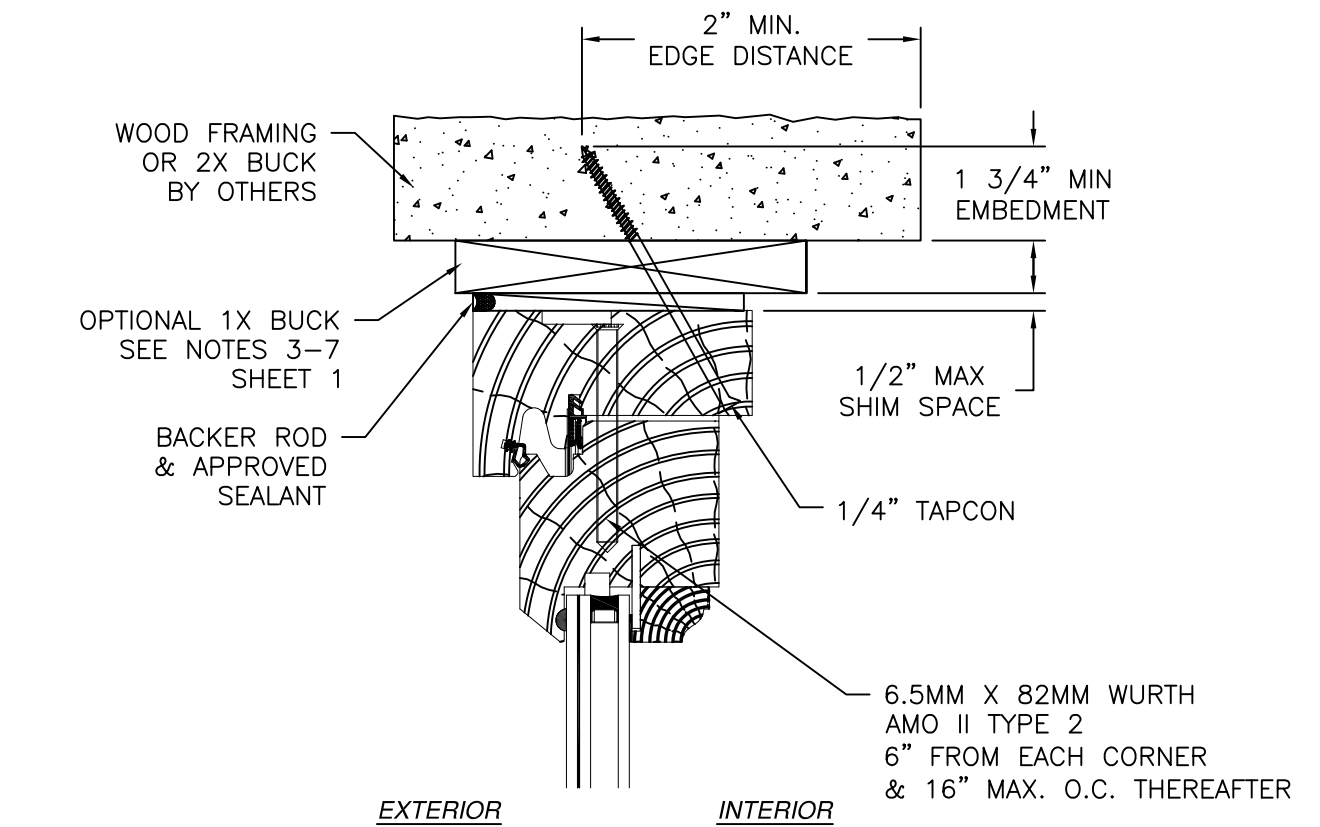

JAMB INSTALLATION DETAIL
CONCRETE/MASONRY INSTALLATION


- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 09/23/2026

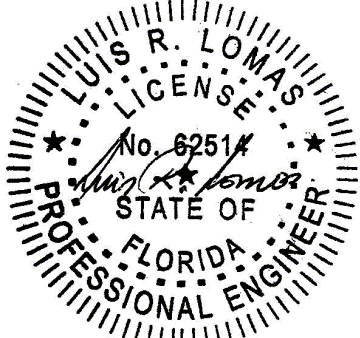
ASSELIN INC. 2870 PEACHTREE RD NW #714 ATLANTA, GA 30305			
TRIPLE WINDOW CA/PW/CA NON-IMPACT FIXED WINDOW INSTALLATION DETAILS			
DRAWN: A.R.	DWG NO. 08-03318	REV A	
SCALE NTS	DATE 10/08/2020	SHEET 8 OF 10	
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com			

Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	UPDATE PER NEW REQUIREMENTS	09/23/26	R.L.

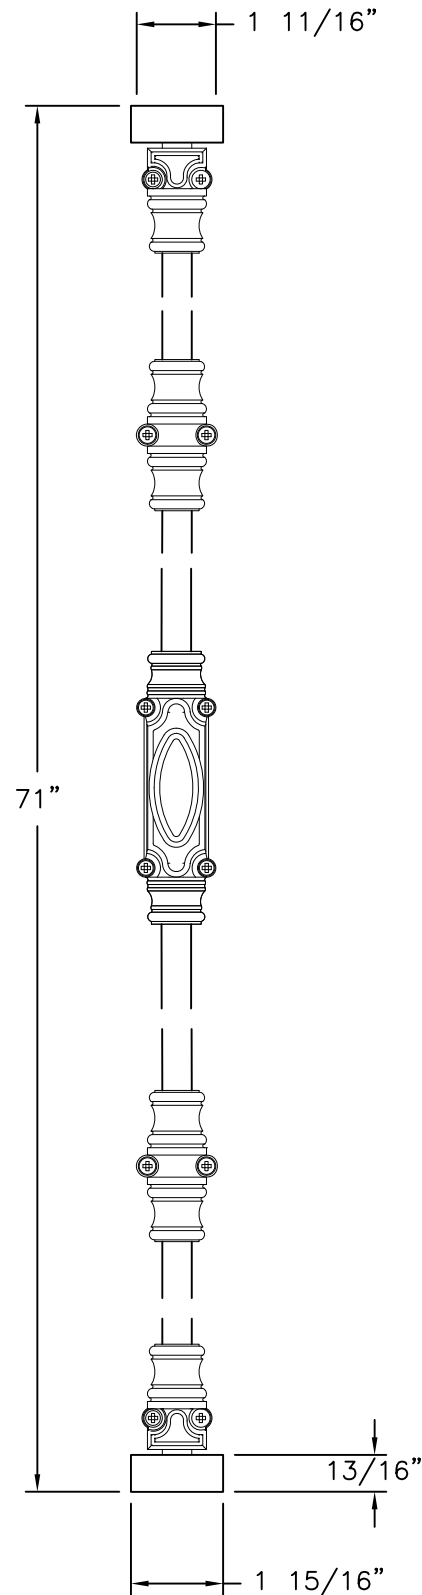

CREMONE
TYPE RG 50 FROM REMY GARNIER

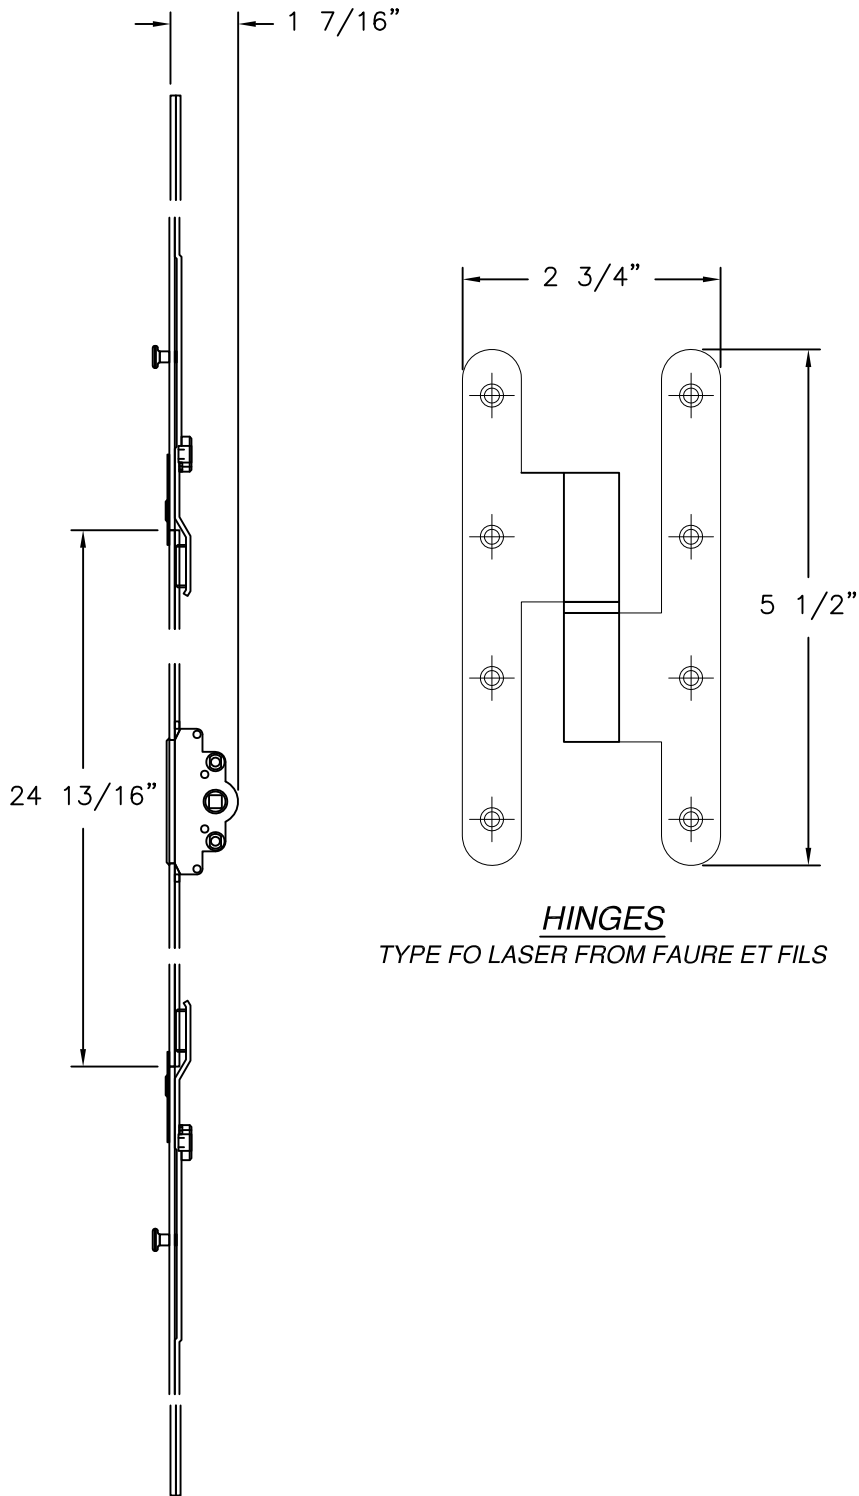

HINGES
TYPE FO LASER FROM FAURE ET FILS

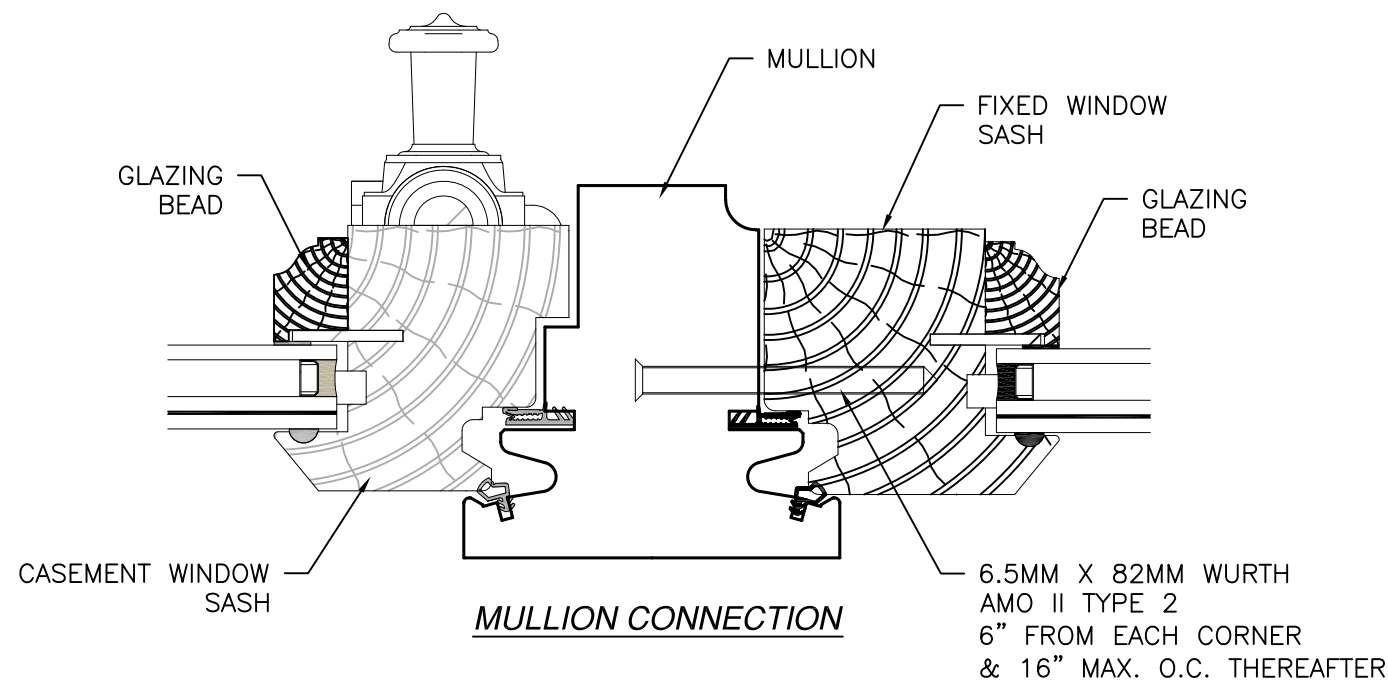

ASSELIN INC.

2870 PEACHTREE RD NW #714

ATLANTA, GA 30305

TRIPLE WINDOW CA/PW/CA

NON-IMPACT

COMPONENTS DETAILS

DRAWN: A.R.

DWG NO. 08-03318

REV A

SCALE NTS

DATE 10/08/2020

SHEET 9 OF 10

L. ROBERTO LOMAS P.E.

208 7th Ave, INDIALANTIC, FL 32903

434-688-0609 rllomas@lrlomaspe.com

SIGNED: 09/23/2026

LUIS R. LOMAS

LICENS. M.E.

No. 62514

STATE OF FLORIDA


PROFESSIONAL ENGINEER

Luis R. Lomas P.E.


FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	UPDATE PER NEW REQUIREMENTS	09/23/26	R.L.


— TOP RAIL
(FRENCH OAK)

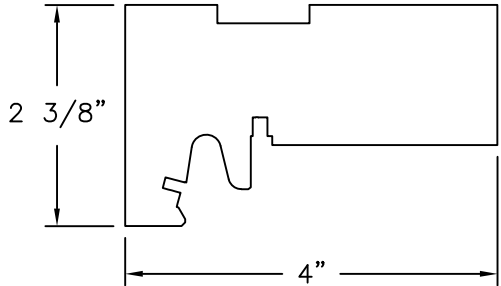


— LEFT JAMB
(FRENCH OAK)

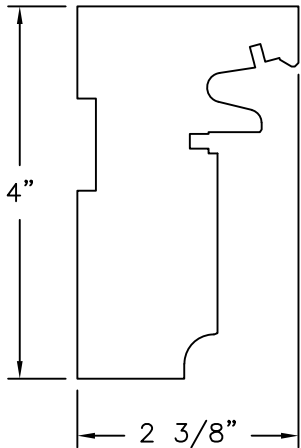


— RIGHT JAMB
(FRENCH OAK)

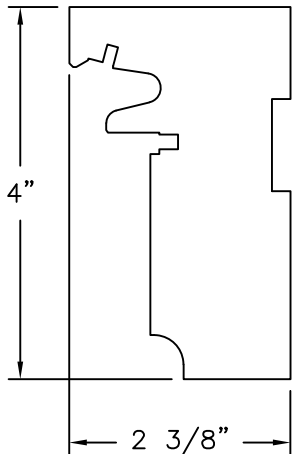


— SASH TOP RAIL
(FRENCH OAK)

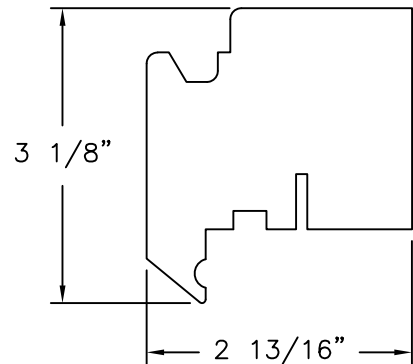


— METALLIC BALL
FOR SUPPORT
(STAINLESS STEEL)

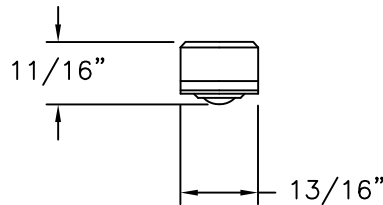


— BOTTOM RAIL
(FRENCH OAK)

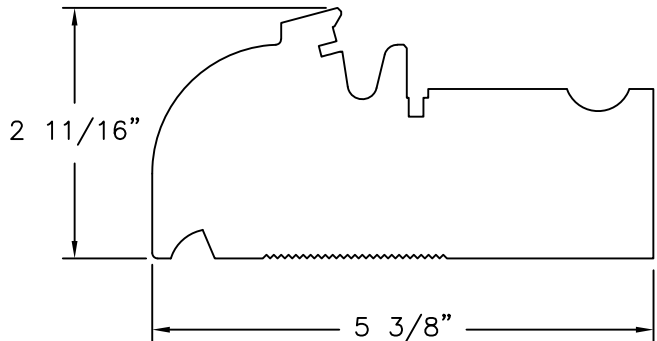


— SASH LEFT JAMB
(FRENCH OAK)

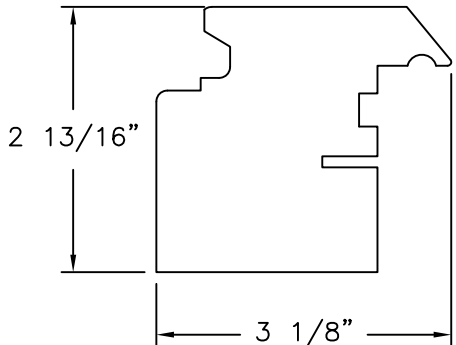


— SASH RIGHT JAMB
(FRENCH OAK)

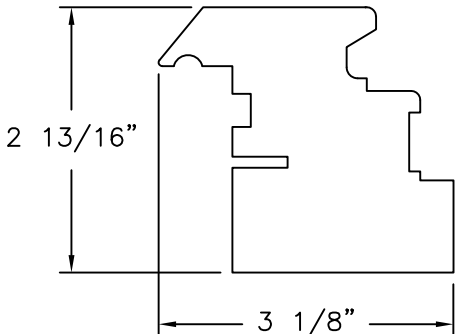

— SASH BOTTOM RAIL
(FRENCH OAK)

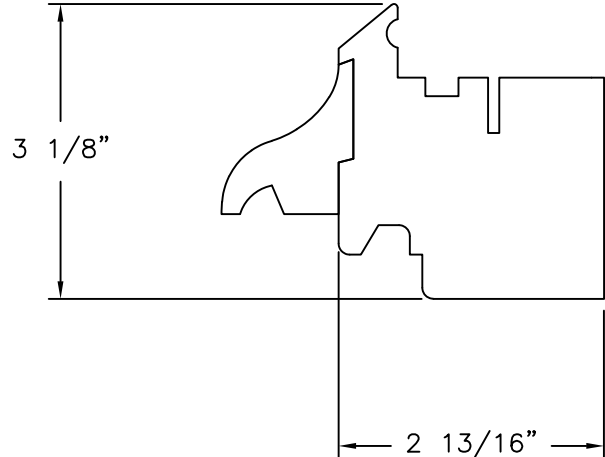

— GLAZING BEAD
(FRENCH OAK)

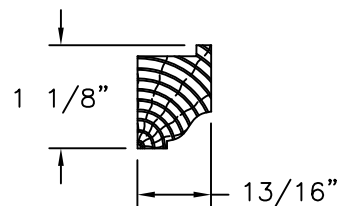


— WEATHER STRIPPING
(SILICONE)




— MEETING RAIL
WEATHER STRIPPING
(EPDM co127)




— METALLIC PLATE
(ALUMINUM EN 6060 ETAT T5/USA ASTM 6063)

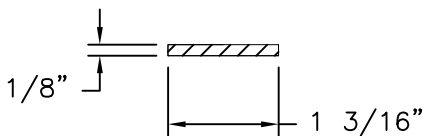

— MULLION
(FRENCH OAK)

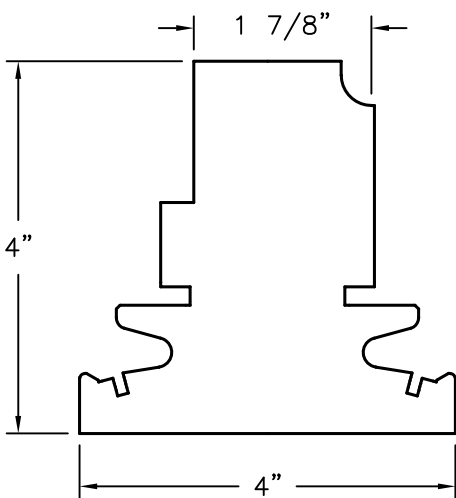

— CASEMENT WINDOW SASH
(FRENCH OAK)

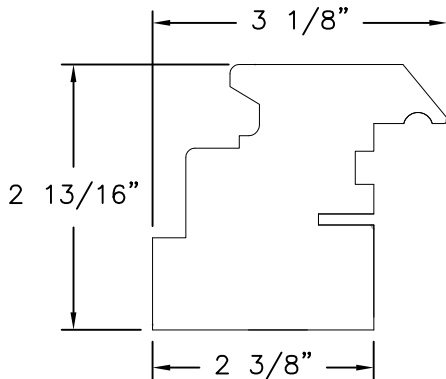

ASSELIN INC.

2870 PEACHTREE RD NW #714
ATLANTA, GA 30305

TRIPLE WINDOW CA/PW/CA
NON-IMPACT
COMPONENTS

DRAWN:
A.R.

DWG NO.
08-03318

REV
A

SCALE
NTS


DATE
10/08/2020

SHEET
10 OF 10

L. ROBERTO LOMAS P.E.

208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 09/23/2026

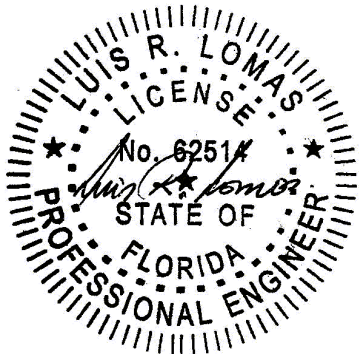

Luis R. Lomas P.E.
FL No.: 62514