

SOUTHEAST ARCHITECTURAL MILLWORK, INC.

SERIES "WOOD DOOR WITH TRANSOM"

In-Swing Glazed Wood Side-Hinged Double Doors w/Transom

INSTALLATION ANCHORAGE DETAILS


GENERAL NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE CURRENT FLORIDA BUILDING CODE INCLUDING THE HIGH VELOCITY HURRICANE ZONE (HVHZ).
2. WOOD FRAMING, 2X WOOD BUCK AND CONCRETE/MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND CONCRETE/MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD. APPROVED INSTALLATION SUBSTRATES INCLUDE THE FOLLOWING:
 - 2.1. WOOD FRAMING
 - 2.2. STEEL STUD FRAMING AND
 - 2.3. CONCRETE AND/OR MASONRY
3. 1X BUCK OVER CONCRETE/MASONRY IS OPTIONAL. WHERE 1X BUCKS ARE USED, INSTALLATION ANCHORS WILL PASS THROUGH WINDOW FRAME AND 1X BUCK INTO CONCRETE/MASONRY SUBSTRATE. WHERE 1X BUCK IS NOT USED, INSTALLATION ANCHORS WILL PASS THROUGH WINDOW FRAME INTO CONCRETE/MASONRY SUBSTRATE. DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
4. THE PRODUCT SHOWN HEREIN HAS BEEN TESTED TO THE FOLLOWING. HVHZ: TAS 201, TAS 202 & TAS 203. NON-HVHZ: ASTM E283-04/E330-02/E331-00 & ASTM E1886-05/E1996-05. SEE TEST REPORT NO. C7124.04-550-18 R1, DATED 04/27/20 BY INTERTEK, 1701 WESTFORK DRIVE, SUITE 106, LITHIA SPRINGS, GA 30122, SIGNED AND SEALED BY VINU J. ABRAHAM, FL P.E.
5. APPROVED IMPACT PROTECTIVE SYSTEM IS NOT REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS INCLUDING THE HVHZ.
6. MATERIAL:
 - 6.1. TYPICAL FRAME AND PANEL COMPONENTS: SAPELE WOOD:
 - 6.2. PANEL STILES: SAPELE WOOD WITH FJ CORE
 - 6.3. SILL/THRESHOLD: SAPELE WOOD/ALUMINUM
 - 6.4. TRANSOM TO DOOR HEAD MULLION & RAISED PANEL INTERIOR: STRUCTURAL PLYWOOD
 - 6.5. FRAME CORNERS SECURED WITH FOUR #9 x 3" ZINC-PLATED SCREWS, PANEL CORNERS MECHANICAL COPE AND STICK WITH FRANKLIN TITE BOND 3 GLUE.
7. GLAZING:
 - 7.1. GLAZING DETAIL AS TESTED: OVERALL 1.25" NOMINAL
 - 7.1.1. GLAZING DETAIL A
 - 7.1.1.1. EXTERIOR: 3/16" TEMPERED GLASS X 5/8" AIR SPACE X LAMI (3/16" HEAT-STRENGTHENED GLASS X 0.100" SAFLEX PVB INTERLAYER X 3/16" HEAT-STRENGTHENED GLASS) :INTERIOR
 - 7.1.1.1.1. SAFLEX PVB INTERLAYER BY EASTMAN CHEMICAL CO. MEETS FLORIDA BUILDING CODE REQUIREMENTS PER CURRENT MIAMI-DADE NOTICE OF ACCEPTANCE.
 - 7.1.1.2. INTERIOR: TREMCO @ S500 SILICONE SEALANT
 - 7.1.1.3. EXTERIOR: TREMCO @ S500 SILICONE SEALANT AND GLASS STOP (PART #29), INSTALLED WITH 1" 18 GAUGE BRAD NAILS LOCATED 2" FROM EDGES AND 10" ON CENTER VERTICALLY AND 6" ON CENTER HORIZONTALLY
 - 7.1.1.4. SPACER: ALLMETAL 5/8" STANDARD AIR SPACERS
 - 7.1.2. GLAZING DETAIL B
 - 7.1.2.1. EXTERIOR: 3/16" TEMPERED GLASS X 5/8" AIR SPACE X LAMI (3/16" HEAT-STRENGTHENED GLASS X 0.100" UVEKOL TYPE "S" LIQUID RESIN INTERLAYER X 3/16" HEAT-STRENGTHENED GLASS) :INTERIOR
 - 7.1.2.1.1. UVEKOL TYPE "S" LIQUID RESIN INTERLAYER BY ALLNEX USA INC. MEETS FLORIDA BUILDING CODE REQUIREMENTS PER CURRENT MIAMI-DADE NOTICE OF ACCEPTANCE.
 - 7.1.2.2. INTERIOR: TREMCO @ S500 SILICONE SEALANT
 - 7.1.1.3. EXTERIOR: TREMCO @ S500 SILICONE SEALANT AND GLASS STOP (PART #29), INSTALLED WITH 1" 18 GAUGE BRAD NAILS LOCATED 2" FROM EDGES AND 10" ON CENTER VERTICALLY AND 6" ON CENTER HORIZONTALLY
 - 7.1.1.4. SPACER: ALLMETAL 5/8" STANDARD AIR SPACERS
 - 7.2. AS TESTED GLAZING MEETS ASTM E1300-12AE1 AND ASTM E1300-2016 FOR THE DESIGN CONDITIONS SHOWN IN THIS PRODUCT APPROVAL DOCUMENT.
 - 7.3. WHERE REQUIRED, SETTING BLOCKS SHALL BE NEOPRENE 70-90 SHORE A DUROMETER HARDNESS OR APPROVED EQUAL.
8. DESIGNATION "X" STANDS FOR OPERABLE PANEL AND "O" STANDS FOR FIXED LIGHT.
9. INTERIOR AND EXTERIOR FINISHING AND PERIMETER SEALING ARE FOR ILLUSTRATIVE PURPOSES ONLY. THESE DRAWINGS CERTIFY THE DOOR INSTALLATION ONLY. WATER PROOFING OF THE INSTALLED DOOR IS NOT PART OF THIS INSTALLATION CERTIFICATION. WATER PROOFING SHALL BE THE RESPONSIBILITY OF THE INSTALLER.
 - 9.1. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH THE FBC RESIDENTIAL AND BUILDING AND WITH FMA/AAMA/WDMA PROTOCOLS.


PERFORMANCE RATING					
MAXIMUM FRAME SIZE	CONFIG.	ELEVATION	GLAZING DETAIL (SEE GENERAL NOTE 7)	DESIGN PRESSURE (PSF)	IMPACT RATING
74-1/4" X 124-1/8"	O/XX	SHEET 2	A & B	+/- 50	LMI (HVHZ)
					WIND ZONE 4 MISSILE LEVEL D (NON-HVHZ)
THIS PRODUCT HAS NOT BEEN TESTED FOR WATER PENETRATION. IT SHALL ONLY BE USED IN AREAS WHERE WATER PENETRATION REQUIREMENTS DO NOT EXIST OR WHERE AN OVERHANG MEETING THE REQUIREMENTS OF SECTION 1709.5.2 OF THE FBC AND SECTION R609.3 OF THE FRC EXISTS.					
SEE SHEET 2 FOR FRAME, PANEL, TRANSOM AND DAYLIGHT OPENING SIZES FOR O/XX, O/X, XX AND X CONFIGURATIONS.					

TABLE OF CONTENTS	
SHEET	SHEET DESCRIPTION
1	GENERAL NOTES, PERFORMANCE RATING TABLE & TABLE OF CONTENTS
2	ELEVATIONS
3	ANCHOR ELEVATIONS
4	VERTICAL SECTIONS A & B
5	VERTICAL SECTIONS C & D
6	HORIZONTAL SECTIONS E & F
7	HORIZONTAL SECTIONS G & H
8	INSTALLATION NOTES AND TABLE
9	COMPONENTS
10	BILL OF MATERIALS


Robert J. Amoruso, P.E.
Florida P.E. No. 49752

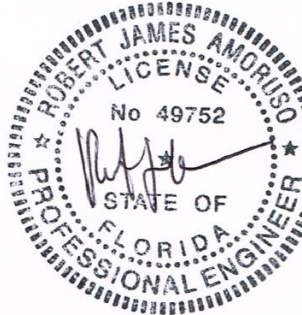

Digitally signed
by Robert J
Amoruso
Date: 2023.09.01
15:48:43 -04'00'

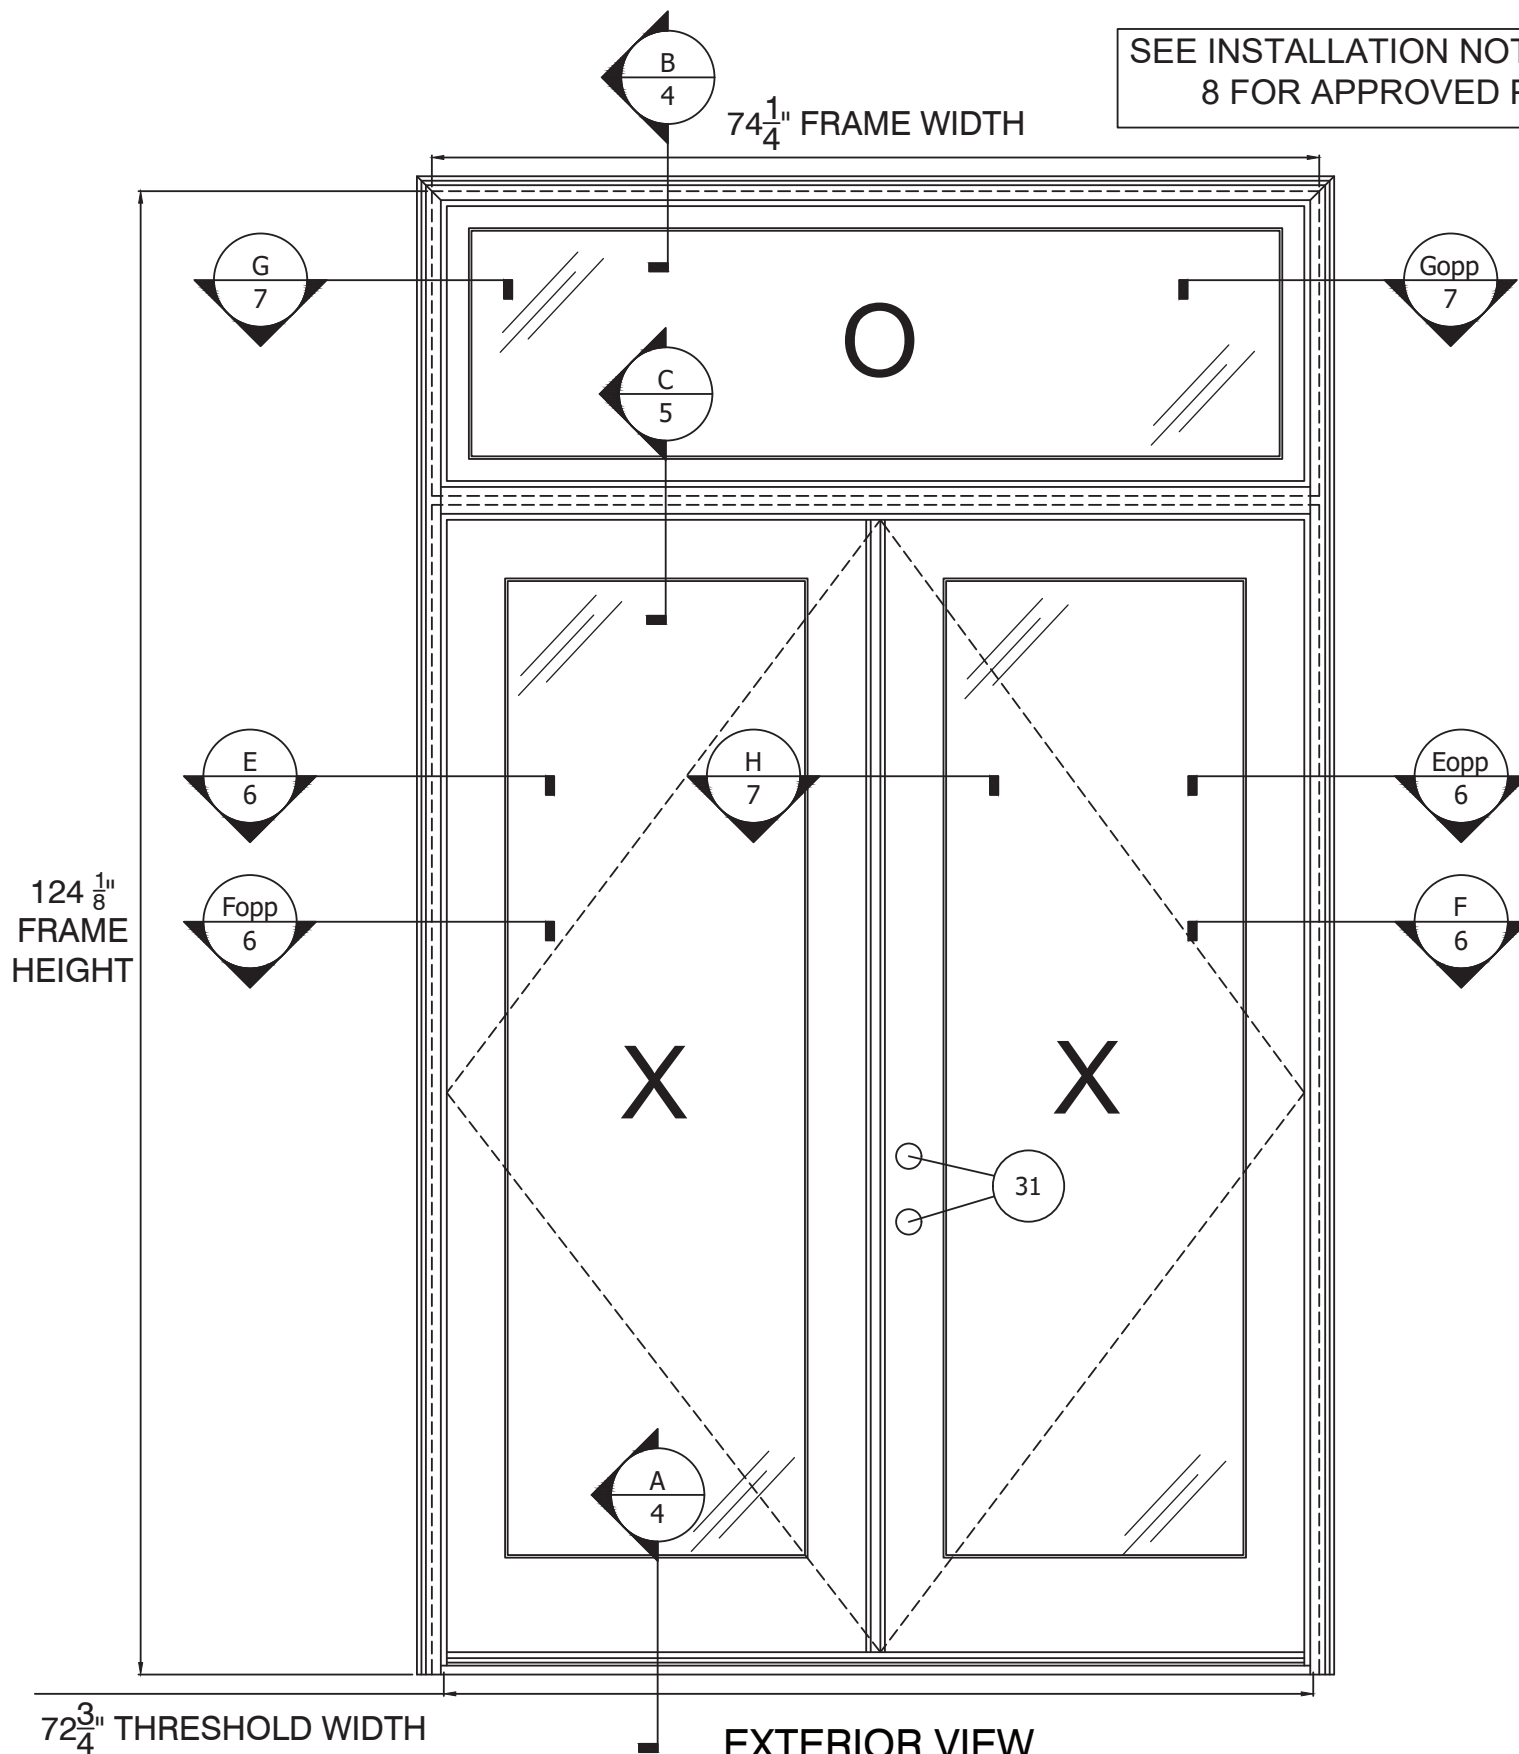

SEE INSTALLATION NOTE 9, SHEET 8 FOR APPROVED PANELS

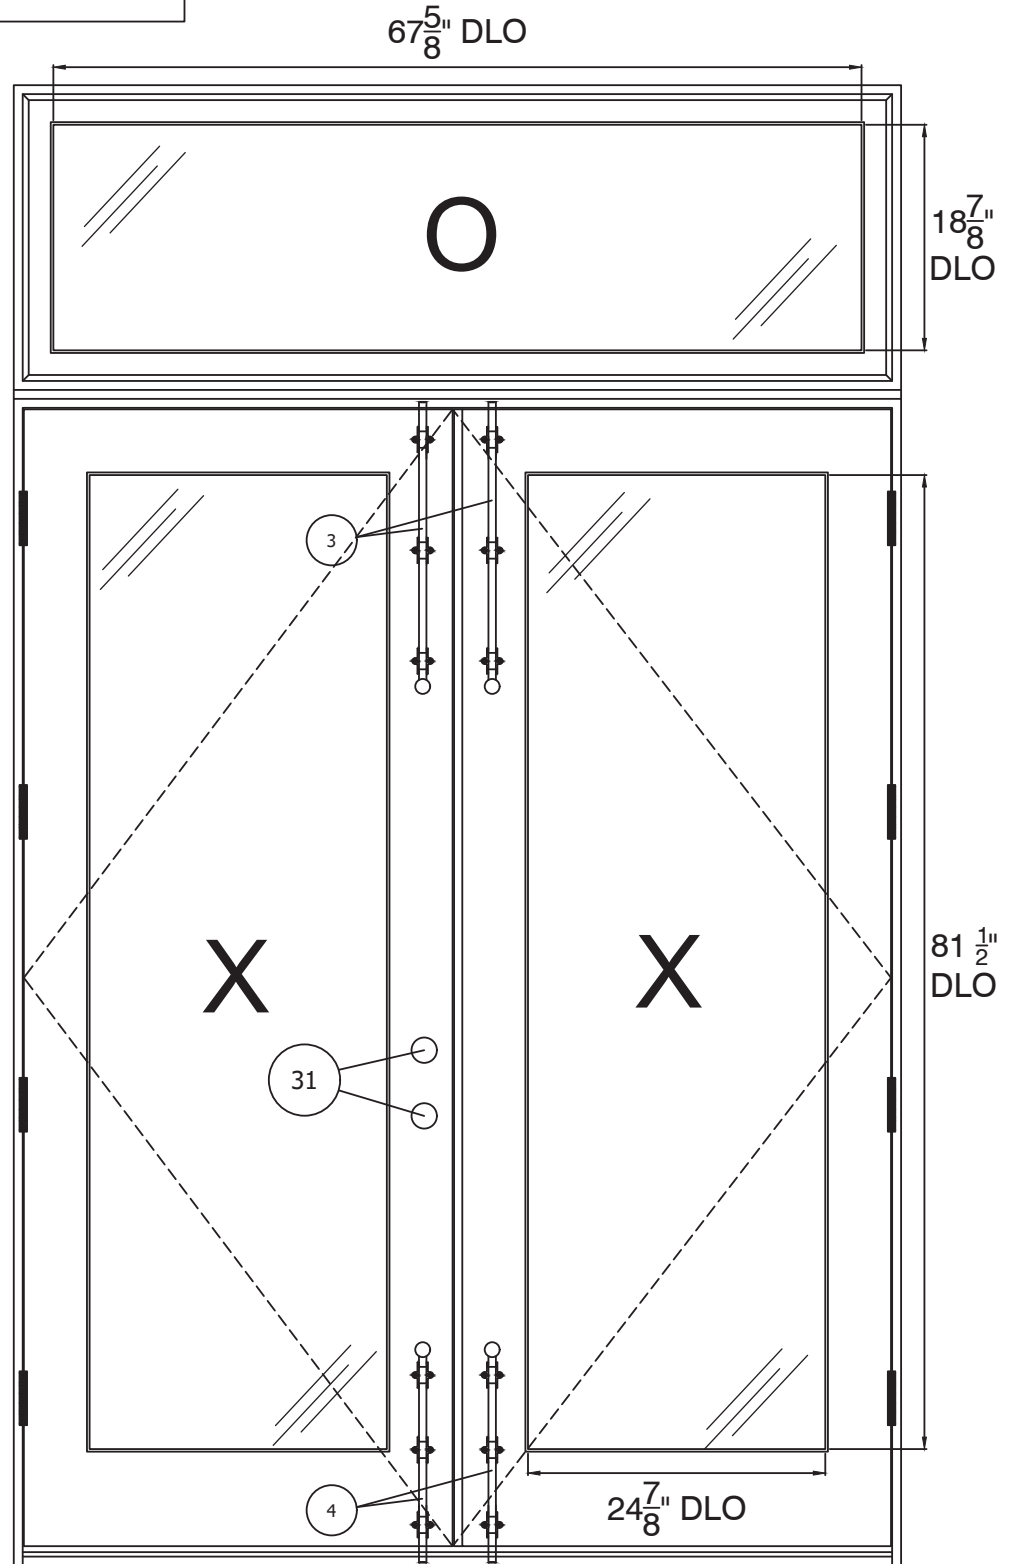

SERIES “ WOOD DOOR WITH TRANSOM”
EXTERIOR VIEW
(O/XX SHOWN. O/X, XX, AND X ALSO APPROVED)

MAXIMUM SIZES				
	O/XX	O/X	XX	X
FRAME	74-1/4" X 124-1/8"	37-1/2" X 124-1/8"	74-1/4" X 97-7/8"	37-1/2" X 97-7/8"
PANEL	35-7/8" X 95-1/8"	35-7/8" X 95-1/8"	35-7/8" X 95-1/8"	35-7/8" X 95-1/8"
TRANSOM	72-5/8" X 23-7/8"	35-7/8" X 23-7/8"	N/A	N/A

PROJECT # 423-0104

SOUTHEAST ARCHITECTURAL MILLWORK, INC.
3485 HIGHWAY 411
WHITE, GA 30184

TITLE:
SERIES "WOOD DOOR WITH TRANSOM"
ELEVATIONS

PREPARED BY:
RJA
DATE:
6/19/2020
DRAWING NO:
SAM0002
SHEET:
2 OF 10


DATE:
6/20/23
BY:
RJA

DESCRIPTION:
UPDATE TO THE 8TH EDITION (2023) FBC

REV:
A

Robert J. Amoruso, P.E.
Florida P.E. No. 49752

Digitally signed
by Robert J
Amoruso
Date: 2023.09.01
15:48:57 -04'00'

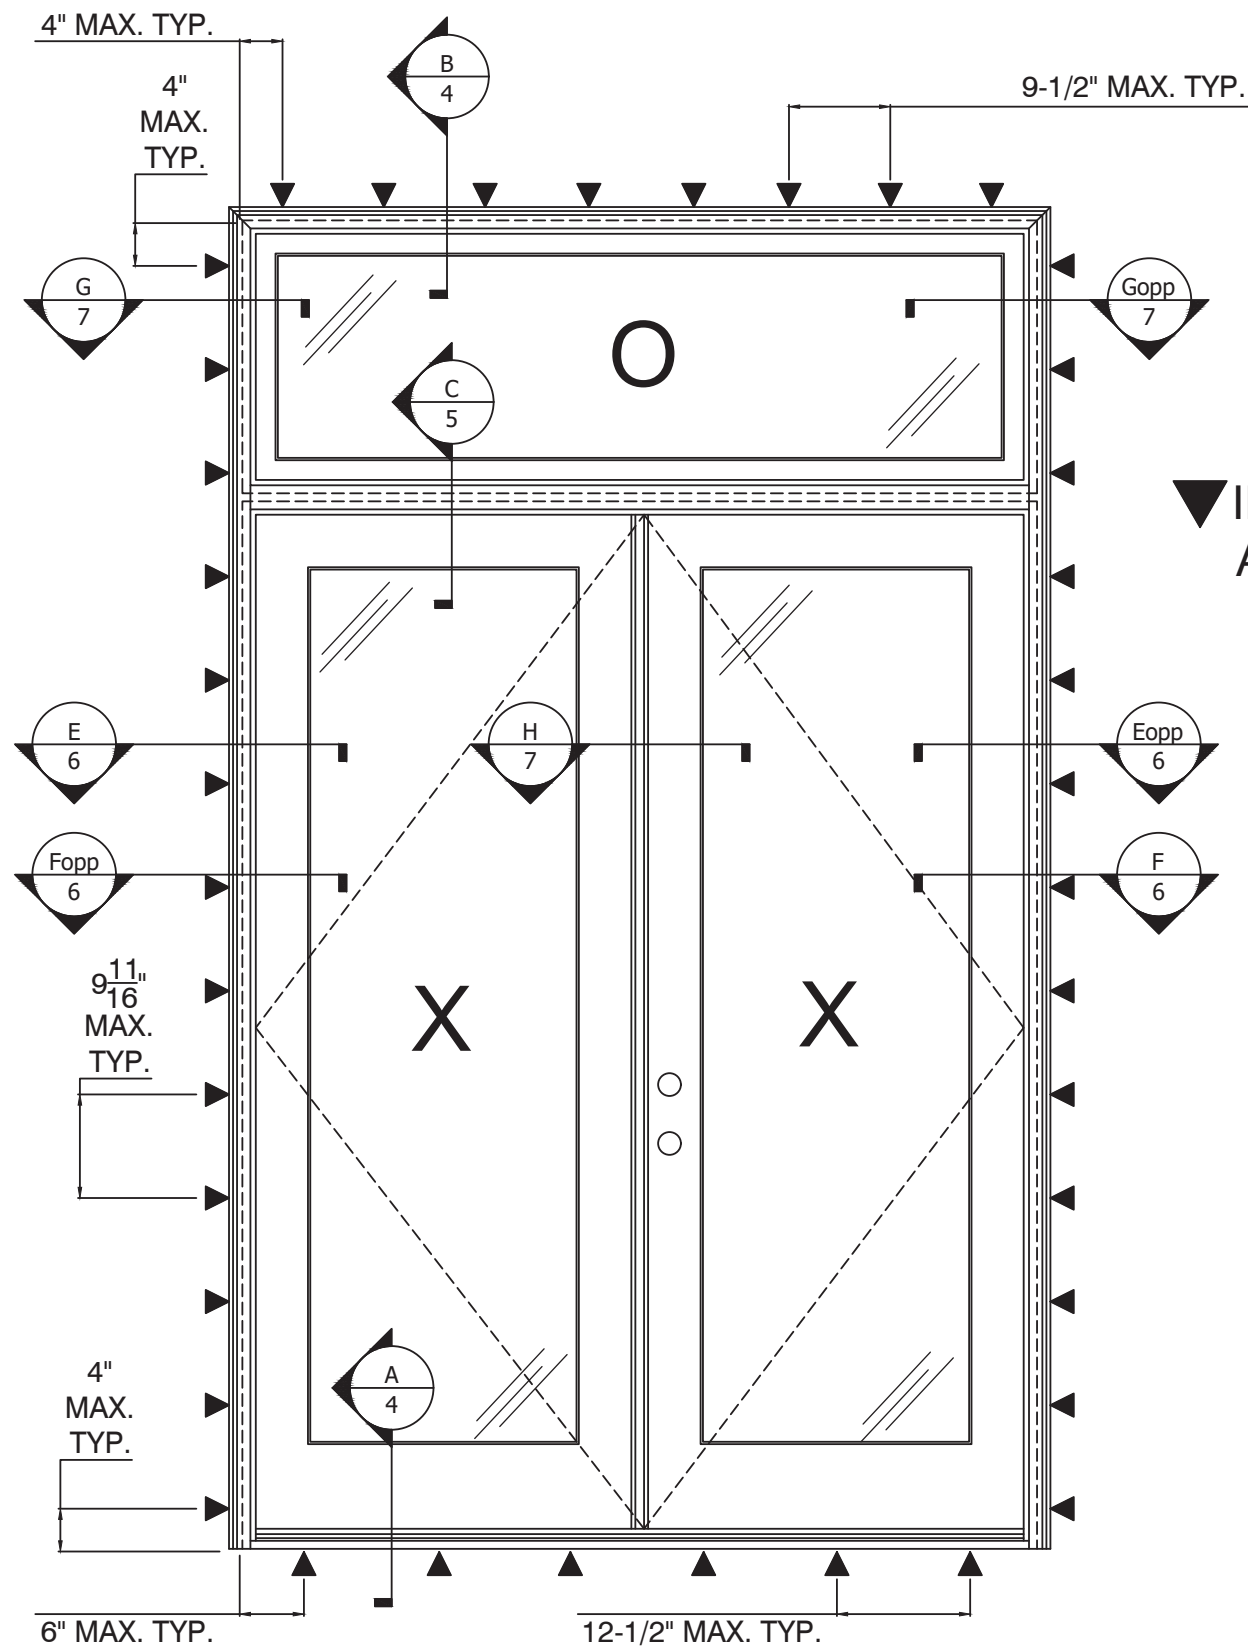


O/XX EXTERIOR VIEW


SERIES “ WOOD DOOR WITH TRANSOM”

THROUGH FRAME INSTALLATION ANCHOR LOCATIONS
(O/XX SHOWN, O/X, XX AND X ALSO APPROVED)

INSTALLATION ANCHOR

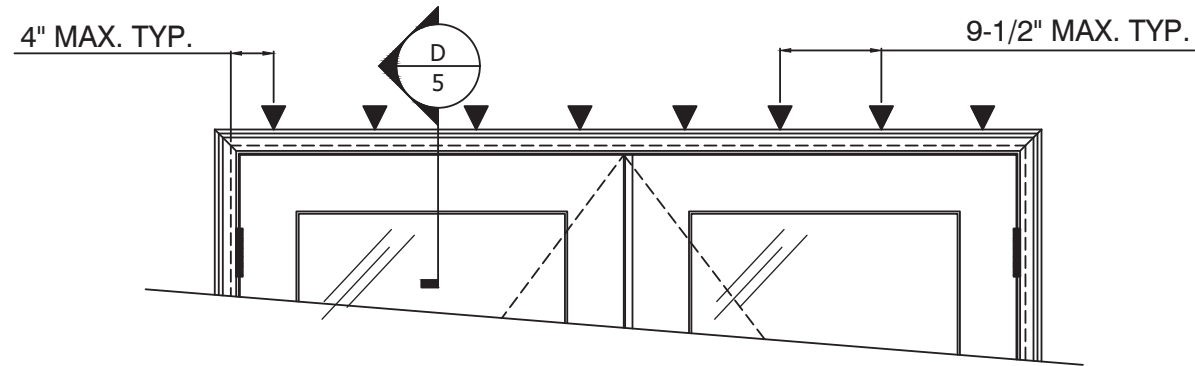

XX HEAD EXTERIOR VIEW

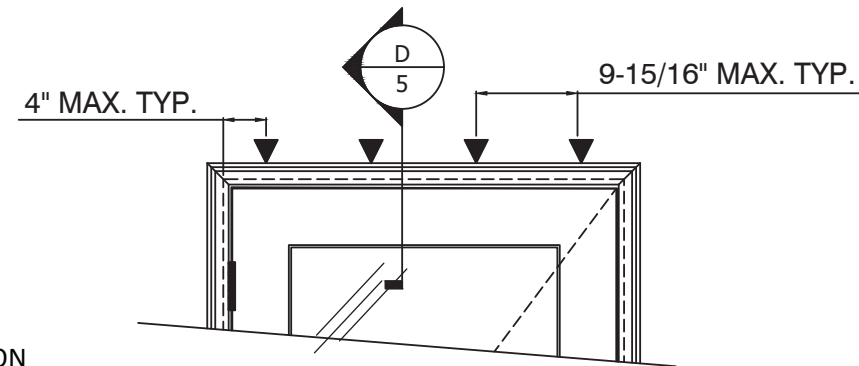

X HEAD EXTERIOR VIEW

ANCHORAGE INSTALLATION

- O/XX
 - 1.1. INSTALL INSTALLATION ANCHORAGE AT THE LOCATIONS SHOWN IN “O/XX EXTERIOR VIEW” ELEVATION. SEE SPACING REQUIREMENTS BELOW. SEE VERTICAL AND HORIZONTAL INSTALLATION ANCHORAGE SECTION VIEWS ON PAGES 4 THROUGH 7 FOR ADDITIONAL DETAILS.
 - 1.1.1. HEAD: 4” FROM ENDS AND 9-1/2” ON CENTER, +/-1” TOLERANCE.
 - 1.1.2. SILL: 6” FROM ENDS AND 12-1/2” ON CENTER, +/-1” TOLERANCE.
 - 1.1.3. JAMBS: 4” FROM ENDS AND 9-11/16” ON CENTER, +/-1” TOLERANCE.
- O/X
 - 2.1. INSTALL INSTALLATION ANCHORAGE SIMILARLY AT THE LOCATIONS SHOWN IN “O/XX EXTERIOR VIEW” ELEVATION EXCEPT THE HEAD AND SILL ANCHOR QUANTITIES WILL BE REDUCED. SEE SPACING REQUIREMENTS BELOW. SEE VERTICAL AND HORIZONTAL INSTALLATION ANCHORAGE SECTION VIEWS ON PAGES 4 THROUGH 7 FOR ADDITIONAL DETAILS.
 - 2.1.1. HEAD: 4” FROM ENDS AND 9-13/16” ON CENTER, +/-1” TOLERANCE.
 - 2.1.2. SILL: 6” FROM ENDS AND 12-13/16” ON CENTER, +/-1” TOLERANCE.
 - 2.1.3. JAMBS: 4” FROM ENDS AND 9-11/16” ON CENTER, +/-1” TOLERANCE.
- XX
 - 3.1. INSTALL INSTALLATION ANCHORAGE SIMILARLY AT THE LOCATIONS SHOWN IN “O/XX EXTERIOR VIEW” ELEVATION EXCEPT THE HEAD ANCHORAGE WILL BE AS SHOWN IN THE “XX HEAD EXTERIOR VIEW”. SEE SPACING REQUIREMENTS BELOW. SEE VERTICAL AND HORIZONTAL INSTALLATION ANCHORAGE SECTION VIEWS ON PAGES 4 THROUGH 7 FOR ADDITIONAL DETAILS.
 - 3.1.1. HEAD: 4” FROM ENDS AND 9-1/2” ON CENTER, +/-1” TOLERANCE.
 - 3.1.2. SILL: 6” FROM ENDS AND 12-1/2” ON CENTER, +/-1” TOLERANCE.
 - 3.1.3. JAMBS: 4” FROM ENDS AND 10” ON CENTER, +/-1” TOLERANCE.
- X
 - 4.1. INSTALL INSTALLATION ANCHORAGE SIMILARLY AT THE LOCATIONS SHOWN IN “O/XX EXTERIOR VIEW” ELEVATION EXCEPT THE HEAD ANCHORAGE WILL BE AS SHOWN IN THE “X HEAD EXTERIOR VIEW”. SEE SPACING REQUIREMENTS BELOW. SEE VERTICAL AND HORIZONTAL INSTALLATION ANCHORAGE SECTION VIEWS ON PAGES 4 THROUGH 7 FOR ADDITIONAL DETAILS.
 - 4.1.1. HEAD: 4” FROM ENDS AND 9-13/16” ON CENTER, +/-1” TOLERANCE.
 - 4.1.2. SILL: 6” FROM ENDS AND 12-13/16” ON CENTER, +/-1” TOLERANCE.
 - 4.1.3. JAMBS: 4” FROM ENDS AND 10” ON CENTER, +/-1” TOLERANCE.

PROJECT # 423-0104

SOUTHEAST ARCHITECTURAL MILLWORK, INC.

3485 HIGHWAY 411
WHITE, GA 30184

TITLE: SERIES “WOOD DOOR WITH TRANSOM”
ANCHOR ELEVATIONS

PREPARED BY: PTC

PO BOX 520775
LONGWOOD, FLORIDA 32752

Phone: 321.690.1788
Fax: 321.690.1789
Email: info@ptc-corp.com
FBIE C.A. NO. 23935

DRAWN BY: RJA

SCALE: N.T.S.

REV: A

DATE: 6/19/2020

DRAWING NO: SAM0002

SHEET: 3 OF 10

UPDATE TO THE 8TH
EDITION (2023) FBC

REV

DESCRIPTION


DATE

BY


RJA

6/20/23

Robert J. Amoruso, P.E.
Florida P.E. No. 49752

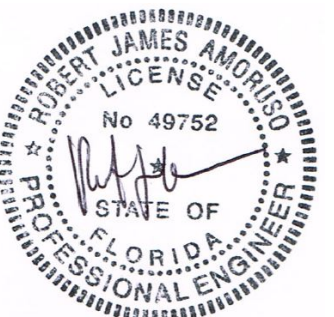

Digitally signed
by Robert J
Amoruso
Date: 2023.09.01
15:49:07 -04'00'

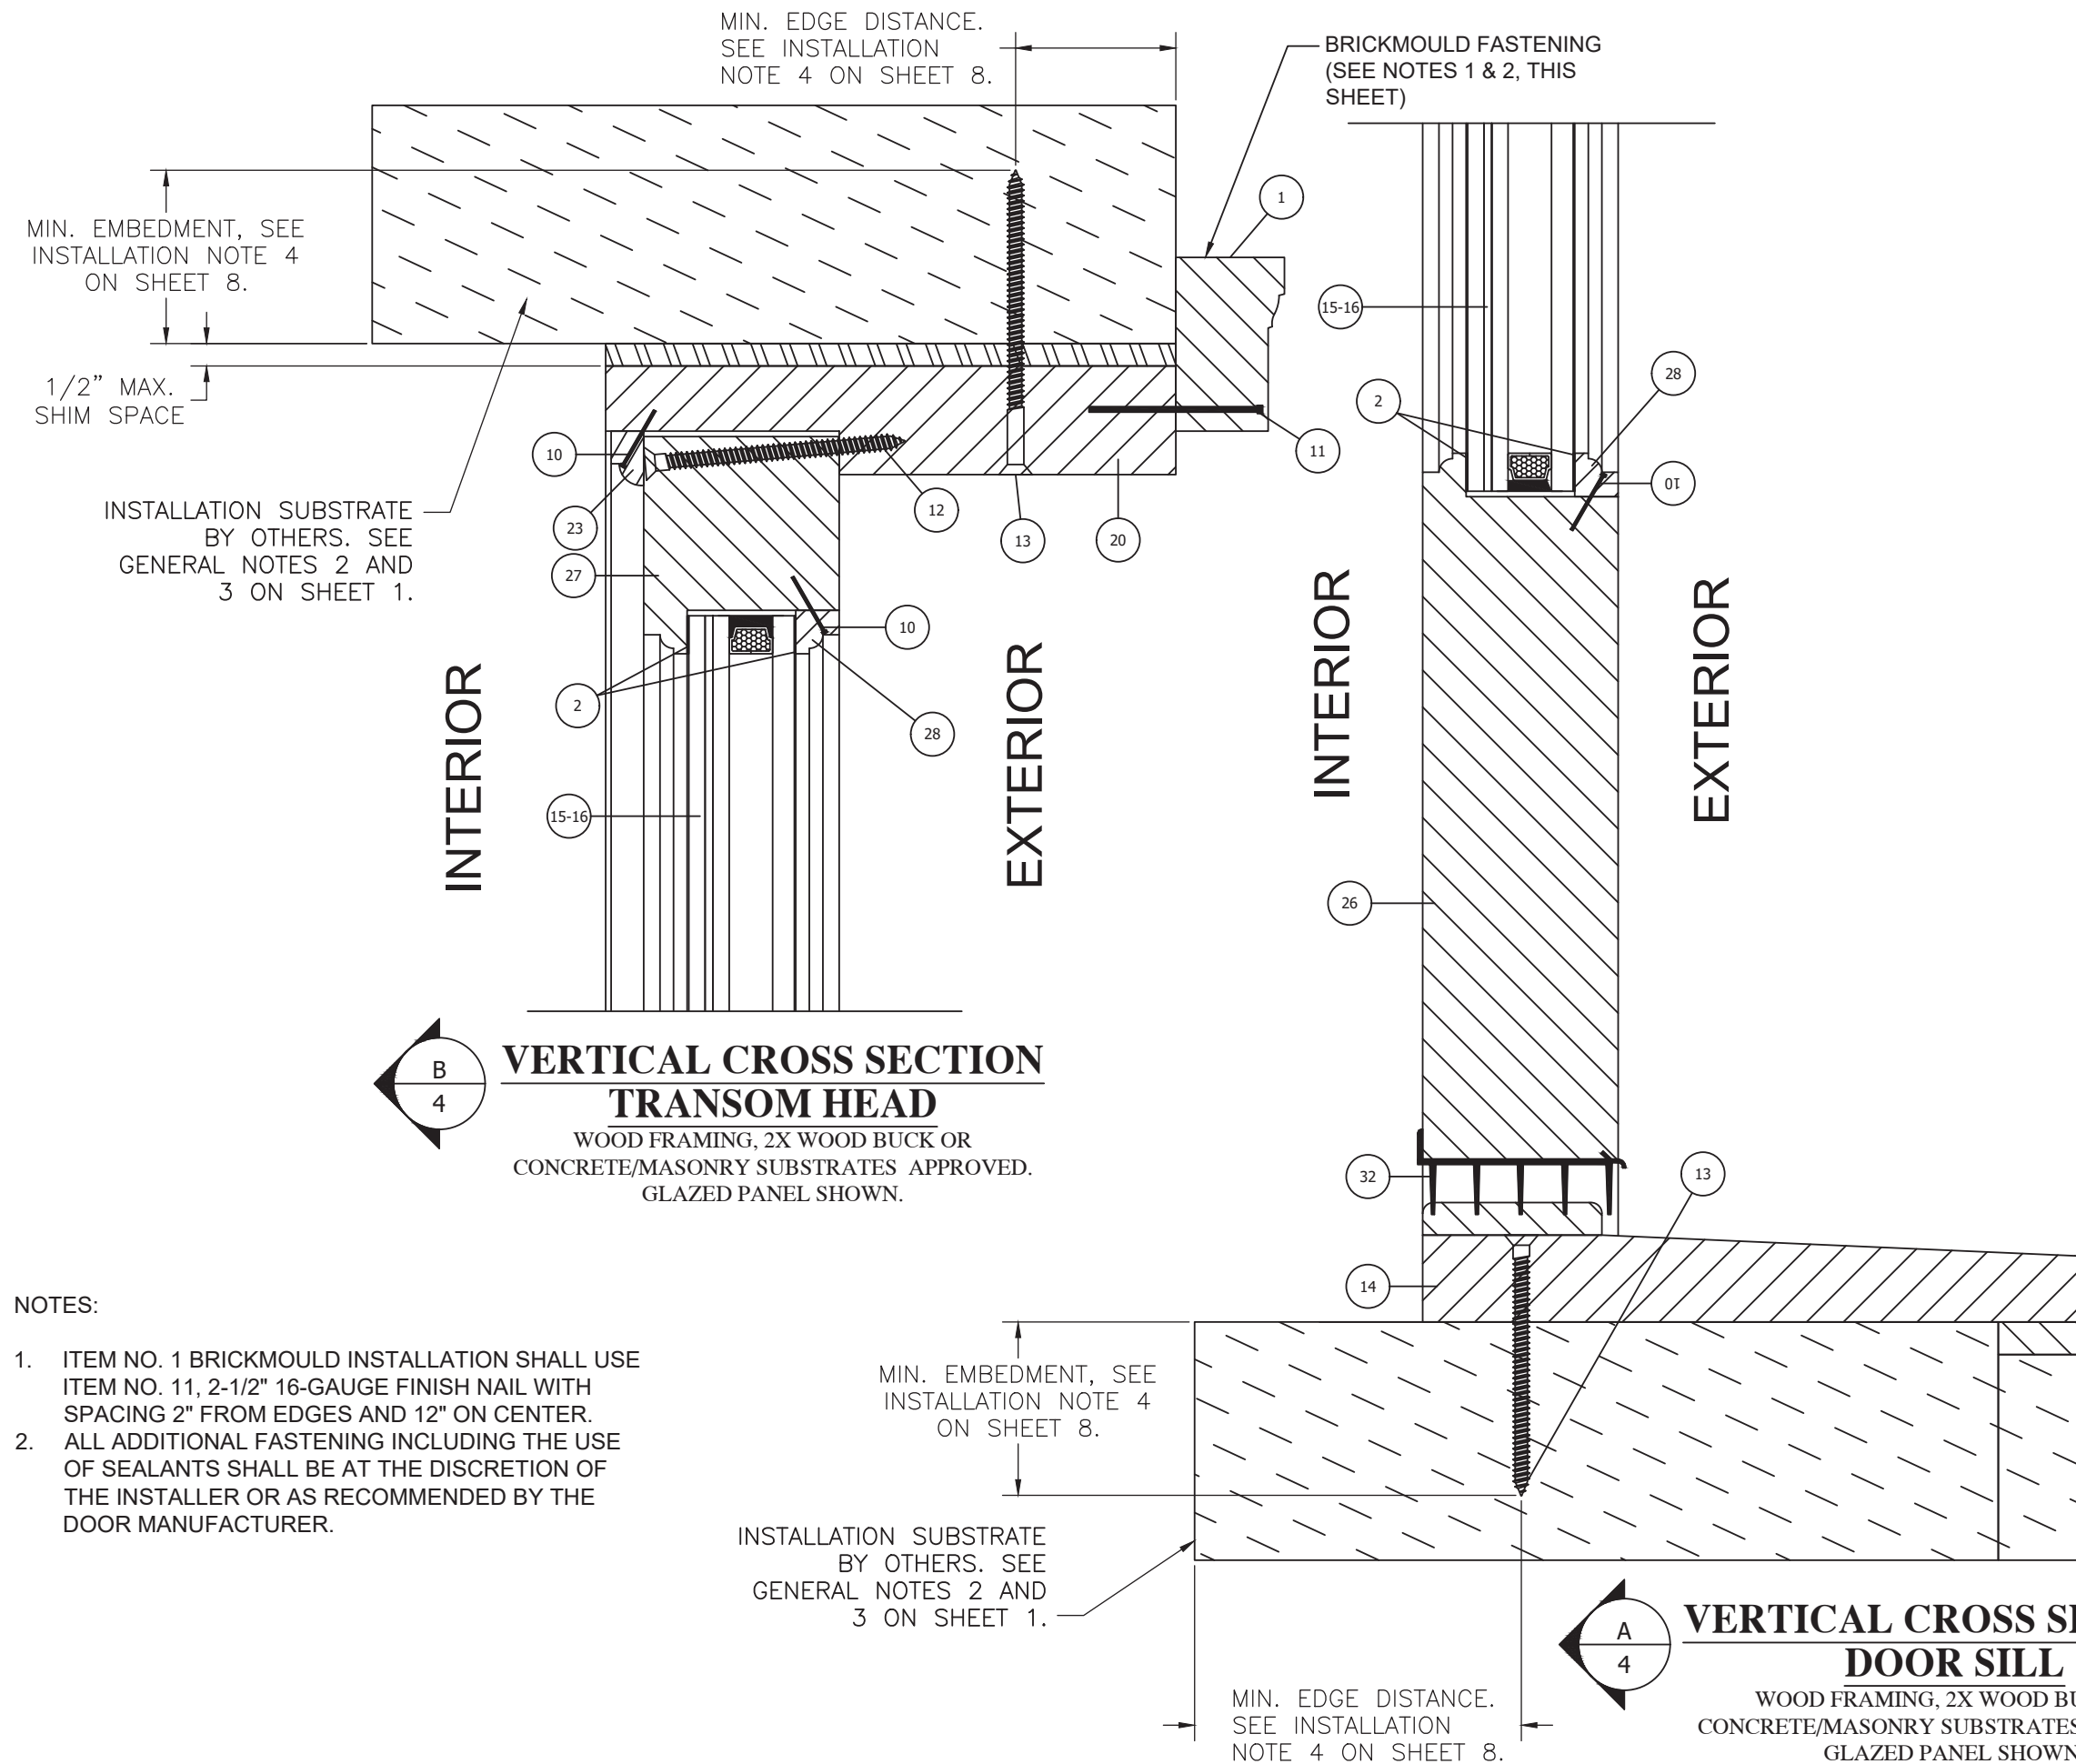

NOTES:

1. ITEM NO. 1 BRICKMOULD INSTALLATION SHALL USE ITEM NO. 11, 2-1/2" 16-GAUGE FINISH NAIL WITH SPACING 2" FROM EDGES AND 12" ON CENTER.
2. ALL ADDITIONAL FASTENING INCLUDING THE USE OF SEALANTS SHALL BE AT THE DISCRETION OF THE INSTALLER OR AS RECOMMENDED BY THE DOOR MANUFACTURER.

SOUTHEAST ARCHITECTURAL MILLWORK, INC.

3485 HIGHWAY 411
WHITE, GA 30184

TITLE: SERIES "WOOD DOOR WITH TRANSOM"
VERTICAL SECTIONS A & B

PREPARED BY: PTC

PTC PRODUCT DESIGN GROUP, LLC

PO BOX 520775

LONGWOOD, FLORIDA 32752

Phone: 321.690.1788

Fax: 321.690.1789

Email: info@ptc-corp.com

DRAWN BY: RJA

SCALE: N.T.S.

REV: A

SHEET: 4 OF 10

DRAWING NO: SAM0002

DATE: 6/19/2020

DESCRIPTION

UPDATE TO THE 8TH EDITION (2023) FBC

REV

DATE


BY

6/20/23


RJA

PROJECT # 423-0104

Robert J. Amoruso, P.E.
Florida P.E. No. 49752

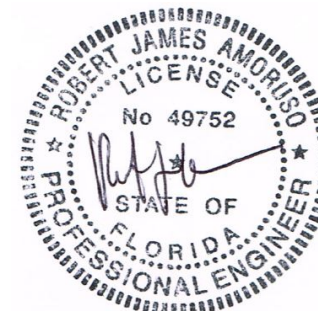


Digitally signed
by Robert J
Amoruso
Date: 2023.09.01
15:49:19 -04'00'

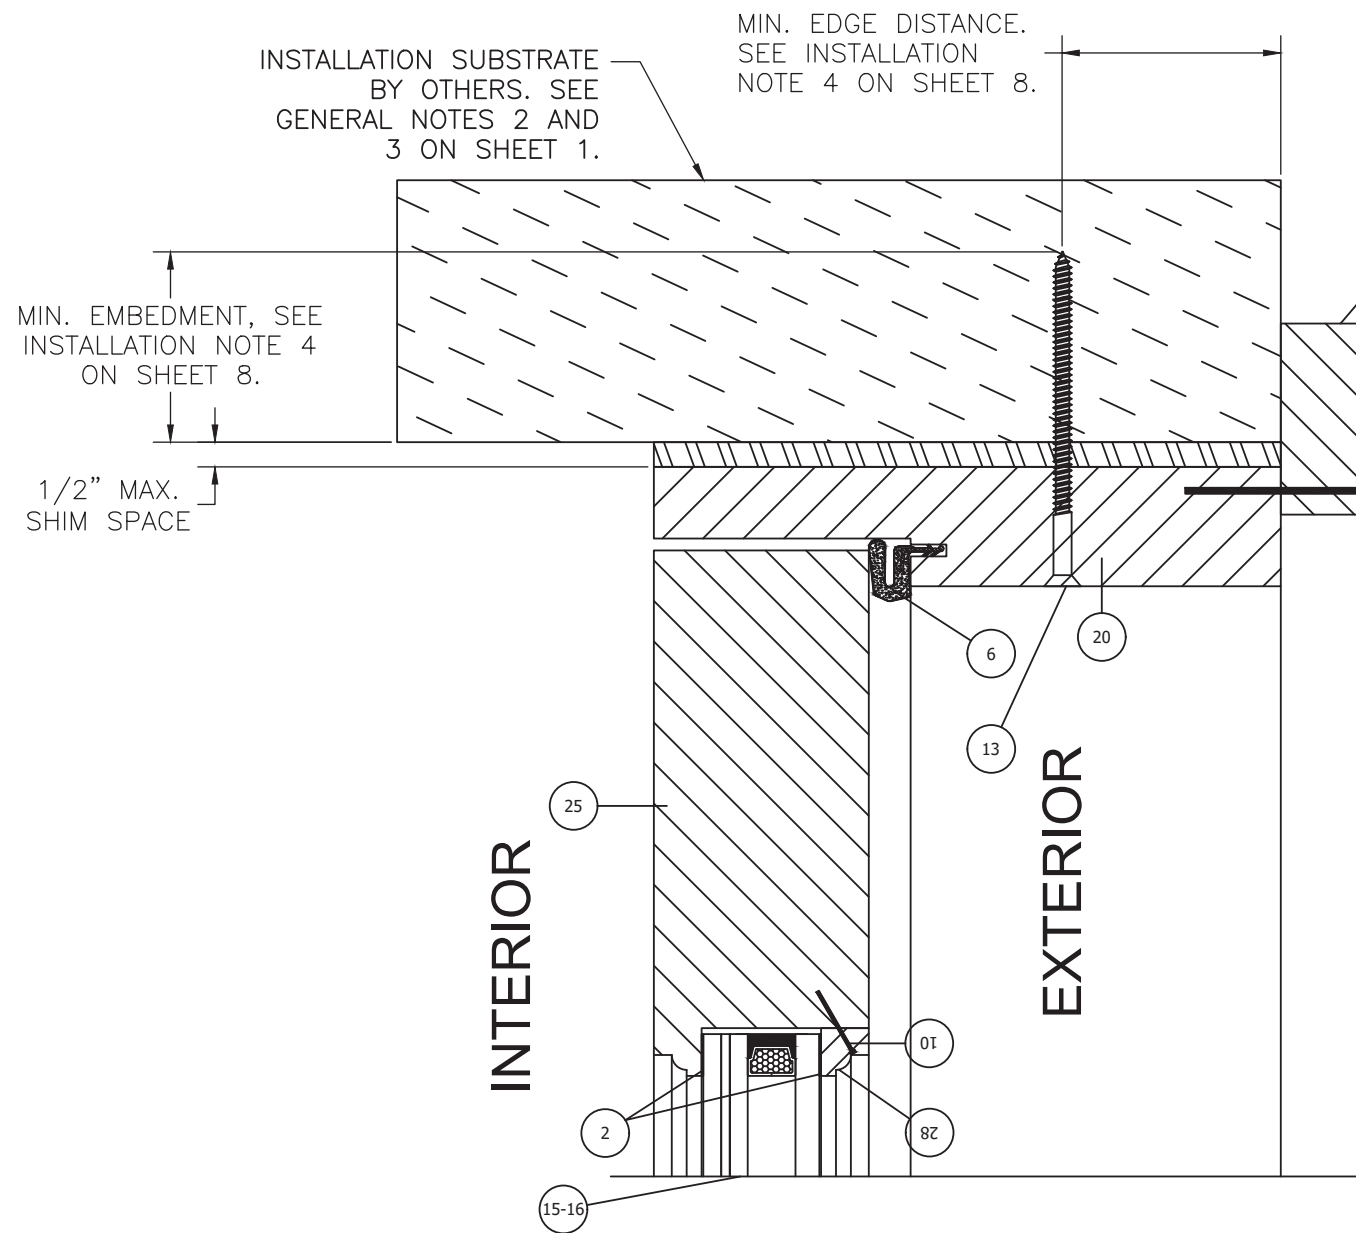

INTERIOR

EXTERIOR




VERTICAL CROSS SECTION DOOR HEAD

WOOD FRAMING, 2X WOOD BUCK OR CONCRETE/MASONRY
SUBSTRATES APPROVED. GLAZED PANEL SHOWN.


NOTES:

1. ITEM NO. 1 BRICKMOULD INSTALLATION SHALL USE ITEM NO. 11, 2-1/2" 16-GAUGE FINISH NAIL WITH SPACING 2" FROM EDGES AND 12" ON CENTER.
2. ALL ADDITIONAL FASTENING INCLUDING THE USE OF SEALANTS SHALL BE AT THE DISCRETION OF THE INSTALLER OR AS RECOMMENDED BY THE DOOR MANUFACTURER.

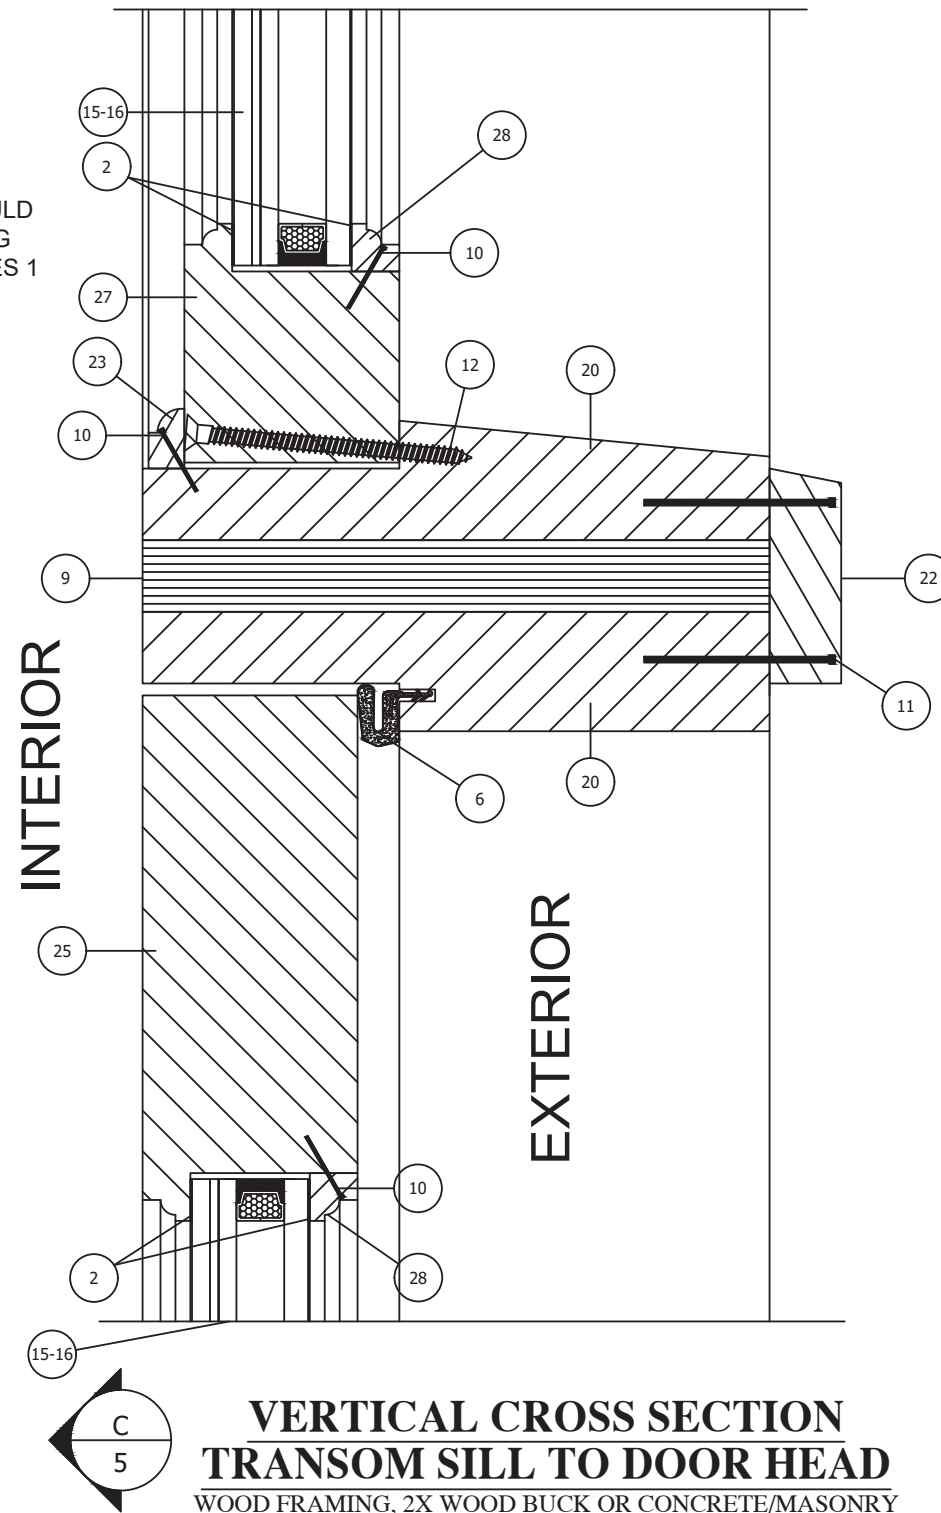

INTERIOR

EXTERIOR



VERTICAL CROSS SECTION TRANSOM SILL TO DOOR HEAD

WOOD FRAMING, 2X WOOD BUCK OR CONCRETE/MASONRY
SUBSTRATES APPROVED. GLAZED PANEL SHOWN.

PROJECT # 423-0104

SOUTHEAST ARCHITECTURAL MILLWORK, INC.

3485 HIGHWAY 411
WHITE, GA 30184

TITLE: SERIES "WOOD DOOR WITH TRANSOM"
VERTICAL SECTIONS C & D

PREPARED BY: PTC

PTC PRODUCT DESIGN GROUP, LLC

PO BOX 520775

LONGWOOD, FLORIDA 32752

FBPE C.A. NO. 23935

DRAWN BY: RJA

SCALE: N.T.S.

REV: A

DATE: 6/19/2020

DRAWING NO: SAM0002

SHEET: 5 OF 10

REV: A

REV

DESCRIPTION


DATE

BY

6/20/23

RJA

UPDATE TO THE 8TH EDITION (2023) FBC

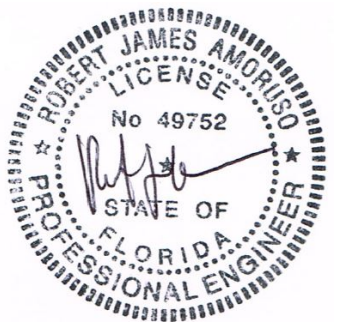

Digitally signed
by Robert J
Amoruso
Date: 2023.09.01
15:49:29 -04'00'

INSTALLATION
SUBSTRATE BY
OTHERS. SEE
GENERAL NOTES
2 AND 3 ON
SHEET 1.

MIN. EMBEDMENT,
SEE INSTALLATION
NOTE 4 ON
SHEET 8.

MIN. EDGE
DISTANCE. SEE
INSTALLATION NOTE
4 ON SHEET 8.

BRICKMOULD FASTENING
(SEE NOTES 1 & 2, THIS
SHEET)



**HORIZONTAL CROSS SECTION
DOOR JAMB - LOCATION AWAY FROM HINGE**
WOOD FRAMING, 2X WOOD BUCK OR CONCRETE/MASONRY SUBSTRATES APPROVED.
GLAZED PANEL SHOWN.

NOTES:

- ITEM NO. 1 BRICKMOULD INSTALLATION SHALL USE ITEM NO. 11, 2-1/2" 16-GAUGE FINISH NAIL WITH SPACING 2" FROM EDGES AND 12" ON CENTER.
- ALL ADDITIONAL FASTENING INCLUDING THE USE OF SEALANTS SHALL BE AT THE DISCRETION OF THE INSTALLER OR AS RECOMMENDED BY THE DOOR MANUFACTURER.

1/2" MAX.
SHIM SPACE

INTERIOR

EXTERIOR

MIN. EMBEDMENT, SEE
INSTALLATION NOTE 4
ON SHEET 8.

1/2" MAX.
SHIM SPACE


MIN. EDGE
DISTANCE. SEE
INSTALLATION NOTE
4 ON SHEET 8.

INSTALLATION
SUBSTRATE BY
OTHERS. SEE
GENERAL
NOTES 2 AND
3 ON SHEET 1.

EXTERIOR

**HORIZONTAL CROSS SECTION
DOOR JAMB - LOCATION AT HINGE**

WOOD FRAMING, 2X WOOD BUCK OR CONCRETE/MASONRY SUBSTRATES APPROVED.
GLAZED PANEL SHOWN.



PROJECT # 423-0104

SOUTHEAST ARCHITECTURAL MILLWORK, INC.

3485 HIGHWAY 411
WHITE, GA 30184

TITLE: SERIES "WOOD DOOR WITH TRANSOM"
HORIZONTAL SECTIONS E & F

PREPARED BY: RJA

DATE: 6/19/2020

SCALE: N.T.S.

REV: A

6 OF 10

DRAWING NO: SAM0002

SHEET: 6

REV: A

DESCRIPTION

UPDATE TO THE 8TH
EDITION (2023) FBC

DATE

BY

RJA


6/20/23

DATE


BY

RJA

Robert J. Amoruso, P.E.
Florida P.E. No. 49752

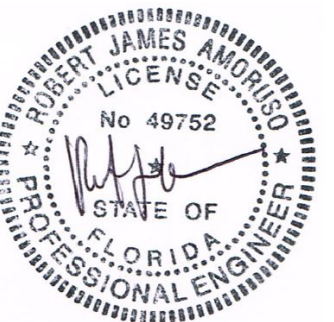


Digitally signed
by Robert J
Amoruso
Date: 2023.09.01
15:49:41 -04'00'

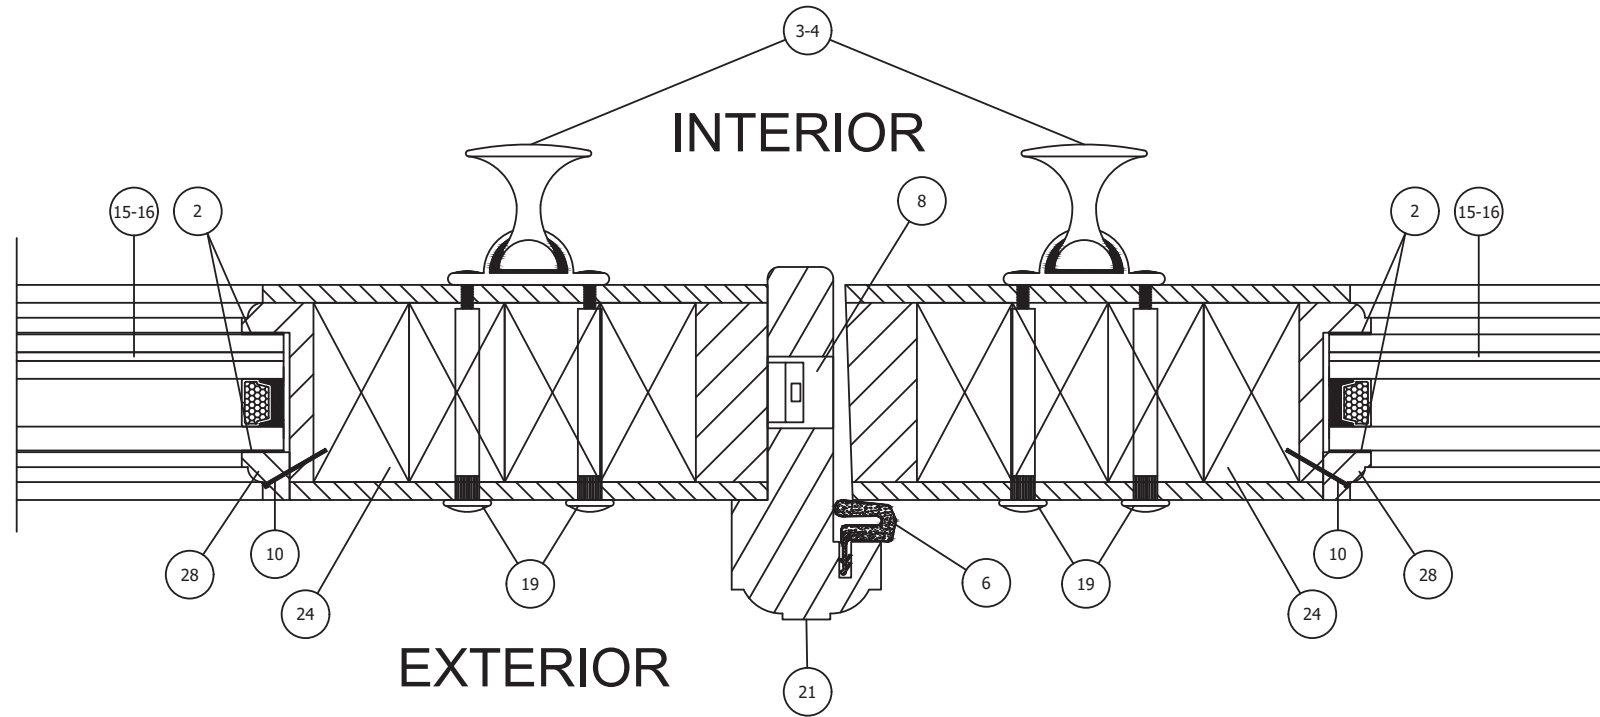

EXTERIOR

**HORIZONTAL CROSS SECTION
ASTRAGAL**

WOOD FRAMING, 2X WOOD BUCK OR CONCRETE/MASONRY
SUBSTRATES APPROVED. GLAZED PANEL SHOWN.

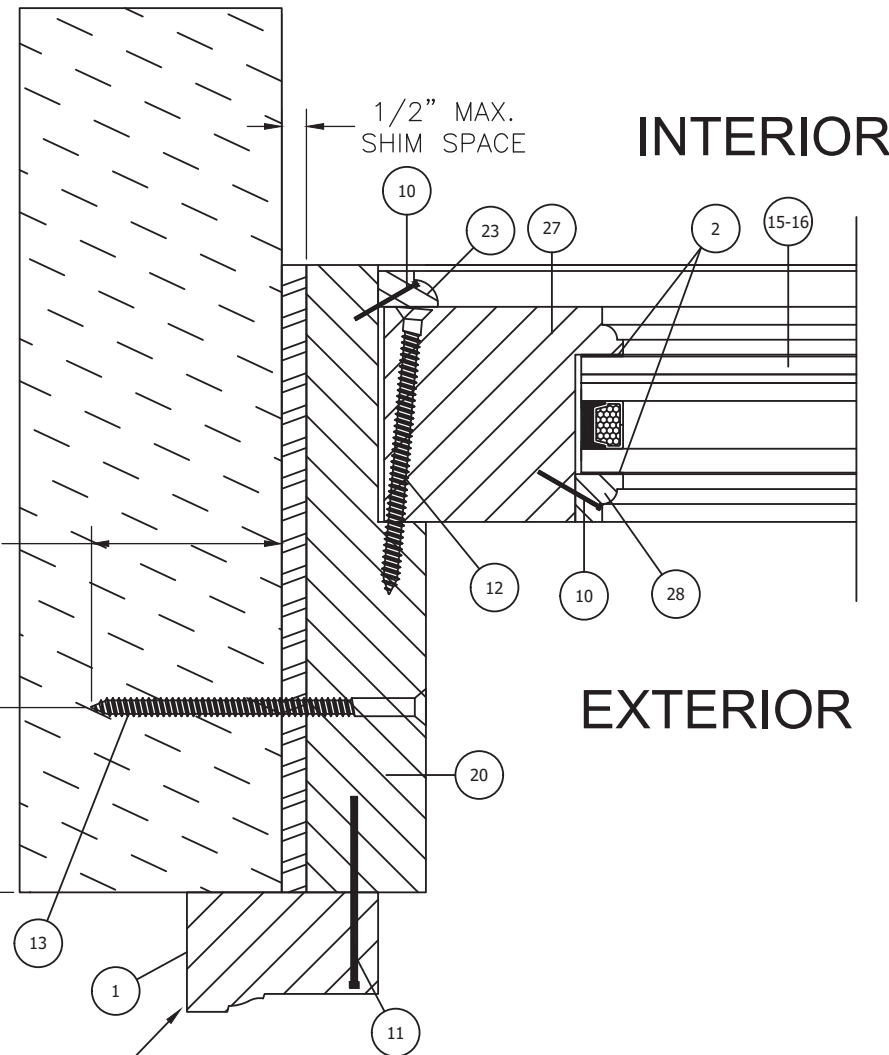

INTERIOR

EXTERIOR

**HORIZONTAL CROSS SECTION
TRANSOM**

WOOD FRAMING, 2X WOOD BUCK OR CONCRETE/MASONRY
SUBSTRATES APPROVED. GLAZED PANEL SHOWN.



MIN. EMBEDMENT,
SEE INSTALLATION
NOTE 4 ON
SHEET 8.

MIN. EDGE
DISTANCE. SEE
INSTALLATION NOTE
4 ON SHEET 8.

BRICKMOULD FASTENING
(SEE NOTES 1 & 2, THIS
SHEET)

NOTES:

- ITEM NO. 1 BRICKMOULD INSTALLATION SHALL USE
ITEM NO. 11, 2-1/2" 16-GAUGE FINISH NAIL WITH
SPACING 2" FROM EDGES AND 12" ON CENTER.
- ALL ADDITIONAL FASTENING INCLUDING THE USE
OF SEALANTS SHALL BE AT THE DISCRETION OF
THE INSTALLER OR AS RECOMMENDED BY THE
DOOR MANUFACTURER.

PROJECT # 423-0104

SOUTHEAST ARCHITECTURAL MILLWORK, INC.

3485 HIGHWAY 411
WHITE, GA 30184

TITLE:
SERIES "WOOD DOOR WITH TRANSOM"
HORIZONTAL SECTIONS G & H

PREPARED BY:

DRAWN BY: RJA

DATE: 6/19/2020

SCALE: N.T.S.

DRAWING NO: SAM0002

REV: A

SHEET: 7 OF 10

PTC PRODUCT DESIGN GROUP, LLC
PO BOX 520775
LONGWOOD, FLORIDA 32752
FAX: 321.690.1789
E-MAIL: info@ptc-corp.com

DESCRIPTION

REV


DATE

BY

6/20/23

RJA

Robert J. Amoruso, P.E.
Florida P.E. No. 49752

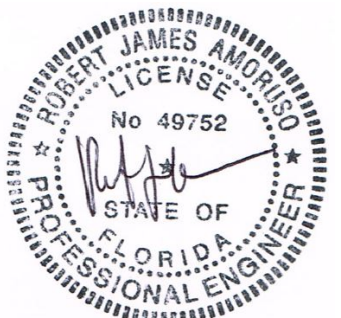

Digitally signed
by Robert J
Amoruso
Date: 2023.09.01
15:49:52 -04'00'

INSTALLATION NOTES:

1. ONE INSTALLATION ANCHOR SHALL BE USED AT EACH ANCHOR LOCATION SHOWN IN ELEVATIONS ON SHEET 3.
2. SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/2".
3. ANCHOR QUANTITIES AND SPACING / EMBEDMENT AND EDGE DISTANCE

3.1. THE NUMBER OF INSTALLATION ANCHORS IS BASED ON THE MAXIMUM END DISTANCE (ED) AND THE MAXIMUM ON CENTER (O.C.) SPACING PLACEMENT OF ANCHORS IN ACCORDANCE WITH ELEVATIONS ON SHEET 3.

3.2. END DISTANCES AND O.C. SPACING LESS THAN THAT SHOWN IN THE ELEVATION ON SHEET 3 ARE ACCEPTABLE.

3.3. FOR ASSEMBLY SIZES SMALLER THAN THOSE SHOWN, ANCHOR QUANTITIES CAN BE REDUCED WHILE MAINTAINING EDGE DISTANCE AND O.C. SPACING REQUIREMENTS.

3.4. ANCHOR QUANTITIES AND SPACING SHOWN ARE BASED ON THE LOWER OF ANCHOR SPACING USED IN TESTING OR REQUIRED BY LOADING AT DESIGN PRESSURE.
4. SUBSTRATE ANCHORING REQUIREMENTS

4.1. SEE INSTALLATION ANCHORAGE TABLE BELOW.

4.2. INSTALLATION ANCHORAGE OF GREATER SIZE (LARGER DIAMETER) ARE ACCEPTABLE AS LONG AS THE FASTENER TYPE REMAINS THE SAME. MINIMUM EDGE DISTANCE AND MINIMUM EMBEDMENT REQUIREMENTS FOR LARGER DIAMETER ANCHORAGE FASTENERS SHALL BE ADHERED TO.

4.3. INSTALLATION ANCHOR LOCATION IN SECTION VIEWS ON SHEETS 5 THROUGH 10 CAN BE VARIED AS REQUIRED TO ACCOMMODATE INSTALLATION SPECIFIC REQUIREMENTS.

4.3.1. ANCHORS AT OPERABLE DOOR PANELS ARE SHOWN IN THE FRAME JAMB RABBET. IT IS ACCEPTABLE TO LOCATE THE ANCHOR IN THE FRAME JAMB AT ITS THICKER CROSS-SECTION.

4.3.2. ANCHORS AT FIXED PANELS ARE SHOWN IN THE FRAME JAMB RABBET. IT IS ACCEPTABLE TO LOCATE THE ANCHOR IN THE FRAME JAMB AT ITS THICKER CROSS-SECTION.

4.3.3. THRESHOLD ANCHORS AS WELL CAN BE RELOCATED FROM THAT SHOWN TO ACCOMMODATE INSTALLATION SPECIFIC REQUIREMENTS.
5. ALL FASTENERS TO BE CORROSION RESISTANT.
6. INTERIOR AND EXTERIOR FINISHES BY OTHERS. NOT SHOWN FOR CLARITY.
7. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED AND/OR SPECIFIED IN ACCORDANCE WITH ASTM E2112 OR AS PROVIDED/RECOMMENDED BY THE MANUFACTURER.
8. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:

8.1. WOOD - MINIMUM SPECIFIC GRAVITY OF G=0.42

8.2. CONCRETE - MINIMUM COMPRESSIVE STRENGTH OF 2500 PSI

8.3. MASONRY - STRENGTH CONFORMANCE TO ASTM C-90, MEDIUM WEIGHT WITH DENSITY > 117 PCF
9. APPROVED PANELS

9.1. SEE ELEVATIONS ON SHEET 2 FOR MAXIMUM PANEL AND TRANSOM SIZES AND DAYLIGHT OPENING SIZES

9.2. FULLY GLAZED PANEL (AS TESTED SHOWN ON SHEET 2 ELEVATIONS)

9.3. RAISED OPAQUE PANEL WITH ONE RAIL (AS TESTED UNDER TEST REPORT C7124.01-550-18-R1 ENVELOPED)

9.4. FULLY OPAQUE PANEL OR RAISED OPAQUE PANEL WITH MULTIPLE RAILS (ENVELOPED BY TESTING)

9.5. VARIABLE SIZES OF PARTIALLY GLAZED/PARTIALLY RAISED OPAQUE PANEL (ENVELOPED BY TESTING BUT CANNOT EXCEED MAXIMUM DLO FOR FULLY GLAZED PANEL SHOWN ON SHEET 2)

ITEM NO. 13 INSTALLATION ANCHORAGE REQUIREMENTS						
FASTENER SIZE	FRAME COMPONENT	SUBSTRATE	FASTENER TYPE	MIN. EMBEDMENT (IN)	MIN. EDGE DISTANCE (IN)	SUBSTRATE CAPACITY
3/16" DIAMETER	ALL	CONCRETE	ITW TAPCONS (1)	1.5	1.125	MIN. 2500 PSI CONCRETE
3/16" DIAMETER	ALL	MASONRY (CMU/BLOCK)	ITW TAPCONS (1)	1.0	2.0	ASTM C-90, MEDIUM WEIGHT
No. 8	TRANSOM HEAD (O/XX AND O/X)	2X WOOD	WOOD SCREW (ANSI B18.6.1) (2) OR TAPPING SCREW (ASME B18.6.4) (2)	1.25	0.75	SPECIFIC GRAVITY OF 0.42
NO. 9	JAMBS AND SILL (O/XX, O/X, XX, X) ----- HEAD (XX, X)	2X WOOD	WOOD SCREW (ANSI B18.6.1) (2) OR TAPPING SCREW (ASME B18.6.4) (2)	1.25	0.75	SPECIFIC GRAVITY OF 0.42
NOTES	(1) ITW TAPCONS USED FOR CONCRETE/MASONRY INSTALLATION SHALL BE ADVANCED THREADFORM TECHNOLOGY TYPE.					
	(2) GRADE 2 STRENGTH REQUIRED.					

FRAME COMPONENT FASTENER DETAILS		
PART #	DESCRIPTION	LOCATIONS
10	1" 18 GUAGE BRAD NAIL	ITEM NO. 29 GLASS STOP: HORIZONTAL 2" FROM EDGES AND 6" ON CENTER
10	1" 18 GUAGE BRAD NAIL	ITEM NO. 29 GLASS STOP: VERTICAL 2" FROM EDGES AND 10" ON CENTER
11	2-1/2" 16 GAUGE FINISH NAIL	ITEM NO. 1 BRICKMOULD & ITEM NO. 22 MULL COVER: 2" FROM EDGES AND 12" ON CENTER
12	#9 x 3" ZINC SCREW	2" FROM EDGES AND 10" ON CENTER

PROJECT # 423-0104			RJA	BY
			6/20/23	DATE
			UPDATE TO THE 8TH EDITION (2023) FBC	DESCRIPTION
			A	REV


SOUTHEAST ARCHITECTURAL MILLWORK, INC. 3485 HIGHWAY 411 WHITE, GA 30184	TITLE: SERIES "WOOD DOOR WITH TRANSOM" INSTALLATION NOTES AND TABLE		DATE:	6/19/2020
			DRAWN BY:	RJA
			SCALE:	N.T.S.
			DRAWING NO:	SAM0002
		PREPARED BY:	REV:	A
		SHEET: 8 OF 10		

PTC


PTC PRODUCT DESIGN GROUP, LLC
PO BOX 520775
LONGWOOD, FLORIDA 32752
FBPE C.A. NO. 23935

Phone: 321.690.1789
Fax: 321.690.1789
Email: info@ptgc-corp.com

Robert J. Amoruso, P.E.
Florida P.E. No. 49752

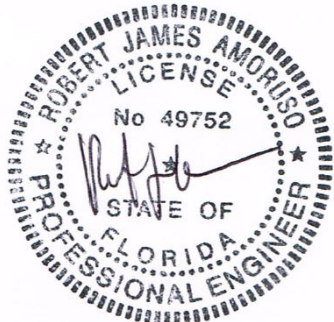

Digitally signed
by Robert J
Amoruso
Date: 2023.09.01
15:50:03 -04'00'

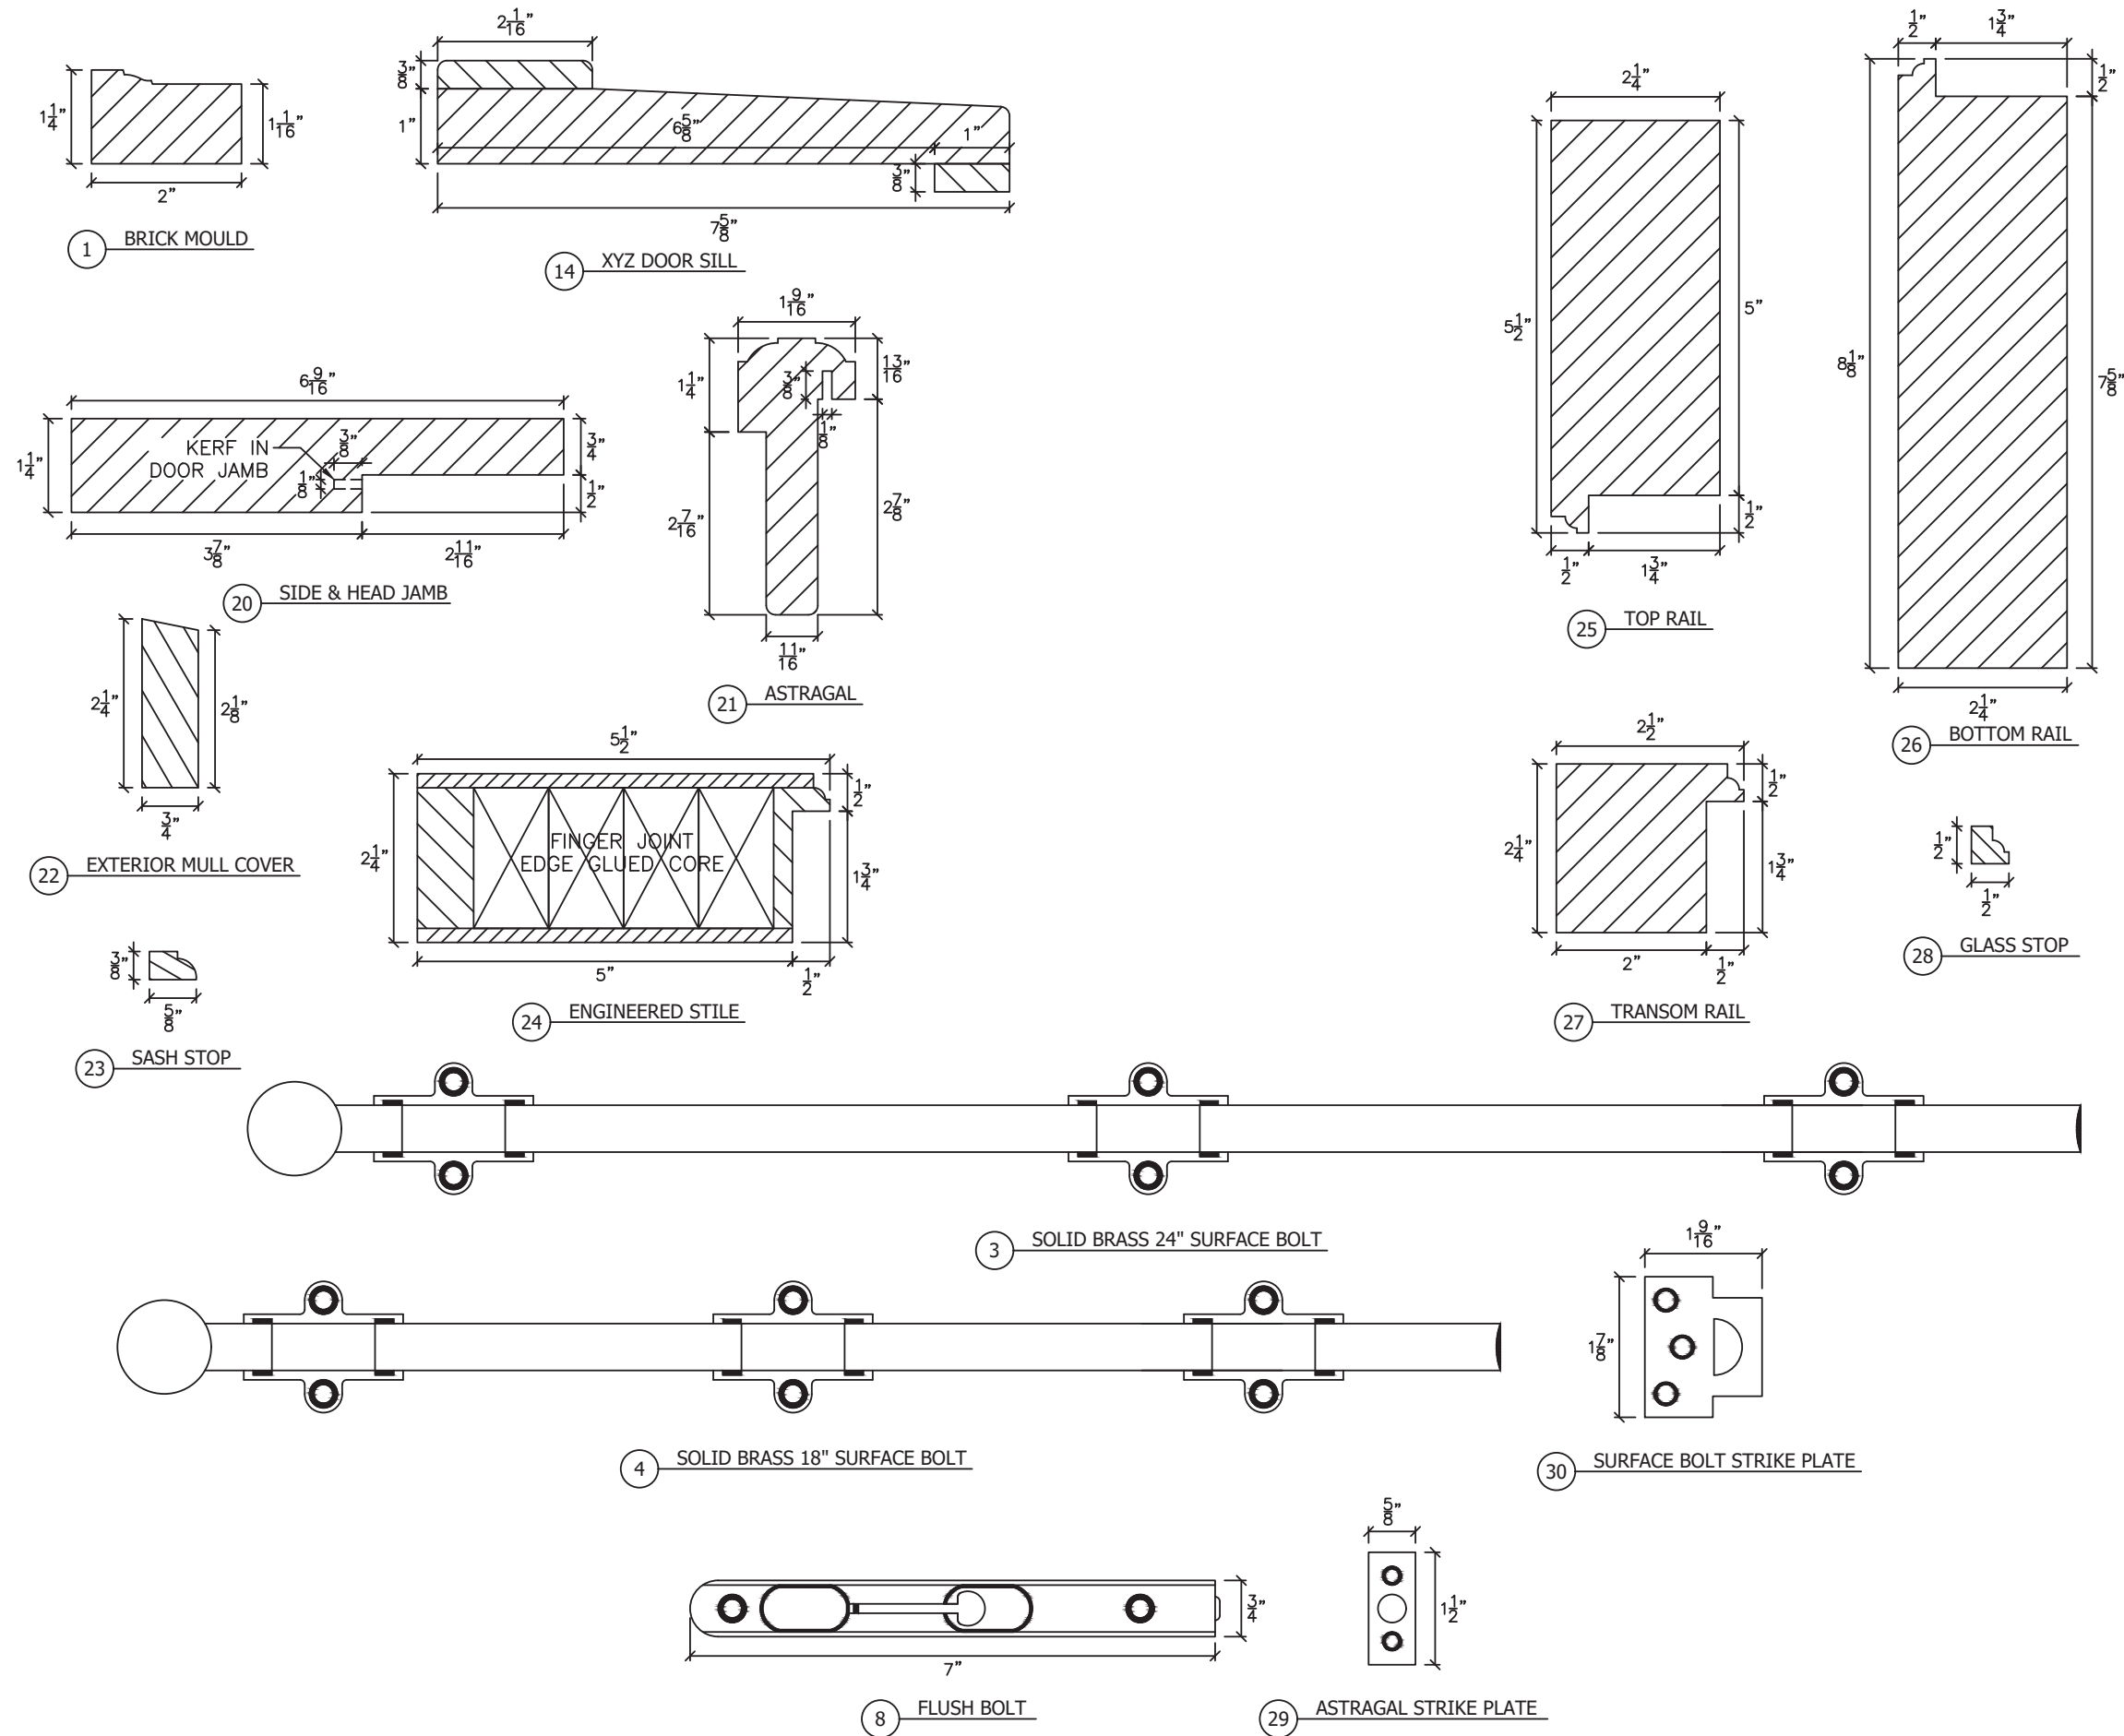


PROJECT # 423-0104

SOUTHEAST ARCHITECTURAL MILLWORK, INC.
3485 HIGHWAY 411
WHITE, GA 30184

TITLE: SERIES "WOOD DOOR WITH TRANSOM" COMPONENTS

DATE:	6/19/2020	DATE:	6/20/23	DATE:	BY
DRAWN BY:	RJA	DRAWING NO.:	6/20/23	DESCRIPTION	
SCALE:	N.T.S.	SAM0002	UPDATE TO THE 8TH EDITION (2023) FBC	REV	
REV:	A	9 OF 10			

Robert J. Amoruso, P.E.
Florida P.E. No. 49752

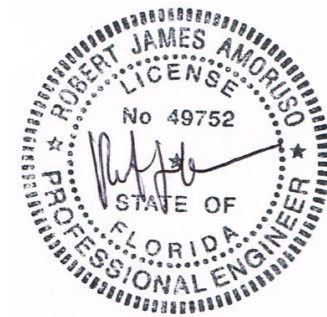

Digitally signed
by Robert J
Amoruso
Date: 2023.09.01
15:50:18 -04'00'

BILL OF MATERIALS		
ITEM	DESCRIPTION	MATERIAL / MFG
1	1-1/4" x 2" 180 BRICK MOULD	WOOD SAPELE
2	TREMCO S500 (BLACK & CLEAR)	TREMCO
3	SOLID BRASS 24" SURFACE BOLT	DELTANA
4	SOLID BRASS 18" SURFACE BOLT	DELTANA
5	#10 X 2-1/2" SCREW	PHILADELPHIA HARDWARE
6	BRZ WEATHER STRIP W/ .650 REACH	LOXCREEN COMPANY
7	4.5" x 4.5" BALL BEARING SOLID BRASS HINGE	PBB,INC.
8	7" FLUSH BOLT	WORLDWIDE DOOR COMPONENTS
9	3/4" STRUCTURAL PLYWOOD	HARDWOODS, INC.
10	1" 18 GAUGE NAIL	FASTENING SOLUTIONS
11	2-1/2" 16 GAUGE NAIL	FASTENING SOLUTIONS
12	#9 x 3" ZINC SCREW	STERLING INDUSTRIAL
13	INSTALLATION ANCHOR - SEE TABLE ON SHEET 11	VARIOUS
14	1-3/8" x 7-5/8" XYZ DOOR SILL	WOOD SAPELE
15	1-1/4" OA INSULATED W/ .100 HS LAM/ WITH/SAFEFLEX INNER LAYER	AGC
16	1-1/4" OA INSULATED W/ .100 HS LAM/ WITH/UVEKOL INNER LAYER	AMERICAN INSULATED
17	FRANKLIN TITE BOND 2 GLUE	FRANKLIN
18	FRANKLIN TITE BOND 3 GLUE	FRANKLIN
19	SOLID BRASS SEX BOLT W/ 2" BARREL, 1" SCREW	ACCURATE MANUFACTURING
20	1-1/4" x 6-9/16" W/ 2-11/16" RABBET	WOOD SAPELE
21	1-9/16" x 3-11/16" ASTRAGAL	WOOD SAPELE
22	3/4" x 2-1/4" EXT. MULL COVER	WOOD SAPELE
23	3/8" x 5/8" SASH STOP	WOOD SAPELE
24	2-1/4" x 5-1/2" ENGINEERED STILE	WOOD SAPELE W/ FJ CORE
25	2-1/4" x 5-1/2" TOP RAIL	WOOD SAPELE
26	2-1/4" x 8-1/8" BOTTOM RAIL	WOOD SAPELE
27	2-1/4" x 2-1/2" TRANSOM RAIL	WOOD SAPELE
28	1/2" x 1/2" GLASS STOP	WOOD SAPELE
29	ASTRAGAL STRIKE PLATE	ALUMINUM
30	SURFACE BOLT STRIKE PLATE	ALUMINUM
31	EMTEK HANDLE AND DEADBOLT SET	EMTEK
32	DOOR SWEEP	WORLDWIDE DOOR COMPONENTS

PROJECT # 423-0104

SOUTHEAST ARCHITECTURAL MILLWORK, INC.
3485 HIGHWAY 411
WHITE, GA 30184

TITLE: SERIES "WOOD DOOR WITH TRANSOM"
BILL OF MATERIALS & COMPONENTS

PREPARED BY: 

DATE: 6/19/2020

DRAWN BY: RJA

SCALE: N.T.S.

REV: A

SHEET: 10 OF 10

DRAWING NO: SAM0002

UPDATE TO THE 8TH EDITION (2023) FBC


6/20/23

RJA

DATE

BY

Robert J. Amoruso, P.E.
Florida P.E. No. 49752

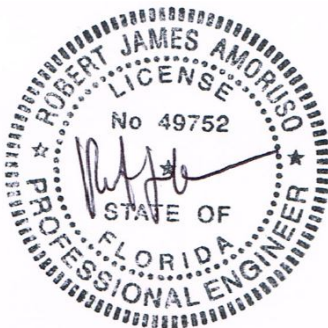

Digitally signed
by Robert J
Amoruso
Date: 2023.09.01
15:50:29 -04'00'