

THERMA-TRU[®]
DOORS


Fiber-Classic[®] & Smooth-Star[®]

WOOD EDGE
GLAZED FIBERGLASS SINGLE DOOR
w/ SIDELITE(S) w/ BLINDS BETWEEN GLASS
INSWING/OUTSWING
"IMPACT"


GENERAL NOTES

1. This product has been evaluated and is in compliance with the 9th Edition (2026) Florida Building Code (FBC) structural requirements excluding the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection this product complies with FBC Sections 1609.1.2 & R301.2.1.2 and does not require an impact resistant covering. This product meets missile level "D" and excludes Wind Zone 4 as defined in ASTM E1996.
4. For 2x stud framing construction, anchoring of these units shall be the same as that shown for 2x buck masonry construction.
5. Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.
6. Fiber-Classic & Smooth-Star Door panel require the use of "J" part numbers and must be stained or painted within six months of installation.

TABLE OF CONTENTS	
SHEET #	DESCRIPTION
1	Typical Elevations, Design Pressures & General Notes
2	Door Panel Details
3	Sidelite Panel Details
4	Elevations
5	Horizontal & Vertical Cross Sections (2X Buck)
6	Horizontal & Vertical Cross Sections (1X Buck)
7	Horizontal Cross Sections
8	Horizontal & Vertical Cross Sections (Direct to Masonry)
9	Vertical Cross Sections (Thresholds)
10	Buck Anchoring
11	Frame Anchoring
12	Hardware Details
13	Lite Frame & Glazing Details
14	Bill of Materials & Components

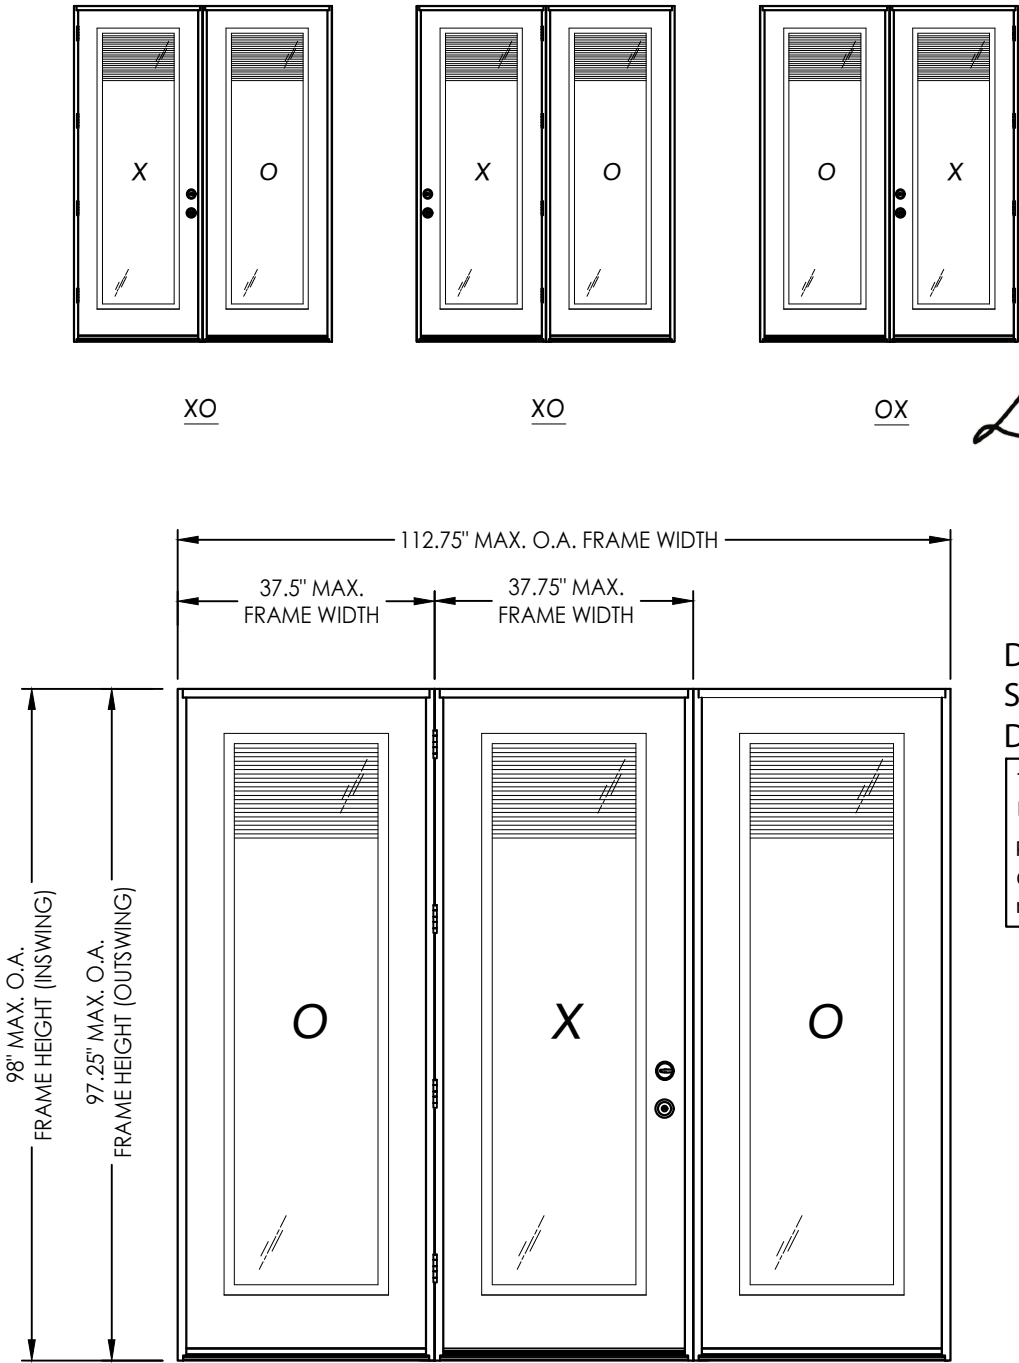

CONFIGURATION	DESIGN PRESSURE (PSF) INSWING		DESIGN PRESSURE (PSF) OUTSWING	
	POSITIVE	NEGATIVE	POSITIVE	NEGATIVE
XO, OX, OXO	+30.0	-35.0	+40.0	-40.0

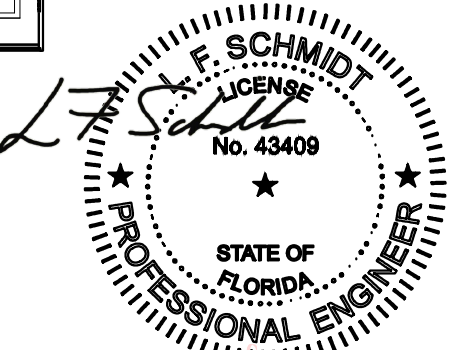

Digitally signed by Lyndon F Schmidt

Date: 2026.08.10 15:26:57 -04'00'

This item has been digitally signed and sealed by L. F. Schmidt, P.E. on the date adjacent to the seal.
Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

THIS PRODUCT APPROVAL IS VALID
ONLY FOR THE STATE OF FLORIDA

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
TYPICAL ELEVATION, DESIGN
PRESSURES & GENERAL NOTES

27/01/26
UPDATE TO 9TH ED. (2026) FBC

27/27/23
UPDATE TO 8TH ED. (2023) FBC

NO. 1
DATE

REVISIONS

DATE: 5/25/21

SCALE: N.T.S.

DWG. BY: RW

CHK. BY: LFS




DRAWING NO.:
FL-37183.8

SHEET 1 OF 14


© 2021 R.W. BUILDING CONSULTANTS INC.

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


Z:\2023 FBC Drawings\Therma-Tru\FL-37183 R2\FL-37183.7-9.dwg

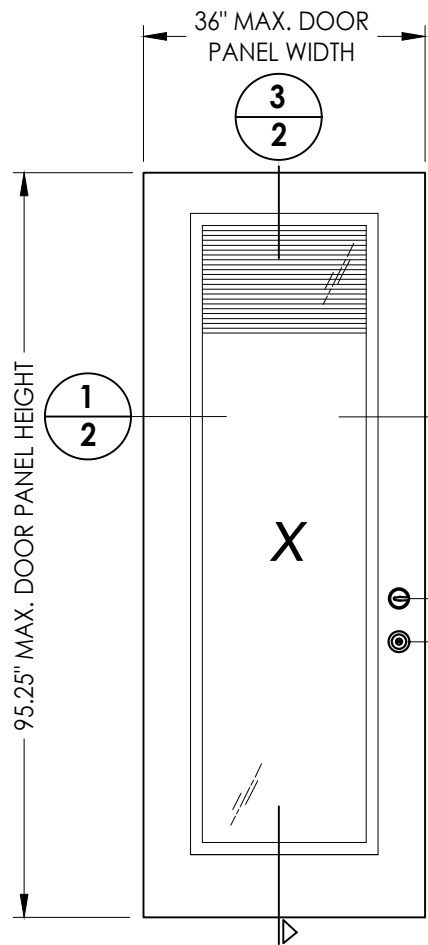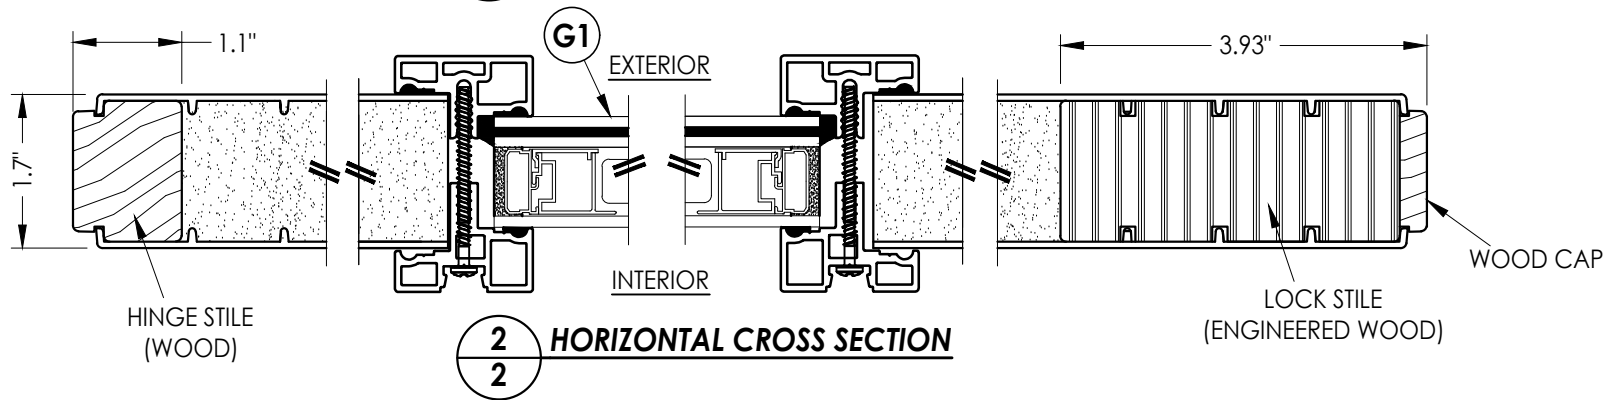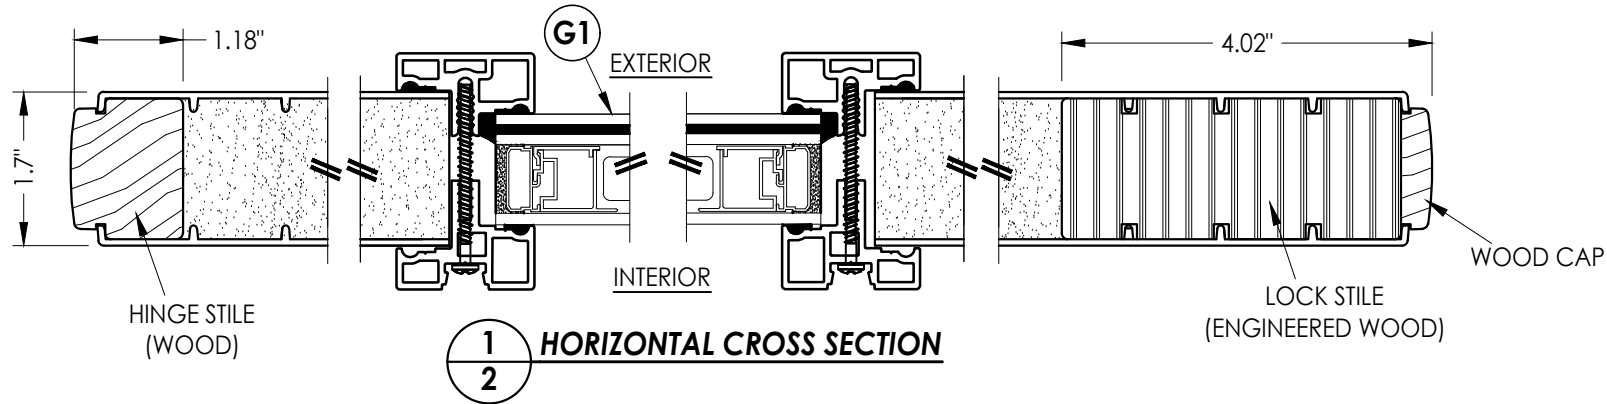

40 FIBERGLASS DOOR PANEL
BOOK DOOR - WOOD EDGE

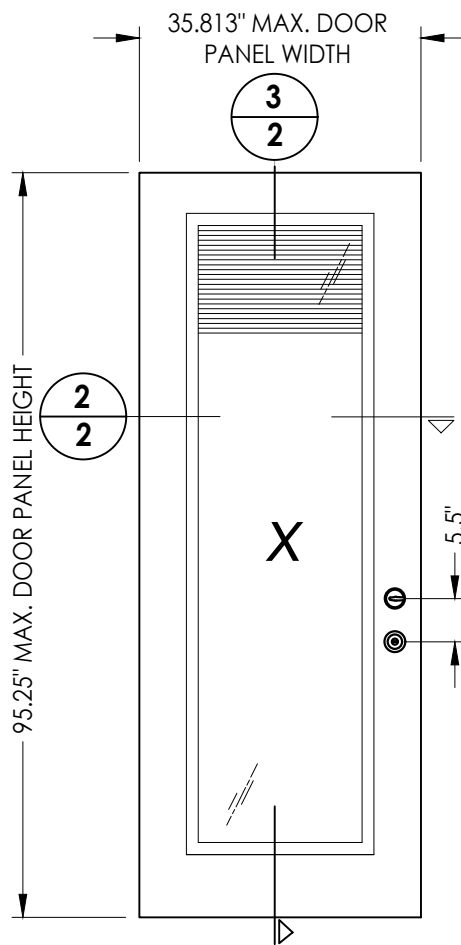


41 FIBERGLASS DOOR PANEL
HYBRID DOOR - WOOD EDGE

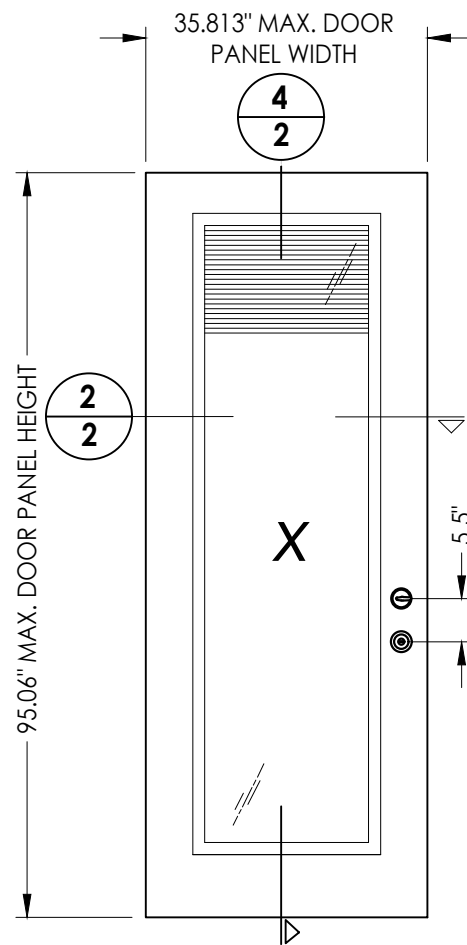


42 FIBERGLASS DOOR PANEL
U1 DOOR - WOOD EDGE

FIBERGLASS SKIN: 0.082" MIN. THK.
FOAM CORE: POLYURETHANE -1.9 PCF MIN.

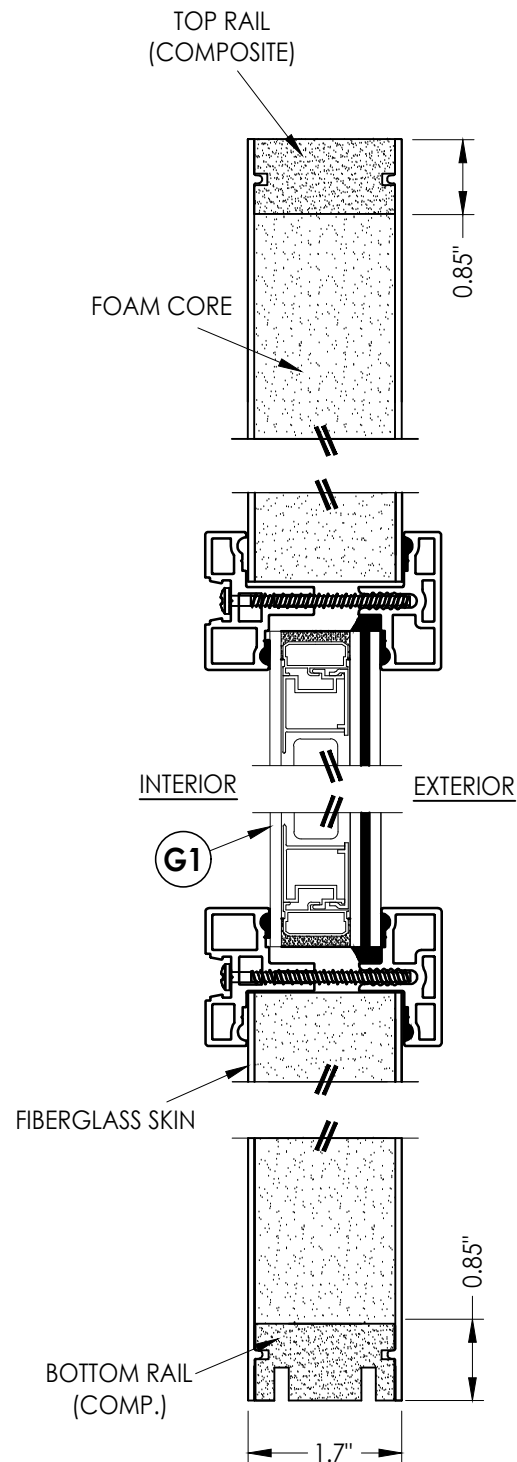

3 VERTICAL CROSS SECTION

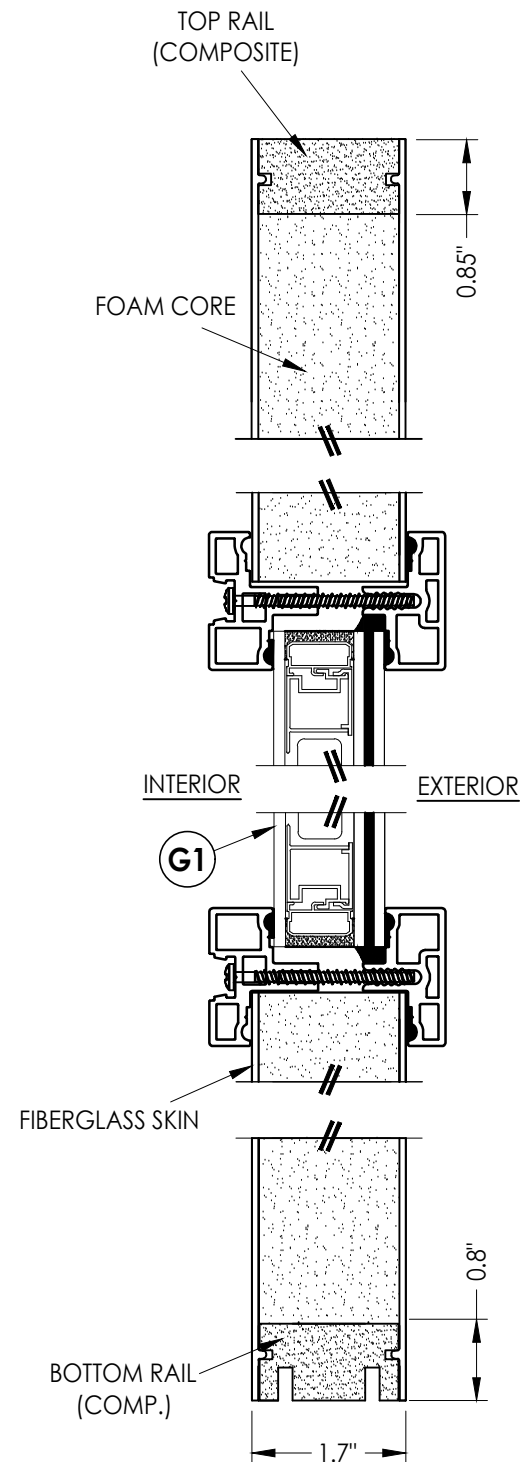

4 VERTICAL CROSS SECTION

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.

P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
THERMA-TRU
FIBERGLASS DOOR

PART OR ASSEMBLY:
DOOR PANEL DETAILS

NO.	DATE	REVISIONS	BY
2	7/01/26	UPDATE TO 9TH ED. (2026) FBC	LFS
1	7/27/23	UPDATE TO 8TH ED. (2023) FBC	LFS

DATE: 5/25/21

SCALE: N.T.S.


DWG. BY: RW

CHK. BY: LFS


DRAWING NO.: FL-37183.8

SHEET 2 OF 14

Z:\2023 FBC Drawings\Therma-Tru\FL-37183 R2\FL-37183.7-9.dwg

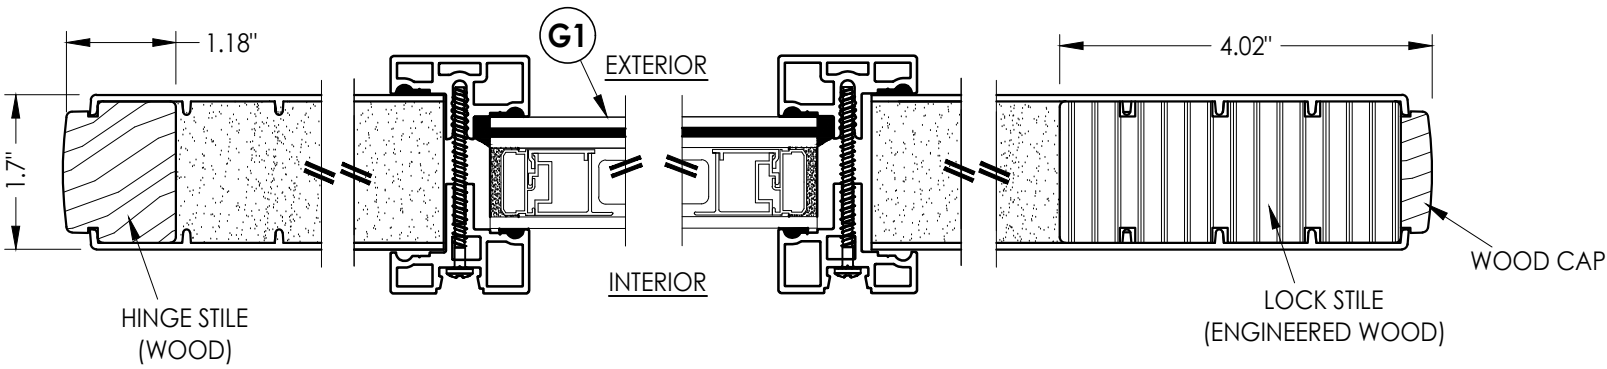


1
3 HORIZONTAL CROSS SECTION

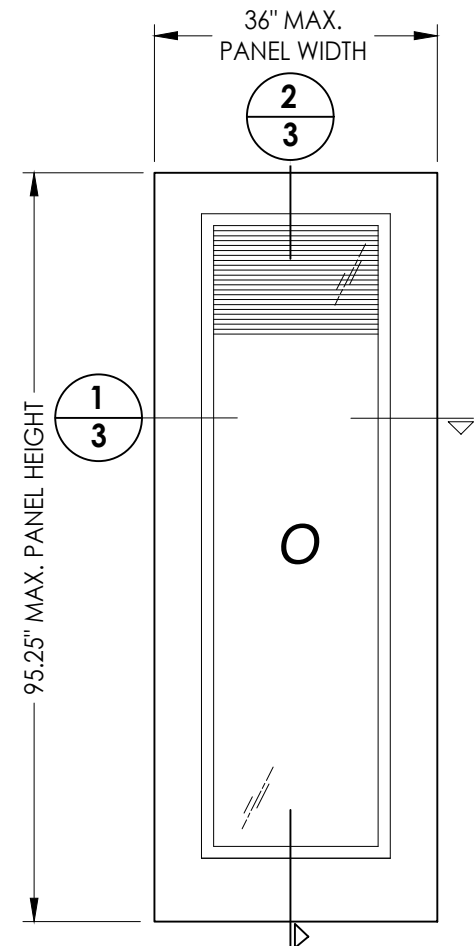

50 FIBERGLASS SIDELITE PANEL
WOOD EDGE

FIBERGLASS SKIN: 0.082" MIN. THK.
FOAM CORE: POLYURETHANE -1.9 PCF MIN.

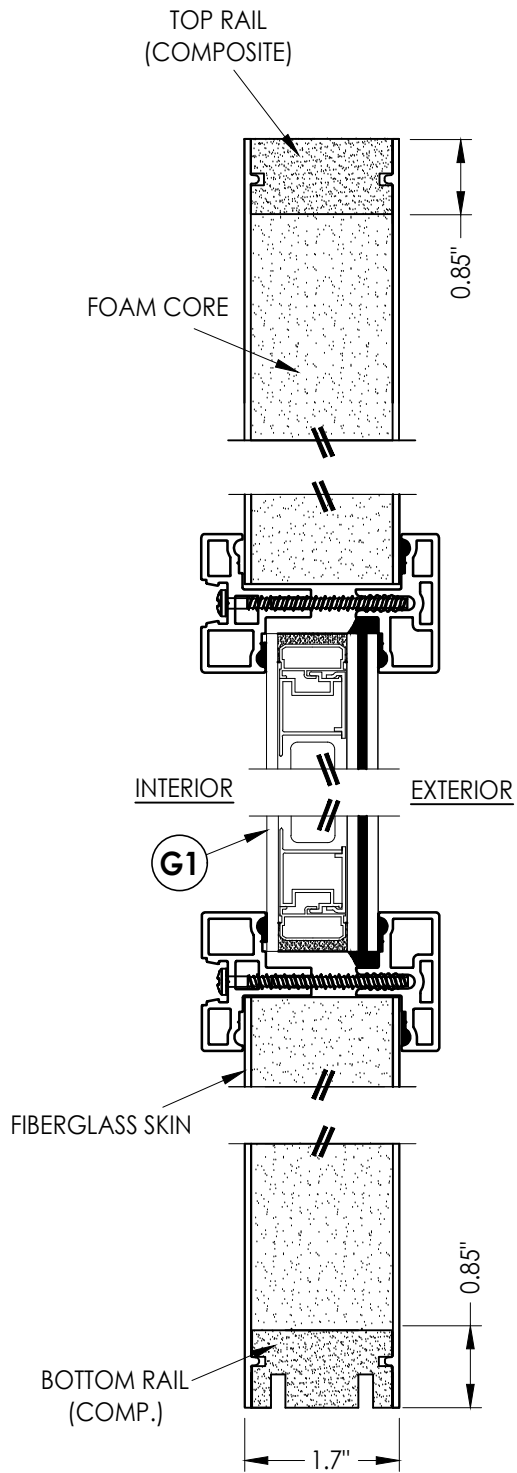

2
3 VERTICAL CROSS SECTION

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:		PART OR ASSEMBLY:	
THERMA-TRU FIBERGLASS DOOR		SIDELITE PANEL DETAILS	
		LFS	BY
		FBC	
2	7/01/26	UPDATE TO 9TH ED. (2026)	FBC
1	7/27/23	UPDATE TO 8TH ED. (2023)	FBC
NO.	DATE		

DATE: 5/25/21

SCALE: N.T.S.

DWG. BY: RW




CHK. BY: LFS

DRAWING NO.:

FL-37183.8

SHEET 3 OF 14

Z:\2023 FBC Drawings\Therma-Tru\FL-37183 R2\FL-37183.7-9.dwg

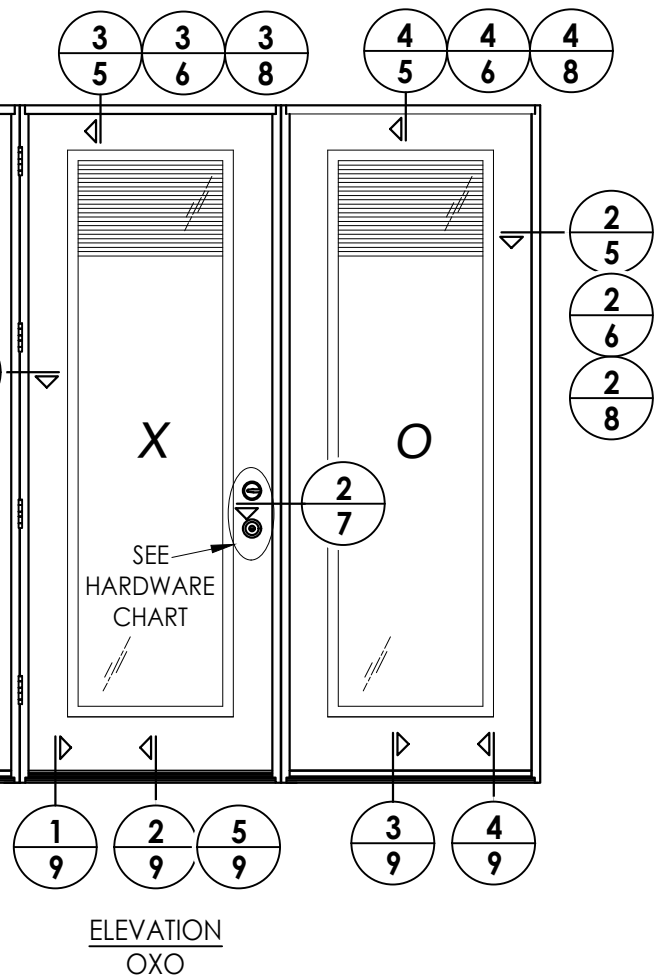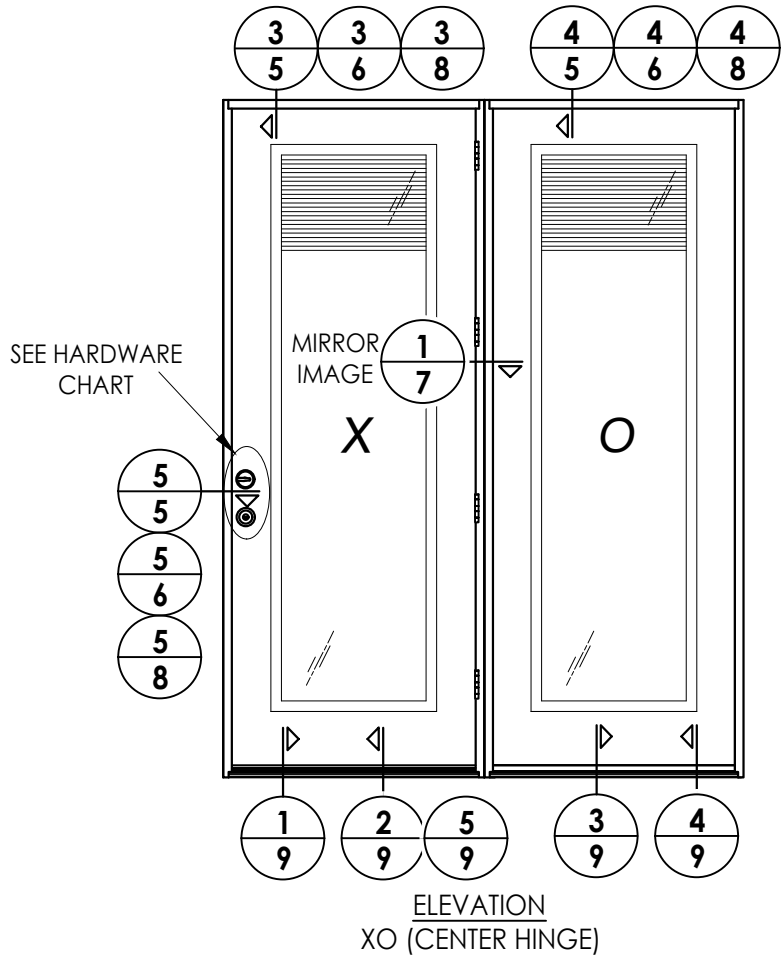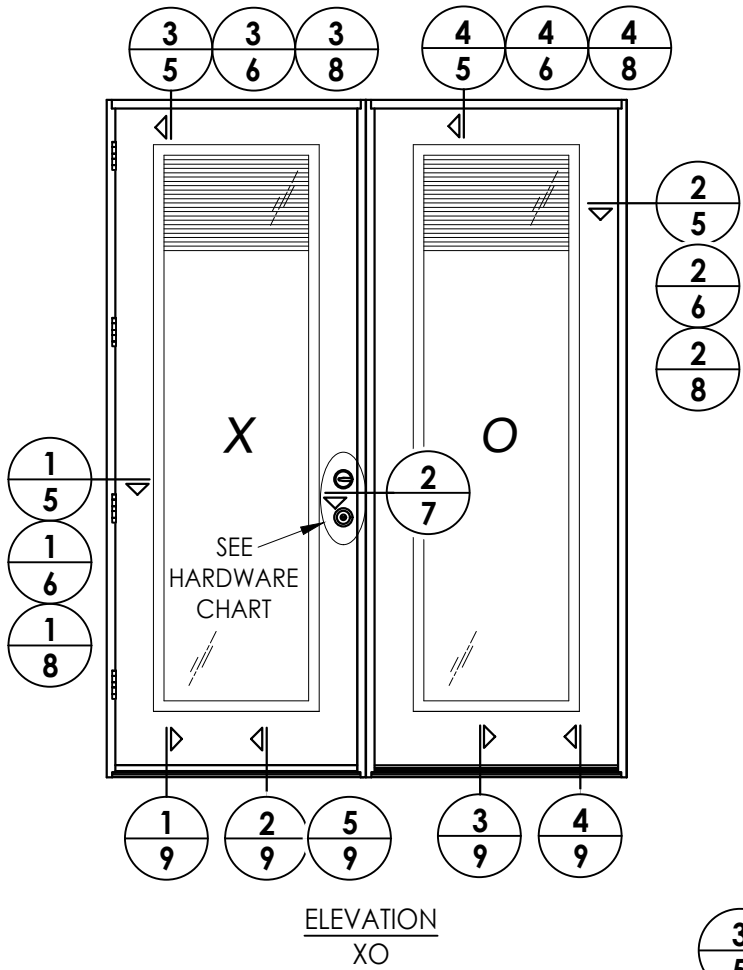

HARDWARE TABLE		
MANUFACTURER	MODEL	
SCHLAGE	KNOB:	F51
	DEADBOLT:	B60
KWIKSET	KNOB:	SIGNATURE SERIES
	DEADBOLT:	SIGNATURE SERIES (980)

REVISIONS			
NO.	DATE	BY	
2	7/01/26	LFS	UPDATE TO 9TH ED. (2026)
1	7/27/23	LFS	UPDATE TO 8TH ED. (2023)


DATE: 5/25/21
SCALE: N.T.S.
DWG. BY: RW
CHK. BY: LFS
DRAWING NO.: FL-37183.8
SHEET 4 OF 14

PRODUCT: THERMA-TRU
FIBERGLASS DOOR
PART OR ASSEMBLY:
ELEVATIONS

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409


RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

Z:\2023 FBC Drawings\Therma-Tru\FL-37183 R2\FL-37183.7-9.dwg

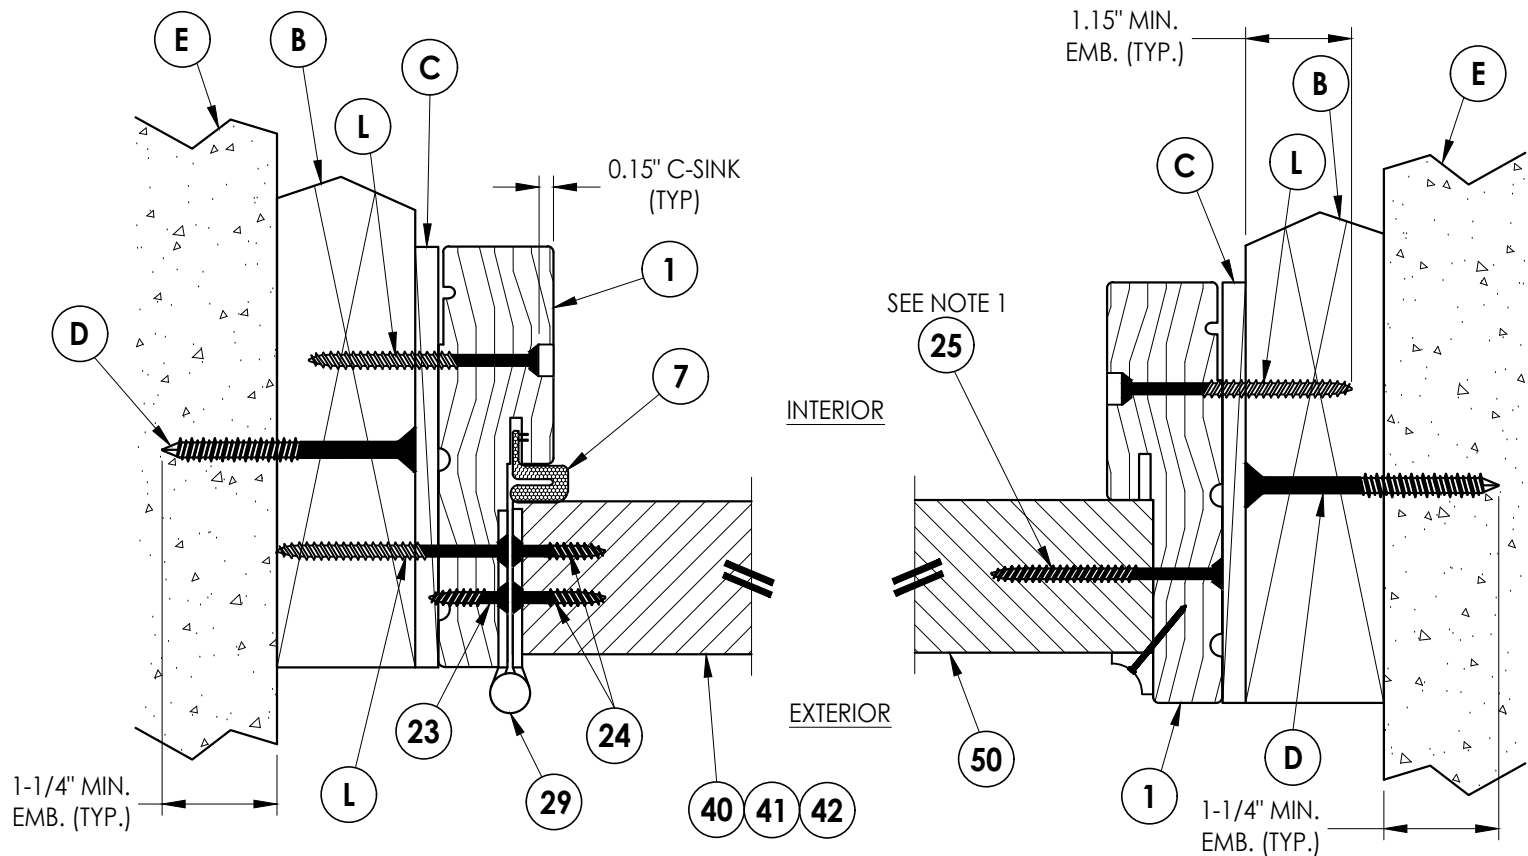


1 **HORIZONTAL CROSS SECTION**
5 Shown w/ 2X Buck
Outswing shown (Inswing similar)

2 **HORIZONTAL CROSS SECTION**
5 Shown w/ 2X Buck
Outswing shown (Inswing similar)

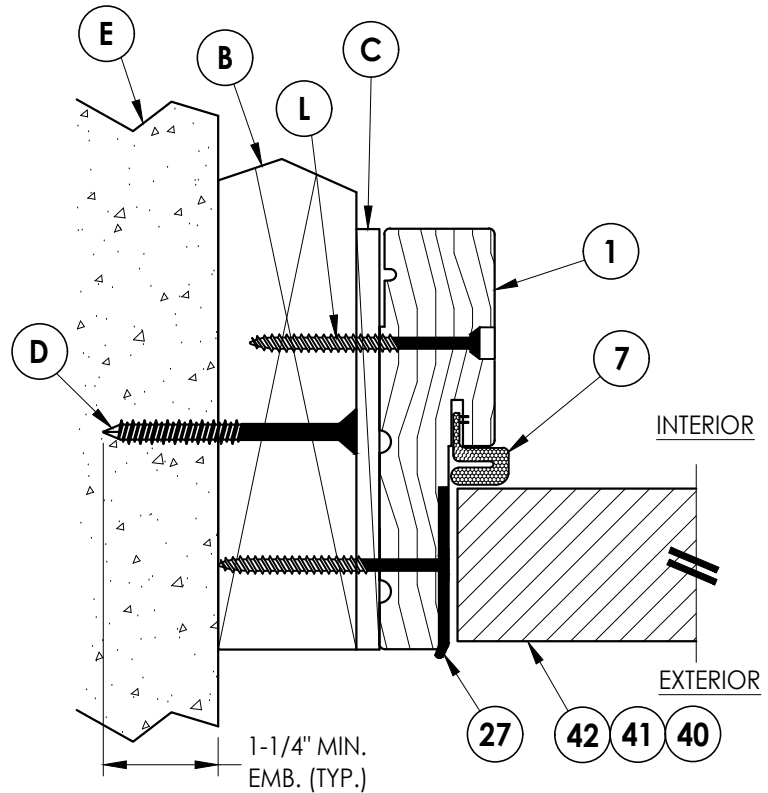


5 **HORIZONTAL CROSS SECTION**
5 Shown w/ 2X Buck
Outswing shown (Inswing similar)

- Notes:
1. Sidelite assembly screws located 6" from each end and 6 more screws equally spaced between (8 screws total per side jamb).
 2. Sidelite assembly screws located 3" from each end and @ centerline (3 screws along head jamb).
 3. PVC/Wood Moulding secured w/ 16 GA. X 1" brad nails located 1" from ends & 10" o.c. max.

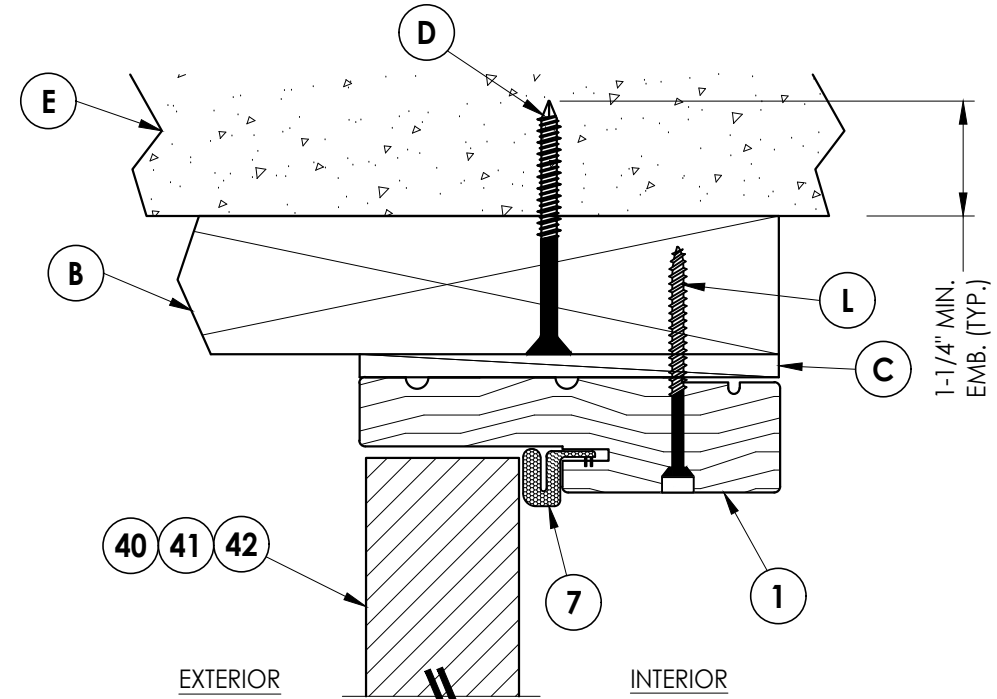

3 **VERTICAL CROSS SECTION**
5 Shown w/ 2X Buck
Outswing shown (Inswing similar)

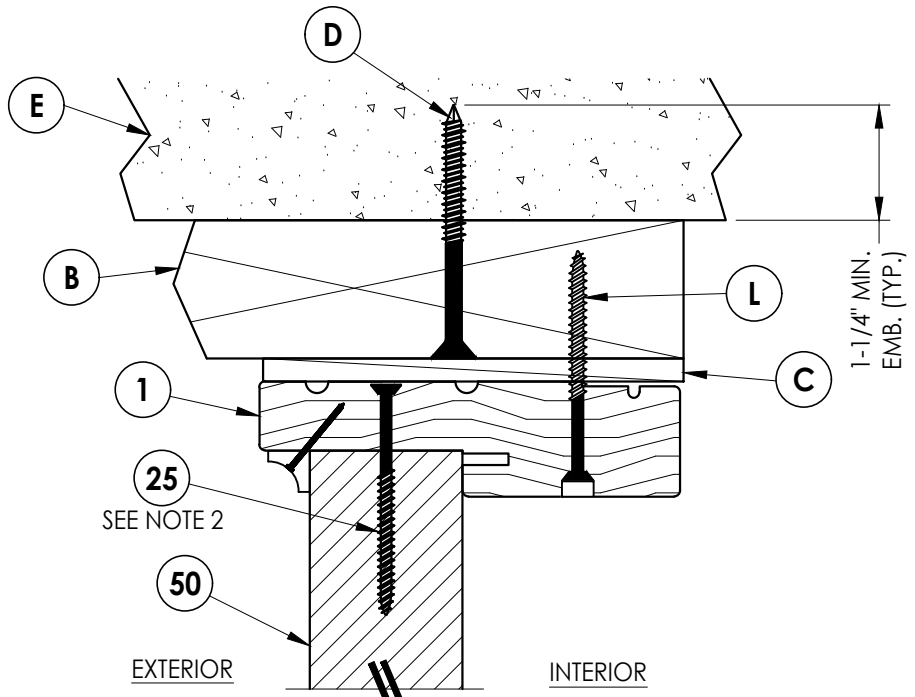

4 **VERTICAL CROSS SECTION**
5 Shown w/ 2X Buck
Outswing shown (Inswing similar)

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: THERMA-TRU
FIBERGLASS DOOR



PART OR ASSEMBLY:
HORIZONTAL & VERTICAL
CROSS SECTIONS (2X BUCK)

NO.	DATE	REVISIONS			
		BY	DATE	DESCRIPTION	REVISIONS
2	7/01/26	LFS		UPDATE TO 9TH ED. (2026)	FBC
1	7/27/23	LFS		UPDATE TO 8TH ED. (2023)	FBC

DATE: 5/25/21
SCALE: N.T.S.
DWG. BY: RW
CHK. BY: LFS
DRAWING NO.: FL-37183.8
SHEET 5 OF 14

[illegible]

Z:\2023 FBC Drawings\Therma-Tru\FL-37183 R2\FL-37183.7-9.dwg

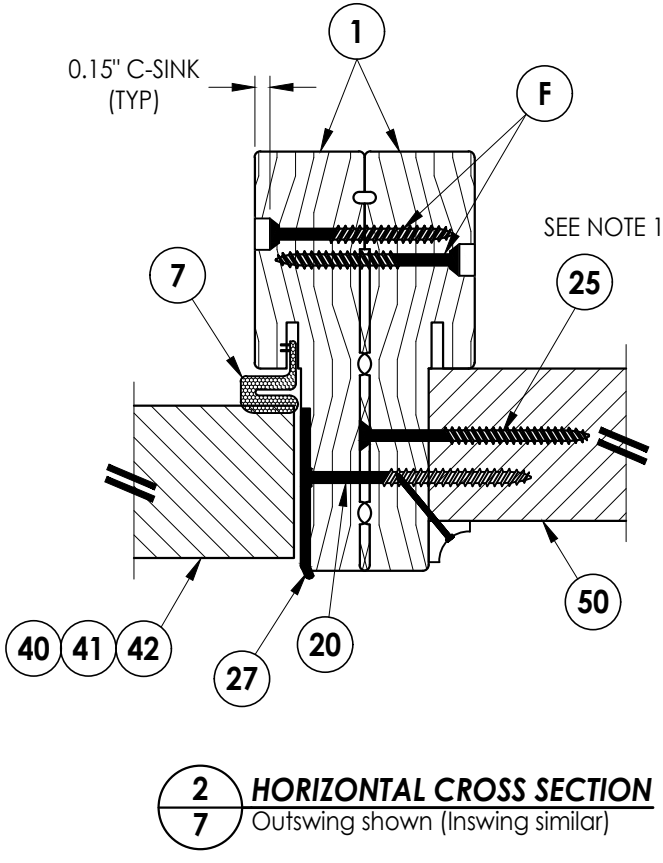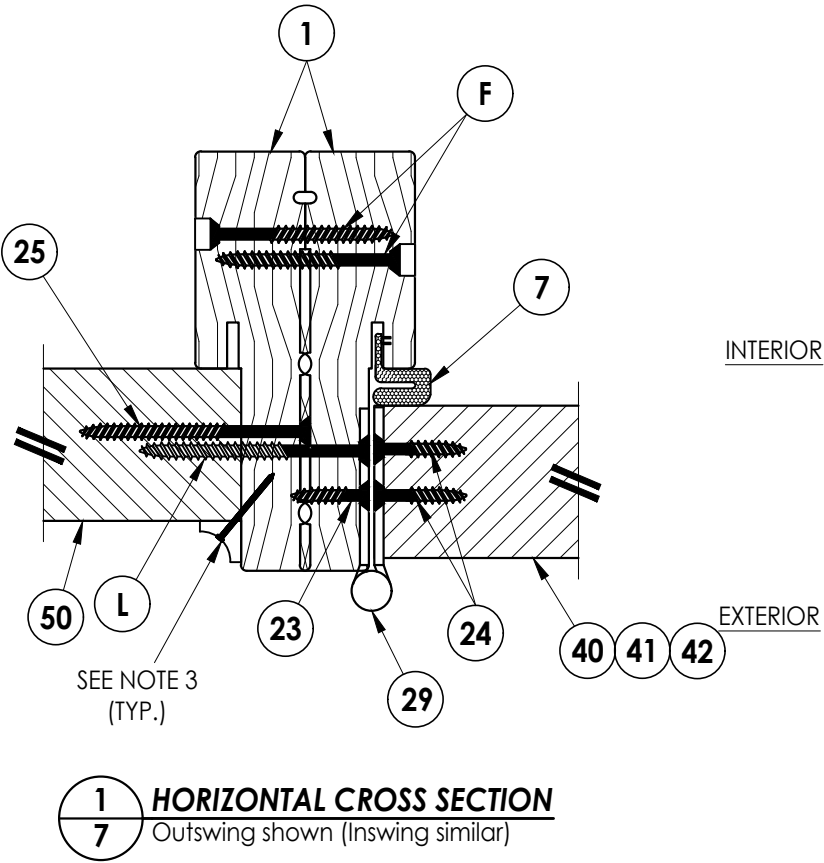


- Notes:
1. Sidelite assembly screws located 6" from each end and 6 more screws equally spaced between (8 screws total per side jamb).
 2. Sidelite assembly screws located 3" from each end and @ centerline (3 screws along head jamb).
 3. PVC/Wood Moulding secured w/ 16 GA. X 1" brad nails located 1" from ends & 10" o.c. max.

DATE:	5/25/21
SCALE:	N.T.S.
DWG. BY:	RW
CHK. BY:	LFS
DRAWING NO.:	FL-37183.8
SHEET	7 OF 14

PRODUCT:	THERMA-TRU FIBERGLASS DOOR
PART OR ASSEMBLY:	HORIZONTAL CROSS SECTIONS


Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409	RW BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813
---	--

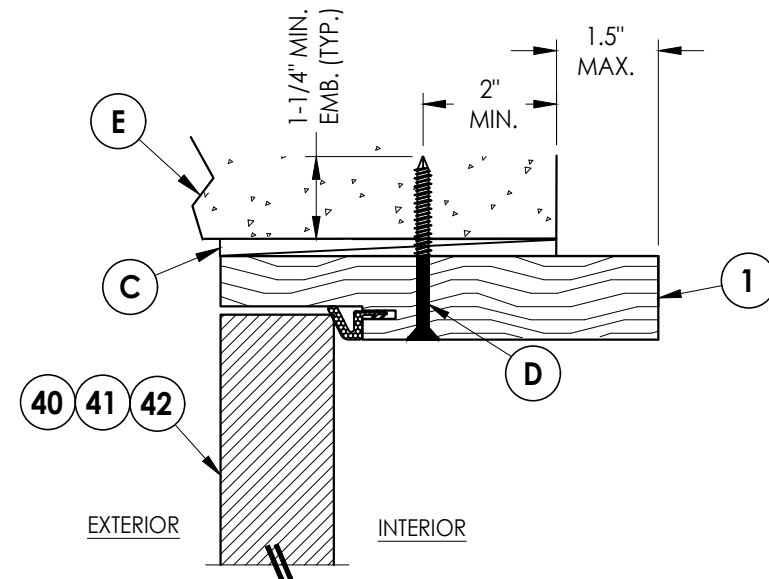


3 **HORIZONTAL CROSS SECTION**
8 Shown Direct to Masonry
 Outswing only w/ 6-9/16" jamb

Notes:


1. Sidelite assembly screws located 6" from each end plus 6 more equally spaced between (8 screws total per side jamb).
2. Sidelite assembly screws located 3" from each end and at centerline (3 screws total at head jamb).
3. PVC/Wood Moulding secured w/ 16 GA. X 1" brad nails located 1" from ends & 10" o.c. max.

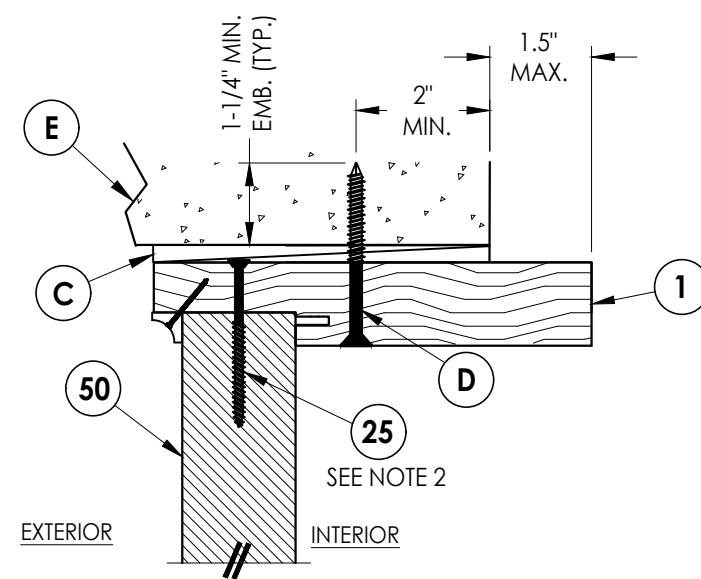


4 **VERTICAL CROSS SECTION**
8 Shown Direct to Masonry
 Outswing only w/ 6-9/16" jamb

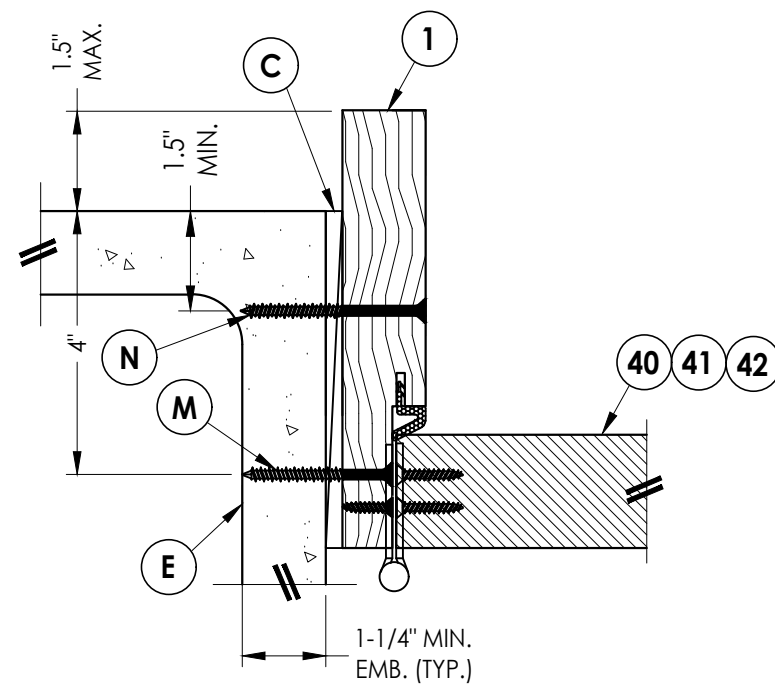

1 **HORIZONTAL CROSS SECTION**
8 Shown Direct to Masonry
Outswing only w/ 6-9/16" jamb

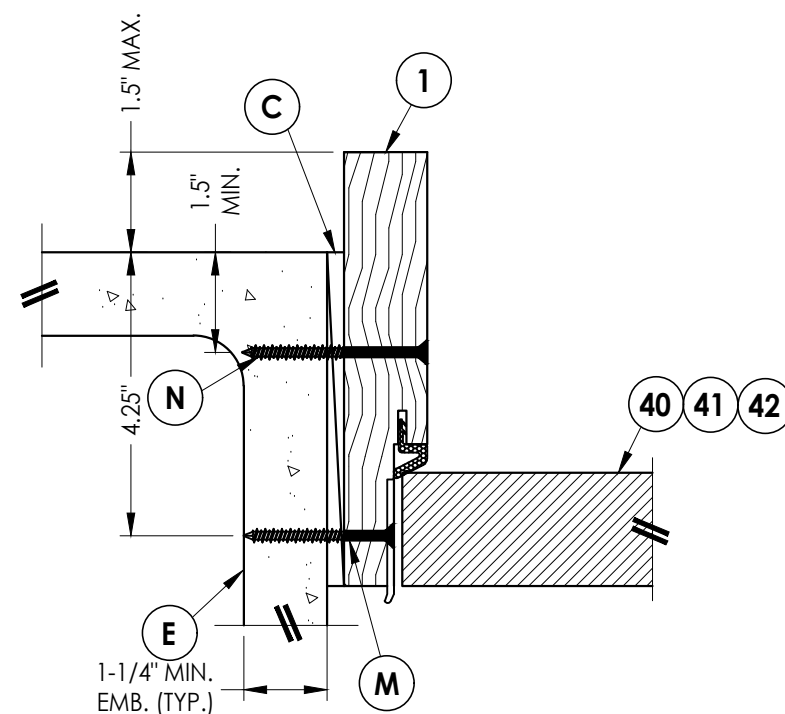

5 **HORIZONTAL CROSS SECTION**
8 Shown Direct to Masonry
 Outswing only w/ 6-9/16" jamb

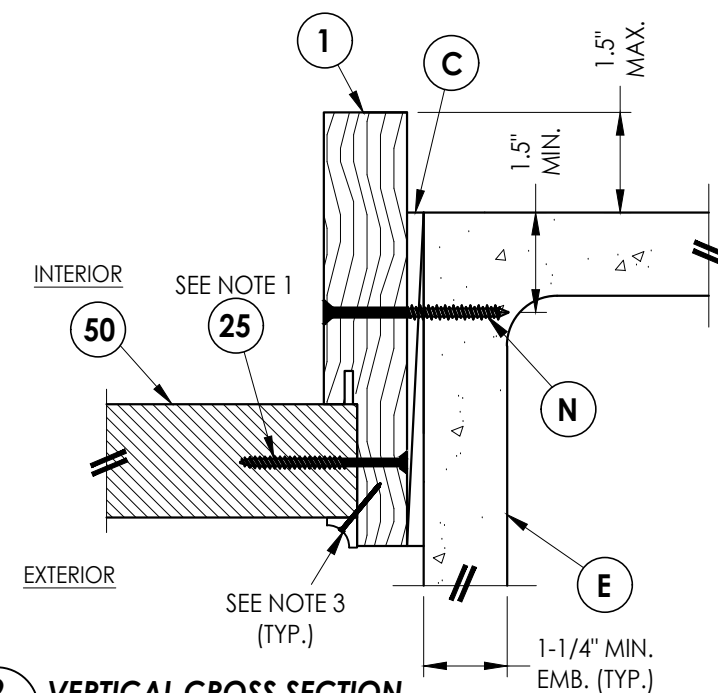

2 **VERTICAL CROSS SECTION**
8 Shown Direct to Masonry
 Outswing only w/ 6-9/16" jamb


[illegible]

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409


R^W BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

© 2021 R.W. BUILDING CONSULTANTS INC.

Z:\2023 FBC Drawings\Therma-Tru\FL-37183 R2\FL-37183.7-9.dwg

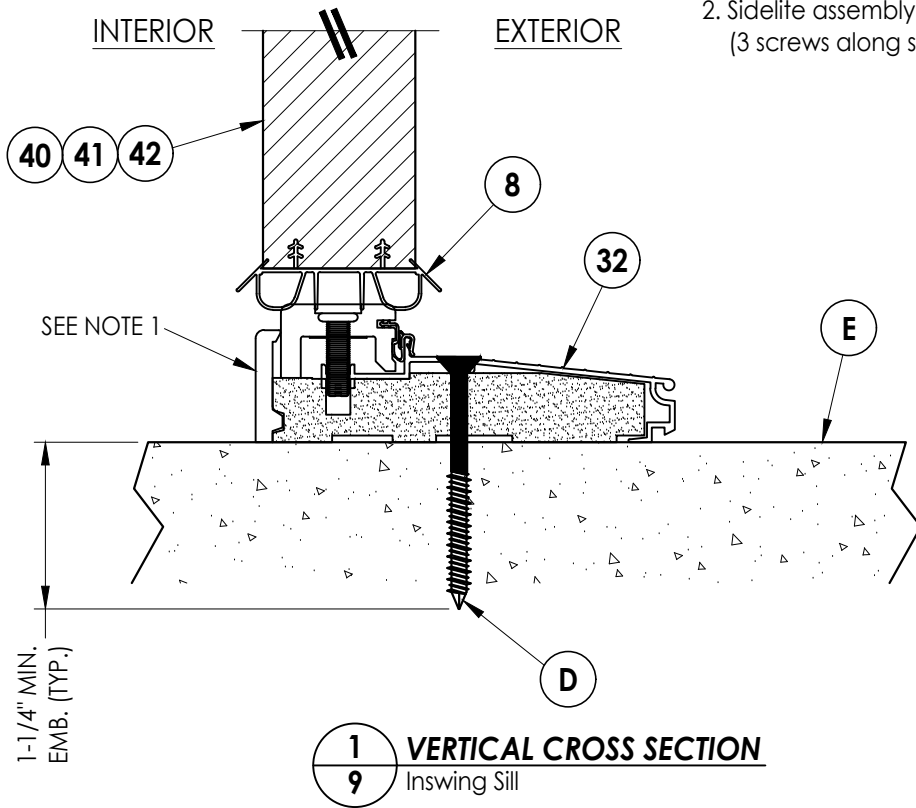


1
9 VERTICAL CROSS SECTION
Inswing Sill

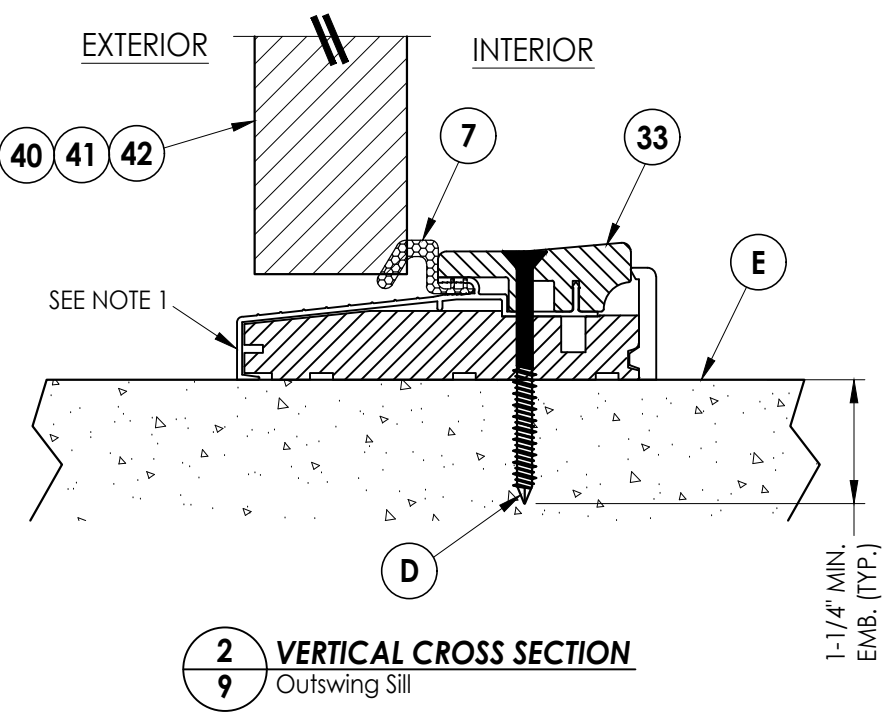


2
9 VERTICAL CROSS SECTION
Outswing Sill


- Notes:
- Sill Item #32 is attached to jambs w/ (3) #8 X 2-1/2" pph screws at each end.
Sill Item #33 is attached to jambs w/ (2) #8 X 2-1/2" pph screws at each end.
Sill Item #34 is attached to jambs utilizing (2) #10 X 2" pph SMS at each end.
 - Sidelite assembly screws located 3" from each end and @ centerline (3 screws along sill).

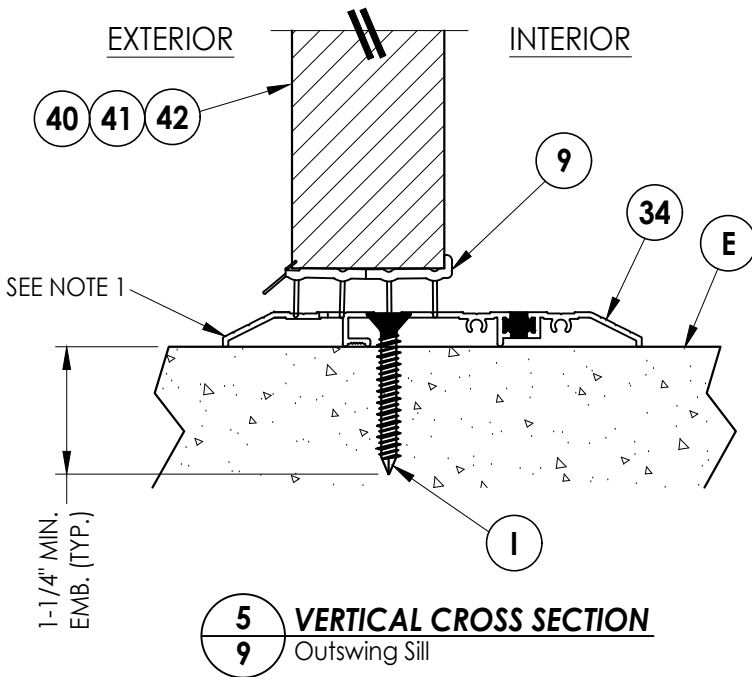

5
9 VERTICAL CROSS SECTION
Outswing Sill


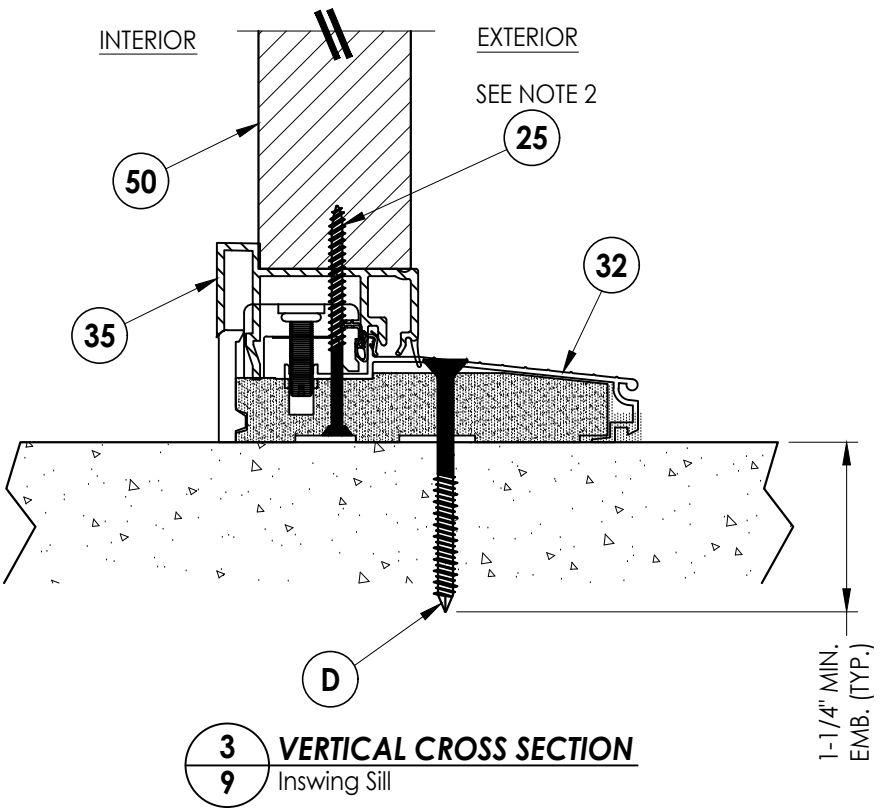


3
9 VERTICAL CROSS SECTION
Inswing Sill

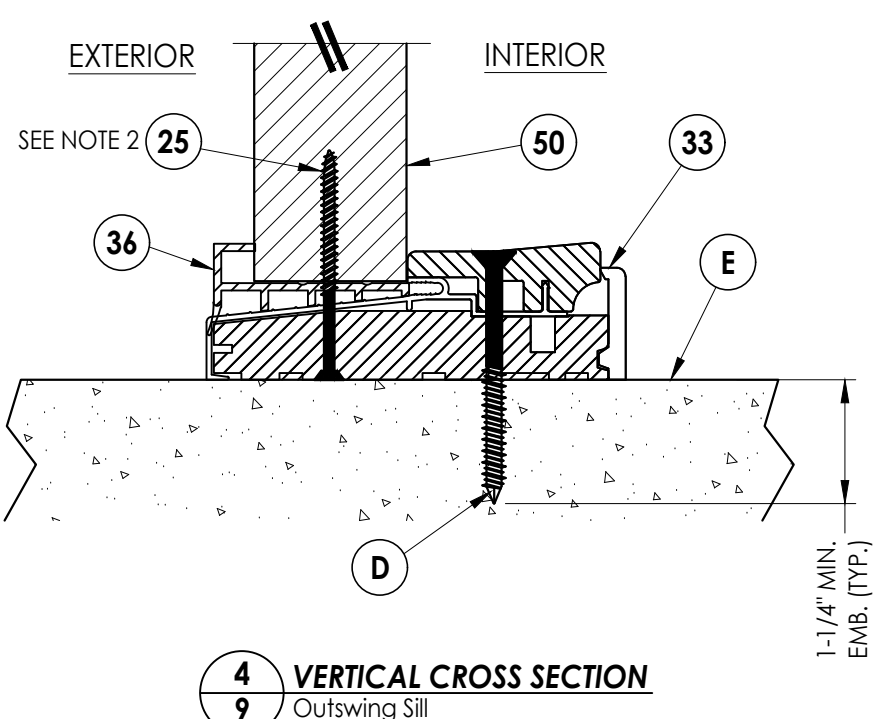

4
9 VERTICAL CROSS SECTION
Outswing Sill

Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409				BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813			
PRODUCT: THERMA-TRU FIBERGLASS DOOR				PART OR ASSEMBLY: VERTICAL CROSS SECTIONS (THRESHOLDS)			

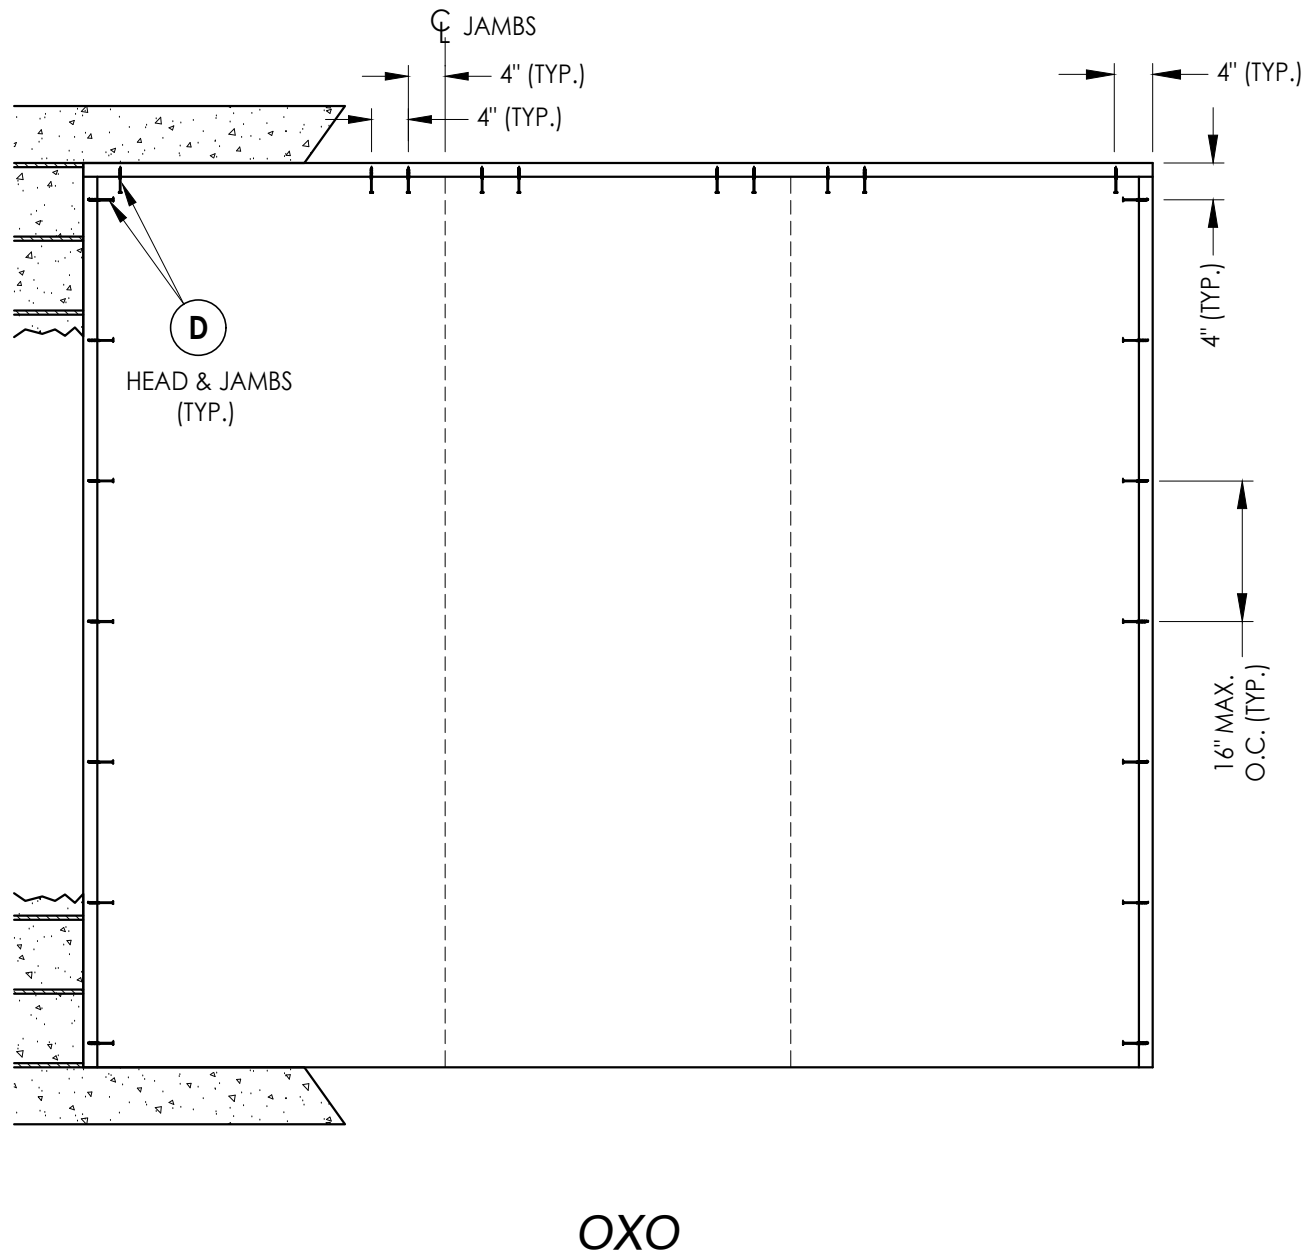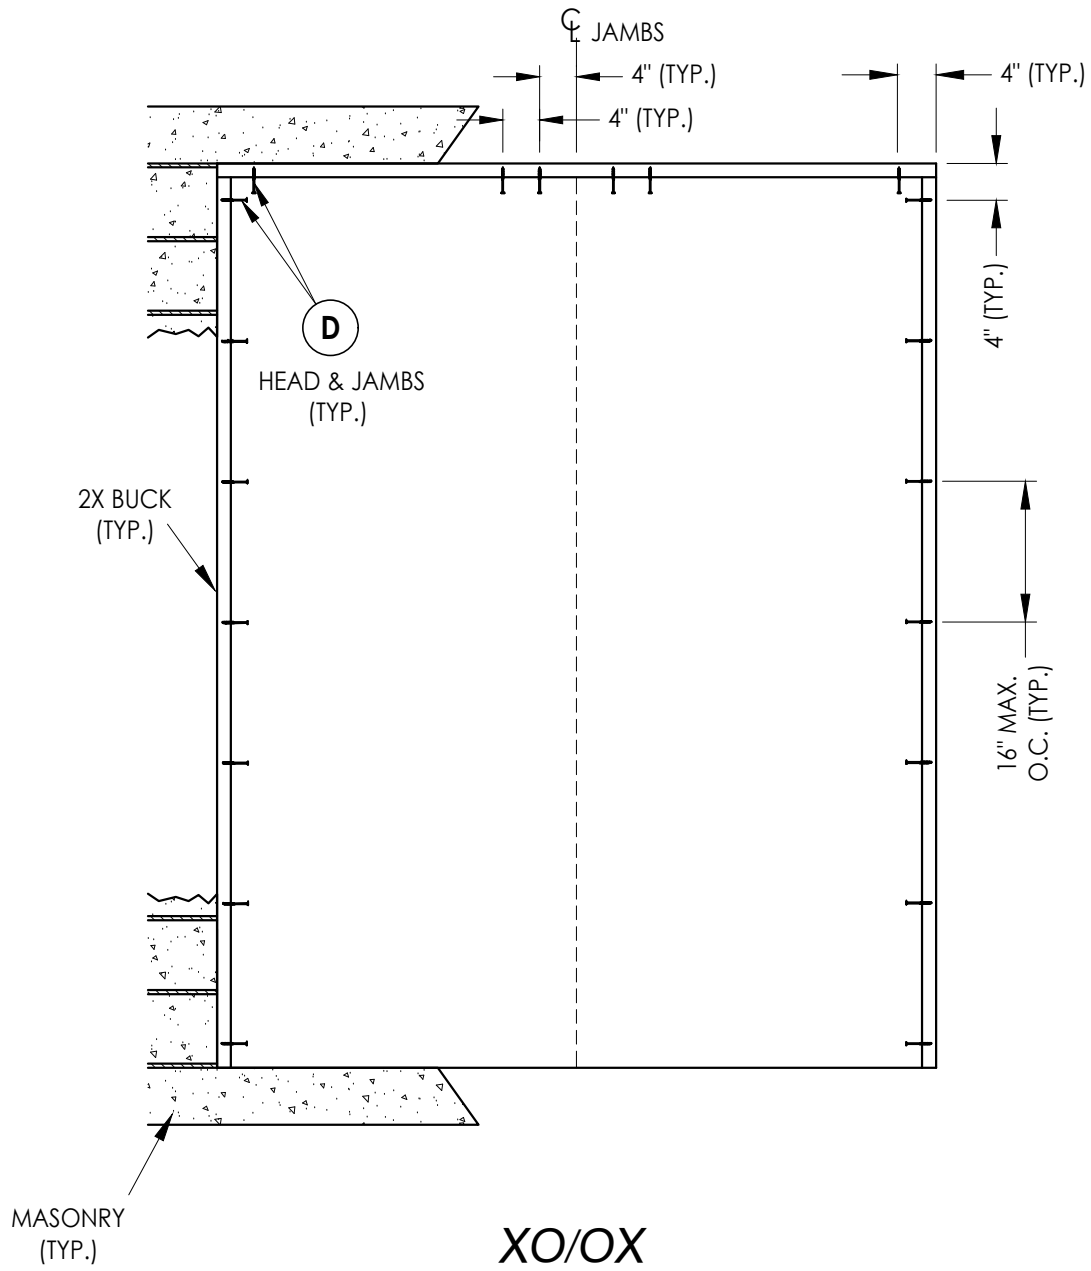


2X BUCK ANCHORING

[illegible]

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409


RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

Z:\2023 FBC Drawings\Therma-Tru\FL-37183 R2\FL-37183.7-9.dwg

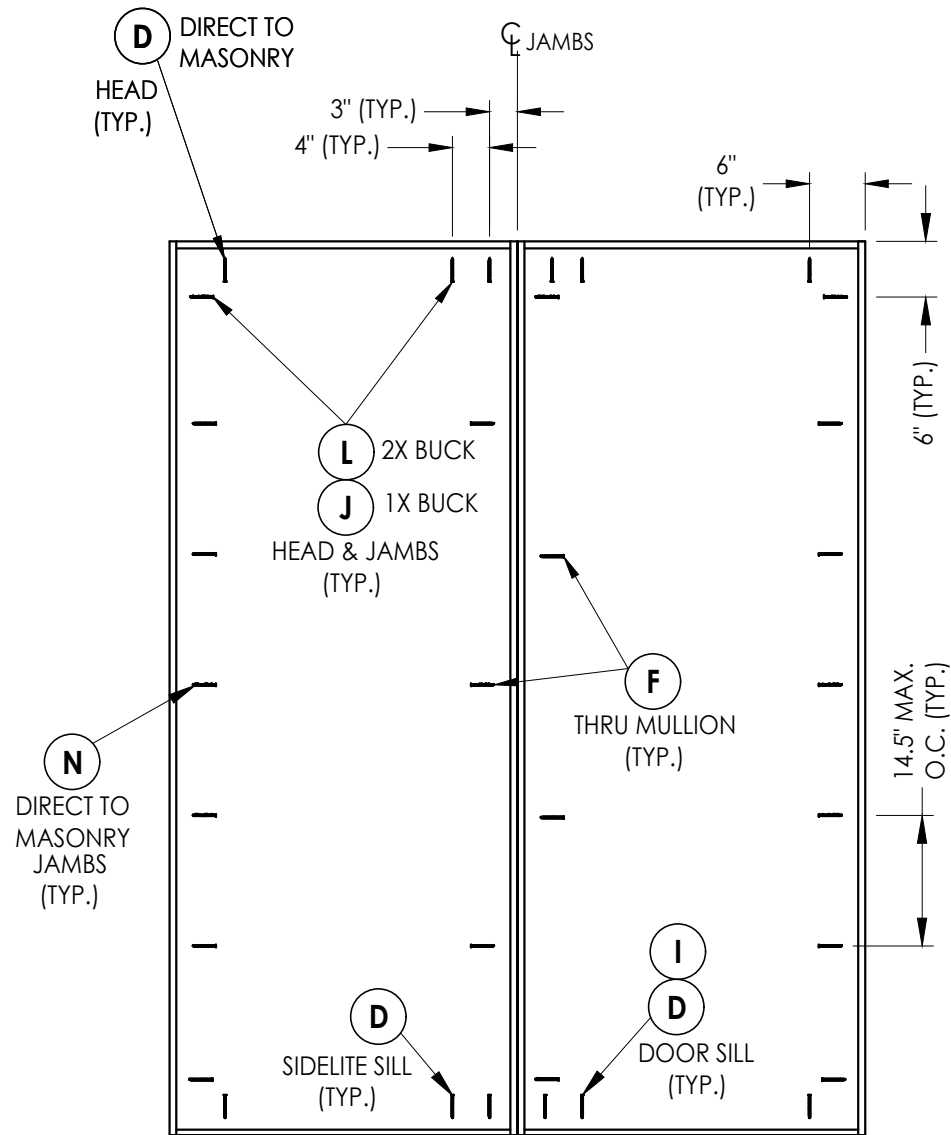


OX/XO

FRAME ANCHORING

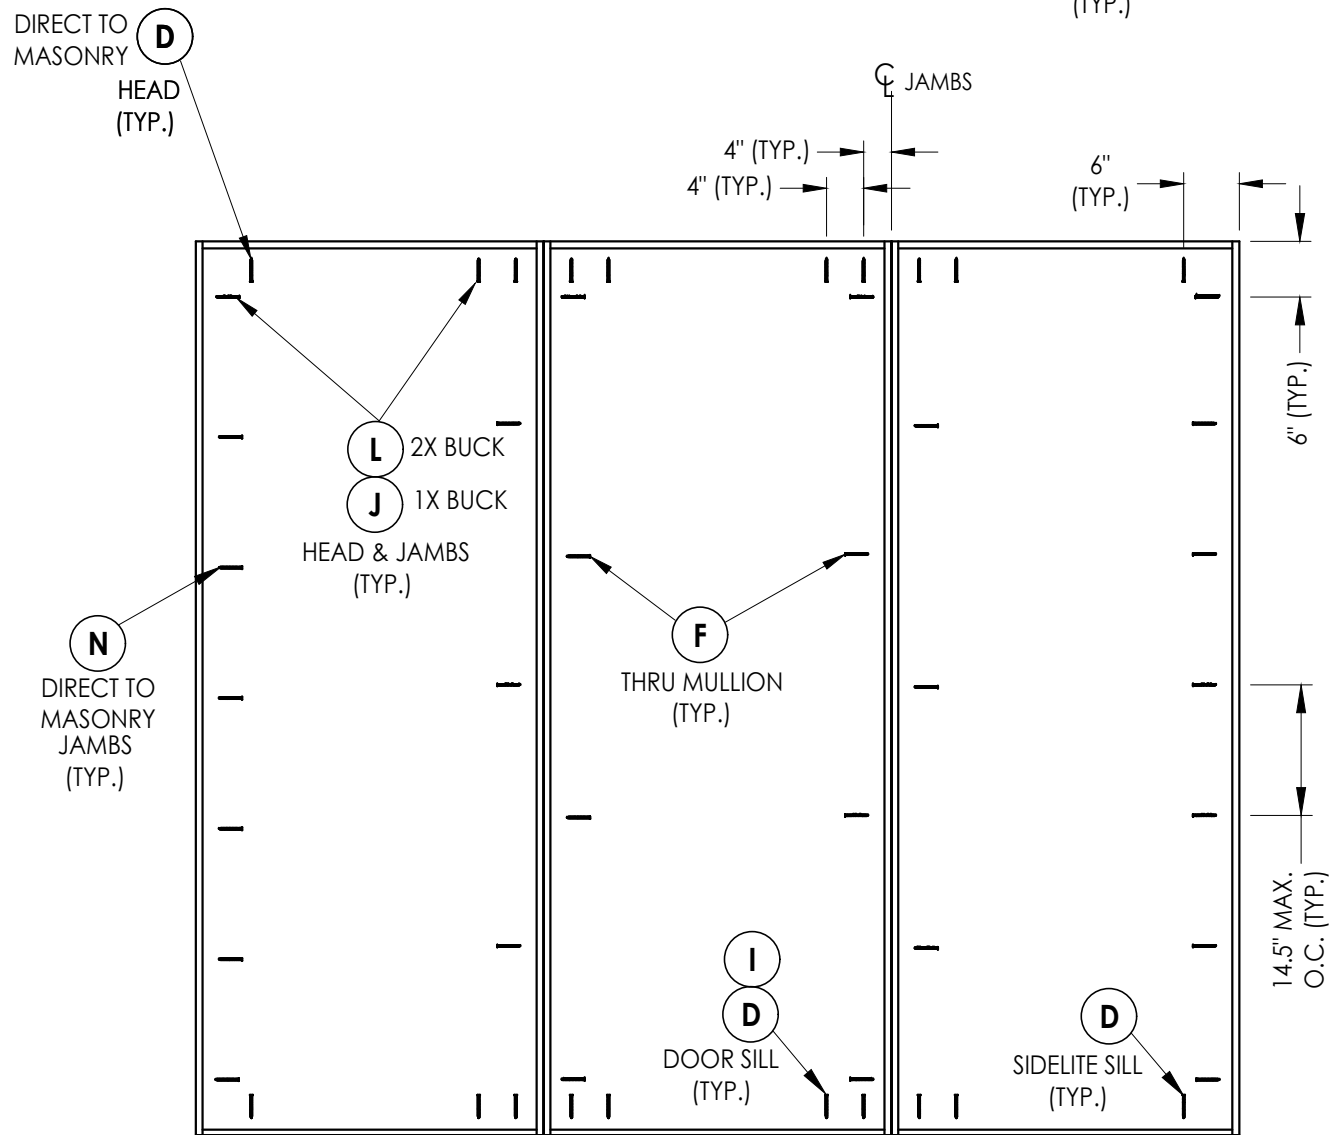

OXO

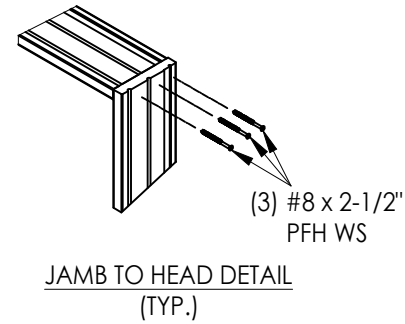

PRODUCT:		THERMA-TRU FIBERGLASS DOOR	
PART OR ASSEMBLY:		FRAME ANCHORING	
		LFS	FBC
		LFS	FBC
		BY	

DATE: 5/25/21

SCALE: N.T.S.

DWG. BY: RW

CHK. BY: LFS


DRAWING NO.:

FL-37183.8


SHEET 11 OF 14

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

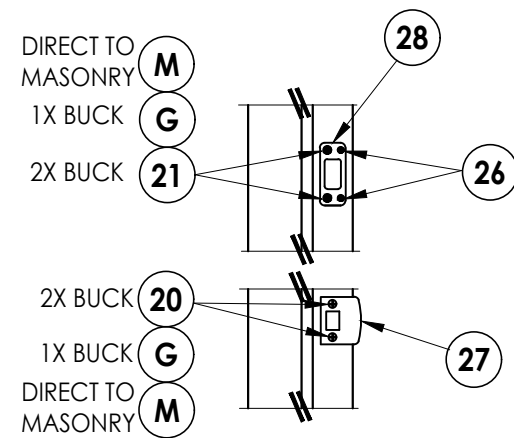


LATCH & DEADBOLT DETAIL
Kwikset

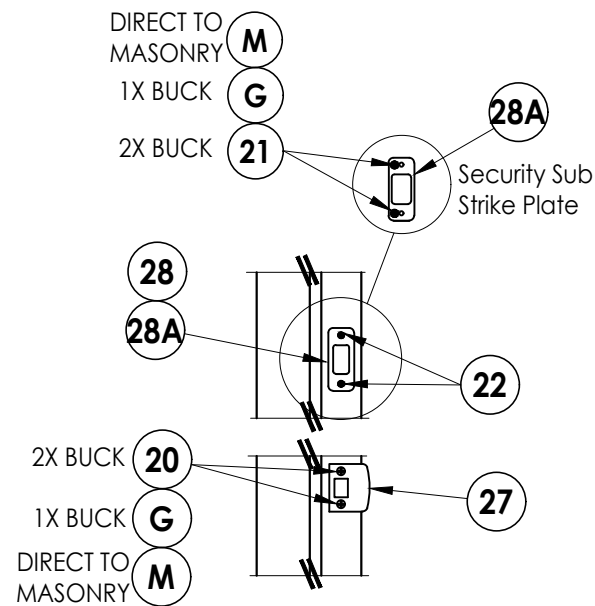


LATCH & DEADBOLT DETAIL
Schlage

LATCH & DEADBOLT STRIKE DETAILS

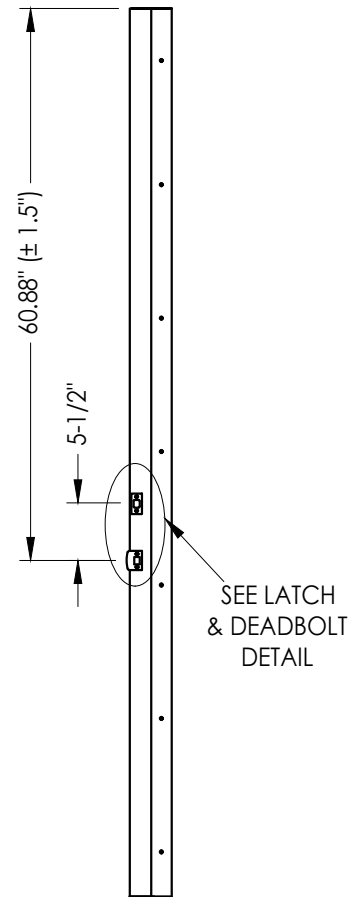


STRIKE JAMB

Latch & Deadbolt

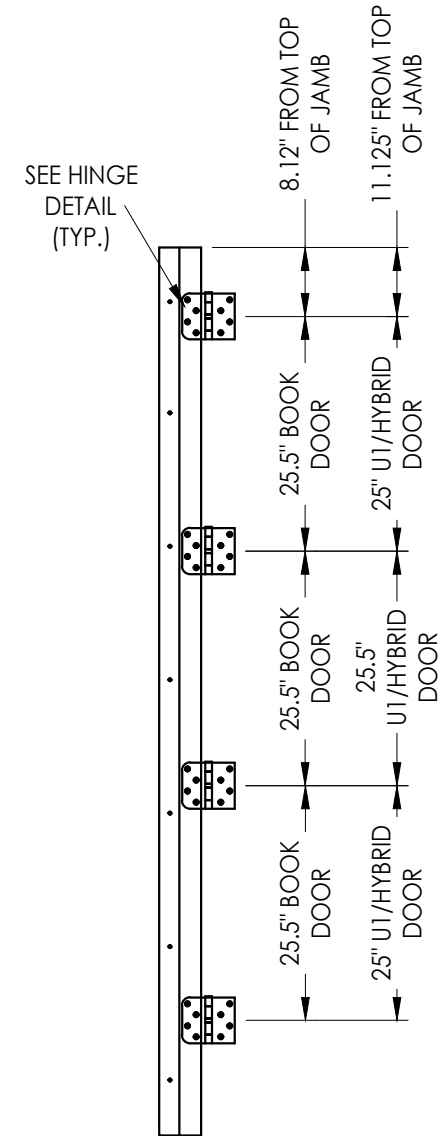

HINGE JAMB

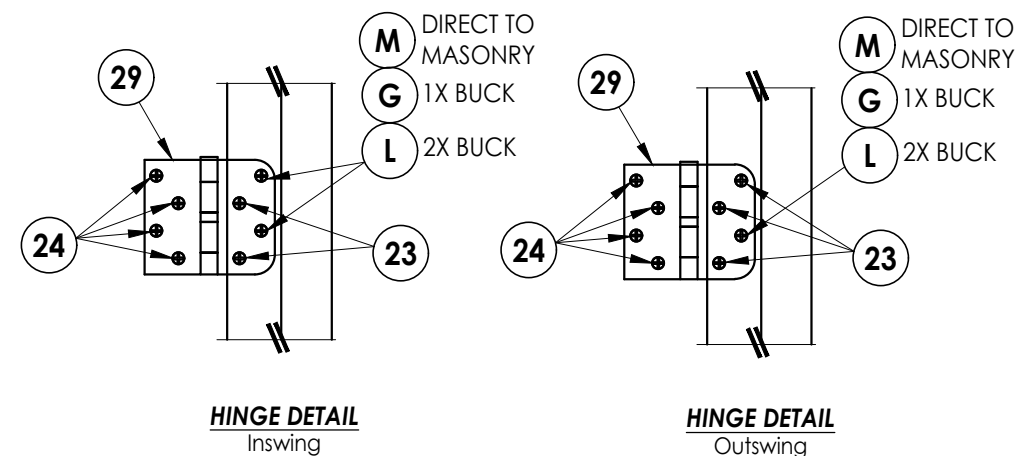

2	7/01/26	UPDATE TO 9TH ED.	(2026)	FBC	LFS
1	7/27/23	UPDATE TO 8TH ED.	(2023)	FBC	LFS
NO.	DATE				
					REVISIONS

DATE: 5/25/21

SCALE: *N.T.S.*

DWG. BY: *RW*


CHK. BY: LFS

DRAWING NO.:


FL-37183.8

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409


RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

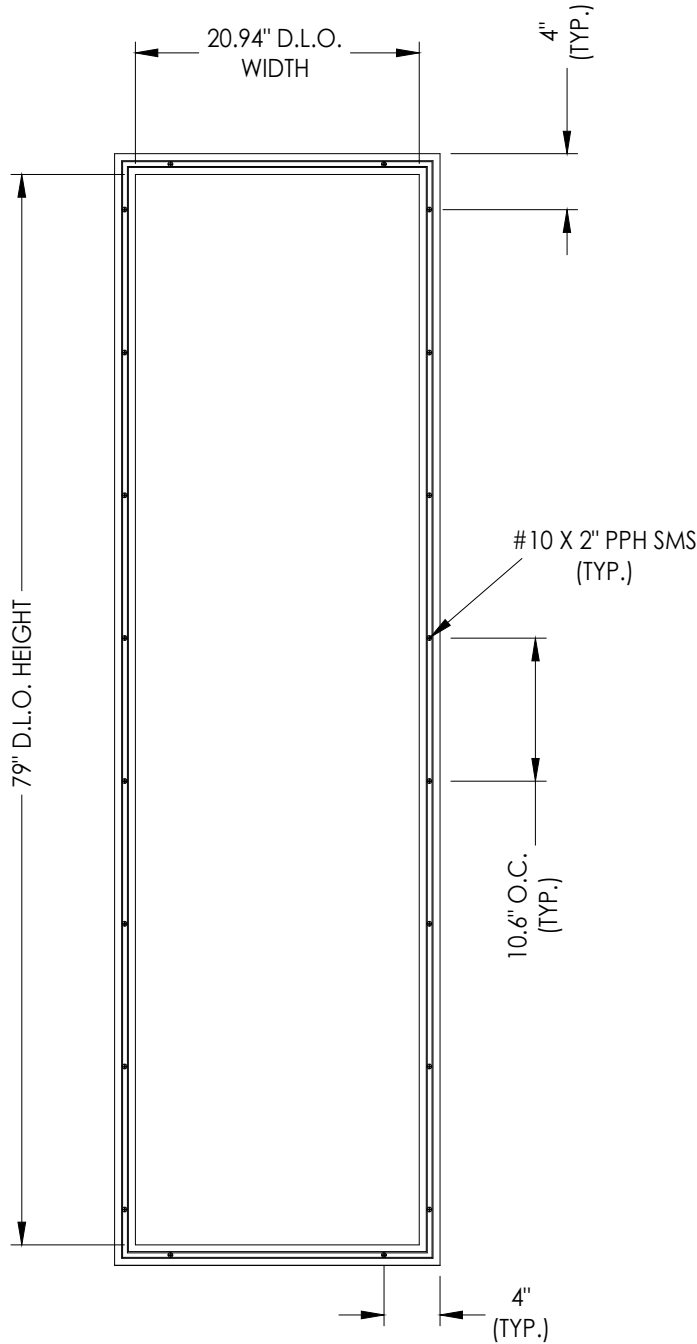

8'-0" LITE FRAME
ALUM. (6063-T5)

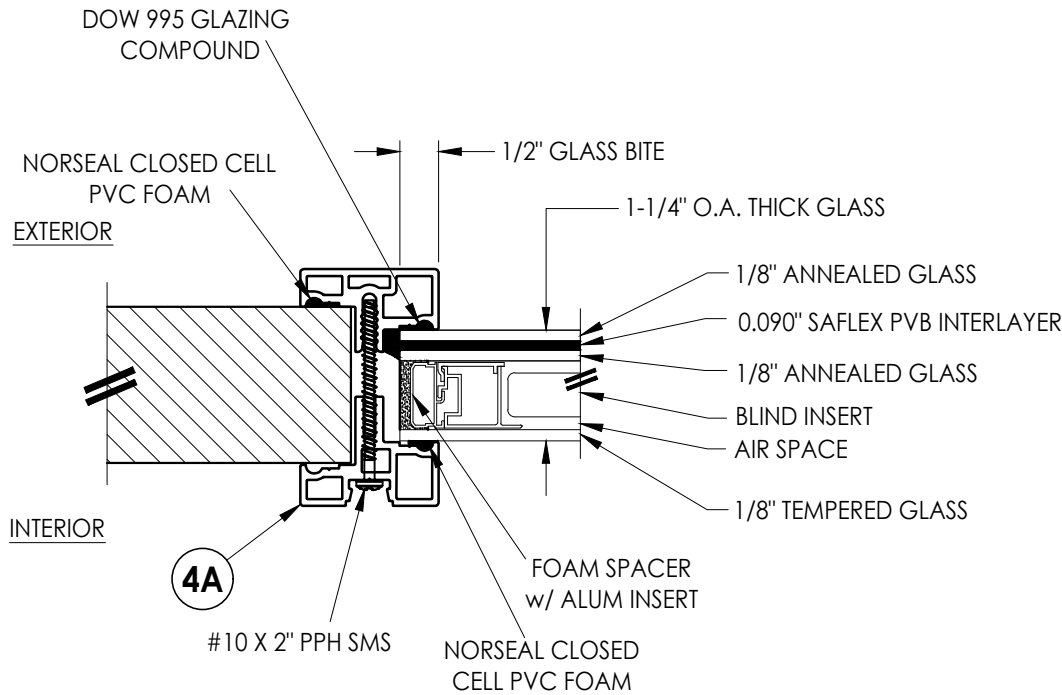

G1 GLAZING DETAIL
1-1/4" Insulated Laminated Glass
w/ Internal Blinds

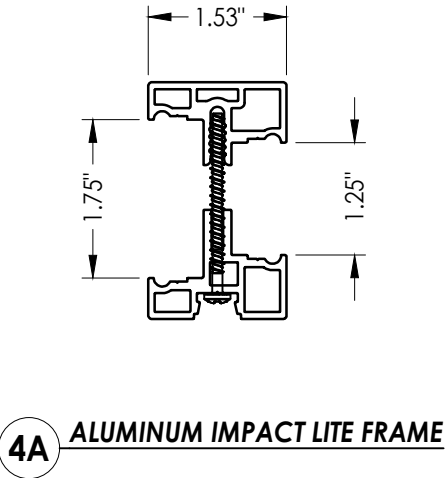

NO.	DATE	REVISIONS
2	7/01/26	UPDATE TO 9TH ED. (2026) FBC LFS
1	7/27/23	UPDATE TO 8TH ED. (2023) FBC LFS


DATE:	5/25/21
SCALE:	N.T.S.
DWG. BY:	RW
CHK. BY:	LFS
DRAWING NO.:	FL-37183.8
SHEET	13 OF 14

PRODUCT:	THERMA-TRU FIBERGLASS DOOR
PART OR ASSEMBLY:	LITE FRAME & GLAZING DETAILS

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL
A	1X BUCK (G >= 0.42)	WOOD
B	2X BUCK (G >= 0.42)	WOOD
C	1/4" MAX. SHIM SPACE	-
D	1/4" X 2-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301 OR HOLLOW BLOCK CONFORMING TO ASTM C90	CONCRETE
F	#10 X 2" PFH WOOD SCREW	STEEL
G	3/16" X 3-1/4" PFH ITW CONCRETE SCREW	STEEL
I	1/4" X 2-1/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
J	1/4" X 3-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
L	#10 X 2-1/2" PFH WOOD SCREW (1.15" MIN. EMBEDMENT)	STEEL
M	3/16" X 2-1/4" ITW CONCRETE SCREW	STEEL
N	3/16" X 2-3/4" ITW CONCRETE SCREW	STEEL
1	WOOD JAMB (FINGER JOINT PINE)	WOOD
7	WEATHERSTRIP	FOAM
8	DOOR SWEEP	VINYL
9	SWEEP (USE w/ PUBLIC ACCESS THRESHOLD)	VINYL
20	#8 X 2-1/2" PFH WOOD SCREW	STEEL
21	#12 X 1-1/2" PFH WOOD SCREW	STEEL
22	#8 X 3/4" PFH WOOD SCREW	STEEL
23	#9 X 3/4" PFH WOOD SCREW	STEEL
24	#9 X 1" PFH WOOD SCREW	STEEL
25	#9 X 2-1/2" PFH WOOD SCREW	STEEL
26	#8 X 5/8" PFH WOOD SCREW	STEEL
27	LATCH STRIKE PLATE	STEEL
28	DEADBOLT STRIKE PLATE	STEEL
28A	DEADBOLT SUB-STRIKE PLATE	STEEL
29	4" X 4" HINGE	STEEL
32	INSWING THRESHOLD	ALUM/COMP
33	OUTSWING THRESHOLD	ALUM/COMP
34	PUBLIC ACCESS THRESHOLD	ALUM
35	SIDELITE SPACER (INSWING)	VINYL
36	SIDELITE SPACER (OUTSWING)	VINYL
40	DOOR PANEL (BOOK)	-
41	DOOR PANEL (HYBRID)	-
42	DOOR PANEL (U1)	-
50	SIDELITE PANEL	-

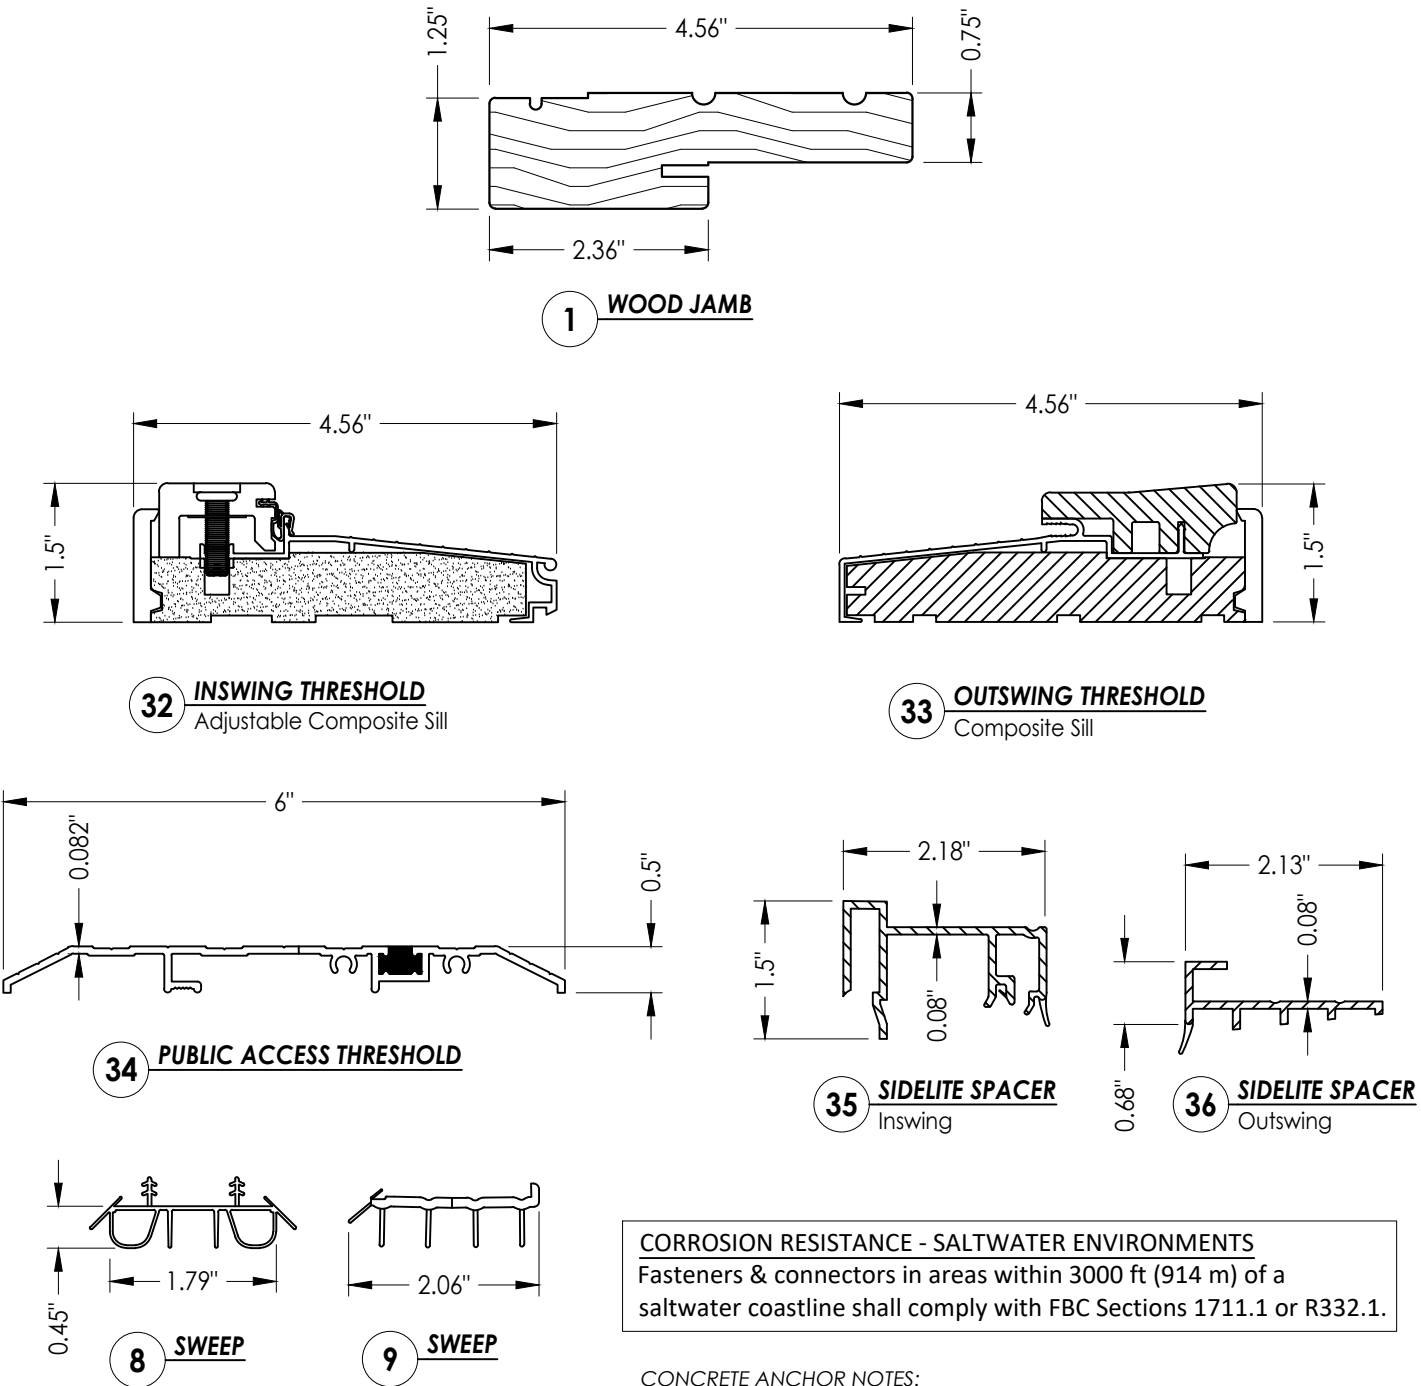

CORROSION RESISTANCE - SALTWATER ENVIRONMENTS
Fasteners & connectors in areas within 3000 ft (914 m) of a saltwater coastline shall comply with FBC Sections 1711.1 or R332.1.

CONCRETE ANCHOR NOTES:
Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON+	1/4"	1-1/4"	1"	4"
ITW TAPCON®	3/16"	1-1/4"	AS SHOWN	1-1/2"

WOOD SCREW INSTALLATION NOTES:
Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

[illegible]