TRINITY GLASS INTERNATIONAL

33615 1st Way S, Federal Way, WA 98003

GLAZED FIBERGLASS PATIO DOOR DOUBLE w/ or w/out SIDELITE(S)

OUTSWING "IMPACT"

GENERAL NOTES

1. This product evaluation drawing has been developed in compliance with the 9th Edition (2026) Florida Building Code (FBC) including the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
3. When used in the "HVHZ", this product complies with Section 1626 of the FBC and does not require an impact resistant covering.
4. When used in areas outside of the "HVHZ" requiring wind borne debris protection, this product complies with FBC Sections 1609.1.2 & R301.2.1.2 and does not require an impact resistant covering. This product meets missile level "D" and includes Wind Zone 4 as defined in ASTM E 1996 and FBC Sections 1609.1.2.2 & R301.2.1.2.1.
5. For 2x stud framing construction, anchoring of these units shall be the same as that shown for 2x buck masonry construction.
6. Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.
7. This product meets the water infiltration requirements for the "HVHZ".

TABLE OF CONTENTS

SHEET #	DESCRIPTION	SHEET #	
1	Typical Elevations, Design Pressures & General Notes	7	Horizontal & Vertical Cross Sections (1X Buck)
2	Door & Sidelite Panel Details	8	Horizontal & Vertical Cross Sections (Direct to Masonry)
3	Lite Frame Glazing Details	9	Vertical Cross Sections (Thresholds)
4	Elevations	10	Buck Anchoring
5	Horizontal & Vertical Cross Sections	11	Frame Anchoring & Hardware Details
6	Horizontal & Vertical Cross Sections (2X Buck)	12	Bill of Materials & Components

L F Schmidt

L. F. SCHMIDT LICENSE No. 43409 STATE OF FLORIDA PROFESSIONAL ENGINEER

Digitally signed by Lyndon F Schmidt
Date: 2026.07.02 07:23:07 -04'00'

This item has been digitally signed and sealed by **L. F. Schmidt, P.E.** on the date adjacent to the seal.

Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

THIS PRODUCT APPROVAL IS VALID ONLY FOR THE STATE OF FLORIDA

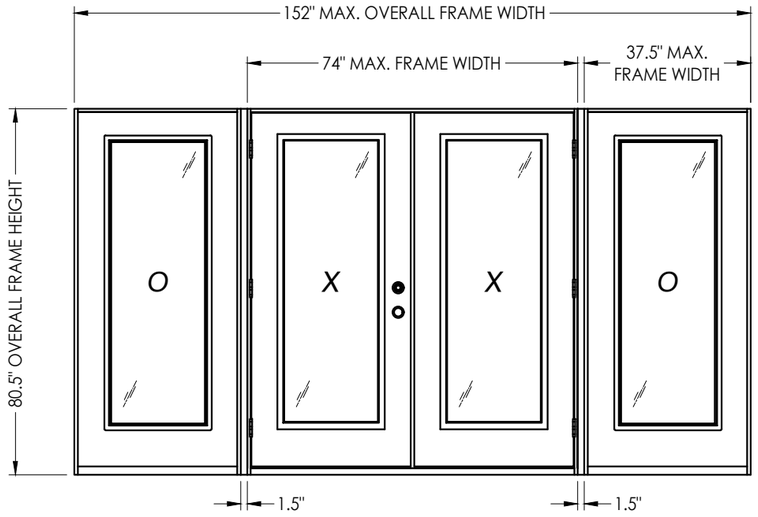



XX

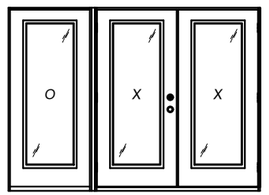

OXX, XXO

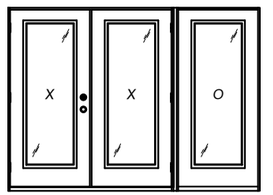

OXX, XXO

CONFIGURATION	MAX. FRAME DIMENSION	JAMB REINFORCEMENT	DESIGN PRESSURE (PSF) OUTSWING	
			POSITIVE	NEGATIVE
XX	74" x 80.5"	N/A	+50.0	-50.0
OXX, XXO	113" x 80.5"	2X	+50.0	-50.0
OXXO	152" x 80.5"	2X	+50.0	-50.0

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: TRINITY FIBERGLASS PATIO DOOR "Impact"

PART OR ASSEMBLY: TYPICAL ELEVATION, DESIGN PRESSURES & GENERAL NOTES

NO.	DATE	BY	REVISIONS
2	7/01/26	LFS	UPDATE TO 9TH ED. (2026) FBC
1	8/01/23	LFS	UPDATE TO 8TH ED. (2023) FBC

DATE: 1/28/21
SCALE: N.T.S.
DWG. BY: RW
CHK. BY: LFS
DRAWING NO.: FL-37184.2
SHEET 1 OF 12

© 2021 R.W. BUILDING CONSULTANTS INC.

Z:\2023 FBC Drawings\Trinity Glass Int'l\FL-37184 R2\FL-37184.2.dwg

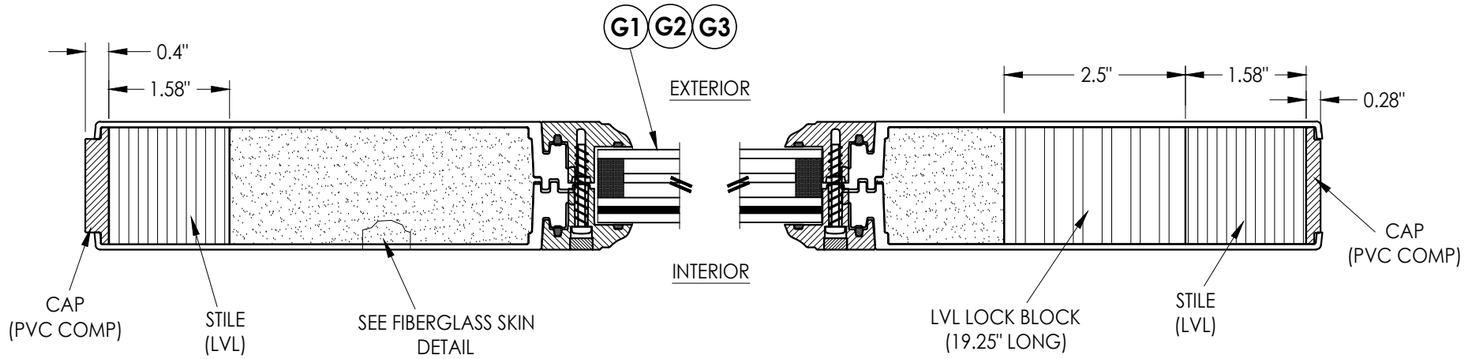

1/2 ***HORIZONTAL CROSS SECTION***

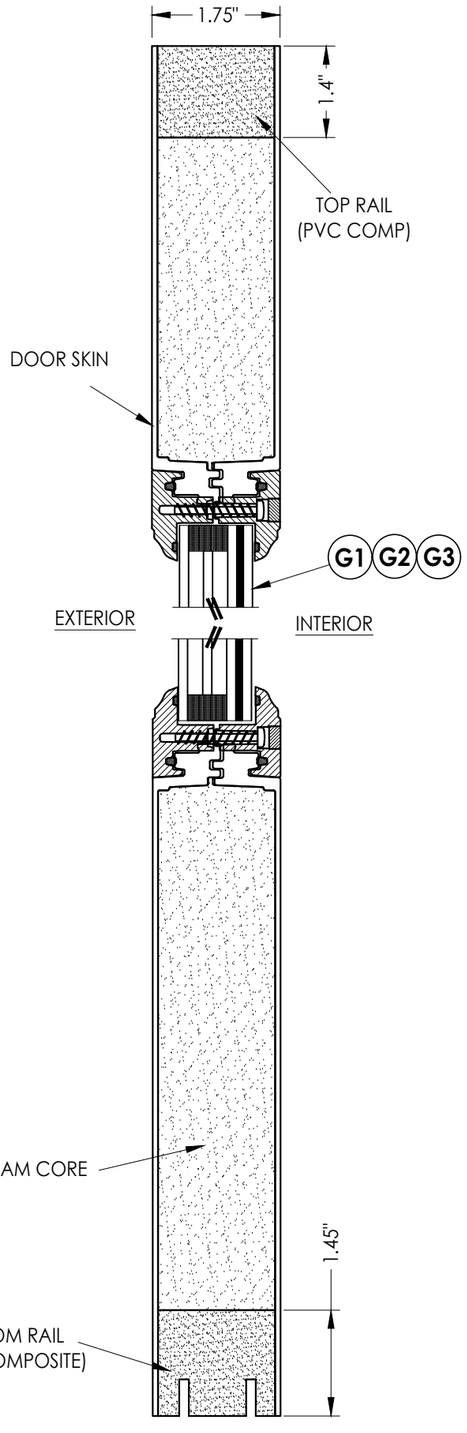

2/2 ***VERTICAL CROSS SECTION***

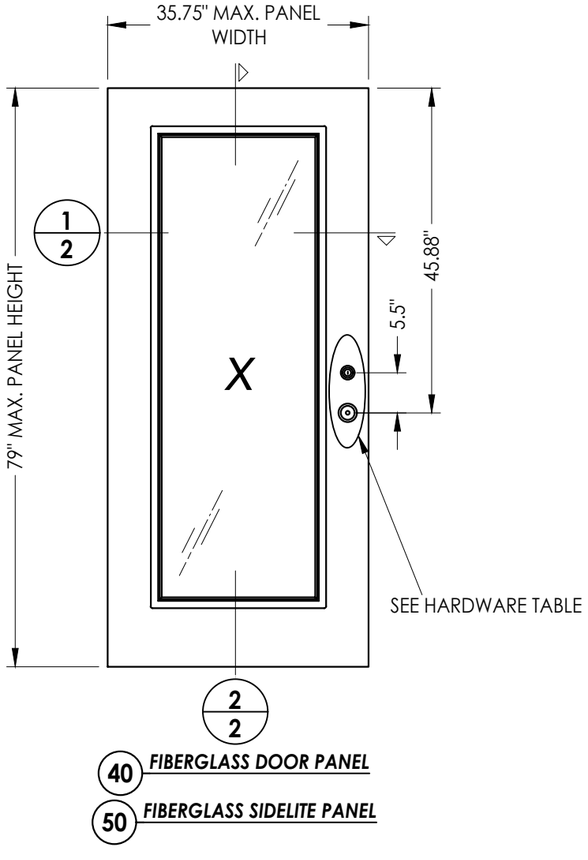

40 ***FIBERGLASS DOOR PANEL***

50 ***FIBERGLASS SIDELITE PANEL***

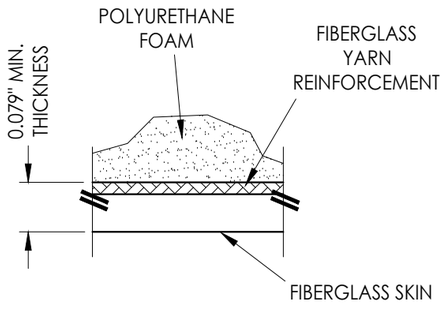

FIBERGLASS SKIN DETAIL

HARDWARE TABLE	
MANUFACTURER	***MODEL***
SCHLAGE	**KNOB: F51** **DEADBOLT: B60N**

FIBERGLASS SKIN: 0.079" MIN. THK. (Fy = 10,000 PSI MIN.)
FOAM CORE: POLYURETHANE - 1.9 PCF MIN.)

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: *TRINITY FIBERGLASS PATIO DOOR "Impact"*

PART OR ASSEMBLY: *DOOR & SIDELITE PANEL DETAILS*

NO.	DATE	REVISIONS	BY
2	7/01/26	UPDATE TO 9TH ED. (2026) FBC	LFS
1	8/01/23	UPDATE TO 8TH ED. (2023) FBC	LFS

DATE: 1/28/21
SCALE: N.T.S.
DWG. BY: RW
CHK. BY: LFS
DRAWING NO.: FL-37184.2
SHEET 2 OF 12

© 2021 R.W. BUILDING CONSULTANTS INC.

Z:\2023 FBC Drawings\Trinity Glass Int'l\FL-37184 R2\FL-37184.2.dwg

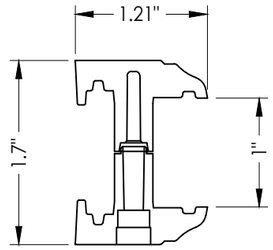

4A ***FLUSH GLAZED LITE FRAME***
ABS

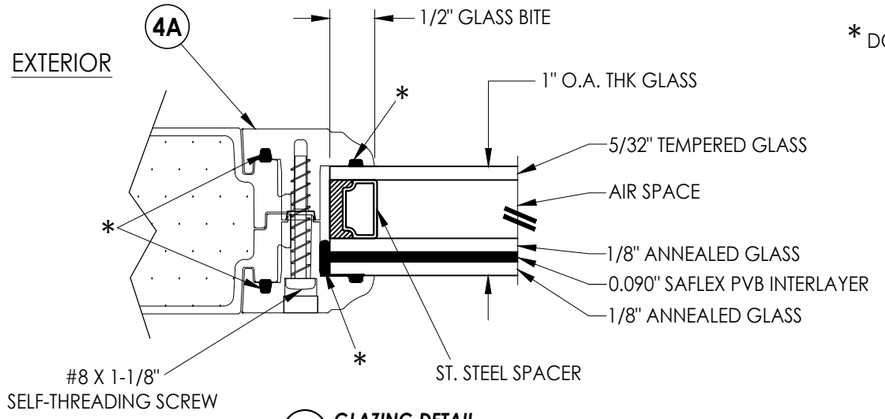

G1 ***GLAZING DETAIL***
Dual Pane

* DOW 995 STRUCTURAL SEALANT

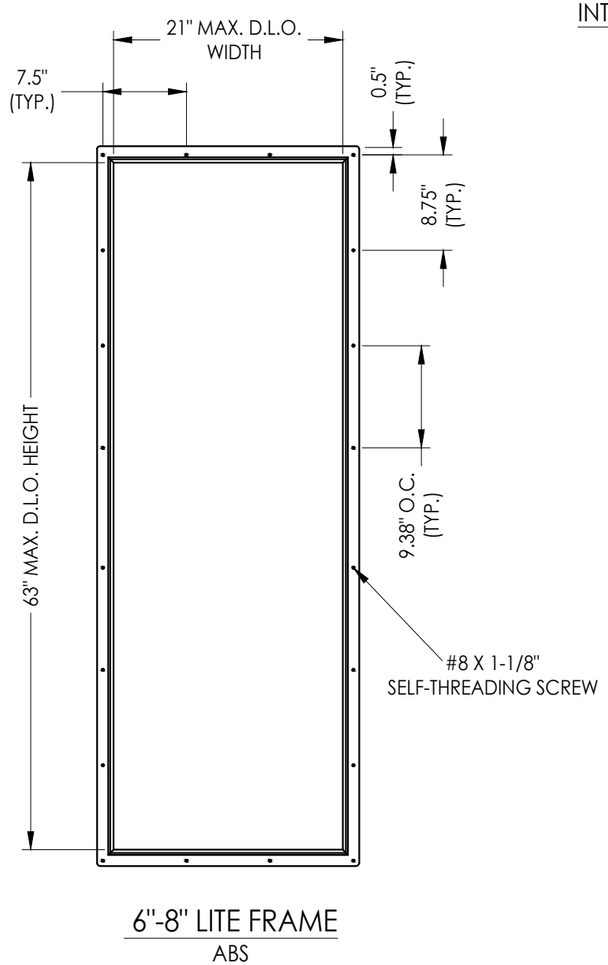

6"-8" LITE FRAME
ABS

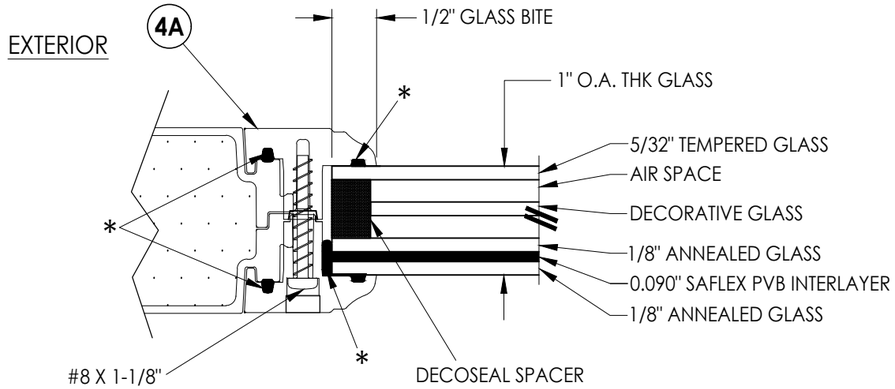

G2 ***GLAZING DETAIL***
Triple Pane

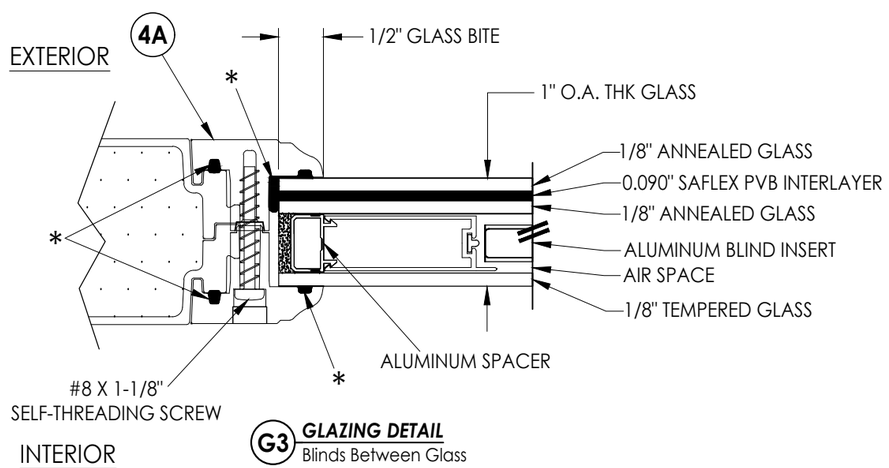

G3 ***GLAZING DETAIL***
Blinds Between Glass

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: *TRINITY FIBERGLASS PATIO DOOR "Impact"*

PART OR ASSEMBLY: *LITE FRAME GLAZING DETAILS*

REVISIONS

NO.	DATE		
2	7/01/26	UPDATE TO 9TH ED. (2026) FBC	LFS
1	8/01/23	UPDATE TO 8TH ED. (2023) FBC	LFS

DATE: 1/28/21
SCALE: N.T.S.
DWG. BY: RW
CHK. BY: LFS
DRAWING NO.: FL-37184.2
SHEET 3 OF 12

© 2021 R.W. Building Consultants Inc.

Z:\2023 FBC Drawings\Trinity Glass Int'l\FL-37184 R2\FL-37184.2.dwg

Z:\2023 FBC Drawings\Trinity Glass Int'l\FL-37184 R2\FL-37184.2.dwg

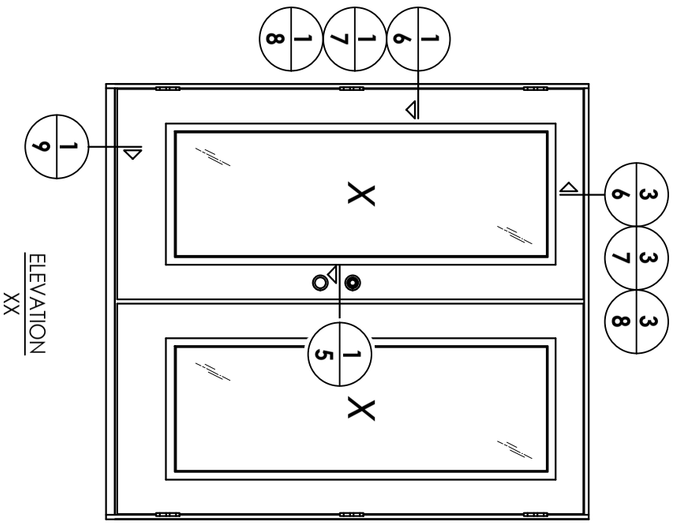

ELEVATION
XX

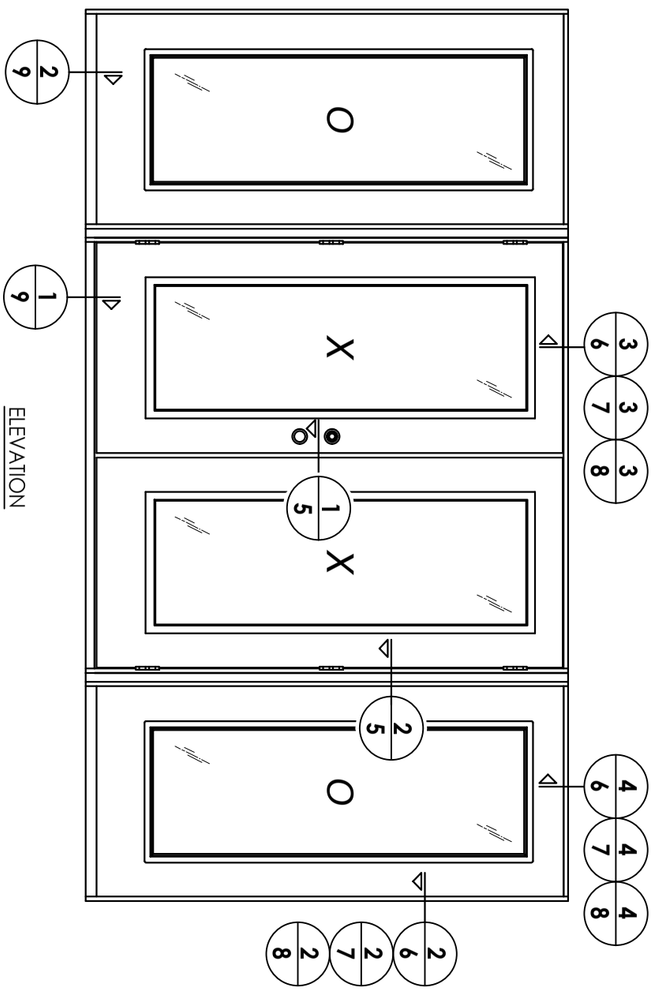

ELEVATION
OXXO

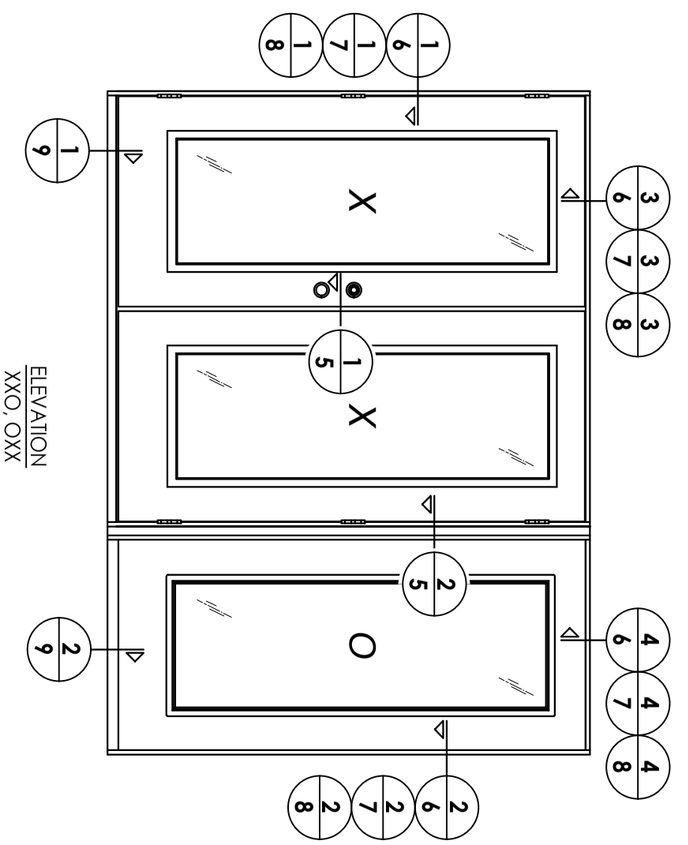

ELEVATION
XXO, OXX

NO.	DATE		BY
2	7/01/26	UPDATE TO 9TH ED. (2026) FBC	LFS
1	8/01/23	UPDATE TO 8TH ED. (2023) FBC	LFS

REVISIONS

PRODUCT: TRINITY
FIBERGLASS PATIO DOOR
"Impact"

PART OR ASSEMBLY:
ELEVATIONS

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

DATE: 1/28/21
SCALE: N.T.S.
DWG. BY: RW
CHK. BY: LFS
DRAWING NO.: FL-37184.2
SHEET 4 OF 12

© 2021 R.W. Building Consultants Inc.

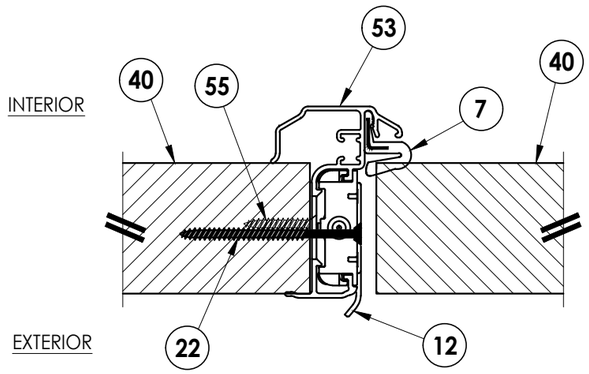

1/5 **HORIZONTAL CROSS SECTION**

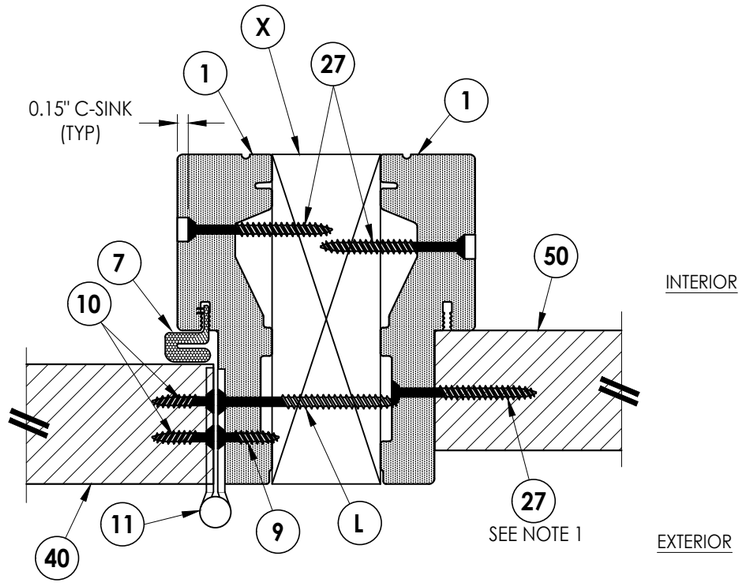

2/5 **HORIZONTAL CROSS SECTION**

Notes:
1. Sidelite assembly screws located 6" from each end and 4 more screws equally spaced between (6 screws total per side jamb).

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: *TRINITY FIBERGLASS PATIO DOOR "Impact"*

PART OR ASSEMBLY: *HORIZONTAL CROSS SECTIONS*

NO.	DATE	REVISIONS	BY
2	7/01/26	UPDATE TO 9TH ED. (2026) FBC	LFS
1	8/01/23	UPDATE TO 8TH ED. (2023) FBC	LFS

DATE: 1/28/21
SCALE: N.T.S.
DWG. BY: RW
CHK. BY: LFS
DRAWING NO.: FL-37184.2
SHEET 5 OF 12

© 2021 R.W. Building Consultants Inc.

Z:\2023 FBC Drawings\Trinity Glass Int'l\FL-37184 R2\FL-37184.2.dwg

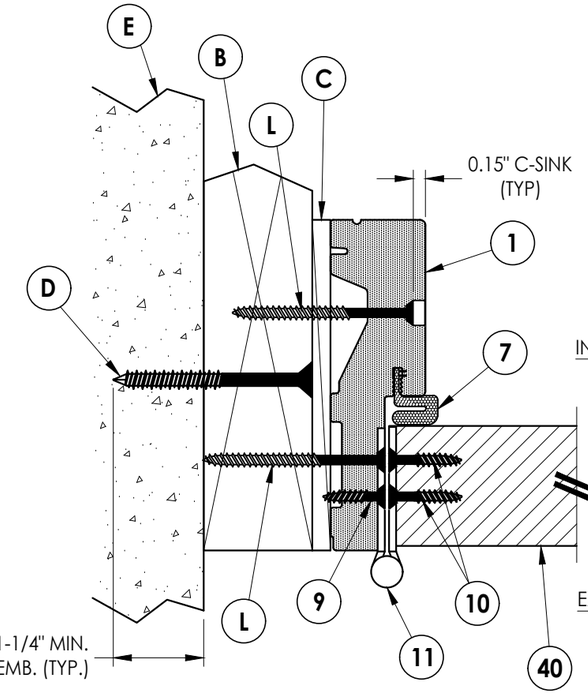

1/6 **HORIZONTAL CROSS SECTION**

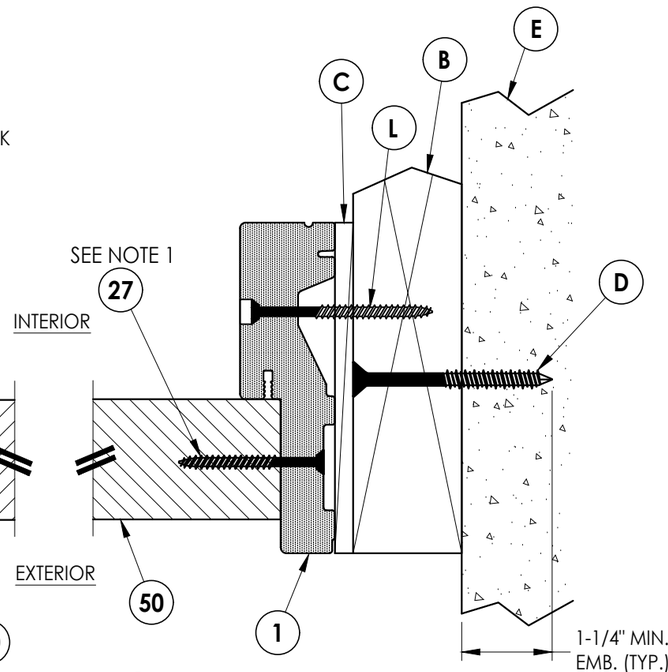

2/6 **HORIZONTAL CROSS SECTION**

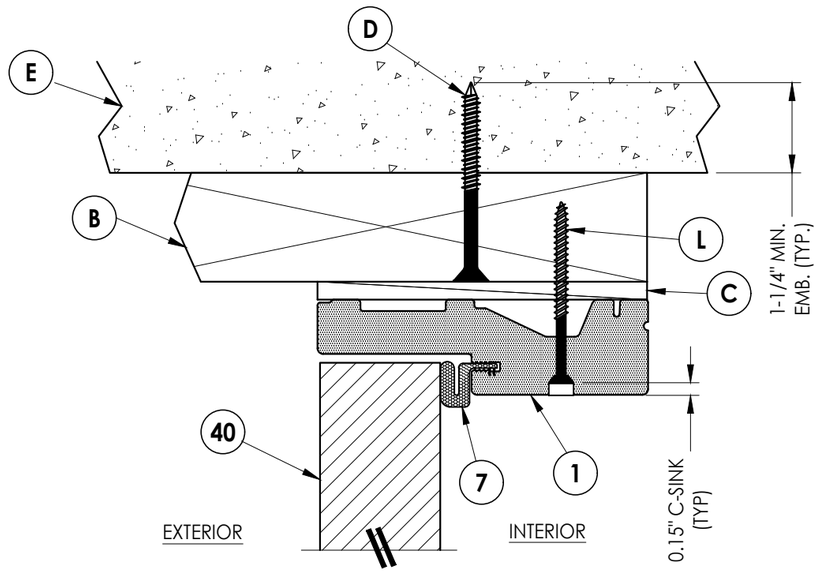

3/6 **VERTICAL CROSS SECTION**

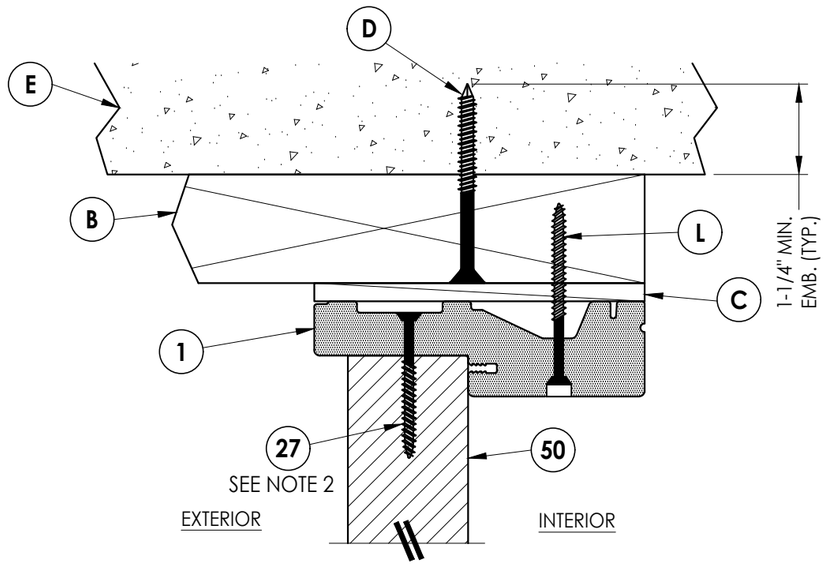

4/6 **VERTICAL CROSS SECTION**

Notes:
1. Sidelite assembly screws located 6" from each end and 4 more screws equally spaced between (6 screws total per side jamb).
2. Sidelite assembly screws located 10" from each end (2 screws total along head & sill).

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409
RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: *TRINITY FIBERGLASS PATIO DOOR "Impact"*

PART OR ASSEMBLY: *HORIZONTAL & VERTICAL CROSS SECTIONS (2X BUCK)*

NO.	DATE	REVISIONS	BY
2	7/01/26	UPDATE TO 9TH ED. (2026) FBC	LFS
1	8/01/23	UPDATE TO 8TH ED. (2023) FBC	LFS

DATE: 1/28/21
SCALE: N.T.S.
DWG. BY: RW
CHK. BY: LFS
DRAWING NO.: FL-37184.2
SHEET 6 OF 12

© 2021 R.W. Building Consultants Inc.

Z:\2023 FBC Drawings\Trinity Glass Int'l\FL-37184 R2\FL-37184.2.dwg

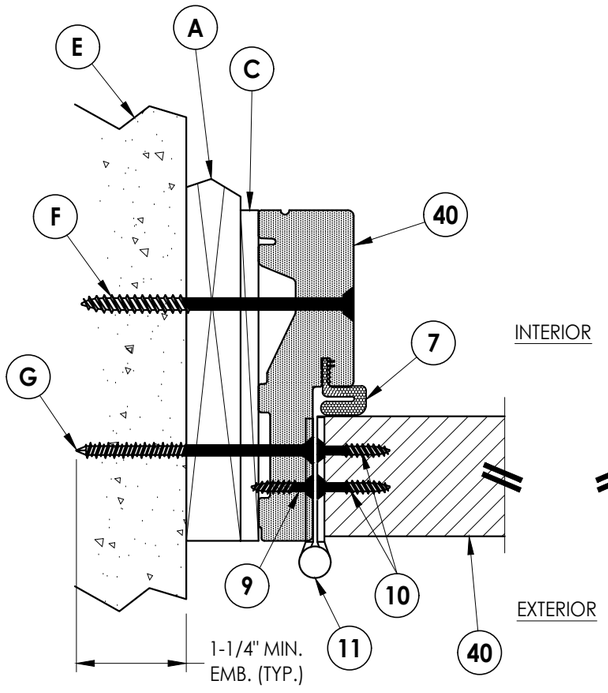

1/7 HORIZONTAL CROSS SECTION
Shown w/ 1X sub-buck

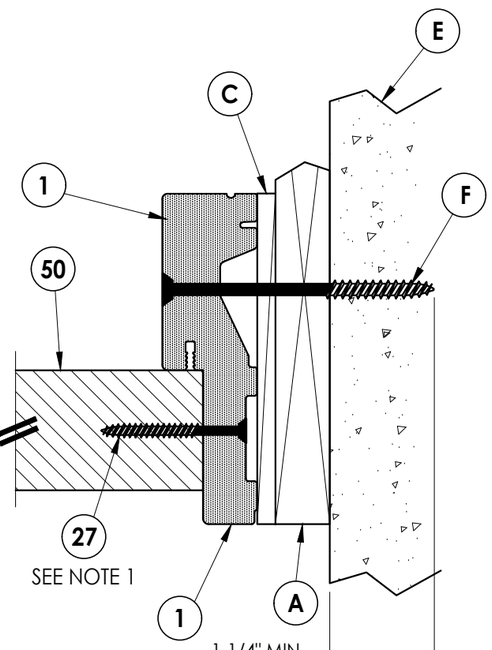

2/7 HORIZONTAL CROSS SECTION
Shown w/ 1X sub-buck

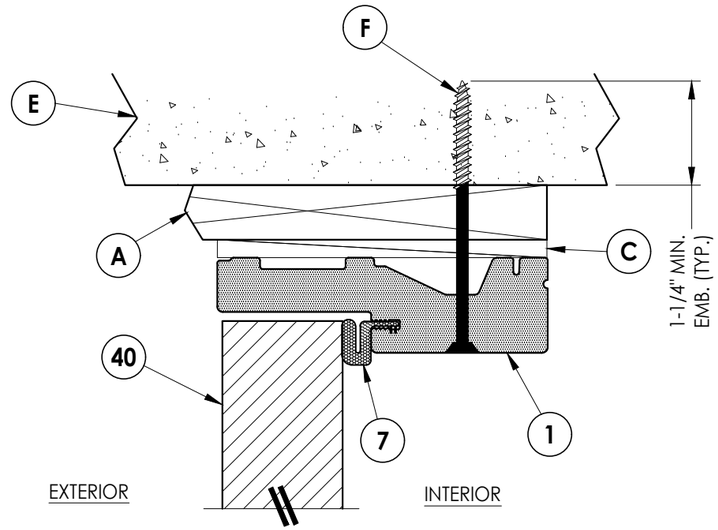

3/7 VERTICAL CROSS SECTION
Shown w/ 1X sub-buck

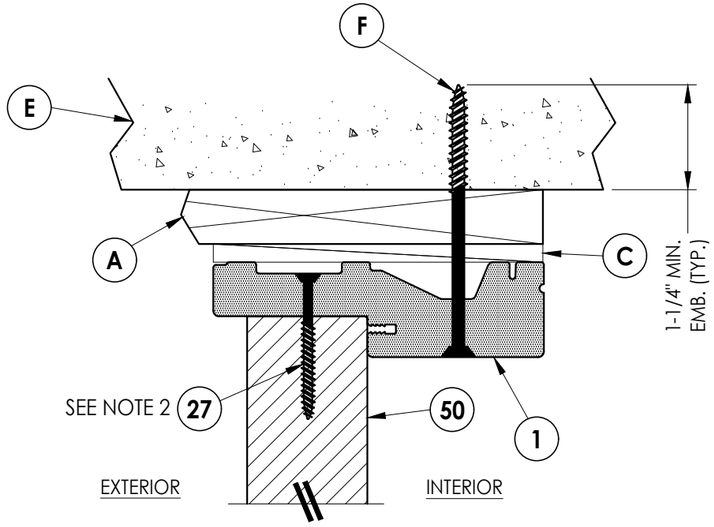

4/7 VERTICAL CROSS SECTION
Shown w/ 1X sub-buck

Notes:
1. Sidelite assembly screws located 6" from each end and 4 more screws equally spaced between (6 screws total per side jamb).
2. Sidelite assembly screws located 10" from each end (2 screws total along head & sill).

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: *TRINITY FIBERGLASS PATIO DOOR "Impact"*

PART OR ASSEMBLY: *HORIZONTAL & VERTICAL CROSS SECTIONS (1X BUCK)*

NO.	DATE	REVISIONS	BY
2	7/01/26	UPDATE TO 9TH ED. (2026) FBC	LFS
1	8/01/23	UPDATE TO 8TH ED. (2023) FBC	LFS

DATE: *1/28/21*
SCALE: *N.T.S.*
DWG. BY: *RW*
CHK. BY: *LFS*
DRAWING NO.: *FL-37184.2*
SHEET 7 OF 12

© 2021 R.W. BUILDING CONSULTANTS INC.

Z:\2023 FBC Drawings\Trinity Glass Int'l\FL-37184 R2\FL-37184.2.dwg

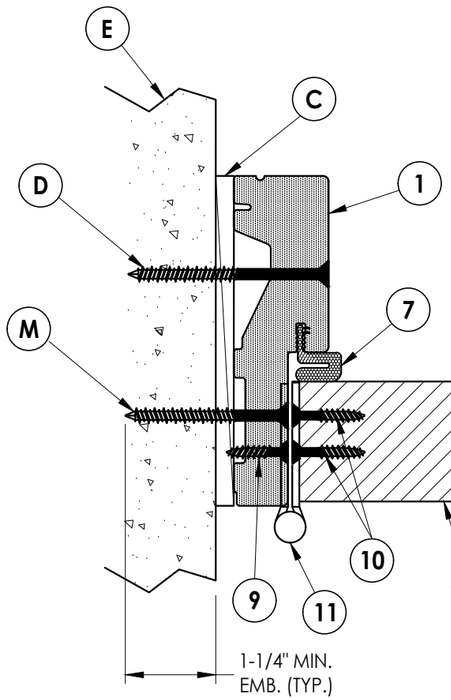

1/8 HORIZONTAL CROSS SECTION
Shown Direct to Masonry

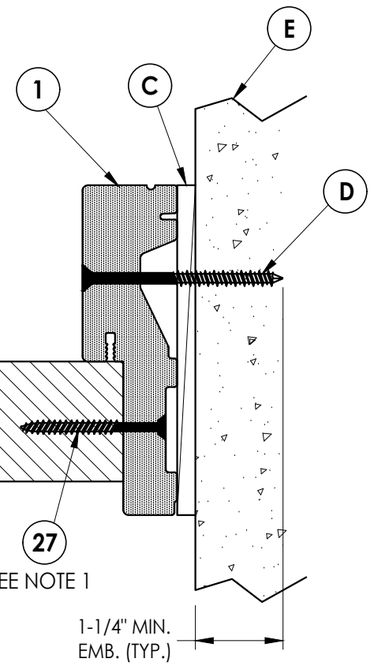

2/8 HORIZONTAL CROSS SECTION
Shown Direct to Masonry

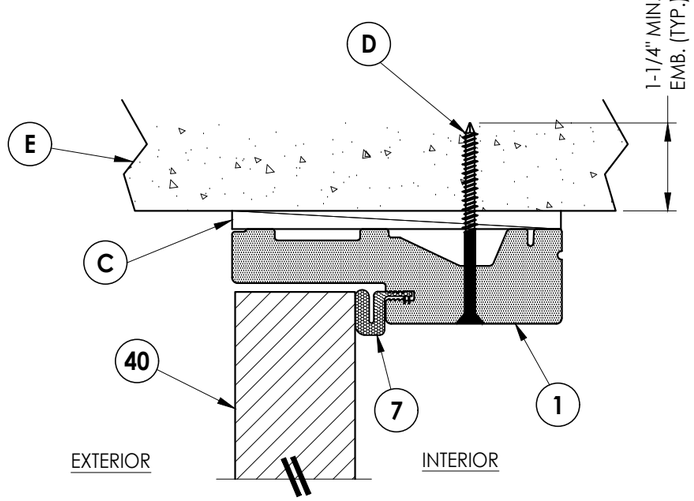

3/8 VERTICAL CROSS SECTION
Shown Direct to Masonry

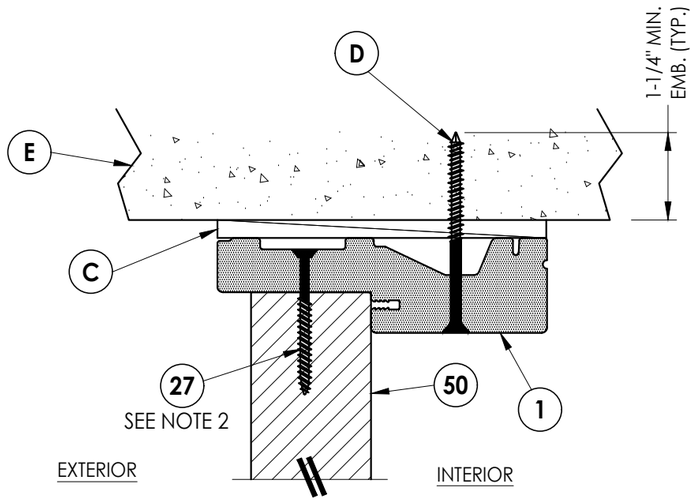

4/8 VERTICAL CROSS SECTION
Shown Direct to Masonry

Notes:
1. Sidelite assembly screws located 6" from each end and 4 more screws equally spaced between (6 screws total per side jamb).
2. Sidelite assembly screws located 10" from each end (2 screws total along head & sill).

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: *FIBERGLASS PATIO DOOR "Impact"* — *TRINITY*

PART OR ASSEMBLY: *HORIZONTAL & VERTICAL CROSS SECTIONS (DIRECT TO MASONRY)*

NO.	DATE	REVISIONS	BY
2	7/01/26	UPDATE TO 9TH ED. (2026) FBC	LFS
1	8/01/23	UPDATE TO 8TH ED. (2023) FBC	LFS

DATE: 1/28/21
SCALE: N.T.S.
DWG. BY: RW
CHK. BY: LFS
DRAWING NO.: FL-37184.2
SHEET 8 OF 12

© 2021 R.W. Building Consultants Inc.

Z:\2023 FBC Drawings\Trinity Glass Int'l\FL-37184 R2\FL-37184.2.dwg

Notes:
1. Sidelite assembly screws located 10" from each end (2 screws total along head & sill).

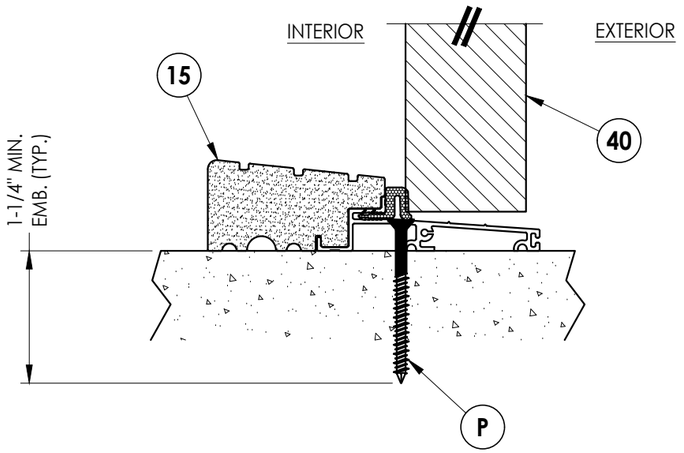

1/9 VERTICAL CROSS SECTION

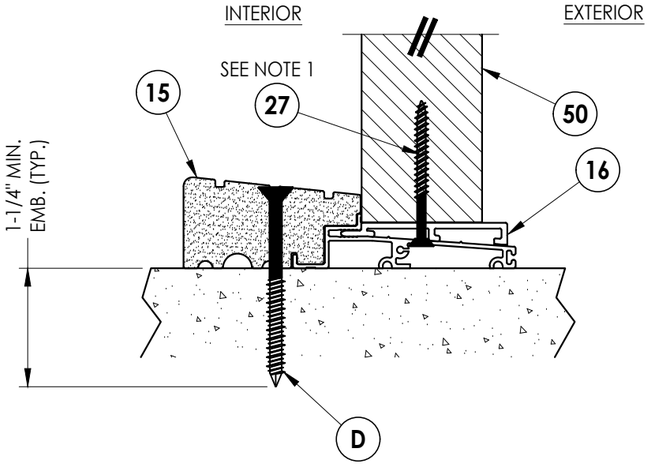

2/9 VERTICAL CROSS SECTION

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: *TRINITY FIBERGLASS PATIO DOOR "Impact"*

PART OR ASSEMBLY: *VERTICAL CROSS SECTIONS (THRESHOLDS)*

NO.	DATE	REVISIONS	BY
2	7/01/26	UPDATE TO 9TH ED. (2026) FBC	LFS
1	8/01/23	UPDATE TO 8TH ED. (2023) FBC	LFS

DATE: 1/28/21
SCALE: N.T.S.
DWG. BY: RW
CHK. BY: LFS
DRAWING NO.: FL-37184.2
SHEET 9 OF 12

© 2021 R.W. Building Consultants Inc.

Z:\2023 FBC Drawings\Trinity Glass Int'l\FL-37184 R2\FL-37184.2.dwg

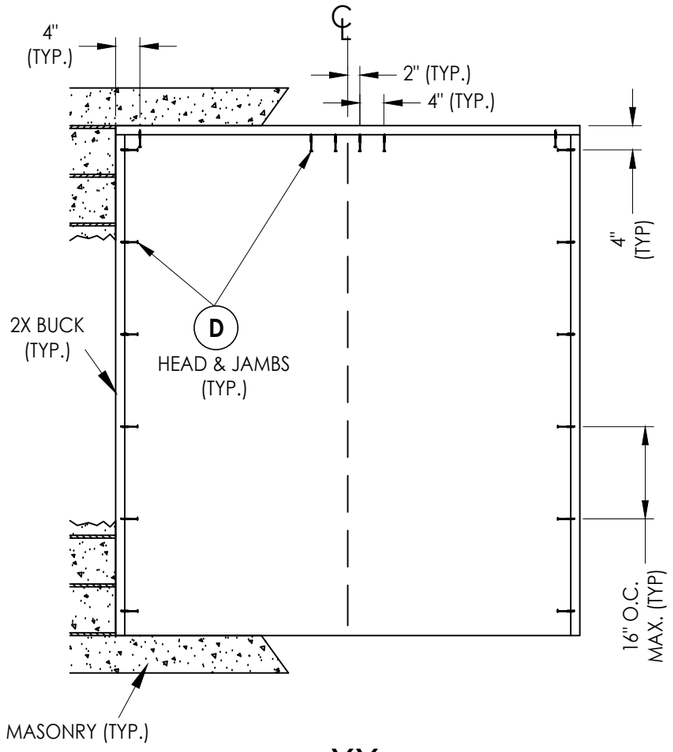

XX

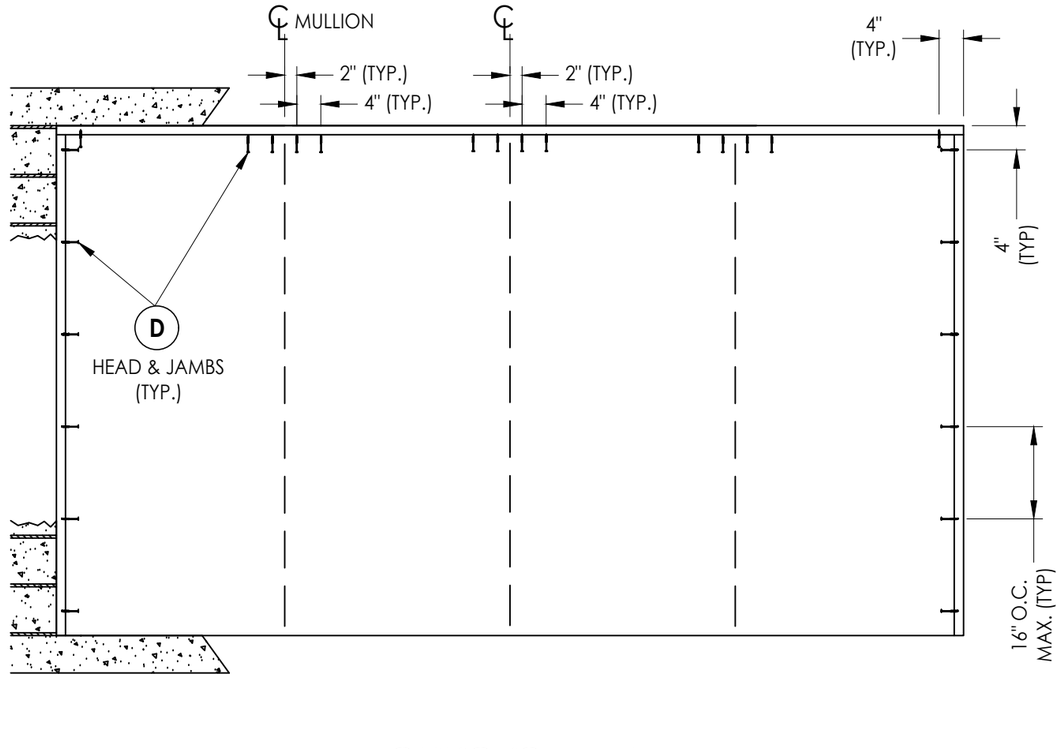

OXXO (Shown)
XXO, OXX (Similar)

2X BUCK ANCHORING

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: *TRINITY FIBERGLASS PATIO DOOR "Impact"*

PART OR ASSEMBLY: *BUCK ANCHORING*

NO.	DATE	REVISIONS	BY
2	7/01/26	UPDATE TO 9TH ED. (2026) FBC	LFS
1	8/01/23	UPDATE TO 8TH ED. (2023) FBC	LFS

DATE: 1/28/21
SCALE: N.T.S.
DWG. BY: RW
CHK. BY: LFS
DRAWING NO.: FL-37184.2
SHEET 10 OF 12

© 2021 R.W. Building Consultants Inc.

Z:\2023 FBC Drawings\Trinity Glass Int'l\FL-37184 R2\FL-37184.2.dwg

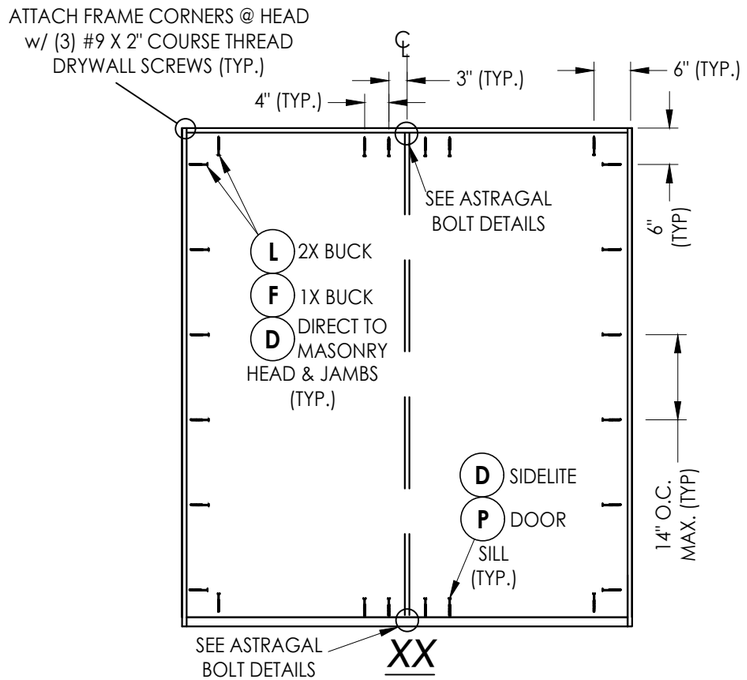

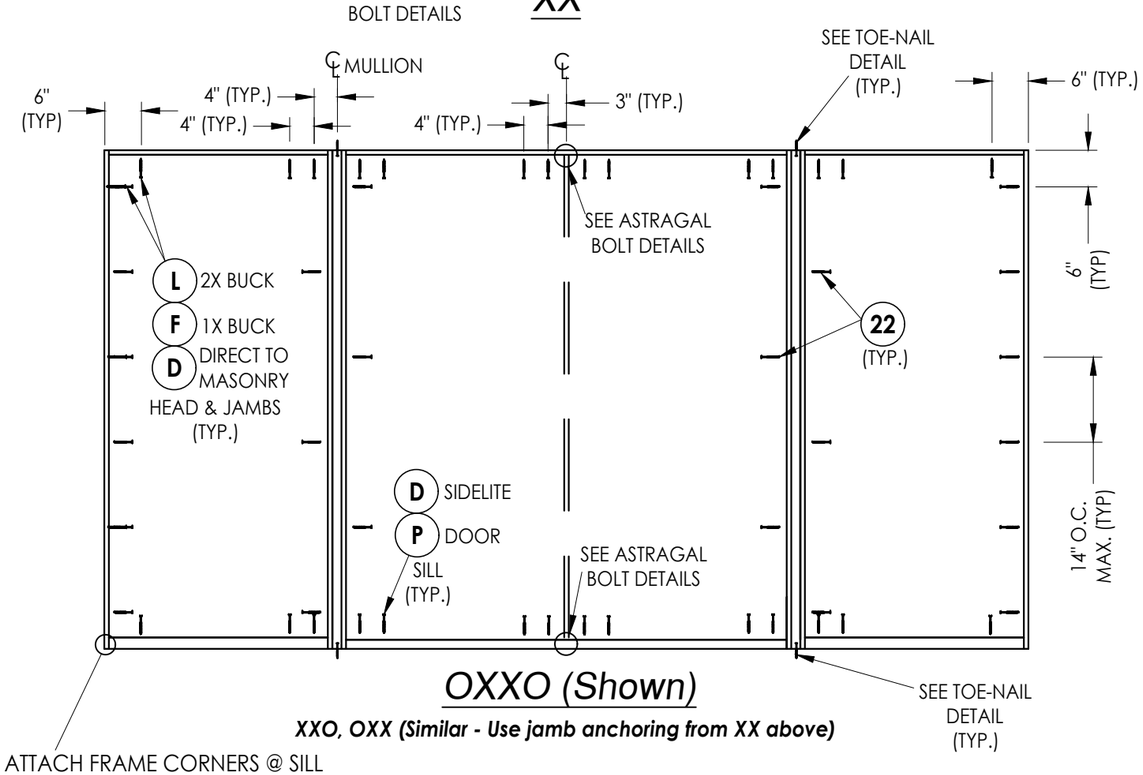

OXXO (Shown)

XXO, OXX (Similar - Use jamb anchoring from XX above)

FRAME ANCHORING

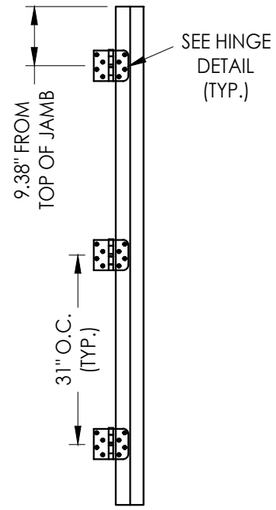

HINGE JAMB

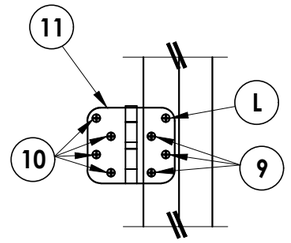

HINGE DETAIL

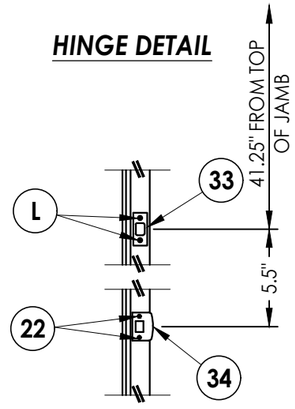

LATCH & DEADBOLT DETAILS

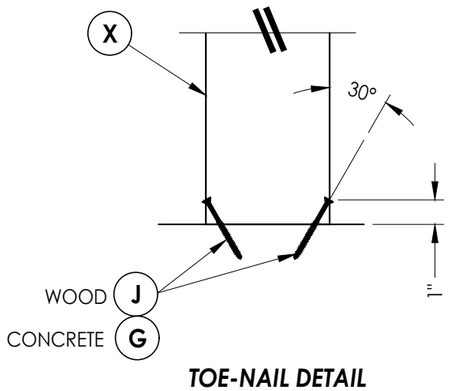

TOE-NAIL DETAIL

TYPICAL @ EACH 2X REINFORCEMENT
(SHOWN @ SILL - HEAD SIMILAR)

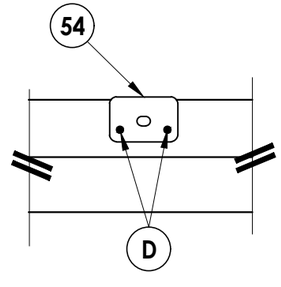

ASTRAGAL BOLT DETAIL

Strike Plate @ Head

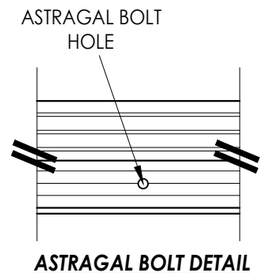

ASTRAGAL BOLT DETAIL

Outswing Threshold

HARDWARE DETAILS

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: *FIBERGLASS PATIO DOOR* PROJECT: *TRINITY*
"Impact"

PART OR ASSEMBLY:
FRAME ANCHORING & HARDWARE DETAILS

NO.	DATE	REVISIONS	BY
2	7/01/26	UPDATE TO 9TH ED. (2026) FBC	LFS
1	8/01/23	UPDATE TO 8TH ED. (2023) FBC	LFS

DATE: 1/28/21
SCALE: N.T.S.
DWG. BY: RW
CHK. BY: LFS
DRAWING NO.: FL-37184.2
SHEET 11 OF 12

© 2021 R.W. Building Consultants Inc.

Z:\2023 FBC Drawings\Trinity Glass Int'l\FL-37184 R2\FL-37184.2.dwg

BILL OF MATERIALS

ITEM #	DESCRIPTION	MATERIAL
A	1X BUCK (G >= 0.42)	WOOD
B	2X BUCK (G >= 0.42)	WOOD
C	1/4" MAX. SHIM SPACE	-
D	1/4" X 2-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301 OR HOLLOW BLOCK CONFORMING TO ASTM C90	CONCRETE
F	1/4" X 3-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
G	3/16" X 3-1/4" PFH ITW CONCRETE SCREW	STEEL
J	#10 X 3" PFH WOOD SCREW	STEEL
L	#10 X 2-1/2" PFH WOOD SCREW (1.15" MIN. EMB.)	STEEL
M	3/16" X 2-1/4" PFH ITW CONCRETE SCREW	STEEL
P	1/4" X 2-1/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
X	2X REINFORCEMENT (SG = 0.55)	WOOD
1	PVC JAMB	COMP.
7	WEATHERSTRIP	FOAM
9	#9 X 3/4" PFH WOOD SCREW	STEEL
10	#9 X 1" PFH WOOD SCREW	STEEL
11	4" X 4" HINGE	STEEL
12	LATCH STRIKE PLATE	STEEL
13	DEADBOLT STRIKE PLATE	STEEL
15	OUTSWING THRESHOLD	ALUM/COMP
16	OUTSWING SIDELITE ADAPTER	PVC
22	#8 X 2-1/2" PFH WOOD SCREW	STEEL
27	#10 X 2" PFH SMS	STEEL
40	DOOR PANEL	-
50	SIDELITE PANEL	-
53	ALUMINUM ASTRAGAL	ALUM
54	ASTRAGAL STRIKE PLATE	STEEL
55	#8 X 1" PFH WS	STEEL

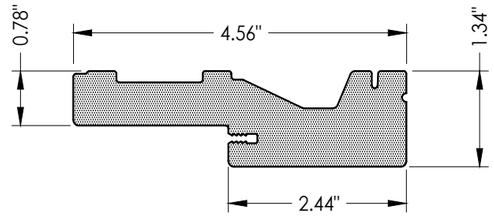

1 PVC JAMB

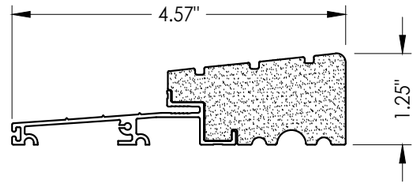

15 OUTSWING THRESHOLD
High-dam



16 OUTSWING SIDELITE ADAPTER

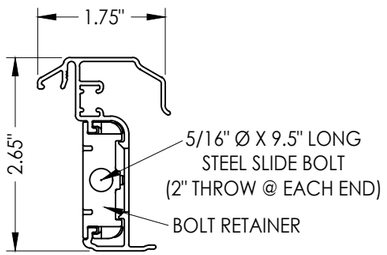

53 ENDURA ASTRAGAL
Ultimate Hurricane

CONCRETE ANCHOR NOTES:

1. *Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.*
2. *Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.*
3. *Concrete anchor table:*

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW BUILDEX TAPCON®	3/16"	1-1/4"	3"	1-1/2"
	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON®	1/4"	1-1/4"	1"	4"

WOOD SCREW INSTALLATION NOTES:

1. *Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.*

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: TRINITY FIBERGLASS PATIO DOOR "Impact"

PART OR ASSEMBLY: BILL OF MATERIALS & COMPONENTS

NO.	DATE	BY	REVISIONS
2	7/01/26	LFS	UPDATE TO 9TH ED. (2026) FBC
1	8/01/23	LFS	UPDATE TO 8TH ED. (2023) FBC

DATE: 1/28/21
SCALE: N.T.S.
DWG. BY: RW
CHK. BY: LFS
DRAWING NO.: FL-37184.2
SHEET 12 OF 12

© 2021 R.W. BUILDING CONSULTANTS INC.

Z:\2023 FBC Drawings\Trinity Glass Int'l\FL-37184 R2\FL-37184.2.dwg