


Weather Shield


Windows & Doors

8517 CONTEMPORARY DOOR


VERTICAL MULLION INSTALLATION

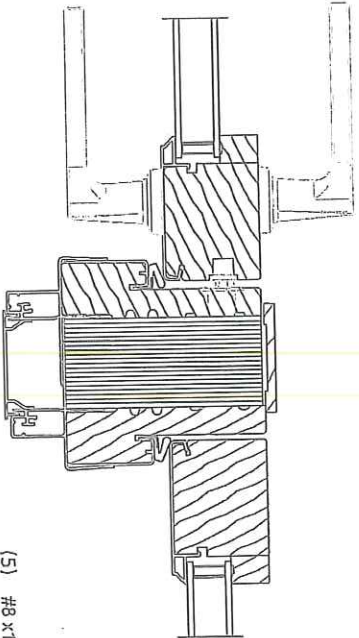


MILLION SECTION AT A-A
2" LVL REINFORCEMENT
SHOWN
OTHER REINFORCEMENT
AVAILABLE.

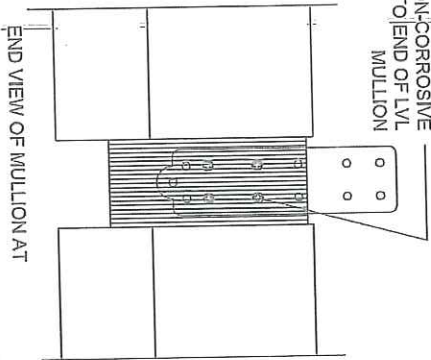


END VIEW OF MULLION AT

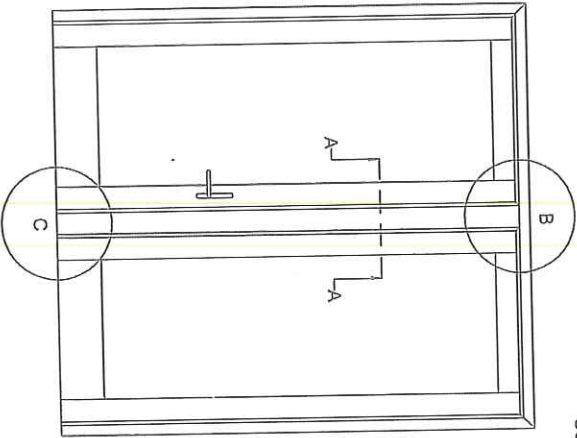

THIS SCHEDULE ADDRESSES ONLY THE FASTENERS REQUIRED TO ANCHOR THE MULLION (S) TO ACHIEVE THE RATED DESIGN PRESSURE. THOROUGHLY READ AND FOLLOW MANUFACTURERS INSTALLATION INSTRUCTIONS RECEIVED WITH UNIT. THIS GUIDE DOES NOT ADDRESS THE SEALING CONSIDERATIONS THAT MAY ARISE IN DIFFERENT WALL CONDITIONS.



WOOD FRAMING
BY OTHERS



1 1/2" MINIMUM
EMBEDMENT

VERTICAL SECTION
AT SILL AT C

AT SILL AT C

**SILL SET INTO A
CONTINUOUS BED OF
SILICONE SEALANT**

(4) #8 x 1" NON-CORROSIVE
SCREWS THROUGH INSTALLATION
CLIP INTO FLOOR

TOLERANCES UNLESS SPECIFIED:	
<u>DIMENSIONS</u>	<u>ANGLE</u>
$\frac{1}{16}$ ± .005	$\frac{1}{2}^\circ$ (1/2°)
$\frac{1}{8}$ ± .005	$\frac{1}{4}^\circ$ (1/4°)
$\frac{1}{4}$ ± .005	

Weather Shield Windows & Doors

PRODUCTS:

8517 CONTEMPORARY INSWING DOOR

DRAWN BY: JVG	DATE: 6-3-2016
------------------	-------------------

TITLE
VERTICAL MULLION ANCHORAGE

PROPERTY OF WEATHER SHIELD MFG. INC.
NOT TO BE REPRINTED OR

PROPERTY OF THE UNIVERSITY OF CALIFORNIA
DRAWING IS NOT TO BE REPRINTED OR
SUBMITTED FOR USE OUTSIDE OF

WEATHERSHIELD MFG. INC.
ALL RIGHTS RESERVED.

SCALE :

1:1	SHEET NAME: Sheet1
-----	--------------------

SHEET 1 OF 1

REV	DATE	DESCRIPTION	PCR NO.	ENG	TYPE, WALL THICKNESS	AGE IN
					VT/FT:	
					HAIR:	FINISH:
					PROF. IN:	PROF. IN: