



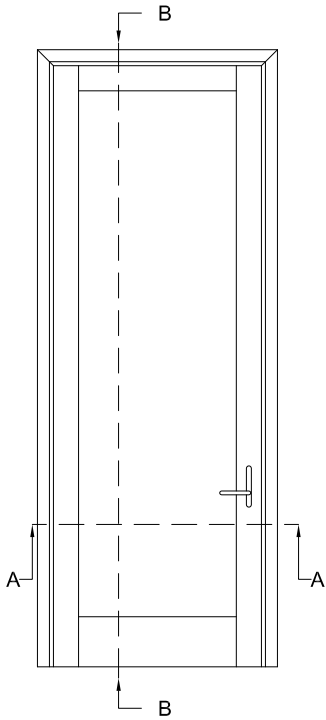

Weather Shield
Windows & Doors


8517 CONTEMPORARY SERIES
SINGLE OPERATING DOOR
NAIL FIN INSTALLATION

(2) #10 x 2 1/2" NON-CORROSIVE
SCREWS THROUGH HEAD STRIKE
PLATE INTO JAMB HEADER

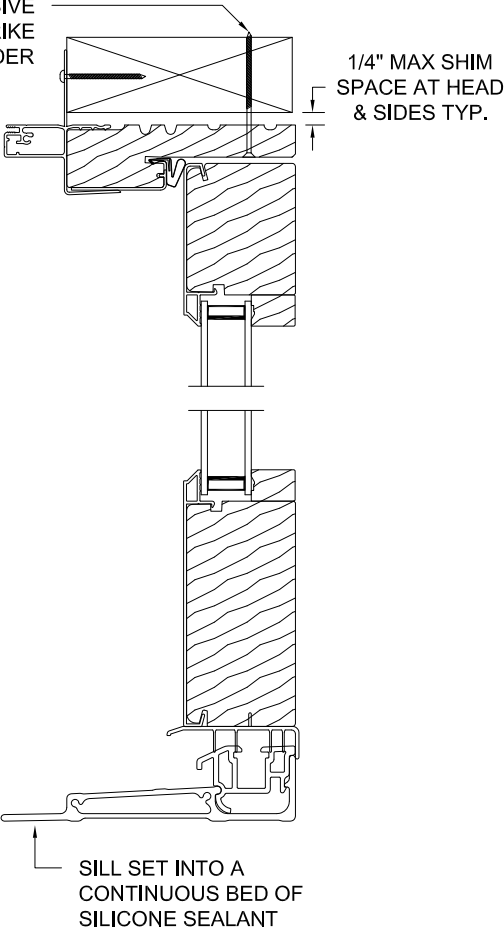

(2) #10 OR #12 x 2 1/2" NON-
CORROSIVE SCREWS PER
HINGE TYPE THROUGH EACH
HINGE LEAF TYP.

(3) #10 x 2 1/2" NON-CORROSIVE
SCREWS THROUGH LATCH &
DEADBOLT STRIKER PLATE.

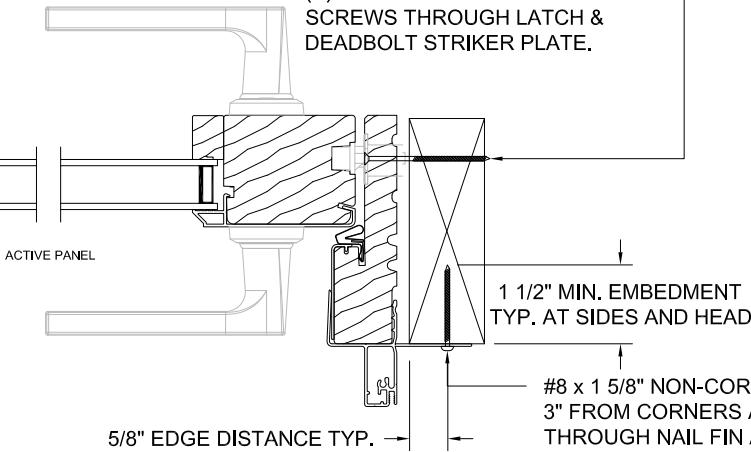

THIS SCHEDULE ADDRESSES ONLY THE FASTENERS REQUIRED TO ANCHOR THE DOOR (S) TO ACHIEVE THE RATED DESIGN PRESSURE. THOROUGHLY READ AND FOLLOW MANUFACTURERS INSTALLATION INSTRUCTIONS RECEIVED WITH UNIT. THIS GUIDE DOES NOT ADDRESS THE SEALING CONSIDERATIONS THAT MAY ARISE IN DIFFERENT WALL CONDITIONS.

TOLERANCES UNLESS SPECIFIED:	
INCHES	ANGLE
.x ± .1"	xx ± 1°
.xx ± .015"	.03xx ± .5° (1/2°)
	xx.xx ± .25° (1/4°)

Weather Shield
Windows & Doors

PRODUCTS:			
8517 CONTEMPORARY INSWING SINGLE DOOR			
DRAWN BY:	DATE:	TITLE:	
JVG	06-01-2016	NAIL FIN ANCHORAGE	
PROPERTY OF WEATHER SHIELD MFG., INC. DRAWING IS NOT TO BE REPRINTED OR SUBMITTED FOR USE OUTSIDE OF WEATHER SHIELD MFG., INC. ALL RIGHTS RESERVED.		DWG NO:	REV
		Draw1	
SCALE :	1:1	SHEET NAME:	Sheet1
		SHEET 1 OF 1	

REV	DATE	DESCRIPTION	PCR NO.	ENG	PDR #:	PROFILE #:
					TYP. WALL THICKNESS:	
					WT/FT:	AREA:
					MAT:	FINISH: