


Weather Shield

Windows & Doors

8617 CONTEMPORARY SERIES DOUBLE OPERATING FRENCH DOOR NAIL FIN INSTALLATION


(2) #10 x 2 1/2" NON-CORROSIVE
SCREWS THROUGH HEAD STRIKE
PLATE INTO JAMB HEADER

1/4" MAX SHIM
SPACE AT HEAD
& SIDES TYP.

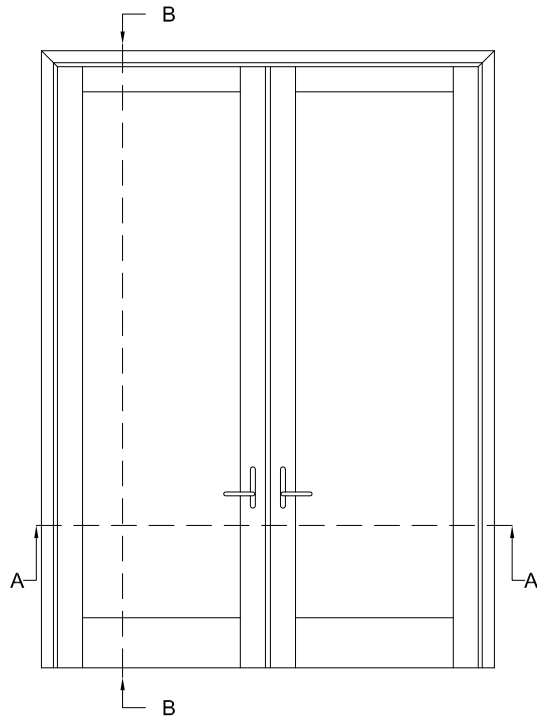

(2) #10 OR #12 x 2 1/2" NON-
CORROSIVE SCREWS PER
HINGE TYPE THROUGH EACH
HINGE LEAF TYP.

(2) #10 x 2 1/2" NON-CORROSIVE
SCREWS THROUGH SILL STRIKE
PLATE INTO FLOOR FRAMING

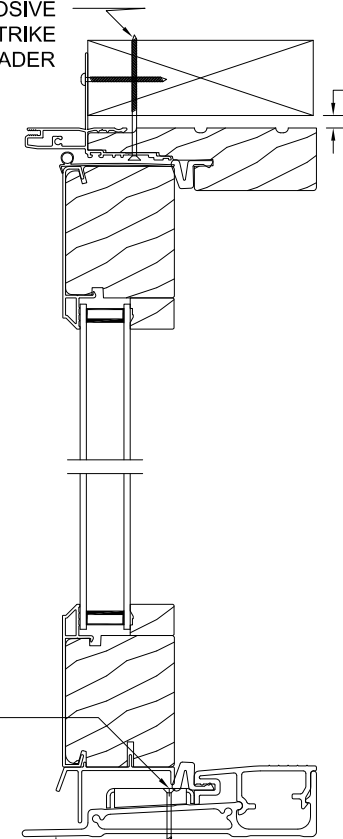

SILL SET INTO A
CONTINUOUS BED OF
SILICONE SEALANT

1 1/2" MIN. EMBEDMENT
TYP. AT SIDES AND HEAD

#8 x 1 5/8" NON-CORROSIVE SCREWS @
3" FROM CORNERS AND 8"-10" O.C.
THROUGH NAIL FIN AT SIDES AND HEAD

5/8" EDGE DISTANCE TYP.

ACTIVE PANEL

INACTIVE PANEL

THIS SCHEDULE ADDRESSES ONLY THE FASTENERS REQUIRED TO ANCHOR THE DOOR (S) TO ACHIEVE THE RATED DESIGN PRESSURE. THOROUGHLY READ AND FOLLOW MANUFACTURERS INSTALLATION INSTRUCTIONS RECEIVED WITH UNIT. THIS GUIDE DOES NOT ADDRESS THE SEALING CONSIDERATIONS THAT MAY ARISE IN DIFFERENT WALL CONDITIONS.

TOLERANCES UNLESS SPECIFIED:	
INCHES	ANGLE
.x ± .1"	xx ± 1°
.xx ± .015"	.03xx ± .5° (1/2°)
	xx.xx ± .25° (1/4°)

Weather Shield

Windows & Doors

PRODUCTS:

8617 CONTEMPORARY OUTSWING FRENCH DOOR

DRAWN BY:

JVG

DATE:

06-15-2016

TITLE:

NAIL FIN ANCHORAGE

PROPERTY OF WEATHER SHIELD MFG., INC.
DRAWING IS NOT TO BE REPRINTED OR
SUBMITTED FOR USE OUTSIDE OF
WEATHER SHIELD MFG., INC.
ALL RIGHTS RESERVED.

DWG NO:

Draw1

REV

SCALE: 1:1

SHEET NAME: Sheet1

SHEET 1 OF 1

TYP. WALL THICKNESS:

WT/FT:

AREA:

MAT:

FINISH:

PDR #:

PROFILE #:

REV	DATE	DESCRIPTION	PCR NO.	ENG	PDR #:	PROFILE #: