



Monument Clad Triple Sliding X0X
Operating Window
119 1/4" x 59 1/4"
Vinyl Nail Fin Installation / Non-Impact

CCL Listing# 436-H-666.15

ELEMENT TEST REPORT: ESP024832P-2117

Monument X0X Clad Sliding Operating Window
Vinyl Nail Fin Installation / WDMA Instructions / Non-Impact

SHEET: 1 OF 2

UPDATED: 3/01/2017

DRAWN BY: B.K.

TEST REPORT SUMMARY:

- SINGLE UNIT, MAXIMUM BASIC UNIT FRAME SIZE:
119 1/4" (3029mm) x 59 1/4" (1505mm)
- OVERALL DESIGN PRESSURE: **±35 psf**
- STRUCTURAL TEST PRESSURE: **+60.15/-52.63 psf**
- RATING: **CW-PG35**

INSTALLATION NOTES:

1. USE 2" x _ WOOD BUCK.

2. 3/8" MAXIMUM SHIM SPACE AT HEAD, SILL, JAMB
- PLACE WOOD SHIMS EVERY 6-10" AS NEEDED AND
BEHIND EACH SCREW LOCATION.

3. APPLY A CONTINUOUS BEAD OF SEALANT
BETWEEN THE VINYL NAIL FIN AND THE BUCK AT THE
HEAD, SILL AND SIDE JAMBS

4. INSTALL #8 X 1-1/4" PPH SCREWS SPACED
APPROXIMATELY 2-3" FROM EACH CORNER AND 6-8"
ON CENTER THEREAFTER INTO THE FRAMING
MATERIAL. SILICONE SEAL OVER SCREW HEADS. 1/4"
MINIMUM EDGE DISTANCE.

5. 1 1/8" MINIMUM FASTENER EMBEDMENT INTO
FRAMING MATERIAL.


6. MAXIMUM BASIC UNIT FRAME WINDOW SIZE:
119 1/4" (3029mm) x 59 1/4" (1505mm)

7. THIS INFORMATION APPLIES TO X0X SLIDER (3
SASH, 2 OPERATING)

- Check rough opening for proper size, plumb, level and square.
- Make all necessary adjustments to ensure rough opening is plumb, level & square.
- Sill must be flat, level and capable of supporting the weight of the unit.
- Opening should allow a maximum of 1/4" shim space at head, sill and jambs.
- - Wood buck, framing, fasteners, sealant and all wall system materials are provided by others

HEAD DETAIL


MONUMENT CLAD SLIDING WINDOW,
MEETING RAIL

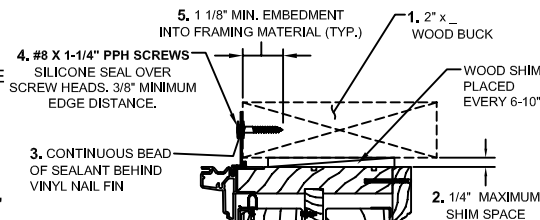

EXTERIOR

HEAD DETAIL


MONUMENT CLAD SLIDING WINDOW,
STATIONARY PANEL

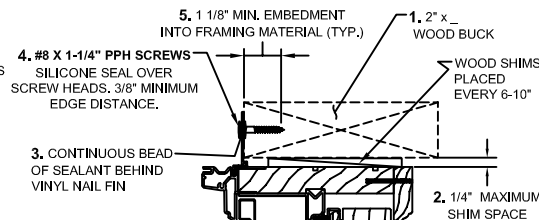

EXTERIOR


SILL DETAIL

MONUMENT CLAD SLIDING
WINDOW, MEETING RAIL

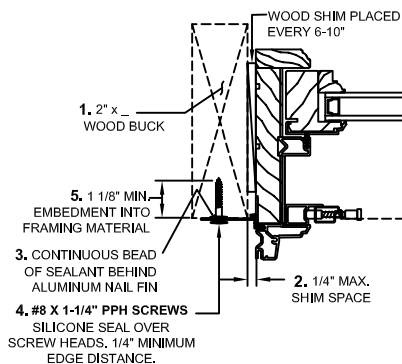

MEETING RAILS DETAIL

MONUMENT SLIDING WINDOW

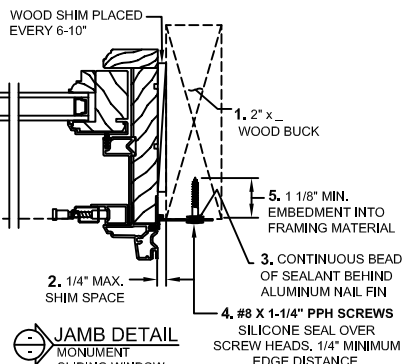

JAMB DETAIL

MONUMENT
SLIDING WINDOW



Monument Clad Triple Sliding X0X
Operating Window
119 1/4" x 59 1/4"
Vinyl Nail Fin Installation / Non-Impact

CCL Listing# 436-H-666.15

ELEMENT TEST REPORT: **ESP024832P-2117**

Monument X0X Clad Sliding Operating Window
Vinyl Nail Fin Installation / WDMA Instructions / Non-Impact

SHEET: 2 OF 2

UPDATED: 3/01/2017

DRAWN BY: B.K.

TEST REPORT SUMMARY:

- SINGLE UNIT, MAXIMUM BASIC UNIT FRAME SIZE:
119 1/4" (3029mm) x 59 1/4" (1505mm)
- OVERALL DESIGN PRESSURE: **±35 psf**
- STRUCTURAL TEST PRESSURE: **+60.15/-52.63 psf**
- RATING: **CW-PG35**

NAIL FIN ANCHOR REQUIREMENTS TABLE			
THROUGH VINYL NAIL FIN WITH SCREWS			
OPENING TYPE (SUBSTRATE)	JAMB TO OPENING FASTENER TYPE, FASTENER SPACING	MINIMUM EMBED	MINIMUM EDGE DIST.
2X WOOD FRAME OR BUCK	#8 X 1-1/4" PPH SCREWS SPACED 2-3" FROM EACH CORNER & 6-8" ON CENTER THEREAFTER.	1 1/8"	3/8"
ANCHORS MUST BE INTO A MIN. 2X WOOD MEMBER. IF SPACE BETWEEN WALL FRAME & WINDOW FRAME IS GREATER THAN THAT REQUIRED FOR A 2X WOOD MEMBER AND A SPACE EXISTS, THE SPACE MUST BE FILLED WITH A WOOD MEMBER OF EQUAL DEPTH TO THE WINDOW FRAME MEMBER OR BUCK AND OF LENGTH = MIN. 20". THE FRAME ANCHOR MUST THEN BE RUN THROUGH THE FRAME & WOOD SHIM AND INTO THE OPENING.			

