

GENERAL NOTES:

1. ROLL UP SHUTTER SYSTEM SHOWN ON THIS PRODUCT EVALUATION DOCUMENT (P.E.D.) HAS BEEN VERIFIED FOR COMPLIANCE IN ACCORDANCE WITH THE 2023 (8th EDITION) OF THE FLORIDA BUILDING CODE. ROLL UP SYSTEM SHALL NOT BE INSTALLED AT HIGH VELOCITY HURRICANE ZONES (MIAMI-DADE/BROWARD COUNTIES).
2. DESIGN WIND LOADS SHALL BE DETERMINED AS PER SECTION 1609 OF THE ABOVE MENTIONED CODE, USING ASCE 7-22 AND SHALL NOT EXCEED THE MAXIMUM (A.S.D.) DESIGN PRESSURE RATINGS INDICATED ON SHEETS 8 THRU 11, 13 THRU 16, 18, 19 AND 20 THRU 22. IN ORDER TO VERIFY THE ABOVE CONDITION, ULTIMATE DESIGN WIND LOADS DETERMINED PER ASCE 7-22 SHALL BE FIRST REDUCED TO A.S.D. DESIGN WIND LOADS BY MULTIPLYING THEM BY 0.6 IN ORDER TO COMPARE THESE W/MAX. (A.S.D.) DESIGN PRESSURE RATINGS INDICATED ABOVE.
- IN ORDER TO VERIFY THAT COMPONENTS AND ANCHORS ON THIS P.E.D. AS TESTED WERE NOT OVER STRESSED, A 33% INCREASE IN ALLOWABLE STRESS FOR WIND LOADS WAS NOT USED IN THEIR ANALYSIS. FASTENERS SPACING TO WOOD HAVE BEEN DETERMINED IN ACCORDANCE WITH N.D.S. 2018. THIS PRODUCT'S ADEQUACY FOR IMPACT AND WIND RESISTANCE HAS BEEN VERIFIED IN ACCORDANCE WITH SECTION 1609.1.2 OF THE ABOVE MENTIONED CODE AS PER BLACK WATER TEST LAB. REPORT # BT-JUP-19-001 AS PER TAS-201, TAS-202 AND TAS-203 PROTOCOLS.
3. ALL ALUMINUM EXTRUSIONS SHALL BE 6063-T6 ALLOY (UNLESS OTHERWISE NOTED), SEE SHEET 2.
4. ALL SCREWS (EXCEPT WINDLOCK SCREW (E)) TO BE STAINLESS STEEL 304 OR 316 SERIES WITH 50 ksi YIELD STRENGTH AND 90 ksi TENSILE STRENGTH OR CORROSION RESISTANT COATED CARBON STEEL AS PER DIN 50018. ALL S.D.S. ARE TEK SCREWS MANUFACTURED BY ITW BUILDEX & SHALL COMPLY W/FLORIDA BUILDING CODE SECTION 2411.3.3.4.
5. BOLTS TO BE ASTM A-307, GALVANIZED OR AISI 304 OR 316 SERIES STAINLESS STEEL WITH 36 ksi MINIMUM YIELD STRENGTH.
6. THIS PRODUCT BEARS U.S. PATENT.
7. ANCHORS TO WALL FOR (C) SIDE RAIL SHALL BE AS FOLLOWS:
- (A) TO EXISTING POURED CONCRETE: MIN. 3000 p.s.i. COMPRESSIVE STRENGTH.
- 5/16" TAPCON XL ANCHORS AS MANUFACTURED BY ITW BUILDEX, INC.
-3/8" S.S KWIK BOLT 3 ANCHORS AS MANUFACTURED BY HILTI, INC.
-3/8" CONFLEX SCREW AS MANUFACTURED BY ELCO CONSTRUCTION PRODUCTS.
- A.1) MINIMUM EMBEDMENT INTO POURED CONCRETE SHALL BE:
2 1/4" FOR 5/16" TAPCON XL ANCHORS, 2 3/8" FOR 3/8" KWIK BOLT 3 ANCHORS & 3 1/2" FOR ELCO CONFLEX. NO EMBEDMENT INTO STUCCO SHALL BE CONSIDERED AS PART OF THE REQUIRED EMBEDMENT.
- A.2) MINIMUM EDGE DISTANCE (E.D.) INTO POURED CONCRETE SHALL BE:
3" FOR 5/16" TAPCON XL & 4 1/2" FOR 3/8" KWIK BOLT 3 AND CONFLEX ANCHORS. EDGE DISTANCE IS BEYOND ANY FINISH MATERIAL.
- A.3) IN CASE THAT PRECAST STONE, PRECAST CONCRETE OR BRICK PANELS, VENEER OR PAVERS BE FOUND ON THE EXISTING WALL, ANCHORS SHALL BE LONG ENOUGH TO REACH THE MAIN STRUCTURE BEHIND SUCH PANELS.
- (B) TO EXISTING MIN. f'c= 2 ksi GROUT FILLED CELL CONCRETE BLOCK WALL: ASTM C-90
- 5/16" TAPCON XL ANCHORS, AS MANUFACTURED BY ITW BUILDEX, INC.
-3/8" S.S KWIK BOLT 3 ANCHORS AS MANUFACTURED BY HILTI INC.
- B.1) MINIMUM EMBEDMENT OF 5/16" TAPCON XL ANCHORS INTO THE GROUT FILLED CELL CONCRETE BLOCK UNIT SHALL BE 2 1/4" & 2 1/2" FOR HILTI KWIK BOLT 3. NO EMBEDMENT INTO STUCCO SHALL BE CONSIDERED AS PART OF THE REQUIRED EMBEDMENT.
- B.2) MINIMUM EDGE DISTANCE (E.D.) OF 5/16" TAPCON XL ANCHORS & KWIK BOLT 3 INTO GROUT FILLED CELL CONCRETE BLOCK SHALL BE 4". EDGE DISTANCE IS BEYOND ANY FINISH MATERIAL.
- B.3) IN CASE THAT PRECAST STONE, PRECAST CONCRETE OR BRICK PANELS, VENEER OR PAVERS BE FOUND ON THE EXISTING WALL, ANCHORS SHALL BE LONG ENOUGH TO REACH THE MAIN STRUCTURE BEHIND SUCH PANELS.
- (C) TO EXISTING WOOD FRAME BUILDING: SPRUCE PINE-FIR-SOUTH (G=0.36), DOUGLAS-FIR-SOUTH (G=0.46) OR SOUTHERN PINE #2 W/ G = 0.55 MIN.
- 5/16" TAPCON XL OR MAXISET ANCHORS, AS MANUFACTURED BY ITW BUILDEX, INC. OR 5/16" ULTRACONS AS MANUFACTURED BY DEWALT.
- C.1) MINIMUM EMBEDMENT OF TAPCON XL ANCHORS, MAXISET OR ULTRACONS INTO THE WOOD FRAME UNIT SHALL BE 1 1/4" PHYSICAL THREADED PENETRATION. NO EMBEDMENT INTO FINISH MATERIAL SHALL BE CONSIDERED AS PART OF THE REQUIRED EMBEDMENT.
- C.2) MINIMUM EDGE DISTANCE (E.D.) OF TAPCON XL ANCHORS, MAXISET OR ULTRACONS INTO WOOD SHALL BE 2 1/4". EDGE DISTANCE IS BEYOND ANY FINISH MATERIAL.
- C.3) IN CASE THAT PRECAST STONE, PRECAST CONCRETE OR BRICK PANELS, VENEER OR PAVERS BE FOUND ON THE EXISTING WALL, ANCHORS SHALL BE LONG ENOUGH TO REACH THE MAIN STRUCTURE BEHIND SUCH PANELS.
8. ANCHORS SHALL BE INSTALLED FOLLOWING ALL OF THE RECOMMENDATIONS AND SPECIFICATIONS OF THE ANCHOR'S MANUFACTURER.


9. SHUTTER MAY BE INSTALLED WITH SLAT'S CONCAVE SIDE FACING IN OR OUT.
10. ANCHORS REQUIRED FOR MULLION CONNECTIONS TO CONCRETE SHALL BE AS SPECIFIED ON APPLICABLE SECTIONS SHOWN ON SHEETS 8, 9, 10 & 11.
- S.S KWIK BOLT 3 EXPANSION ANCHOR MANUFACTURED BY HILTI, INC.
- CONFLEX SCREW ANCHOR MANUFACTURED BY ELCO CONSTRUCTION PRODUCTS.

MINIMUM EDGE DISTANCE FOR ABOVE MENTIONED ANCHORS SHALL BE AS INDICATED BELOW OR AT ABOVE MENTIONED SHEET. EDGE DISTANCE AND EMBEDMENTS ARE BEYOND ANY FINISH MATERIAL.

ANCHOR	EDGE DISTANCE @ 100%	EMBEDMENT @ 100% CONCRETE	REQ' MIN. THICKNESS FOR FOR SUBSTRATE
3/4" KWIK BOLT 3	14"	5 1/2" (3000 psi)	10"
1/2" KWIK BOLT 3	8"	3 1/2" (3000 PSI)	8"
3/8" KWIK BOLT 3	4 1/2"	2 3/8" (3000 PSI)	6"
3/8" CONFLEX SCREW	4"	2 5/8" (3000 PSI)	6"
1/2" CONFLEX	6"	3 1/2" (3000 PSI)	6"
5/8" HILTI HUS-H SCREW	7 1/2"	2 1/2" (3000 PSI)	4"















11. THE INSTALLATION CONTRACTOR IS TO SEAL/CAULK ALL PRODUCT COMPONENT EDGES WHICH REMAIN IN CONTINUOUS CONTACT WITH THE BUILDING TO PREVENT WIND/RAIN INTRUSION. CAULK AND SEAL PRODUCT TRACKS ALL AROUND FULL LENGTH.
12. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY THE SOUNDNESS OF THE STRUCTURE WHERE PRODUCT IS TO BE ATTACHED TO INSURE PROPER ANCHORAGE. THIS PRODUCT SHALL ONLY BE ATTACHED TO CONCRETE, GROUTED CONCRETE BLOCK OR WOOD FRAME BUILDINGS.
13. THIS PRODUCT'S INSTALLATION SHALL COMPLY WITH ALL SPECS INDICATED IN THIS DRAWING PLUS ANY BUILDING AND ZONING REGULATIONS PROVIDED BY THE JURISDICTION WHERE PERMIT IS APPLIED TO.
14. LIFTING MECHANISM NOT PART OF THIS APPROVAL.
15. (a) THIS P.E.D. PREPARED BY THIS ENGINEER IS GENERIC AND DOES NOT PROVIDE INFORMATION FOR A SITE SPECIFIC PROJECT; i.e. WHERE THE SITE CONDITIONS DEViate FROM THE P.E.D.
- (b) CONTRACTOR TO BE RESPONSIBLE FOR THE SELECTION, PURCHASE AND INSTALLATION INCLUDING LIFE SAFETY OF THIS PRODUCT, BASED ON THIS P.E.D. PROVIDED HE/SHE DOES NOT DEViate FROM THE CONDITIONS DETAILED ON THIS DOCUMENT. CONSTRUCTION SAFETY AT SITE IS THE CONTRACTOR'S RESPONSIBILITY.
- (c) THIS P.E.D. WILL BE CONSIDERED INVALID IF ALTERED BY ANY MEANS.
- (d) SITE SPECIFIC PROJECTS SHALL BE PREPARED BY A FLORIDA REGISTERED ENGINEER OR ARCHITECT WHICH WILL BECOME THE ENGINEER OF RECORD (E.O.R.) FOR THE PROJECT AND WHO WILL BE RESPONSIBLE FOR THE PROPER USE OF THE P.E.D. ENGINEER OF RECORD, ACTING AS A DELEGATED ENGINEER TO THE P.E.D. ENGINEER, SHALL SUBMIT TO THIS LATTER THE SITE SPECIFIC DRAWINGS FOR REVIEW.
- (e) THIS P.E.D. SHALL BEAR THE DATE AND ORIGINAL SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER OF RECORD THAT PREPARED IT.
16. PRODUCT MANUFACTURER'S LABEL SHALL BE LOCATED ON A READILY VISIBLE LOCATION AT PRODUCT IN ACCORDANCE WITH SECTION 1709.9.2 OF FLORIDA BUILDING CODE. ONE LABEL SHALL BE PLACED FOR EVERY OPENING.

THIS DRAWING SHALL ONLY BE USED TO
OBTAIN PERMITS IN THE STATE OF FLORIDA

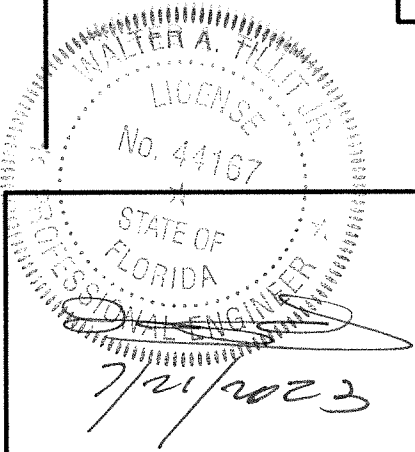

P.E. SEAL/SIGNATURE/DATE

FLORIDA BUILDING CODE (NON HIGH VELOCITY HURRICANE ZONE)					
©2023 TILTECO, INC.			ROLL-UP SHUTTER SYSTEM WITH CHD-6 SLAT (END RETENTION)		W.H. DRAWN BY:
 TILLIT TESTING & ENGINEERING COMPANY 6355 N.W. 36th St., Ste. 305, VIRGINIA GARDENS, FL 33168 Phone : (305)871-1530 • Fax : (305)871-1531 CA-0006719 WALTER A. TILLIT Jr. P.E. FLORIDA Lic. # 44167			CARGOR ENTERPRISE LLC. 901 EAST INDUSTRIAL CIRCLE, UNIT 9 CAPE CORAL, FL 33909 PH: 239-540-3034		07/21/2023 DATE:
			23-136 DRAWING No.		SHEET 1 OF 22
REV. NO	DESCRIPTION	DATE	REV. No	DESCRIPTION	DATE
1	OLD 21-108	07/21/23	3	-	-
2	-	-	4	-	-

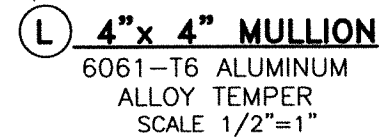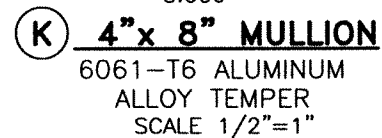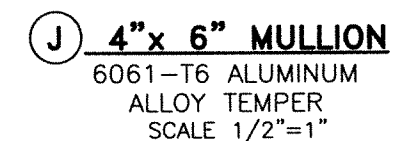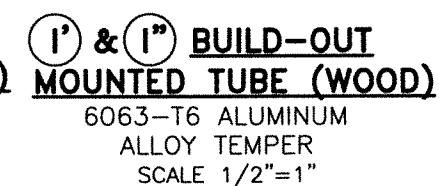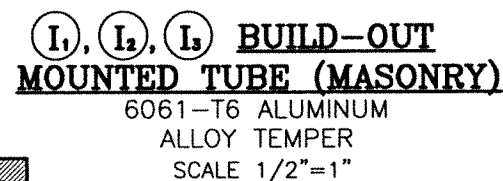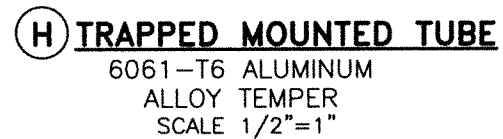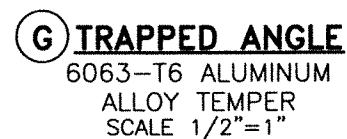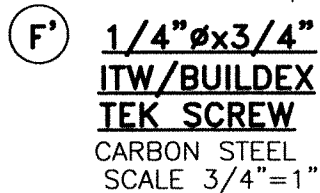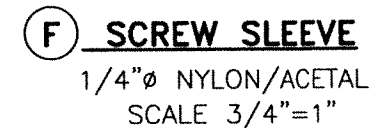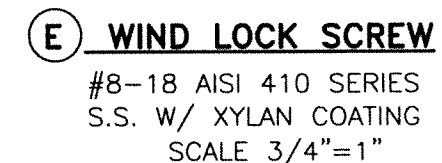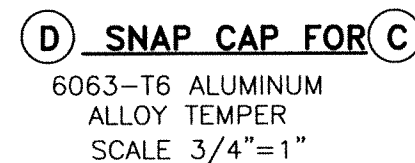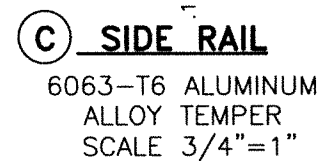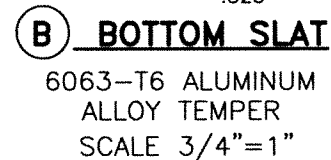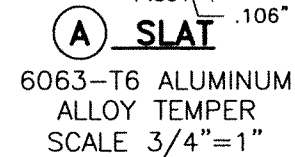

COMPONENTS



FLORIDA BUILDING CODE (NON HIGH VELOCITY HURRICANE ZONE)

©2023 TILTECO, INC.

TILTECO INC.

TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FL 33166
Phone : (305)871-1530 . Fax : (305)871-1531
CA-0006719
WALTER A. TILLIT Jr. P.E.
FLORIDA Lic. # 44167

**ROLL-UP SHUTTER SYSTEM
WITH CHD-6 SLAT (END RETENTION)**

CARGOR ENTERPRISE LLC.

901 EAST INDUSTRIAL CIRCLE, UNIT 9
CAPE CORAL, FL 33909
PH: 239-540-3034

W.H.
DRAWN BY:


07/21/2023
DATE:

23-136


DRAWING No.

REV. NO	DESCRIPTION	DATE	REV. No	DESCRIPTION	DATE
1	OLD 21-100	07/21/23	3	-	-
2	-	-	4	-	-



SHEET 2 OF 22

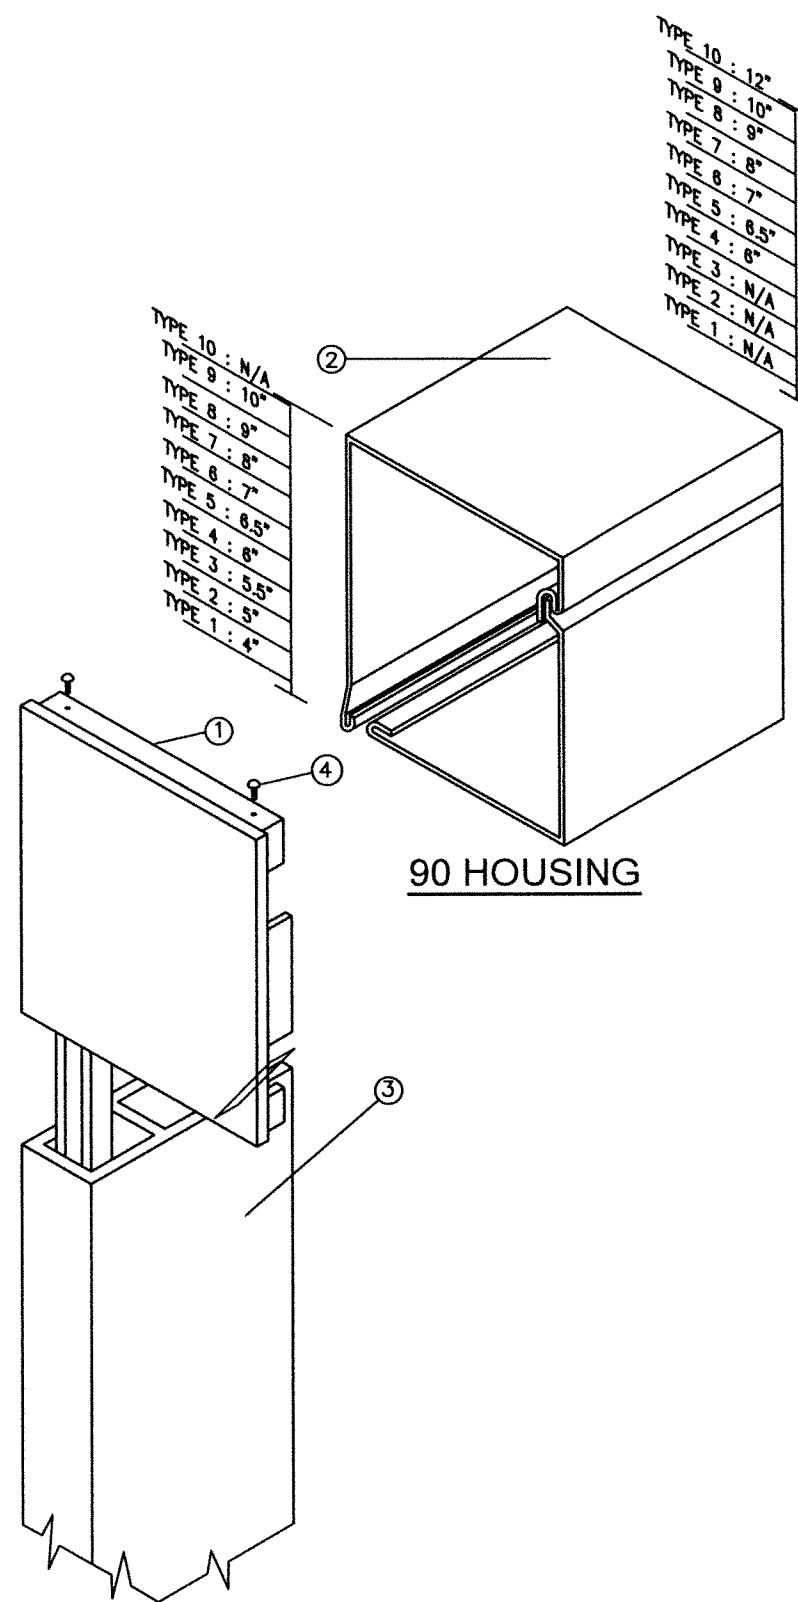

90 HOUSING

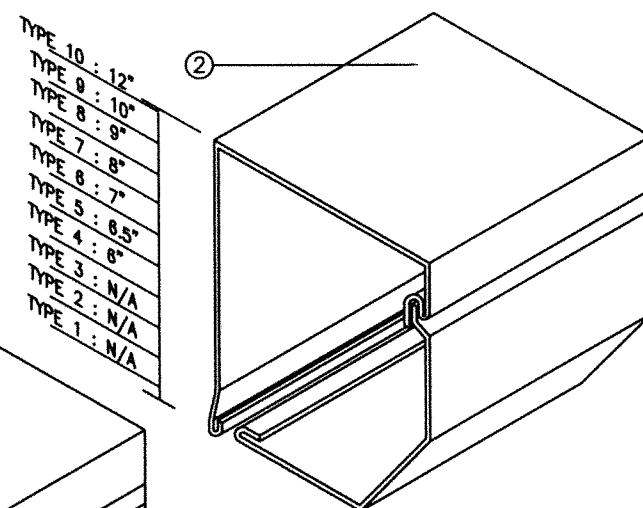

**45 & 45/S OPTIONAL
HOUSINGS**

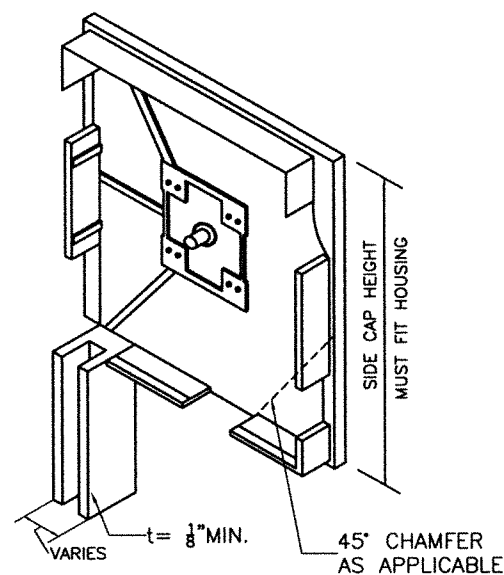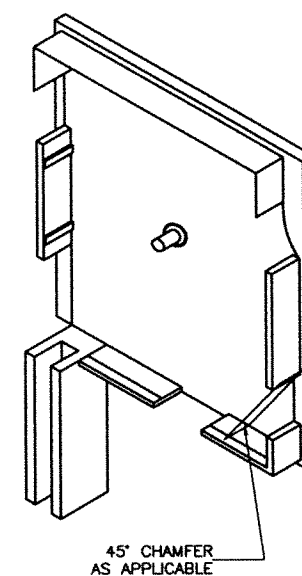

STRUCTURAL COMPONENTS FOR OPERATING SYSTEM

- ① - SIDE/END CAP (CAST ALUMINUM) *
- ② - HOUSING MIN. 0.040" THICK SHEET METAL (3105-H14 OR STRONGER)

- ③ - SIDE RAIL © W/ ④


FASTENERS

- ④ - 3/16" ALUMINUM POP RIVETS OR # 10 S.D.S. (6 REQ'D EA. SIDE CAP) : 2 Ⓢ TOP, 2 Ⓢ REAR, 2 Ⓢ BOTTOM

* SHALL BE CAPABLE TO SUSTAIN SLAT'S WEIGHT AND ASSURE LIFTING MECHANISM. (SEE NOTE 14/1)

① END CAPS:

BOX STRUCTURAL COMPONENTS AND ASSEMBLY DETAIL

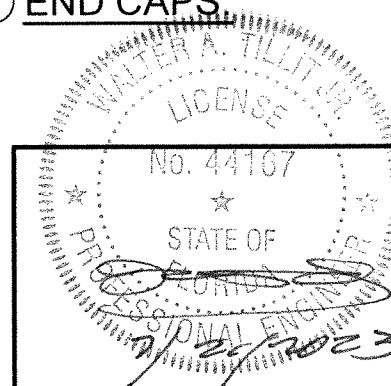

P.E. SEAL/SIGNATURE/DATE

FLORIDA BUILDING CODE (NON HIGH VELOCITY HURRICANE ZONE)

©2023 TILTECO, INC.

TILTECO Inc.
TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th St., Ste. 305, VIRGINIA GARDENS, FL 33166
Phone : (305)871-1530 . Fax : (305)871-1531
CA-0006719
WALTER A. TILLIT Jr., P.E.
FLORIDA Lic. # 44167

**ROLL-UP SHUTTER SYSTEM
WITH CHD-6 SLAT (END RETENTION)**

CARGOR ENTERPRISE LLC.
901 EAST INDUSTRIAL CIRCLE, UNIT 9
CAPE CORAL, FL 33909
PH: 239-540-3034


W.H.
DRAWN BY:

07/21/2023
DATE:


23-136
DRAWING No.

REV. NO	DESCRIPTION	DATE	REV. No	DESCRIPTION	DATE
1	OLD 21-109	07/21/23	3	-	-
2	-	-	4	-	-

SHEET 3 OF 22

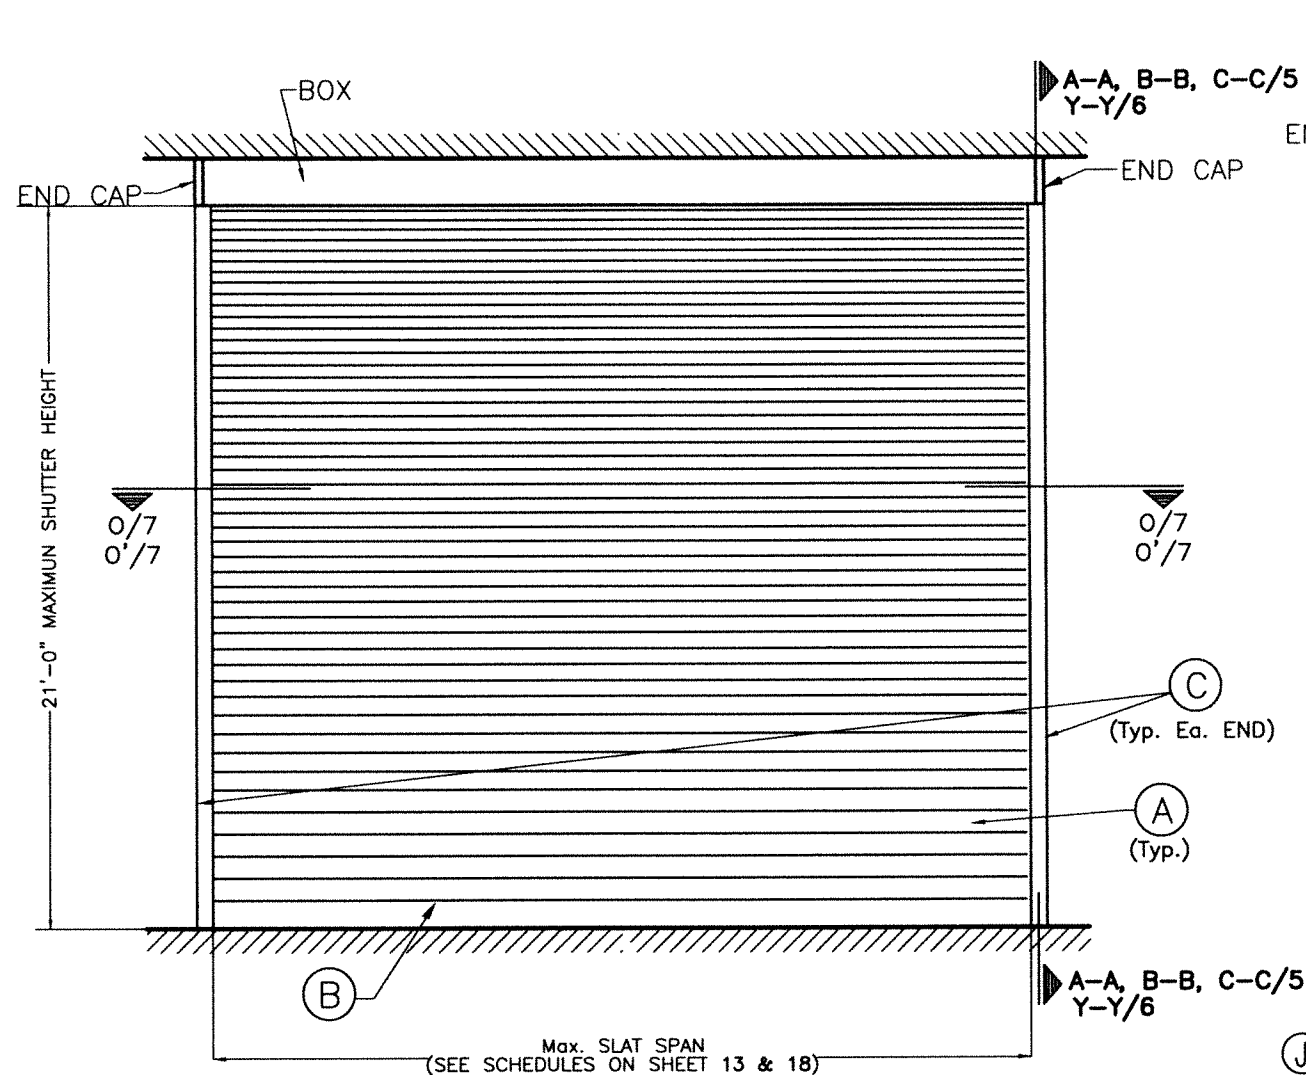


TYPICAL SINGLE UNIT ELEVATION
(CONCRETE, GROUTED BLOCK OR WOOD)
 NOTE: SEE SHEETS 2 & 3 FOR COMPONENTS NOMENCLATURE.
 N.T.S.

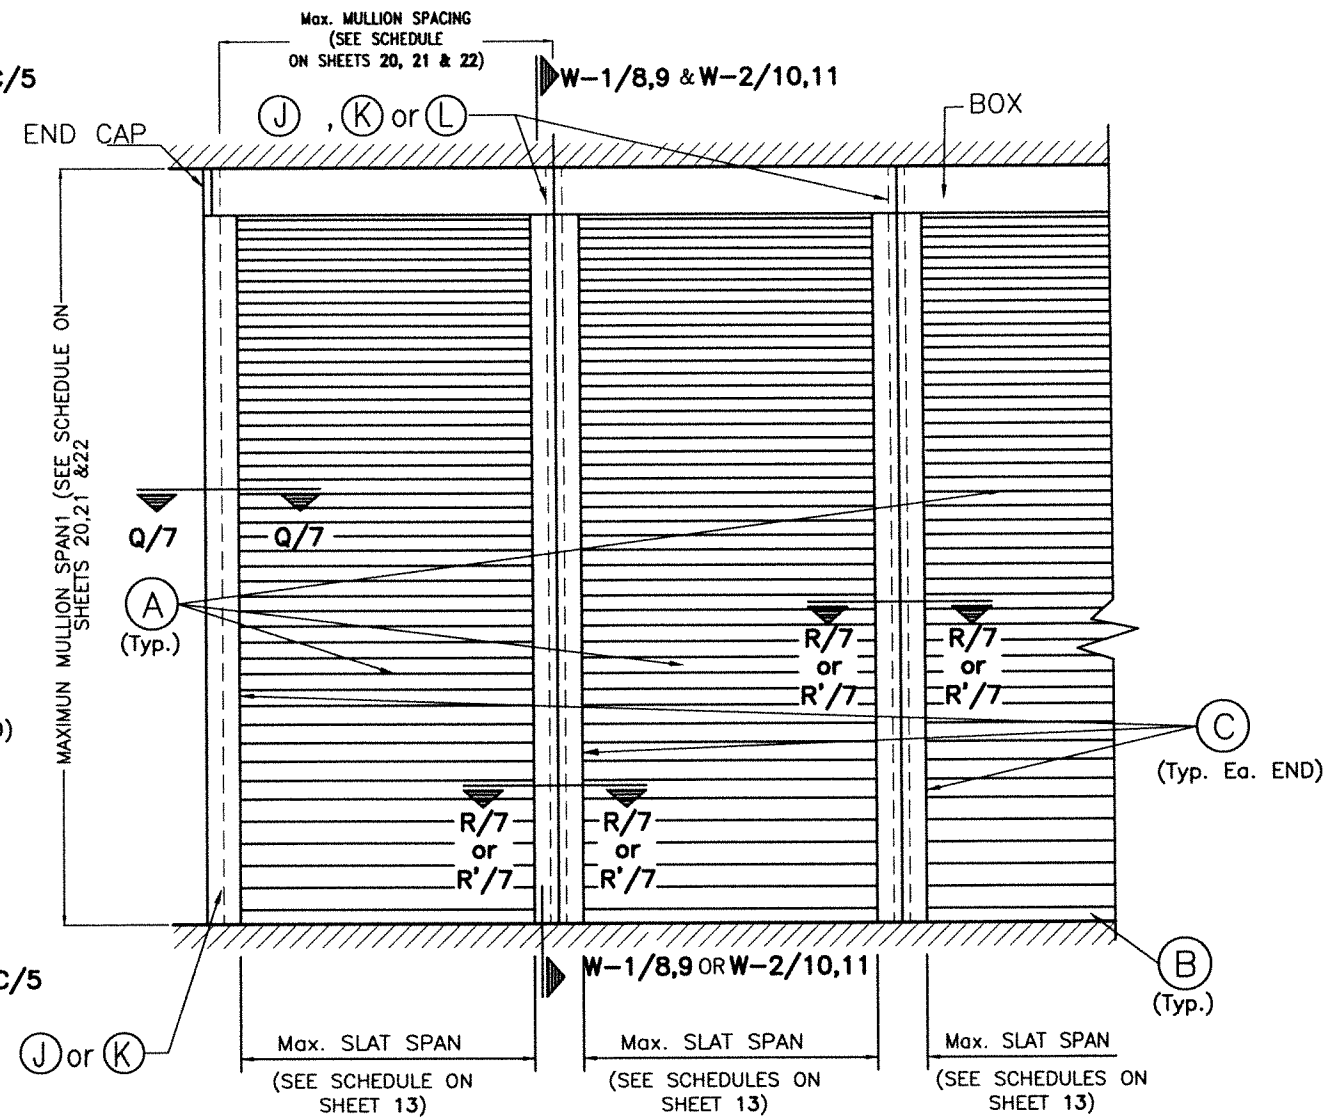


TYPICAL CONSECUTIVE SINGLE UNIT ELEVATION
W/ MULLION INTO POURED CONCRETE
 NOTE: SEE SHEETS 2 & 3 FOR COMPONENTS NOMENCLATURE.
 N.T.S.

WALTER A. TILLIT JR.
 LICENCE
 No. 44167
 STATE OF
 FLORIDA
 PROFESSIONAL ENGINEER
 7/21/2023
 P.E. SEAL/SIGNATURE/DATE


FLORIDA BUILDING CODE (NON HIGH VELOCITY HURRICANE ZONE)					
©2023 TILTECO, INC.			ROLL-UP SHUTTER SYSTEM WITH CHD-6 SLAT (END RETENTION)		W.H. DRAWN BY:
TILTECO Inc.			CARGOR ENTERPRISE LLC.		07/21/2023 DATE:
TILLIT TESTING & ENGINEERING COMPANY 6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FL 33166 Phone : (305)871-1530 . Fax : (305)871-1531 CA-0006719 WALTER A. TILLIT Jr. P.E. FLORIDA Lic. # 44167			901 EAST INDUSTRIAL CIRCLE, UNIT 9 CAPE CORAL, FL 33909 PH: 239-540-3034		23-136 DRAWING No.
REV. NO	DESCRIPTION	DATE	REV. No	DESCRIPTION	DATE
1	OLD 21-108	07/21/23	3	-	-
2	-	-	4	-	-
SHEET 4 OF 22					

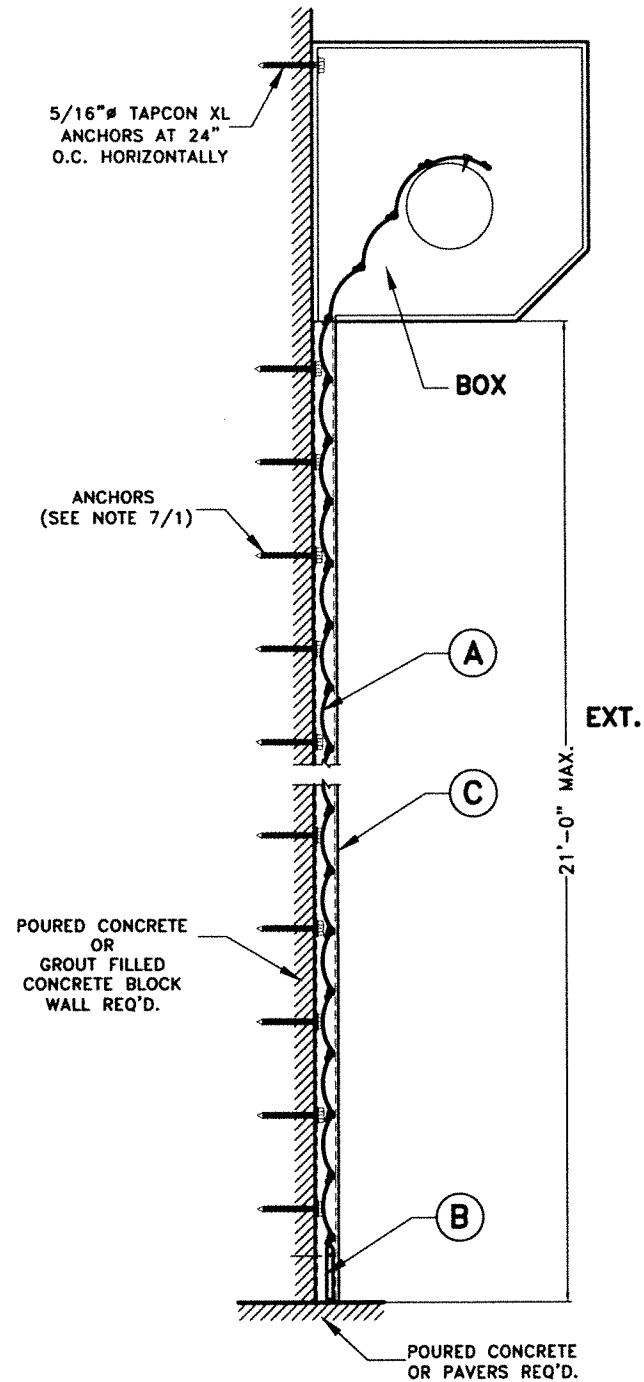

**SECTION A-A
(WALL MOUNTED)**
SCALE 1/8"=1"

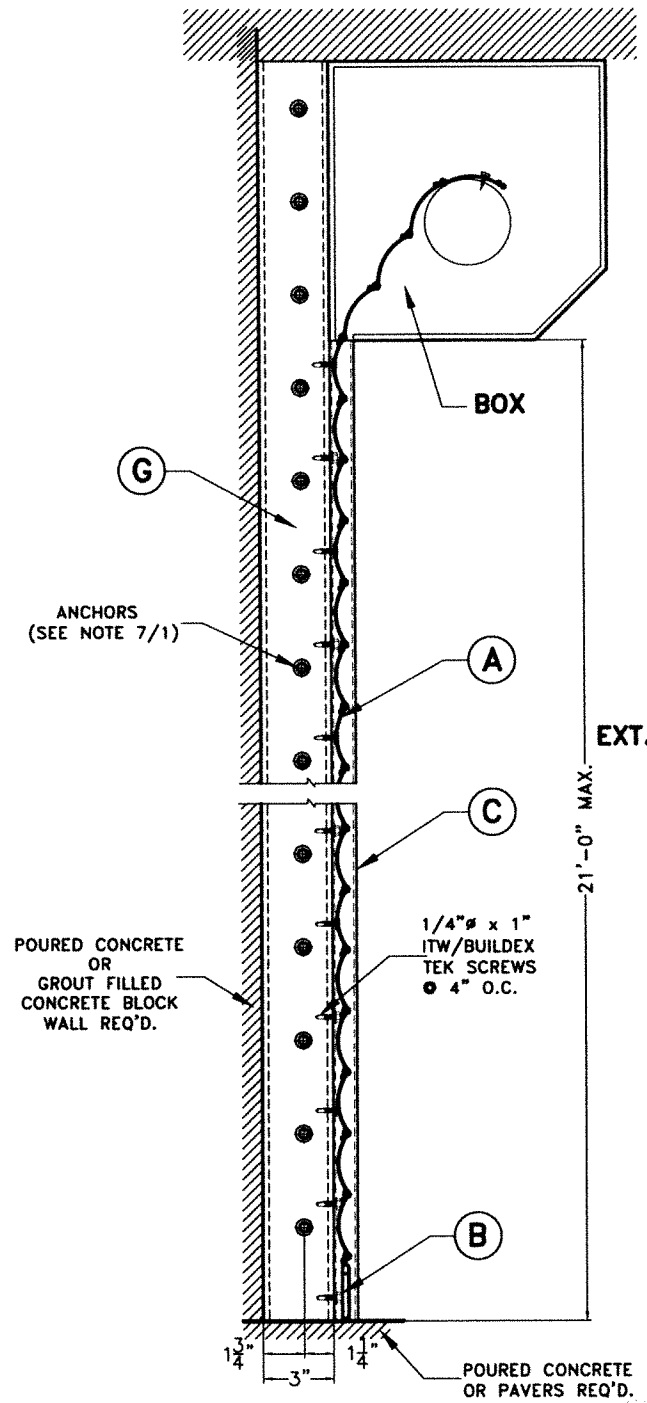

**SECTIONS B-B
(TRAPPED MOUNTED)**
SCALE 1/8"=1"

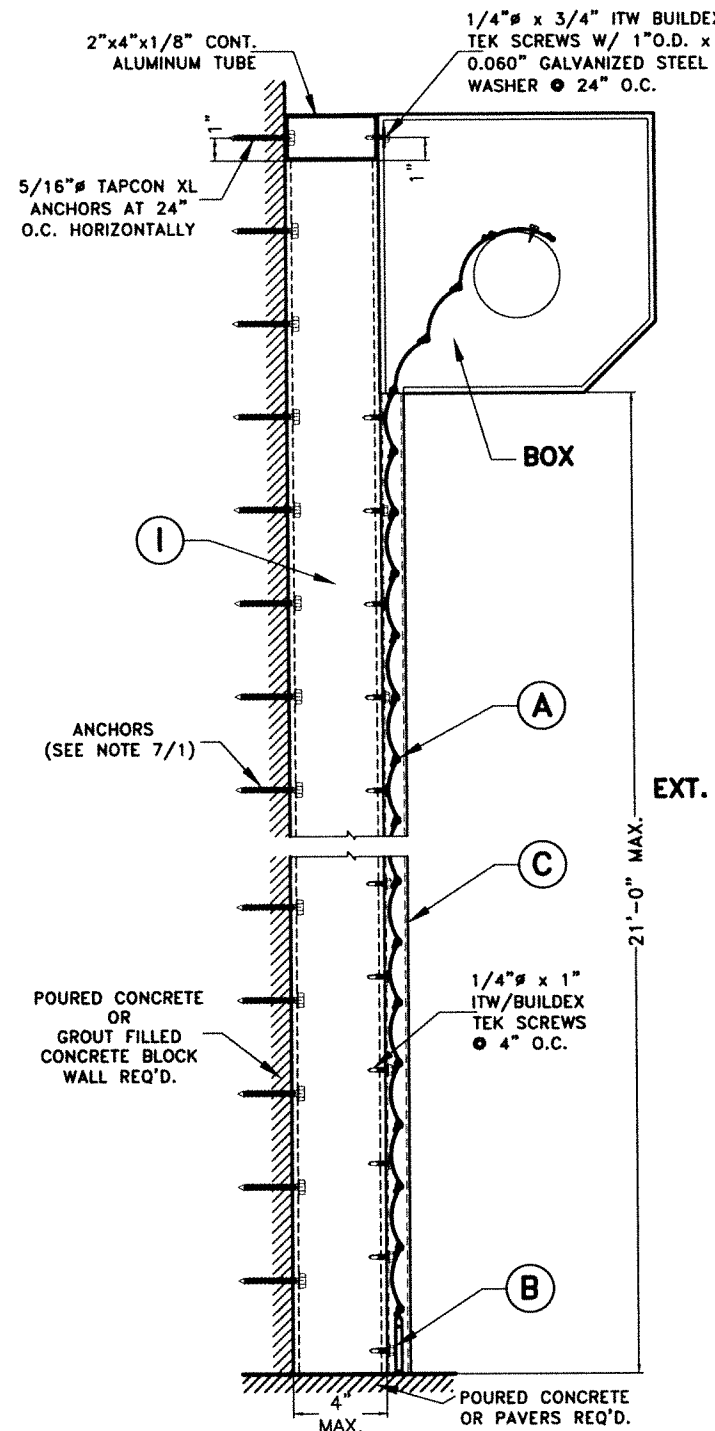

**SECTION C-C
(BUILD OUT)**
SCALE 1/8"=1"

**INSTALLATION DETAILS ON EXISTING
POURED CONCRETE OR GROUT FILLED
CONCRETE BLOCK WALL BUILDINGS**

No. 44167
STATE OF
FLORIDA
P.E. SEAL/SIGNATURE/DATE

FLORIDA BUILDING CODE (NON HIGH VELOCITY HURRICANE ZONE)

©2023 TILTECO, INC.

TILTECO inc.
TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th St., Ste. 305, VIRGINIA GARDENS, FL 33166
Phone : (305)871-1530 Fax : (305)871-1531
CA-0006719
WALTER A. TILLIT Jr. P.E.
FLORIDA Lic. # 44167

**ROLL-UP SHUTTER SYSTEM
WITH CHD-6 SLAT (END RETENTION)**

CARGOR ENTERPRISE LLC.
901 EAST INDUSTRIAL CIRCLE, UNIT 9
CAPE CORAL, FL 33909
PH: 239-540-3034

W.H.
DRAWN BY:


07/21/2023
DATE:

23-136

DRAWING No.



SHEET 5 OF 22

REV. NO	DESCRIPTION	DATE	REV. No	DESCRIPTION	DATE
1	OLD 21-108	07/21/23	3	-	-
2	-	-	4	-	-

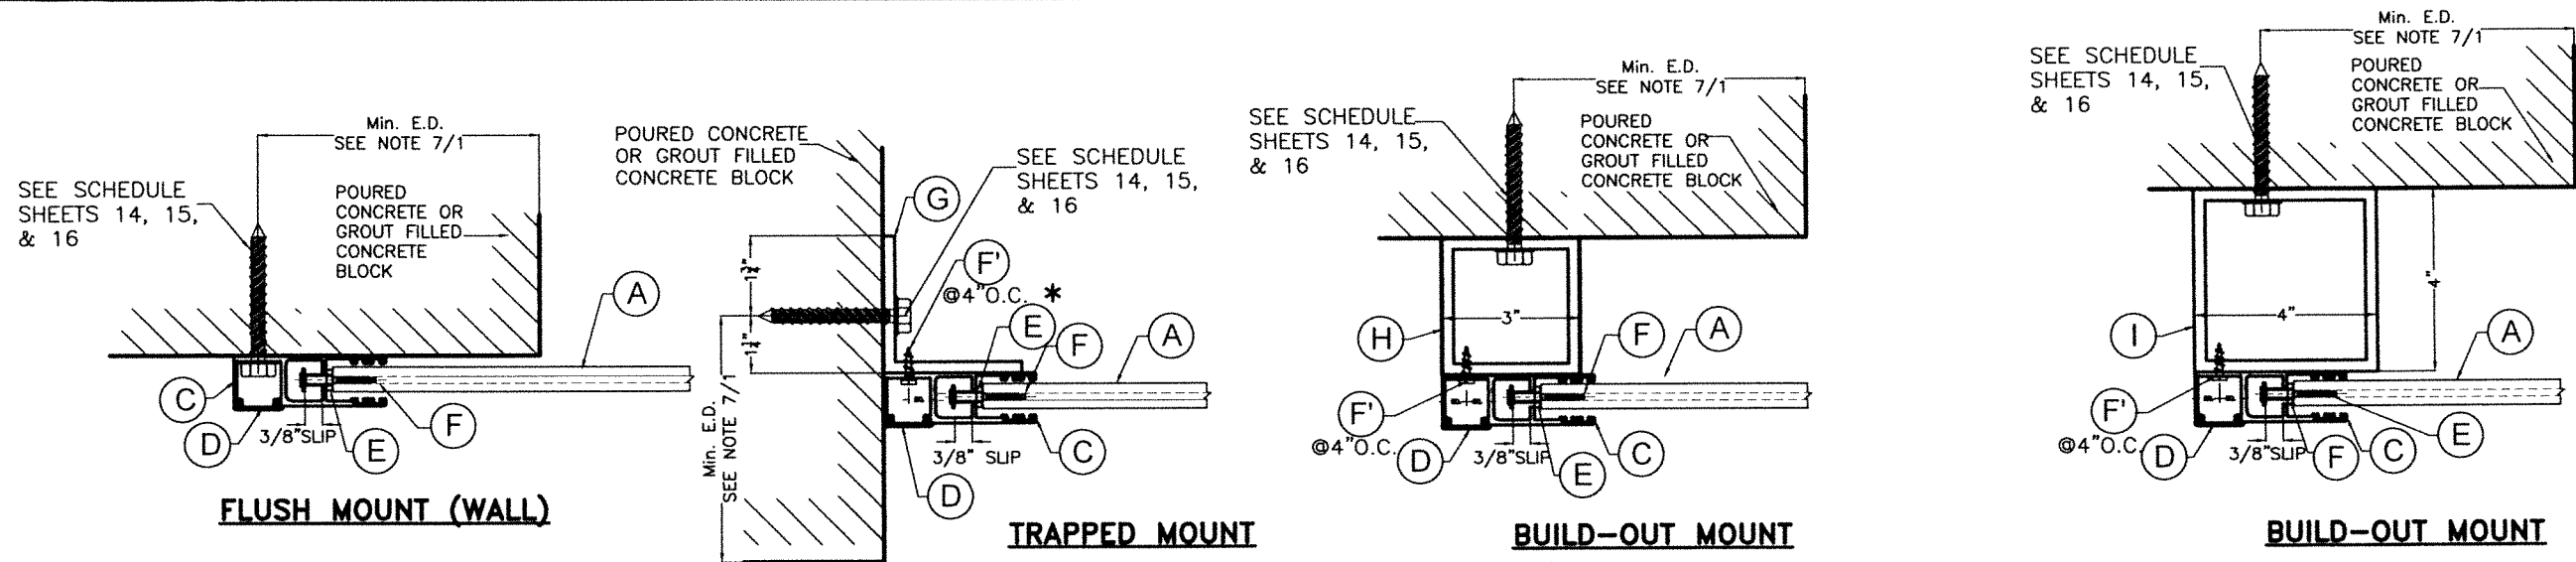

SECTIONS O-O (PLAN)

INSTALLATION DETAILS INTO EXISTING POURED CONCRETE OR GROUT FILLED CONCRETE BLOCK BUILDINGS

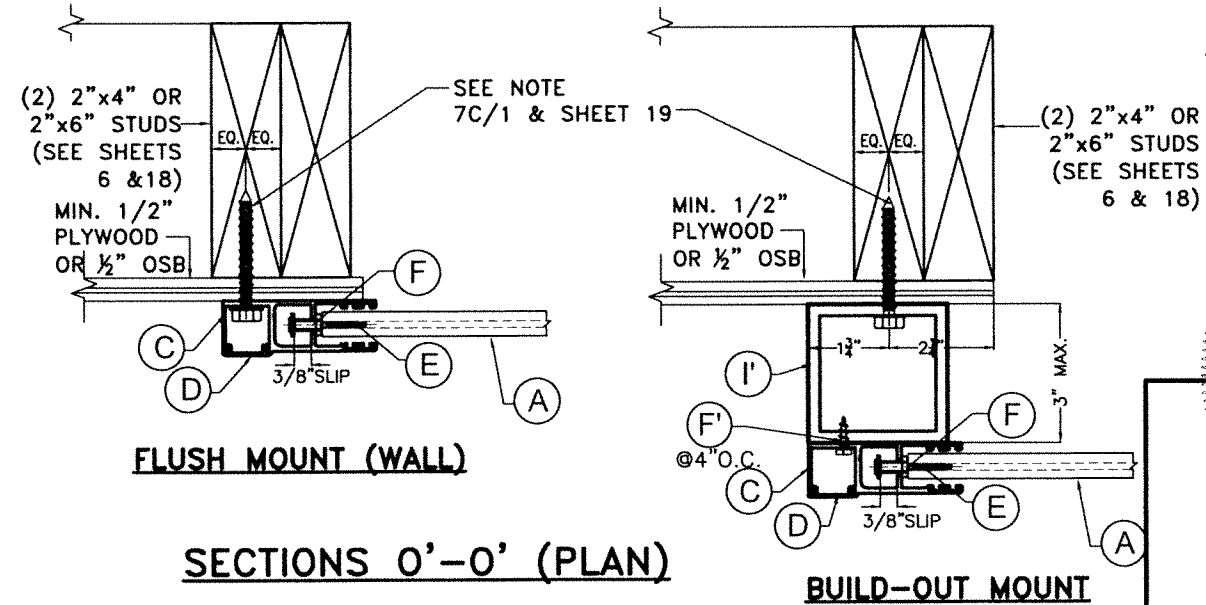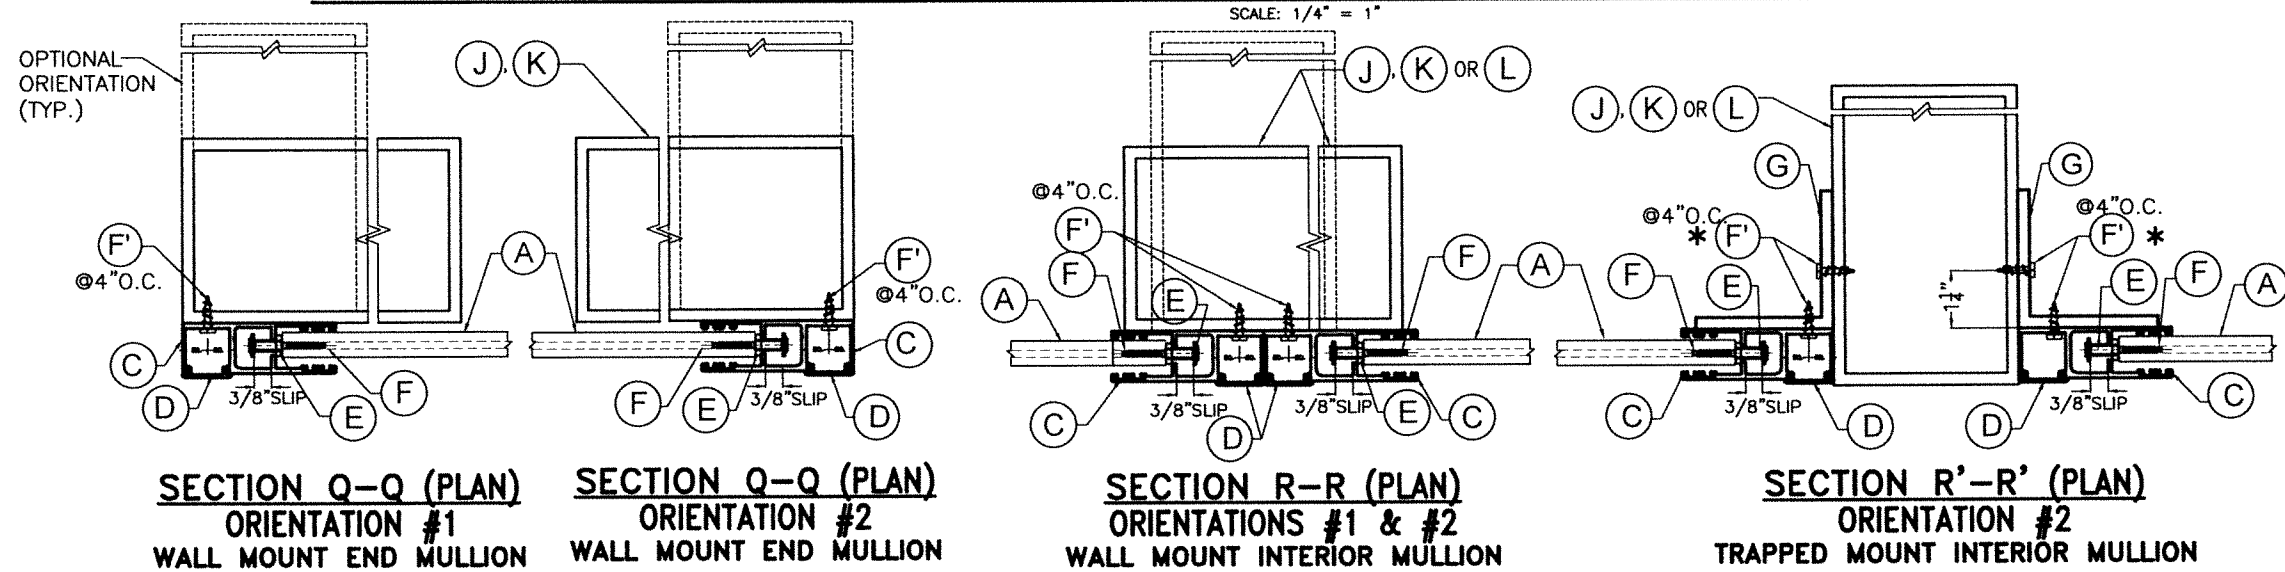


SECTIONS O'-O' (PLAN)

INSTALLATION DETAILS INTO EXISTING WOOD BUILDINGS

INSTALLATION DETAILS INTO MULLIONS J, K, L

* ALTERNATIVELY TO (F) A 1/4"Ø-20x3/4" S.S. M.S. W/ NUT MAY BE USED FOR THIS CONNECTION

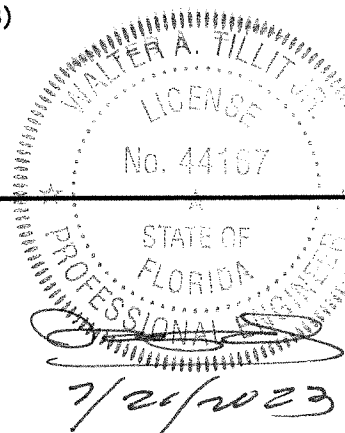

P.E. SEAL/SIGNATURE/DATE

FLORIDA BUILDING CODE (NON HIGH VELOCITY HURRICANE ZONE)

©2023 TILTECO, INC.

TILTECO INC.
TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th St., Ste. 305, VIRGINIA GARDENS, FL 33166
Phone : (305)871-1530 • Fax : (305)871-1531
CA-0006719
WALTER A. TILLIT Jr. P.E.
FLORIDA Lic. # 44167

ROLL-UP SHUTTER SYSTEM WITH CHD-6 SLAT (END RETENTION)

CARGOR ENTERPRISE LLC.
901 EAST INDUSTRIAL CIRCLE, UNIT 9
CAPE CORAL, FL 33909
PH: 239-540-3034

W.H.
DRAWN BY:


07/21/2023
DATE:


23-136

DRAWING No.

REV. NO	DESCRIPTION	DATE	REV. No	DESCRIPTION	DATE
1	OLD 21-109	07/21/23	3	-	-
2	-	-	4	-	-

SHEET 7 OF 22



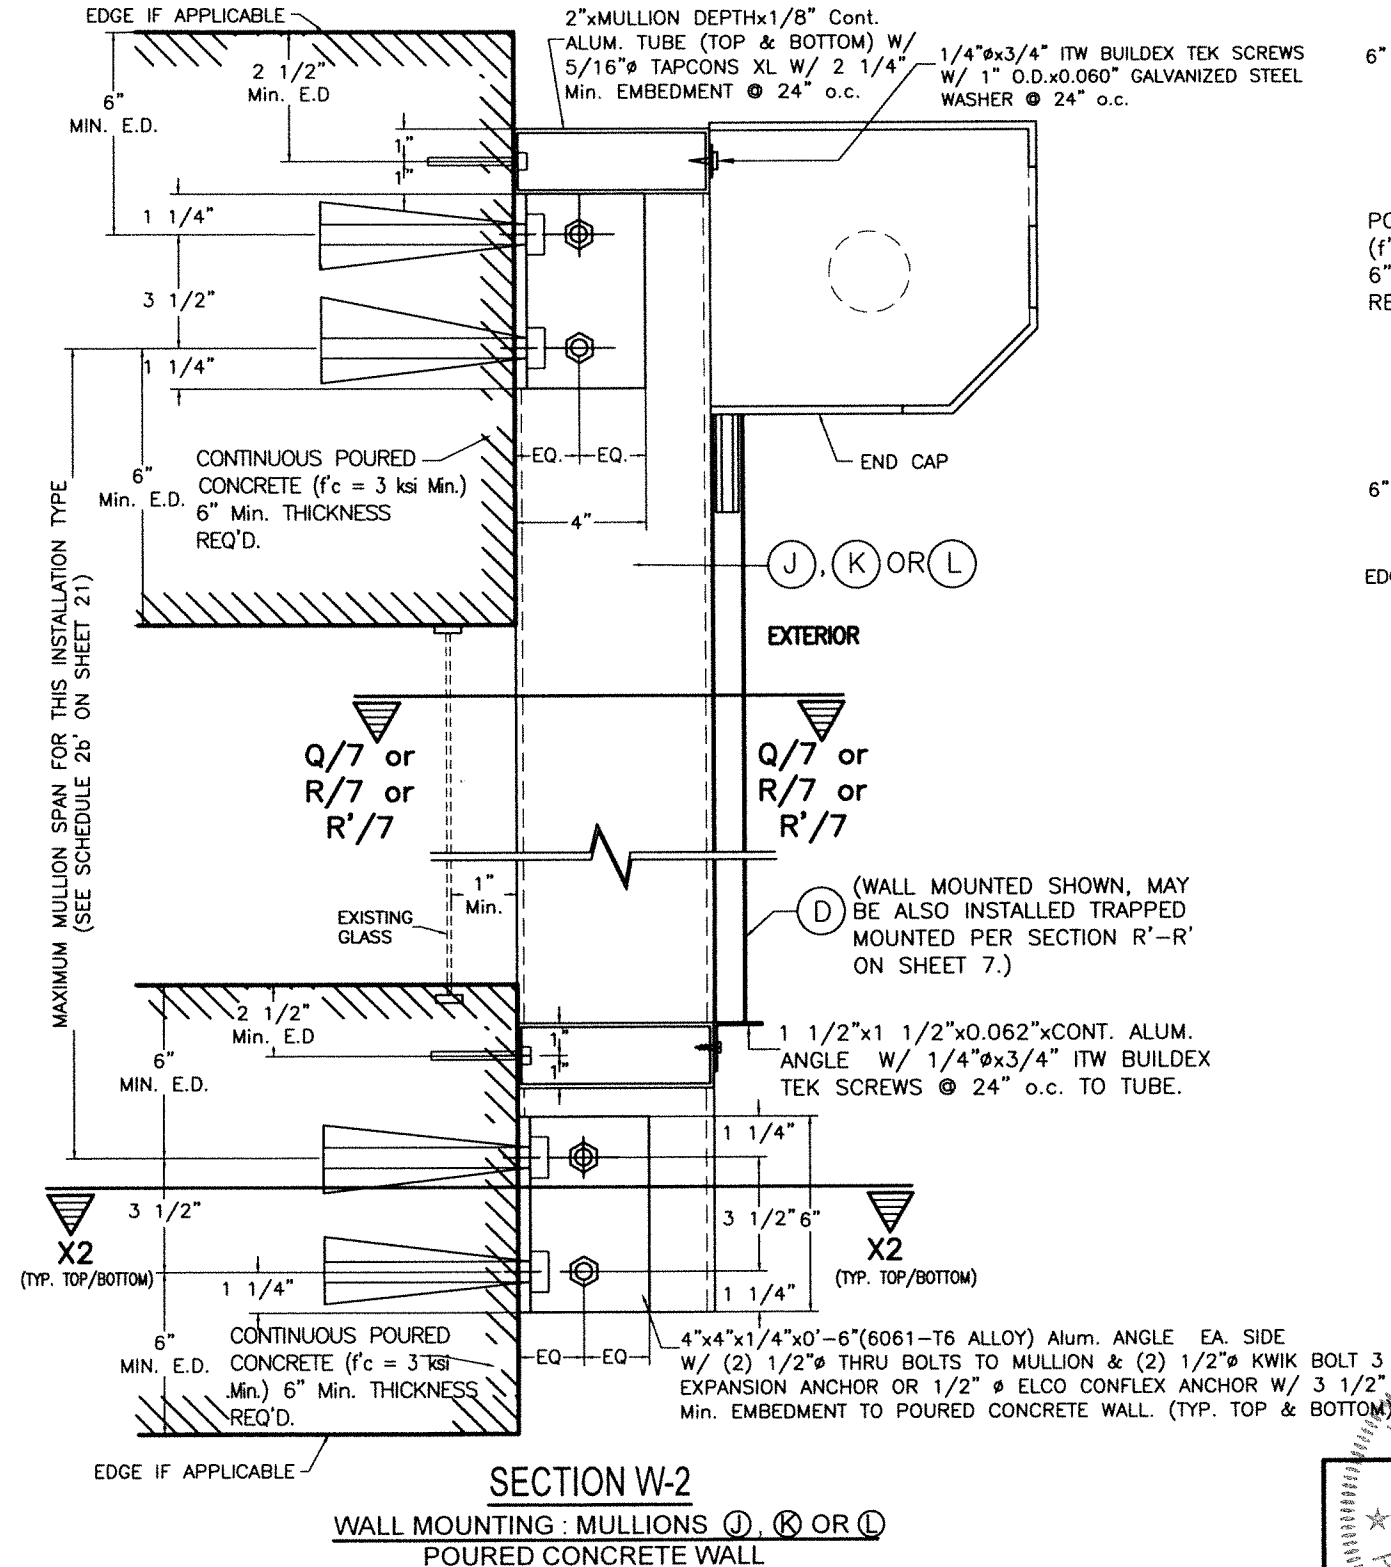


◇ **END & INTERIOR WALL MOUNTED MULLION INSTALLATION ***


APPLICABLE TO A LIMITED LOAD, MULLION SPAN AND MULLION SPACING INSTALLATIONS

(TO BE USED WITH SCHEDULE 2b' ON SHEET 21)

SCALE: 1/8" = 1'

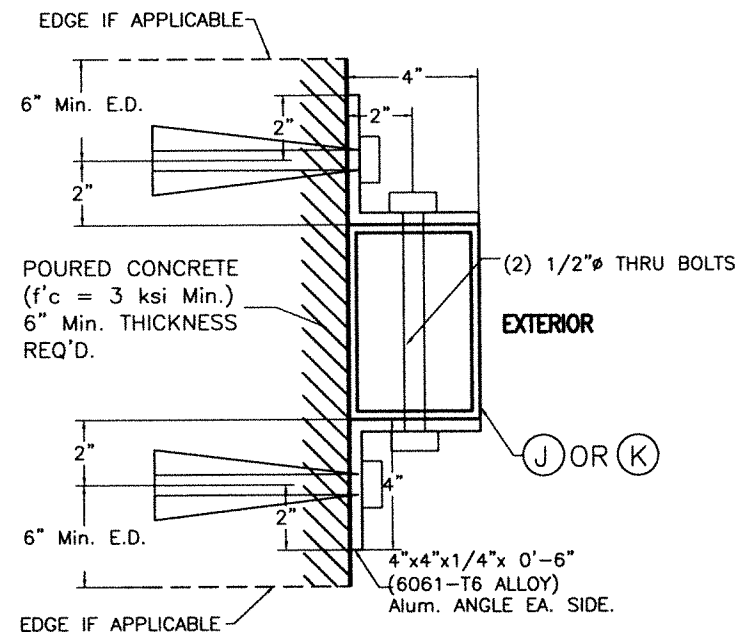

SECTION X2-X2 W/ (K)*
(END & INTERIOR MULLION) (J) & (K)
W/ OR INTERIOR MULLION (L)
(4"x4" or 4"x8")

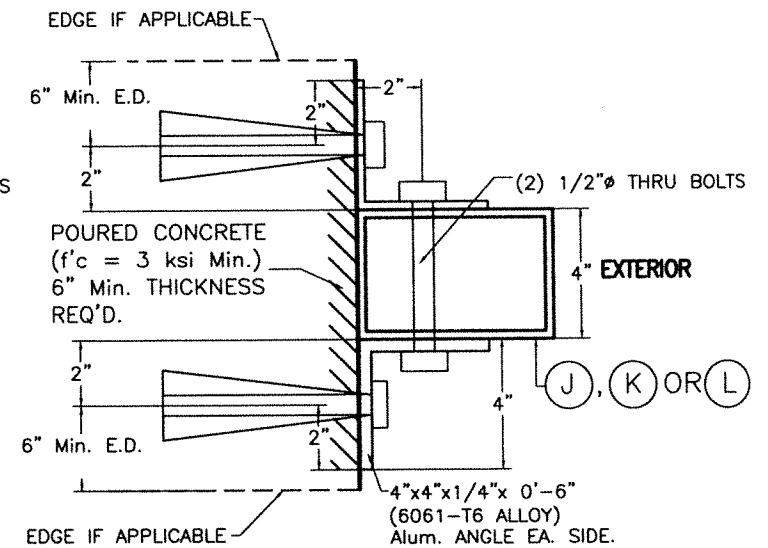

ALTERNATIVE SECTION X2-X2 W/ (J), (K) OR (L)*
(INTERIOR MULLION)
(W/ ORIENTATION # 2)
(4"x4", 4"x6" or 4"x8")

◇ SEE MAXIMUM (L) (INTERIOR) (J) & (K) (END & INTERIOR) WALL MOUNTED MULLIONS SPAN COVERED BY SCHEDULE 2b' FOR INSTALLATION CASES I' & II' ON SHEET 21 (LIMITED LOAD, MULLION SPACING AND SPAN INSTALLATION):

INSTALLATION CASE I' - RESIDENTIAL AND COMMERCIAL APPLICATIONS WITH ±60.8 p.s.f. MAXIMUM A.S.D. DESIGN PRESSURE RATING, 12'-0" MAXIMUM MULLION SPACING. VALID FOR CONNECTION TO CONCRETE W/ 1/2" S.S. KWIK BOLT 3 OR 1/2" ELCO CONFLEX ANCHOR.

INSTALLATION CASE II' - COMMERCIAL APPLICATION FOR ±100.0 p.s.f. MAXIMUM A.S.D. DESIGN PRESSURE RATING, 8'-0" MAXIMUM MULLION SPACING. VALID FOR CONNECTION TO CONCRETE W/ 1/2" S.S. HILTI INC KWIK BOLT 3 ANCHORS.

* SIDE RAIL © NOT SHOWN FOR CLARITY

No. 44167

STATE OF FLORIDA

PROFESSIONAL ENGINEER

WALTER A. TILLIT JR. P.E.

P.E. SEAL/SIGNATURE/DATE

FLORIDA BUILDING CODE (NON HIGH VELOCITY HURRICANE ZONE)							
©2023 TILTECO, INC.				ROLL-UP SHUTTER SYSTEM WITH CHD-6 SLAT (END RETENTION)			
TILTECO Inc.				CARGOR ENTERPRISE LLC.			
TILLIT TESTING & ENGINEERING COMPANY 6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FL 33166 Phone : (305)871-1530 Fax : (305)871-1531				901 EAST INDUSTRIAL CIRCLE, UNIT 9 CAPE CORAL, FL 33909 PH: 239-540-3034			
REV. NO	DESCRIPTION	DATE	REV. No	DESCRIPTION	DATE	W.H. DRAWN BY:	
1	OLD 21-108	07/21/23	3	-	-	07/21/2023 DATE:	
2	-	-	4	-	-	23-136 DRAWING No.	
						SHEET 11 OF 22	

TYPICAL MANDATORY PROCEDURE FOR VERIFYING PRODUCT CODE COMPLIANCE RELATED TO ITS INSTALLATION
INTO EXISTING POURED CONCRETE OR GROUT FILLED CELL CONCRETE BLOCK STRUCTURES (*)

STEP 1: OBTAIN JOB SITE'S A.S.D. DESIGN PRESSURE RATING (p.s.f.) FOR THE OPENING AND DESIRED SLAT SPAN "L" (ft) TO PROTECT IT (SEE GENERAL NOTE #2, SHEET 1).

STEP 2: ENTER TO CHARTS **Ia, Ib, Ic, Id** AND **Ie** ON SHEET 13 TO DETERMINE, BASED ON AN 3/8" SLAT SLIP (in), ANCHOR TYPE AT SIDE RAILS; AND A.S.D. DESIGN PRESSURE RATING (p.s.f.), THE REQUIRED MAX SLAT SPAN "L" ft.

THE FOLLOWING INFORMATION IS PROVIDED AT CHARTS **I** THRU **Ie** TO PROCEED WITH PRODUCT INSTALLATION VERIFICATION:

- ENTER A.S.D. DESIGN PRESSURE RATING: SEE STEP (1) ABOVE.
- FOR A SPECIFIC PRODUCT MOUNTING INSTALLATION TYPE, INCLUDING ANCHOR TYPE, THE FOLLOWING DEFINITION FOR SLAT SPAN SHALL BE CONSIDERED:

L_{MAX}: THIS IS THE MAXIMUM ALLOWABLE SLAT SPAN FOR WHICH A GIVEN 3/8" SLAT SLIP MAY BE USED, FOR A GIVEN A.S.D. DESIGN PRESSURE RATING, AND MOUNTING TYPE.
- MINIMUM REQUIRED SEPARATION TO GLASS IS PROVIDED ON CHART **Ie**.

STEP 3: OBTAIN INFORMATION ON PRODUCT'S SIDE RAIL ANCHOR SPACING REQUIREMENTS FOR CONNECTION TO EXISTING STRUCTURE FROM ANCHOR SCHEDULES Va, Vb & Vb' ON SHEETS 14 THRU 16. ENTER SCHEDULES WITH ANCHOR TYPE, SUBSTRATE, MOUNTING TYPE, A.S.D. DESIGN PRESSURE RATING & SLAT SPAN AND OBTAIN MAXIMUM ANCHOR SPACING (INCHES ON CENTERS). SEE GENERAL NOTE 7 ON SHEET 1 FOR ANCHOR SPECS.

STEP 4: IF PRODUCT INSTALLATION INCLUDES MULLIONS, THE FOLLOWING MANDATORY ADDITIONAL PROCEDURE IS APPLICABLE.

1. MINIMUM SEPARATION TO GLASS FOR SLATS IF MULLIONS ARE USED SHALL BE BASED ON CHART **Ie** ON SHEET 13. IT SHALL BE MEASURED FROM BACK OF SLATS TO GLASS.
2. ENTER SCHEDULES 1a THRU 2c ON SHEETS 20, 21 & 22 W/ A.S.D. DESIGN LOAD; MAXIMUM MULLION SPACING (MAX., 12', 8' OR 7'), AND DETERMINE MAXIMUM MULLIONS SPAN (HEIGHT) W/ ALLOWABLE INTERPOLATION IN BETWEEN SPACING'S FOR A GIVEN **(J, K & L)**, MULLION TYPE & MULLION ORIENTATION.

3. SEE SHEETS 8 THRU 11 FOR REQUIRED MULLION CONNECTION DETAILS AT TOP & BOTTOM FOR FLOOR TO CEILING (TRAPPED) OR WALL MOUNTINGS OF MULLIONS INTO CONCRETE FOR A GIVEN MULLION TYPE **(J, K, & L)**.

* PROCEDURE PER STEPS 1 THRU 3 IS SIMILAR FOR INSTALLATIONS INTO WOOD FRAME STRUCTURES. SEE SHEETS 18 & 19 FOR LIMITATIONS APPLICABLE TO INSTALLATIONS INTO WOOD FRAME STRUCTURES.

WALTER A. TILLIT JR.
LICENSE
No. 44167
STATE OF FLORIDA
PROFESSIONAL ENGINEER
7/21/2023
P.E. SEAL/SIGNATURE/DATE

FLORIDA BUILDING CODE (NON HIGH VELOCITY HURRICANE ZONE)					
©2023 TILTECO, INC.			ROLL-UP SHUTTER SYSTEM WITH CHD-6 SLAT (END RETENTION)		W.H. DRAWN BY:
TILTECO inc.			CARGOR ENTERPRISE LLC.		07/21/2023 DATE:
TILLIT TESTING & ENGINEERING COMPANY 6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FL 33166 Phone : (305)871-1530 . Fax : (305)871-1531 CA-0006719 WALTER A. TILLIT Jr. P.E. FLORIDA Lic. # 44167			901 EAST INDUSTRIAL CIRCLE, UNIT 9 CAPE CORAL, FL 33909 PH: 239-540-3034		23-136 DRAWING No.
REV. NO	DESCRIPTION	DATE	REV. No	DESCRIPTION	DATE
1	OLD 21-108	07/21/23	3	-	-
2	-	-	4	-	-
					SHEET 12 OF 22


SLAT PERFORMANCE CHARTS **Ia, Ib, Ic, Id & Ie**: (ONLY VALID FOR 3/8" SLIP). SEE SHEET 18 FOR WOOD SUBSTRATE

FOR A GIVEN A.S.D. DESIGN PRESSURE RATING (p.s.f.), PRODUCT MOUNT CONDITION INCLUDING ANCHOR TYPE

MAX. A.S.D. DESIGN PRESSURE RATING (psf)	CHART Ia				CHART Ib				CHART Ic				CHART Id				CHART Ie	
	3/8"Ø ELCO CONPLEX ANCHOR TO POURED CONCRETE				3/8"Ø KWIK BOLT 3 ANCHOR TO POURED CONCRETE				5/16"Ø TAPCON XL ANCHOR TO POURED CONCRETE				5/16"Ø TAPCON XL ANCHOR or 3/8" Ø KWIK BOLT 3 TO GROUT FILLED CELL CONCRETE BLOCK				USE MAXIMUM POSITIVE A.S.D. LOAD VALUE	
	MAX. SLAT SPAN "L _{MAX.} " (FT)				MAX. SLAT SPAN "L _{MAX.} " (FT)				MAX. SLAT SPAN "L _{MAX.} " (FT)				MAX. SLAT SPAN "L _{MAX.} " (FT)				REQUIRED MIN. SEPARATION TO GLASS MEASURED TO BACK OF SLAT (in)	
	WALL MOUNT SEE NOTES *	TRAPPED MOUNT SEE NOTES *	BUILD-OUT MOUNT W/ I1 & I2 SEE NOTES *	BUILD-OUT MOUNT W/ I3 SEE NOTES *	WALL MOUNT SEE NOTES *	TRAPPED MOUNT SEE NOTES *	BUILD-OUT MOUNT W/ I1 & I2 SEE NOTES *	BUILD-OUT MOUNT W/ I3 SEE NOTES *	WALL MOUNT SEE NOTES *	TRAPPED MOUNT SEE NOTES *	BUILD-OUT MOUNT W/ I1 & I2 SEE NOTES *	BUILD-OUT MOUNT W/ I3 SEE NOTES *	WALL MOUNT SEE NOTES *	TRAPPED MOUNT SEE NOTES *	BUILD-OUT MOUNT W/ I1 & I2 SEE NOTES *	BUILD-OUT MOUNT W/ I3 SEE NOTES *		
																	ZONE 1, 2 & 3	ZONE 4
30.0	21'-8"	21'-8"	21'-8"	21'-8"	21'-8"	21'-8"	16'-9"	21'-8"	21'-8"	21'-8"	13'-4"	17'-0"	21'-8"	21'-8"	11'-2"	14'-9"	1"	7"
35.0	19'-9"	19'-9"	19'-9"	19'-9"	19'-9"	19'-9"	15'-0"	19'-9"	19'-9"	19'-9"	12'-0"	15'-3"	19'-9"	19'-9"	10'-0"	13'-6"	1"	7"
40.0	18'-0"	18'-0"	18'-0"	18'-0"	18'-0"	18'-0"	13'-9"	17'-10"	18'-0"	18'-0"	11'-0"	13'-9"	18'-0"	18'-0"	9'-0"	12'-3"	1"	7"
45.0	16'-6"	16'-6"	16'-6"	16'-6"	16'-6"	16'-6"	12'-8"	16'-3"	16'-6"	16'-6"	10'-0"	12'-9"	16'-6"	16'-6"	8'-4"	11'-3"	1"	7"
50.0	15'-3"	15'-3"	15'-3"	15'-3"	15'-3"	15'-3"	11'-6"	15'-0"	15'-3"	15'-3"	9'-6"	11'-9"	15'-3"	15'-3"	7'-9"	10'-6"	1"	6"
55.0	14'-3"	14'-3"	14'-3"	14'-3"	14'-3"	14'-3"	11'-0"	14'-0"	14'-3"	14'-3"	9'-0"	11'-2"	14'-3"	14'-3"	7'-4"	10'-0"	1"	6"
60.0	13'-6"	13'-6"	13'-6"	13'-6"	13'-6"	13'-6"	10'-3"	13'-0"	13'-6"	13'-6"	8'-4"	10'-6"	13'-6"	13'-6"	7'-0"	9'-3"	1"	6"
65.0	12'-9"	12'-9"	12'-9"	12'-9"	12'-9"	12'-9"	9'-9"	12'-6"	12'-9"	12'-9"	8'-2"	10'-0"	12'-9"	12'-9"	6'-6"	8'-9"	1"	6"
70.0	12'-0"	12'-0"	12'-0"	12'-0"	12'-0"	12'-0"	9'-3"	11'-6"	12'-0"	12'-0"	7'-9"	9'-6"	12'-0"	12'-0"	6'-3"	8'-6"	1"	6"
75.0	11'-6"	11'-6"	11'-6"	11'-6"	11'-6"	11'-6"	8'-9"	11'-0"	11'-6"	11'-6"	7'-6"	9'-0"	11'-6"	11'-6"	6'-0"	8'-0"	1"	6"
80.0	11'-0"	11'-0"	11'-0"	11'-0"	11'-0"	11'-0"	8'-4"	10'-6"	11'-0"	11'-0"	7'-2"	8'-3"	11'-0"	11'-0"	5'-9"	7'-8"	1"	6"
85.0	10'-6"	10'-6"	10'-6"	10'-6"	10'-6"	10'-6"	8'-3"	10'-3"	10'-6"	10'-6"	6'-9"	8'-0"	10'-6"	10'-6"	5'-6"	7'-6"	1"	6"
90.0	10'-3"	10'-3"	10'-3"	10'-3"	10'-3"	10'-3"	8'-0"	9'-9"	10'-3"	10'-3"	6'-8"	7'-6"	10'-3"	10'-3"	5'-4"	7'-3"	1"	6"
95.0	9'-9"	9'-9"	9'-9"	9'-9"	9'-9"	9'-9"	7'-9"	9'-3"	9'-9"	9'-9"	6'-6"	7'-3"	9'-9"	9'-9"	5'-2"	7'-0"	1"	6"
100.0	9'-6"	9'-6"	9'-6"	9'-6"	9'-6"	9'-6"	7'-6"	9'-0"	9'-6"	9'-6"	6'-5"	7'-2"	9'-6"	9'-6"	5'-0"	6'-9"	1"	6"
105.0	9'-3"	9'-3"	9'-3"	9'-3"	9'-3"	9'-3"	7'-3"	8'-9"	9'-3"	9'-3"	6'-3"	7'-1"	9'-3"	9'-3"	4'-10"	6'-6"	1"	6"
110.0	9'-0"	9'-0"	9'-0"	9'-0"	9'-0"	9'-0"	7'-0"	8'-6"	9'-0"	9'-0"	6'-0"	7'-0"	9'-0"	9'-0"	4'-9"	6'-4"	1"	6"
115.0	8'-9"	8'-9"	8'-9"	8'-9"	8'-9"	8'-9"	6'-9"	8'-3"	8'-9"	8'-9"	5'-9"	6'-6"	8'-9"	8'-9"	4'-8"	6'-3"	1"	5"
120.0	8'-6"	8'-6"	-	-	8'-6"	8'-6"	-	-	8'-6"	8'-6"	-	-	8'-6"	8'-6"	-	-	1"	5"
125.0	8'-3"	8'-3"	-	-	8'-3"	8'-3"	-	-	8'-3"	8'-3"	-	-	8'-3"	8'-3"	-	-	1"	5"
130.0	8'-0"	8'-0"	-	-	8'-0"	8'-0"	-	-	8'-0"	8'-0"	-	-	8'-0"	8'-0"	-	-	1"	5"
135.0	7'-9"	7'-9"	-	-	7'-9"	7'-9"	-	-	7'-9"	7'-9"	-	-	7'-9"	7'-9"	-	-	1"	4 5/16"
140.0	7'-9"	7'-9"	-	-	7'-9"	7'-9"	-	-	7'-9"	7'-9"	-	-	7'-9"	7'-9"	-	-	1"	4 5/16"

* **NOTES:**

- ABOVE INDICATED MAX. SLAT SPANS MAY BE USED AS LONG AS ANCHOR SPACING SCHEDULES ON SHEETS 14, 15 & 16 INDICATE THAT AN ANCHOR SPACING IS AVAILABLE FOR THE CORRESPONDING SLAT SPAN AND A.S.D. DESIGN PRESSURE RATING.
- REQUIRES SIDE RAILS FASTENED TO EXISTING STRUCTURE WITH **3/8"Ø KWIK BOLT 3 ANCHOR OR 5/16"Ø TAPCON XL ANCHOR, OR 3/8" Ø ELCO CONPLEX**, INTO POURED CONCRETE OR GROUT FILLED CELL CONCRETE BLOCK, OR WITH (P) AT MULLIONS CONNECTION. VALID FOR WALL MOUNTED, TRAPPED MOUNTED, AND BUILD-OUT MOUNTED SLATS.
- MAXIMUM SLAT SPANS FOR INTERMEDIATE LOADS MAY BE DETERMINED BY LINEAR INTERPOLATION BETWEEN END VALUES.
- MIN. SEPARATION TO GLASS FOR WIND ZONES 1, 2 & 3 IS 1" AND AS SHOWN ON CHART **Ie** FOR WIND ZONE 4, PER ASTM E 1996.

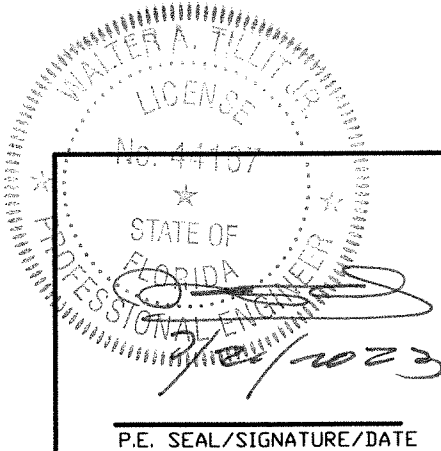

P.E. SEAL/SIGNATURE/DATE

FLORIDA BUILDING CODE (NON HIGH VELOCITY HURRICANE ZONE)

©2023 TILTECO, INC.

TILTECO INC.

TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FL 33166
Phone : (305)871-1530 . Fax : (305)871-1531
CA-0006719
WALTER A. TILLIT Jr. P.E.
FLORIDA Lic. # 44167

**ROLL-UP SHUTTER SYSTEM
WITH CHD-6 SLAT (END RETENTION)**

CARGOR ENTERPRISE LLC.
901 EAST INDUSTRIAL CIRCLE, UNIT 9
CAPE CORAL, FL 33909
PH: 239-540-3034

W.H.
DRAWN BY:

07/21/2023
DATE:

23-136
DRAWING No.

SHEET 13 OF 22

REV. NO	DESCRIPTION	DATE	REV. No	DESCRIPTION	DATE
1	OLD 21-109	07/21/23	3	-	-
2	-	-	4	-	-

MAX. ANCHOR'S SPACING SCHEDULE **Va**

FOR A GIVEN PRODUCT MOUNTING TYPE, W/ 3/8"Ø CONFLEX ANCHORS TO POURED CONCRETE WALL, A.S.D. DESIGN PRESSURE RATING & SLAT SPAN RANGE †

WALL MOUNT

MAX. A.S.D. DESIGN PRESSURE RATING RANGE (p.s.f)	SLAT SPAN RANGE							
	0'-4' †	> 4'-5' †	> 5'-6' †	> 6'-7' †	> 7'-9' †	> 9'-12' †	> 12'-16' †	>16'-21'-8"†
≤ 30.0	6"	6"	6"	6"	6"	6"	6"	6"
>31-40	6"	6"	6"	6"	6"	6"	6"	6"
>41-60	6"	6"	6"	6"	6"	6"	6"	6"
>61-80	6"	6"	6"	6"	6"	6"	6"	—
>81-105	6"	6"	6"	6"	6"	6"	—	—
>106-120	6"	6"	6"	6"	6"	6"	—	—
>121-140	6"	6"	6"	6"	6"	—	—	—



SLAT SPAN DEFINITION

† NOTE:
MAX. SLAT SPAN FOR A GIVEN A.S.D. DESIGN PRESSURE RATING SHALL **NEVER** EXCEED MAX. SLAT SPAN INDICATED ON SLAT PERFORMANCE CHART ON SHEET 13.

TRAPPED MOUNT

MAX. A.S.D. DESIGN PRESSURE RATING RANGE (p.s.f)	SLAT SPAN RANGE							
	0'-4' †	> 4'-5' †	> 5'-6' †	> 6'-7' †	> 7'-9' †	> 9'-12' †	> 12'-16' †	>16'-21'-8"†
≤ 30.0	6"	6"	6"	6"	6"	6"	6"	6"
>31-40	6"	6"	6"	6"	6"	6"	6"	6"
>41-60	6"	6"	6"	6"	6"	6"	6"	6"
>61-80	6"	6"	6"	6"	6"	6"	6"	—
>81-105	6"	6"	6"	6"	6"	6"	—	—
>106-120	6"	6"	6"	6"	6"	6"	—	—
>121-140	6"	6"	6"	6"	6"	—	—	—

BUILD-OUT MOUNT

MAX. A.S.D. DESIGN PRESSURE RATING RANGE (p.s.f)	SLAT SPAN RANGE																							
	0'-4' †			> 4'-5' †			> 5'-6' †			> 6'-7' †			> 7'-9' †			> 9'-12' †			> 12'-16' †			>16'-21'-8"†		
	I ₁	I ₂	I ₃	I ₁	I ₂	I ₃	I ₁	I ₂	I ₃	I ₁	I ₂	I ₃	I ₁	I ₂	I ₃	I ₁	I ₂	I ₃	I ₁	I ₂	I ₃	I ₁	I ₂	I ₃
≤ 30.0	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"
>31-40	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"
>41-60	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"
>61-80	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	—	—	4"
>81-105	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	—	—	—	4"
>105-115	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	—	—	—	—	—	—

WALTER A. TILLIT JR.
LICENSE
NO. 44167
STATE OF FLORIDA
PROFESSIONAL ENGINEER
07/21/2023

P.E. SEAL/SIGNATURE/DATE

FLORIDA BUILDING CODE (NON HIGH VELOCITY HURRICANE ZONE)

©2023 TILTECO, INC.
TILTECO inc.
TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FL 33166
Phone : (305)871-1530 . Fax : (305)871-1531
CA-0006719
WALTER A. TILLIT Jr. P.E.
FLORIDA Lic. # 44167

ROLL-UP SHUTTER SYSTEM
WITH CHD-8 SLAT (END RETENTION)

CARGOR ENTERPRISE LLC.
901 EAST INDUSTRIAL CIRCLE, UNIT 9
CAPE CORAL, FL 33909
PH: 239-540-3034

W.H.
DRAWN BY:

07/21/2023
DATE:

23-136
DRAWING No.

REV. NO	DESCRIPTION	DATE	REV. No	DESCRIPTION	DATE
1	OLD 21-109	07/21/23	3	-	-
2	-	-	4	-	-

SHEET 14 OF 22

MAX. ANCHOR'S SPACING SCHEDULE **Va1**

FOR A GIVEN PRODUCT MOUNTING TYPE, W/ 3/8"Ø KWIK BOLT 3 ANCHORS TO POURED CONCRETE WALL, A.S.D. DESIGN PRESSURE RATING & SLAT SPAN RANGE†

WALL MOUNT

MAX. A.S.D. DESIGN PRESSURE RATING RANGE (p.s.f.)	SLAT SPAN RANGE							
	0'-4' †	> 4'-5' †	> 5'-6' †	> 6'-7' †	> 7'-9' †	> 9'-12' †	> 12'-16' †	>16'-21'-8"†
≤ 30.0	6"	6"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	4 1/2"
>31-40	6"	6"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	4 1/2"
>41-60	6"	6"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	4 1/2"
>61-80	6"	6"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	—
>81-105	6"	6"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	—	—
>106-120	6"	6"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	—	—
>121-140	6"	6"	4 1/2"	4 1/2"	4 1/2"	—	—	—



SLAT SPAN DEFINITION

† NOTE:
MAX. SLAT SPAN FOR A GIVEN A.S.D. DESIGN PRESSURE RATING SHALL **NEVER** EXCEED MAX. SLAT SPAN INDICATED ON SLAT PERFORMANCE CHART ON SHEET 13.

TRAPPED MOUNT

MAX. A.S.D. DESIGN PRESSURE RATING RANGE (p.s.f.)	SLAT SPAN RANGE							
	0'-4' †	> 4'-5' †	> 5'-6' †	> 6'-7' †	> 7'-9' †	> 9'-12' †	> 12'-16' †	>16'-21'-8"†
≤ 30.0	6"	6"	5"	5"	5"	5"	5"	5"
>31-40	6"	6"	5"	5"	5"	5"	5"	5"
>41-60	6"	6"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	4 1/2"
>61-80	6"	6"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	—
>81-105	6"	6"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	—	—
>106-120	6"	6"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	—	—
>121-140	6"	6"	4 1/2"	4 1/2"	4 1/2"	—	—	—

BUILD-OUT MOUNT

MAX. A.S.D. DESIGN PRESSURE RATING RANGE (p.s.f.)	SLAT SPAN RANGE																							
	0'-4' †			> 4'-5' †			> 5'-6' †			> 6'-7' †			> 7'-9' †			> 9'-12' †			> 12'-16' †			>16'-21'-8"†		
	I ₁	I ₂	I ₃	I ₁	I ₂	I ₃	I ₁	I ₂	I ₃	I ₁	I ₂	I ₃	I ₁	I ₂	I ₃	I ₁	I ₂	I ₃	I ₁	I ₂	I ₃	I ₁	I ₂	I ₃
≤ 30.0	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"
>31-40	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	—	—	4"
>41-60	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	—	—	4"
>61-80	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	—	—	4"	—	—	—
>81-105	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	—	—	4"	—	—	—	—	—	—
>105-115	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	—	—	—	—	—	—	—	—	—

WALTER A. TILLIT
LICENSE
No. 44167
STATE OF FLORIDA
7/22/2023
P.E. SEAL/SIGNATURE/DATE

FLORIDA BUILDING CODE (NON HIGH VELOCITY HURRICANE ZONE)

©2023 TILTECO, INC.

TILTECO inc.
TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FL 33166
Phone : (305)871-1530 • Fax : (305)871-1531
CA-0006719
WALTER A. TILLIT Jr. P.E.
FLORIDA Lic. # 44167

ROLL-UP SHUTTER SYSTEM
WITH CHD-6 SLAT (END RETENTION)

CARGOR ENTERPRISE LLC.
901 EAST INDUSTRIAL CIRCLE, UNIT 9
CAPE CORAL, FL 33909
PH: 239-540-3034

REV. NO. DESCRIPTION DATE

1 OLD 21-109 07/21/23

2 - - -

REV. No. DESCRIPTION DATE

3 - -

4 - -

W.H.
DRAWN BY:

07/21/2023
DATE:

23-136
DRAWING No.

SHEET 14 OF 22

MAX. ANCHOR'S SPACING SCHEDULE **Vb** FOR A GIVEN SHUTTER MOUNTING TYPE

W/ 5/16"Ø TAPCON XL ANCHOR TO POURED CONCRETE WALL

A.S.D. DESIGN LOAD & SLAT SPAN RANGE †

WALL MOUNT

MAXIMUM A.S.D. DESIGN PRESSURE RATING RANGE(psf)	SLAT SPAN RANGE							
	0'-4' †	> 4'-5' †	> 5'-6' †	> 6'-7' †	> 7'-9' †	> 9'-12' †	> 12'-16' †	>16'-21'-8"†
≤ 30.0	6"	6"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	4 1/2"
>31-40	6"	6"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	4 1/2"
>41-60	6"	6"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	4 1/2"
>61-80	6"	6"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	-
>81-105	6"	6"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	3 3/4"	-
>106-120	6"	6"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	-	-
>121-140	6"	6"	4 1/2"	4 1/2"	4 1/2"	-	-	-



SLAT SPAN DEFINITION

† NOTE:
MAX. SLAT SPAN FOR A
GIVEN A.S.D. DESIGN LOAD
SHALL **NEVER** EXCEED MAX.
SLAT SPAN INDICATED ON
SLAT PERFORMANCE CHART
ON SHEET 15.

TRAPPED MOUNT

MAXIMUM A.S.D. DESIGN PRESSURE RATING RANGE(psf)	SLAT SPAN RANGE							
	0'-4' †	> 4'-5' †	> 5'-6' †	> 6'-7' †	> 7'-9' †	> 9'-12' †	> 12'-16' †	>16'-21'-8"†
≤ 30.0	6"	6"	4 1/2"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"
>31-40	6"	6"	4 1/2"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"
>41-60	6"	6"	4 1/2"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"
>61-80	6"	6"	4 1/2"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	-
>81-105	6"	6"	4 1/2"	3 3/4"	3 3/4"	3 3/4"	-	-
>106-120	6"	6"	4 1/2"	3 3/4"	3 3/4"	-	-	-
>121-140	6"	6"	4 1/2"	3 3/4"	3 3/4"	-	-	-

BUILD-OUT MOUNT

MAXIMUM A.S.D. DESIGN PRESSURE RATING RANGE(psf)	SLAT SPAN RANGE																							
	0'-4' †			> 4'-5' †			> 5'-6' †			> 6'-7' †			> 7'-9' †			> 9'-12' †			> 12'-16' †			>16'-21'-8"†		
	I ₁	I ₂	I ₃	I ₁	I ₂	I ₃	I ₁	I ₂	I ₃	I ₁	I ₂	I ₃	I ₁	I ₂	I ₃	I ₁	I ₂	I ₃	I ₁	I ₂	I ₃	I ₁	I ₂	I ₃
≤ 30.0	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	-	-	3 3/4"
>31-40	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	-	-	3 3/4"
>41-60	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	-	-	3 3/4"	-	-	-
>61-80	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	3 3/4"	3 3/4"	3 3/4"	-	-	3 3/4"	-	-	-	-	-	-
>81-105	4"	4"	4"	4"	4"	4"	3 3/4"	3 3/4"	4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	-	-	-	-	-	-	-	-	-
>105-115	4"	4"	4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	3 3/4"	-	-	-	-	-	-	-	-	-	-	-

WALTER A. TILLIT JR.
P.E.
No. 44167
FLORIDA
PROFESSIONAL ENGINEER
07/21/2023
P.E. SEAL/SIGNATURE/DATE

FLORIDA BUILDING CODE (NON HIGH VELOCITY HURRICANE ZONE)											
©2023 TILTECO, INC.						ROLL-UP SHUTTER SYSTEM WITH CHD-6 SLAT (END RETENTION)					
TILTECO inc. TILLIT TESTING & ENGINEERING COMPANY 6355 N.W. 36th St., Ste. 305, VIRGINIA GARDENS, FL 33166 Phone : (305)871-1530 • Fax : (305)871-1531 CA-0006719 WALTER A. TILLIT Jr., P.E. FLORIDA Lic. # 44167						CARGOR ENTERPRISE LLC. 901 EAST INDUSTRIAL CIRCLE, UNIT 9 CAPE CORAL, FL 33909 PH: 239-540-3034					
W.H. DRAWN BY:						07/21/2023 DATE:					
23-136 DRAWING No.						SHEET 15 OF 22					
REV. NO	DESCRIPTION	DATE	REV. NO	DESCRIPTION	DATE	REV. NO	DESCRIPTION	DATE	REV. NO	DESCRIPTION	DATE
1	OLD 21-108	07/21/23	3	-	-	2	-	-	4	-	-

MAX. ANCHOR'S SPACING SCHEDULE **Vb'** FOR A GIVEN PRODUCT MOUNTING TYPE,
W/ 5/16"Ø TAPCON XL OR 3/8 " Ø KWIK BOLT 3 ANCHORS TO GROUT FILLED CELL CONCRETE BLOCK WALL,
A.S.D. DESIGN PRESSURE RATING & SLAT SPAN RANGE †

WALL MOUNT

MAX. A.S.D. DESIGN PRESSURE RATING RANGE (p.s.f.)	SLAT SPAN RANGE							
	0'-4' †	> 4'-5' †	> 5'-6' †	> 6'-7' †	> 7'-9' †	> 9'-12' †	> 12'-16' †	>16'-21'-8"†
≤ 30.0	6"	6"	4"	4"	4"	4"	4"	4"
>31-40	6"	6"	4"	4"	4"	4"	4"	4"
>41-60	6"	6"	4"	4"	4"	4"	4"	4"
>61-80	6"	6"	4"	4"	4"	4"	4"	-
>81-105	6"	6"	4"	4"	4"	4"	-	-
>106-120	6"	6"	4"	4"	4"	4"	-	-
>121-140	6"	6"	4"	4"	4"	-	-	-



SLAT SPAN DEFINITION

† NOTE:
MAX. SLAT SPAN FOR A
GIVEN A.S.D. DESIGN
PRESSURE RATING SHALL
NEVER EXCEED MAX. SLAT
SPAN INDICATED ON SLAT
PERFORMANCE CHART ON
SHEET 13.

TRAPPED MOUNT

MAX. A.S.D. DESIGN PRESSURE RATING RANGE (p.s.f.)	SLAT SPAN RANGE							
	0'-4' †	> 4'-5' †	> 5'-6' †	> 6'-7' †	> 7'-9' †	> 9'-12' †	> 12'-16' †	>16'-21'-8"†
≤ 30.0	6"	5"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	4 1/2"
>31-40	6"	5"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	4 1/2"
>41-60	6"	5"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	-
>61-80	6"	5"	4 1/2"	4 1/2"	4 1/2"	4 1/2"	-	-
>81-105	6"	5"	4 1/2"	4 1/2"	-	-	-	-
>106-120	6"	5"	4 1/2"	4 1/2"	-	-	-	-
>121-140	6"	5"	4 1/2"	-	-	-	-	-

BUILD-OUT MOUNT

MAX. A.S.D. DESIGN PRESSURE RATING RANGE (p.s.f.)	SLAT SPAN RANGE																							
	0'-4' †			> 4'-5' †			> 5'-6' †			> 6'-7' †			> 7'-9' †			> 9'-12' †			> 12'-16' †			>16'-21'-8"†		
	⑪	⑫	⑬	⑪	⑫	⑬	⑪	⑫	⑬	⑪	⑫	⑬	⑪	⑫	⑬	⑪	⑫	⑬	⑪	⑫	⑬	⑪	⑫	⑬
≤ 30.0	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	-	-	4"	-	-	-
>31-40	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	-	-	4"	-	-	-
>41-60	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	4"	-	-	4"	-	-	-
>61-80	4"	4"	4"	4"	4"	4"	4"	4"	4"	-	-	4"	-	-	4"	-	-	4"	-	-	4"	-	-	-
>81-105	4"	4"	4"	4"	4"	4"	4"	4"	4"	-	-	4"	-	-	4"	-	-	4"	-	-	4"	-	-	-
>105-115	4"	4"	4"	4"	4"	4"	-	-	4"	-	-	4"	-	-	4"	-	-	4"	-	-	4"	-	-	-

WALTER A. TILLIT JR.
P.E. SEAL/SIGNATURE/DATE
No. 44167
07/21/2023

FLORIDA BUILDING CODE (NON HIGH VELOCITY HURRICANE ZONE)														
©2023 TILTECO, INC.						ROLL-UP SHUTTER SYSTEM WITH CHD-6 SLAT (END RETENTION)			W.H. DRAWN BY:					
 TILLIT TESTING & ENGINEERING COMPANY 6355 N.W. 36th St., Ste. 305, VIRGINIA GARDENS, FL 33166 Phone : (305)871-1530 • Fax : (305)871-1531 CA-0006719 WALTER A. TILLIT Jr. P.E. FLORIDA Lic. # 44167						CARGOR ENTERPRISE LLC. 901 EAST INDUSTRIAL CIRCLE, UNIT 9 CAPE CORAL, FL 33909 PH: 239-540-3034			07/21/2023 DATE:					
									23-136 DRAWING No.					
REV. NO	DESCRIPTION	DATE	REV. NO	DESCRIPTION	DATE	SHEET 16 OF 22								
1	OLD 21-108	07/21/23	3	-	-									
2	-	-	4	-	-									



SCHEDULE V_c :
 V_x FORCES (Lb/FT) & V_y FORCES (Lb/FT) ACTING AT JAMBS FOR AN A.S.D. DESIGN LOAD RANGE, SLAT SPAN RANGE FOR
POURED CONCRETE OR GROUT FILLED CELL CONCRETE BLOCK WALL BUILDINGS*
(USE MAXIMUM VALUE BETWEEN POSITIVE AND NEGATIVE A.S.D. LOAD)

MAXIMUM A.S.D. DESIGN PRESSURE RATING (psf)	SLAT SPAN RANGE																	
	0'-4'		> 4'-5'		> 5'-6'		> 6'-7'		> 7'-9'		> 9'-12'		> 12'-16'		> 16'-20'		> 20'-21'-8"	
	V_x	V_y	V_x	V_y	V_x	V_y	V_x	V_y	V_x	V_y	V_x	V_y	V_x	V_y	V_x	V_y	V_x	V_y
≤ 30.0	0	60	0	75	20	90	181	105	427	135	739	180	1134	240	1530	300	1696	325
>31-40	0	80	0	100	127	120	307	140	599	180	986	240	1485	320	1736	360	-	-
>41-60	0	120	55	150	330	180	551	210	932	270	1461	360	1722	405	-	-	-	-
>61-80	0	160	215	200	525	240	786	280	1254	360	1698	440	-	-	-	-	-	-
>81-105	0	210	407	263	763	315	1073	368	1645	473	1714	486	-	-	-	-	-	-
>106-120	20	240	519	300	902	360	1242	420	1719	510	-	-	-	-	-	-	-	-
>121-140	138	280	666	350	1086	420	1463	490	1734	543	-	-	-	-	-	-	-	-



SLAT SPAN DEFINITION

***NOTE:**
IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR OR PERMIT HOLDER TO VERIFY THAT EXISTING STRUCTURE IS DESIGNED TO SUPPORT V_x AND V_y FORCES IN POUNDS PER UNIT FOOT OF PRODUCT HEIGHT AT BOTH JAMBS. SEE THIS SHEET FOR V_x & V_y VALUES.

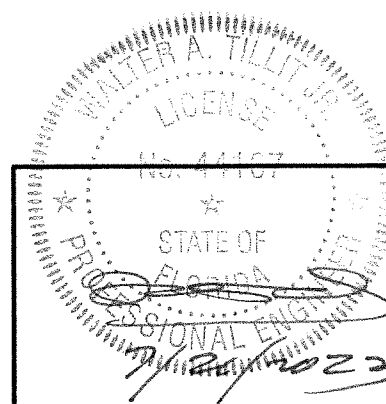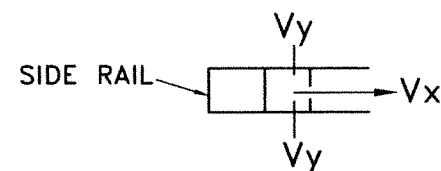

P.E. SEAL/SIGNATURE/DATE

FLORIDA BUILDING CODE (NON HIGH VELOCITY HURRICANE ZONE)

©2023 TILTECO, INC.

TILTECO inc.
TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th St., Ste. 305, VIRGINIA GARDENS, FL 33166
Phone : (305)871-1530 . Fax : (305)871-1531
CA-0006719
WALTER A. TILLIT Jr., P.E.
FLORIDA Lic. # 44167

**ROLL-UP SHUTTER SYSTEM
WITH CHD-6 SLAT (END RETENTION)**

CARGOR ENTERPRISE LLC.
901 EAST INDUSTRIAL CIRCLE, UNIT 9
CAPE CORAL, FL 33909
PH: 239-540-3034

W.H.
DRAWN BY:

07/21/2023
DATE:

23-136

DRAWING No.


SHEET 17 OF 22

REV. NO	DESCRIPTION	DATE	REV. No	DESCRIPTION	DATE
1	OLD 21-109	07/21/23	3	-	-
2	-	-	4	-	-

SLAT PERFORMANCE CHART **Ib1** & **Ic1**

FOR A GIVEN MAXIMUM A.S.D. DESIGN PRESSURE RATING (p.s.f) AND SHUTTER MOUNT CONDITION
FOR INSTALLATIONS PER DETAIL 1

CHART Ib1				CHART Ic1	
USE MAXIMUM VALUE BETWEEN POSITIVE AND NEGATIVE A.S.D. LOAD				USE MAXIMUM POSITIVE A.S.D. LOAD VALUE	
<u>5/16"Ø TAPCON XL ANCHOR</u>					
MAXIMUM A.S.D. DESIGN PRESSURE RATING (psf)	MAX. SLAT SPAN "L _{MAX.} " (ft)			REQUIRED MIN. SEPARATION TO GLASS MEASURED TO BACK OF SLAT (in)	
	WALL MOUNT (SEE NOTES Δ)	BUILD-OUT MOUNT W/ (1") (SEE NOTES) Δ	BUILD-OUT MOUNT W/ (1") (SEE NOTES Δ)	WIND ZONES 1-3	WIND ZONE 4
30.0 *	12'-0"	10'-0"	10'-0"	1"	5 1/4"
35.0 **	10'-0"	10'-0"	10'-0"	1"	5 1/4"
40.0 **	10'-0"	10'-0"	10'-0"	1"	5 1/4"
45.0 ***	10'-0"	10'-0"	10'-0"	1"	5 1/4"
50.0 ***	10'-0"	10'-0"	10'-0"	1"	5 1/4"
55.0 ***	8'-0"	8'-0"	10'-0"	1"	4 1/4"

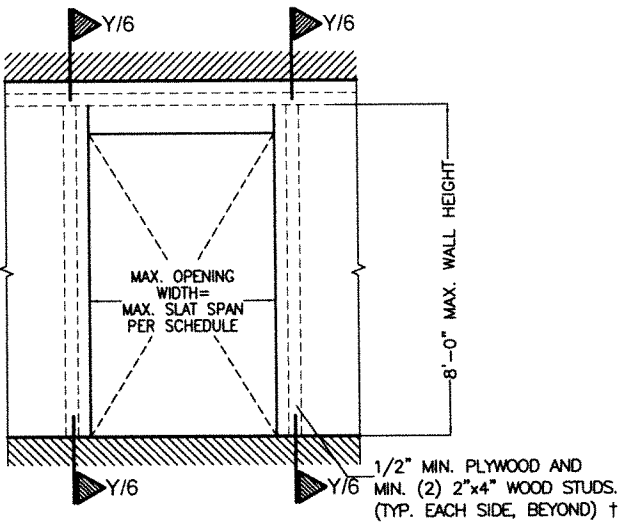

DETAIL 1 (ELEVATION)



SLAT SPAN "L" DEFINITION

MAXIMUM A.S.D. DESIGN LOAD VS WOOD GRADE SCHEDULE:

- * VALID FOR DOUGLAS-FIR-SOUTH (G=0.46)
SOUTHERN PINE #2 (G=0.55)
SPRUCE PINE-FIR-SITH (G=0.36)
- ** VALID FOR DOUGLAS-FIR-SOUTH (G=0.46)
SOUTHERN PINE #2 (G=0.55)
- *** VALID FOR SOUTHERN PINE #2 (G=0.55)

Δ NOTES:

1. ABOVE INDICATED MAX. SLAT SPANS MAY BE USED AS LONG AS ANCHOR SPACING SCHEDULES ON SHEET 19 INDICATE THAT A SPACING IS AVAILABLE FOR THE CORRESPONDING SLAT SPAN AND A.S.D. DESIGN LOAD.

†: WOOD FRAME WALL TO BE BUILT STRICTLY IN ACCORDANCE WITH SPECS GIVEN ON SHEET 6 AND PROVISIONS FROM CHAPTER 23 OF THE FLORIDA BUILDING CODE. MINIMUM LENGTH OF WALL AT EITHER SIDE OF OPENING SHALL BE 33".

INSTALLATIONS INTO WOOD FRAME BUILDINGS

WALTER A. TILLIT JR.
LICENSE
No. 44167
STATE OF FLORIDA
PROFESSIONAL ENGINEER
7/21/2023
P.E. SEAL/SIGNATURE/DATE

FLORIDA BUILDING CODE (NON HIGH VELOCITY HURRICANE ZONE)					
©2023 TILTECO, INC.			ROLL-UP SHUTTER SYSTEM WITH CHD-6 SLAT (END RETENTION)		
TILTECO inc.			CARGOR ENTERPRISE LLC.		
TILLIT TESTING & ENGINEERING COMPANY 6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FL 33166 Phone : (305)871-1530 . Fax : (305)871-1531 CA-0006719 WALTER A. TILLIT Jr. P.E. FLORIDA Lic. # 44167			901 EAST INDUSTRIAL CIRCLE, UNIT 9 CAPE CORAL, FL 33909 PH: 239-540-3034		
REV. NO	DESCRIPTION	DATE	REV. No	DESCRIPTION	DATE
1	OLD 21-109	07/21/23	3	-	-
2	-	-	4	-	-
W.H. DRAWN BY: 07/21/2023 DATE: 23-136 DRAWING No.					SHEET 18 OF 22

MAX. ANCHOR'S SPACING SCHEDULE **VI** FOR A GIVEN SHUTTER MOUNTING TYPE, WOOD GRADE, A.S.D.
DESIGN LOAD (psf) AND SLAT SPAN RANGE FOR INSTALLATIONS INTO WOOD BUILDINGS;
SEE SHT.7 SECTION O'-O' FOR ANCHOR SPEC'S & GENERAL NOTE 7C ON SHT. 1


WALL MOUNT TO MIN. 2"x4" WOOD STUD WITH MINIMUM 1/2" PLYWOOD OR OSB
(SEE DETAIL 1 ON SHEET 18)

WOOD GRADE	MAXIMUM A.S.D. DESIGN PRESSURE RATING RANGE (psf)	SLAT SPAN RANGE						
		0' to 4' *	> 4' to 5' *	> 5' to 6' *	> 6' to 7' *	> 7' to 9' *	> 9' to 10' *	>10' to 12' *
SOUTHERN PINE #2 (G=0.55)	≤ 30.0	6"	6"	6"	6"	6"	6"	6"
	40	6"	6"	6"	6"	6"	4 3/4"	4 1/2"
	50	6"	6"	6"	6"	4 3/4"	3 1/2"	3"
	55	6"	6"	5 3/4"	5 1/4"	3 3/4"	3"	3"
DOUGLAS-FIR-SOUTH (G=0.46)	≤ 30.0	6"	6"	6"	6"	6"	6"	6"
	40	6"	6"	6"	5 1/4"	5 1/4"	4 1/4"	3"
SPRUCE PINE-FIR-SOUTH (G=0.36)	≤ 30.0	6"	6"	6"	6"	6"	5 1/4"	4 1/2"

BUILD-OUT MOUNT TO MIN. 2"x4" WOOD STUD WITH MINIMUM 1/2" PLYWOOD OR OSB
(SEE DETAIL 1 ON SHEET 18)

WOOD GRADE	MAXIMUM A.S.D. DESIGN PRESSURE RATING RANGE (psf)	SLAT SPAN RANGE													
		0'-4' *		> 4'-5' *		> 5'-6' *		> 6'-7' *		> 7'-9' *		> 9'-10' *		> 10' to 12' *	
		BUILD-OUT MOUNT W/(P)	BUILD-OUT MOUNT W/(P)	BUILD-OUT MOUNT W/(P)	BUILD-OUT MOUNT W/(P)	BUILD-OUT MOUNT W/(P)	BUILD-OUT MOUNT W/(P)	BUILD-OUT MOUNT W/(P)	BUILD-OUT MOUNT W/(P)	BUILD-OUT MOUNT W/(P)	BUILD-OUT MOUNT W/(P)	BUILD-OUT MOUNT W/(P)	BUILD-OUT MOUNT W/(P)	BUILD-OUT MOUNT W/(P)	BUILD-OUT MOUNT W/(P)
SOUTHERN PINE #2 (G=0.55)	≤ 30.0	6"	6"	6"	6"	6"	6"	6"	6"	6"	6"	6"	6"	6"	6"
	40	6"	6"	6"	6"	6"	6"	6"	6"	6"	6"	5 1/4"	5 1/4"	5 1/4"	5 1/4"
	50	6"	6"	6"	6"	6"	6"	6"	6"	5 1/4"	5 1/4"	4"	4"	4"	4"
	55	6"	6"	6"	6"	6"	6"	5 3/4"	5 3/4"	4"	4"	3"	3"	3"	3"
DOUGLAS-FIR-SOUTH (G=0.46)	≤ 30.0	6"	6"	6"	6"	6"	6"	6"	6"	6"	6"	6"	6"	6"	6"
	40	6"	6"	6"	6"	6"	6"	5 1/2"	5 1/2"	5 1/2"	5 1/2"	4 1/2"	4 1/2"	4 1/2"	4 1/2"
SPRUCE PINE-FIR-SOUTH (G=0.36)	≤ 30.0	6"	6"	6"	6"	6"	6"	6"	6"	6"	6"	5 1/4"	5"	5 1/4"	5"

* NOTE:
MAX. SPAN FOR SLAT FOR A
GIVEN A.S.D. DESIGN LOAD
SHALL **NEVER** EXCEED MAX.
SLAT SPAN INDICATED ON
SLAT PERFORMANCE CHARTS
ON SHEET 18.

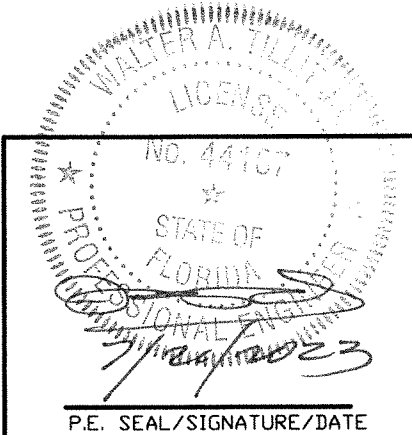

FLORIDA BUILDING CODE (NON HIGH VELOCITY HURRICANE ZONE)									
©2023 TILTECO, INC.						ROLL-UP SHUTTER SYSTEM WITH CHD-6 SLAT (END RETENTION)		W.H. DRAWN BY:	
TILTECO inc.						CARGOR ENTERPRISE LLC.		07/21/2023 DATE:	
TILLIT TESTING & ENGINEERING COMPANY 6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FL 33166 Phone : (305)871-1530 . Fax : (305)871-1531 CA-0006719 WALTER A. TILLIT Jr. P.E. FLORIDA Lic. # 44167						901 EAST INDUSTRIAL CIRCLE, UNIT 9 CAPE CORAL, FL 33909 PH: 239-540-3034		23-136 DRAWING No.	
REV. NO	DESCRIPTION	DATE	REV. No	DESCRIPTION	DATE	SHEET 19 OF 22			
1	OLD 21-109	07/21/23	3	-	-				
2	-	-	4	-	-				


SCHEDULE 1a
FLOOR TO CEILING (TRAPPED) MOUNTING
MAX. SPAN (ft) FOR END AND INTERIOR MULLIONS FOR A GIVEN
A.S.D. DESIGN PRESSURE RATING (p.s.f.), & A MAX. MULLION SPACING (ft) *

MAX. A.S.D. DESIGN PRESSURE RATING (p.s.f.)	MAXIMUM MULLION SPACING (ft) *	MAXIMUM MULLION SPAN (FT)									
		ⓐ 4"x6"x1/4" MULLION					Ⓚ 4"x8"x1/4" MULLION				Ⓛ 4"x4"x1/4" MULLION
		ORIENTATION #2 (⇌) †		ORIENTATION #1 (⏊) †		ORIENTATION #2 (⇌) †		ORIENTATION #1 (⏊)			
		END	INTERIOR	END	INTERIOR	END	INTERIOR	END	INTERIOR	INTERIOR	
30.0	21'-8"	7'-10"	9'-8"	7'-3"	12'-0"	9'-4"	10'-7"	8'-0"	12'-6"	7'-4"	
35.0	19'-9"	7'-4"	9'-3"	6'-9"	11'-5"	8'-8"	10'-0"	7'-7"	12'-6"	7'-3"	
40.0	18'-0"	6'-10"	8'-10"	6'-4"	10'-11"	8'-1"	9'-7"	7'-3"	12'-6"	7'-2"	
45.0	16'-6"	6'-6"	8'-6"	6'-6"	10'-6"	7'-8"	9'-3"	6'-11"	12'-6"	7'-1"	
50.0	15'-3"	6'-2"	8'-2"	6'-0"	9'-11"	7'-4"	8'-11"	6'-7"	12'-6"	7'-0"	
55.0	14'-3"	5'-11"	7'-11"	5'-9"	9'-0"	6'-8"	8'-7"	6'-3"	12'-4"	6'-11"	
60.0	13'-6"	5'-9"	7'-9"	5'-6"	8'-6"	6'-4"	8'-6"	6'-2"	12'-0"	6'-10"	
65.0	12'-9"	5'-9"	7'-9"	5'-4"	8'-4"	6'-4"	8'-4"	6'-2	11'-10"	6'-10"	
70.0	12'-0"	5'-9"	7'-8"	5'-4"	8'-2"	6'-3"	8'-2"	6'-2"	11'-9"	6'-9"	
75.0	11'-6"	5'-9"	7'-7"	5'-4"	8'-0"	6'-3"	8'-0"	6'-2"	11'-7"	6'-9"	
80.0	11'-0"	5'-9"	7'-7"	5'-4"	7'-10"	6'-3"	7'-10"	6'-2"	11'-6"	6'-8"	
85.0	10'-6"	5'-9"	7'-7"	5'-4"	7'-9"	6'-3"	7'-9"	6'-2"	11'-5"	6'-7"	
90.0	10'-3"	5'-10"	7'-7"	5'-5"	7'-9"	6'-4"	7'-9"	6'-3"	11'-5"	6'-7"	
95.0	9'-9"	5'-10"	7'-7"	5'-6"	7'-9"	6'-5"	7'-9"	6'-4"	11'-5"	6'-7"	
100.0	9'-6"	5'-11"	7'-7"	5'-7"	7'-9"	6'-6"	7'-9"	6'-4"	11'-5"	6'-6"	
105.0	9'-3"	6'-0"	7'-7"	5'-7"	7'-9"	6'-7"	7'-9"	6'-5"	11'-5"	6'-5"	
110.0	9'-0"	6'-0"	7'-7"	5'-8"	7'-9"	6'-8"	7'-9"	6'-6"	11'-5"	6'-5"	
115.0	8'-9"	6'-1"	7'-7"	5'-9"	7'-9"	6'-9"	7'-9"	6'-7"	11'-5"	6'-5"	
120.0	8'-6"	6'-1"	7'-6"	5'-9"	7'-9"	6'-10"	7'-9"	6'-7"	11'-5"	6'-4"	
125.0	8'-3"	6'-2"	7'-7"	5'-10"	7'-10"	7'-0"	7'-10"	6'-9"	11'-5"	6'-4"	
130.0	8'-0"	6'-3"	7'-7"	5'-10"	7'-9"	7'-0"	7'-9"	6'-9"	11'-5"	6'-4"	
135.0	7'-9"	6'-4"	7'-7"	5'-11"	7'-10"	7'-2"	7'-10"	6'-10"	11'-5"	6'-4"	
140.0	7'-9"	6'-4"	7'-7"	6'-0"	7'-10"	7'-3"	7'-10"	6'-11"	11'-5"	6'-3"	


SCHEDULE 2a
WALL MOUNTING
MAX. SPAN (FT) FOR END AND INTERIOR MULLIONS FOR A GIVEN A.S.D.
DESIGN PRESSURE RATING (P.S.F.), & A MAX. MULLION SPACING (FT) *

MAX. A.S.D. DESIGN PRESSURE RATING (p.s.f.)	MAXIMUM MULLION SPACING (ft) *	MAXIMUM MULLION SPAN (FT)									
		ⓐ 4"x6"x1/4" MULLION				Ⓚ 4"x8"x1/4" MULLION				Ⓛ 4"x4"x1/4" MULLION	
		ORIENTATION #2 (⇌) †		ORIENTATION #1 (⏊) †		ORIENTATION #2 (⇌) †		ORIENTATION #1 (⏊) †			
		END	INTERIOR	END	INTERIOR	END	INTERIOR	END	INTERIOR		
30.0	21'-8"	7'-10"	9'-8"	7'-3"	12'-0"	9'-4"	10'-7"	8'-0"	12'-6"	7'-4"	
35.0	19'-9"	7'-4"	9'-3"	6'-9"	11'-5"	8'-8"	10'-0"	7'-7"	12'-6"	7'-3"	
40.0	18'-0"	6'-10"	8'-10"	6'-4"	10'-11"	8'-1"	9'-7"	7'-3"	12'-6"	7'-2"	
45.0	16'-6"	6'-6"	8'-6"	6'-6"	10'-6"	7'-8"	9'-3"	6'-11"	12'-6"	7'-1"	
50.0	15'-3"	6'-2"	8'-2"	6'-0"	10'-2"	7'-4"	8'-11"	5'-3"	12'-6"	7'-0"	
55.0	14'-3"	5'-11"	7'-11"	5'-9"	9'-10"	7'-0"	8'-7"	4'-10"	12'-4"	6'-11"	
60.0	13'-6"	5'-9"	7'-9"	5'-6"	9'-8"	6'-10"	8'-6"	4'-8"	12'-0"	6'-10"	
65.0	12'-9"	5'-9"	7'-9"	5'-4"	9'-7"	6'-10"	8'-5"	4'-8"	11'-10"	6'-10"	
70.0	12'-0"	5'-9"	7'-8"	5'-4"	9'-6"	6'-10"	8'-4"	4'-8"	11'-9"	6'-9"	
75.0	11'-6"	5'-9"	7'-7"	5'-4"	9'-5"	6'-10"	8'-3"	4'-8"	11'-7"	6'-9"	
80.0	11'-0"	5'-9"	7'-7"	5'-4"	9'-4"	6'-10"	8'-3"	4'-8"	11'-6"	6'-8"	
85.0	10'-6"	5'-9"	7'-7"	5'-4"	9'-3"	6'-10"	8'-2"	4'-8"	11'-5"	6'-7"	
90.0	10'-3"	5'-10"	7'-7"	5'-5"	9'-3"	6'-11"	8'-3"	4'-10"	11'-5"	6'-7"	
95.0	9'-9"	5'-10"	7'-7"	5'-6"	9'-3"	6'-11"	8'-3"	4'-11"	11'-5"	6'-7"	
100.0	9'-6"	5'-11"	7'-7"	5'-7"	9'-3"	7'-0"	8'-2"	5'-0"	11'-5"	6'-6"	
105.0	9'-3"	6'-0"	7'-7"	5'-7"	9'-3"	7'-1"	8'-2"	5'-1"	11'-5"	6'-5"	
110.0	9'-0"	6'-0"	7'-7"	5'-8"	9'-3"	7'-2"	8'-3"	5'-3"	11'-5"	6'-5"	
115.0	8'-9"	6'-1"	7'-7"	5'-9"	9'-3"	7'-2"	8'-3"	5'-4"	11'-5"	6'-5"	
120.0	8'-6"	6'-1"	7'-6"	5'-9"	9'-3"	7'-3"	8'-2"	5'-5"	11'-5"	6'-4"	
125.0	8'-3"	6'-2"	7'-7"	5'-10"	9'-3"	7'-4"	8'-3"	6'-9"	11'-5"	6'-4"	
130.0	8'-0"	6'-3"	7'-7"	5'-10"	9'-3"	7'-4"	8'-2"	6'-9"	11'-5"	6'-4"	
135.0	7'-9"	6'-4"	7'-7"	5'-11"	9'-3"	7'-5"	8'-3"	6'-10"	11'-5"	6'-4"	
140.0	7'-9"	6'-4"	7'-7"	6'-0"	9'-3"	7'-6"	8'-3"	6'-11"	11'-5"	6'-3"	

* MAXIMUM MULLION SPACING SHALL BE SUCH THAT MAX. ALLOWABLE WALL MOUNTED SLAT SPAN FOR THAT A.S.D. DESIGN PRESSURE RATING SHALL NOT BE EXCEEDED.
† MULLION ORIENTATION IS AS SEEN FROM THE OUTSIDE (EXTERIOR) OF PRODUCT.

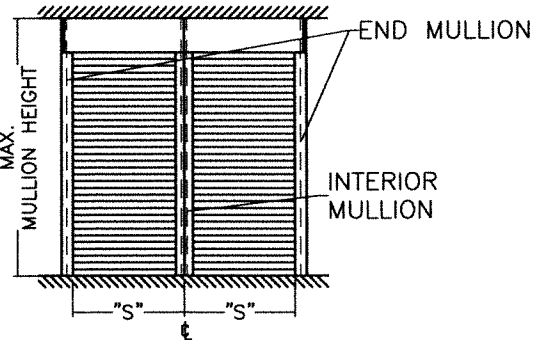

MULLION SPACING: "S"

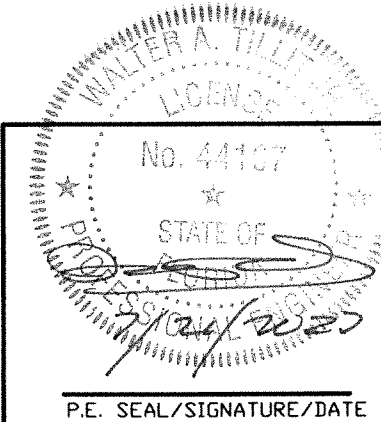


FLORIDA BUILDING CODE (NON HIGH VELOCITY HURRICANE ZONE)					
©2023 TILTECO, INC.			ROLL-UP SHUTTER SYSTEM WITH CHD-6 SLAT (END RETENTION)		W.H. DRAWN BY:
TILTECO inc. TILLIT TESTING & ENGINEERING COMPANY 6355 N.W. 36th. St., Ste. 305, VIRGINIA GARDENS, FL 33166 Phone : (305)871-1530 . Fax : (305)871-1531 CA-0006719 WALTER A. TILLIT Jr. P.E. FLORIDA Lic. # 44167			CARGO ENTERPRISE LLC. 901 EAST INDUSTRIAL CIRCLE, UNIT 9 CAPE CORAL, FL 33909 PH: 239-540-3034		07/21/2023 DATE:
					23-136 DRAWING No.
REV. NO	DESCRIPTION	DATE	REV. No	DESCRIPTION	DATE
1	OLD 21-108	07/21/23	3	-	-
2	-	-	4	-	-
					SHEET 20 OF 22

SCHEDULE 1b
FLOOR TO CEILING (TRAPPED) MOUNTING MAX. SPAN (ft) FOR END AND INTERIOR MULLIONS FOR A GIVEN
A.S.D. DESIGN PRESSURE RATING (p.s.f.), & A 12'-0" MAX. MULLION SPACING (ft) *

MAX. A.S.D. DESIGN PRESSURE RATING (p.s.f.)	MAXIMUM MULLION SPACING (ft) *	MAXIMUM MULLION SPAN (ft)									
		ⓐ 4"x6"x1/4" MULLION					ⓑ 4"x8"x1/4" MULLION				
		ORIENTATION #2 (⇌) †		ORIENTATION #1 (⏏) †			ORIENTATION #2 (⇌) †		ORIENTATION #1 (⏏) †		
		END	INTERIOR	END	INTERIOR	INTERIOR	END	INTERIOR	END	INTERIOR	INTERIOR
30.0	12'-0"	11'-7"	11'-6"	9'-9"	12'-6"	12'-6"	12'-6"	10'-7"	12'-6"	9'-0"	
35.0	12'-0"	10'-7"	10'-11"	9'-2"	12'-6"	12'-6"	11'-11"	10'-0"	12'-6"	8'-6"	
40.0	12'-0"	9'-10"	10'-5"	8'-9"	12'-6"	11'-8"	11'-4"	9'-6"	12'-6"	8'-2"	
45.0	12'-0"	9'-3"	10'-1"	8'-4"	12'-5"	10'-11"	10'-11"	9'-1"	12'-6"	7'-10"	
50.0	12'-0"	8'-9"	9'-8"	8'-1"	12'-0"	10'-4"	10'-7"	8'-9"	12'-6"	7'-5"	
55.0	12'-0"	8'-4"	9'-5"	7'-10"	11'-8"	9'-10"	10'-3"	8'-6"	12'-6"	7'-4"	
60.0	12'-0"	8'-0"	9'-2"	7'-6"	11'-4"	9'-5"	9'-11"	8'-3"	12'-6"	7'-2"	
65.0	12'-0"	7'-8"	8'-11"	7'-2"	11'-0"	9'-1"	9'-8"	8'-0"	12'-6"	6'-11"	
70.0	12'-0"	7'-4"	8'-8"	6'-11"	10'-9"	8'-9"	9'-5"	7'-10"	12'-6"	6'-9"	
75.0	12'-0"	7'-1"	8'-6"	6'-8"	10'-6"	8'-5"	9'-3"	7'-8"	12'-6"	-	
80.0	12'-0"	6'-11"	8'-4"	6'-5"	10'-3"	8'-2"	9'-0"	7'-5"	12'-6"	-	
85.0	12'-0"	6'-8"	8'-2"	6'-3"	9'-9"	7'-11"	8'-10"	7'-2"	12'-6"	-	
90.0	12'-0"	6'-6"	8'-0"	6'-1"	9'-2"	7'-8"	8'-8"	7'-0"	12'-5"	-	
95.0	12'-0"	6'-4"	7'-10"	5'-11"	8'-8"	7'-5"	8'-6"	6'-10"	12'-1"	-	
100.0	12'-0"	6'-2"	7'-8"	5'-9"	8'-3"	7'-0"	8'-3"	6'-8"	11'-9"	-	
105.0	12'-0"	6'-0"	7'-7"	5'-8"	7'-10"	6'-8"	7'-10"	6'-6"	11'-6"	-	

SCHEDULE 1b' (LIMITED LOAD, MULLION SPACING & SPAN INSTALLATION)
FLOOR TO CEILING (TRAPPED) MOUNTED MAX. SPAN (ft) FOR END & INTERIOR MULLIONS FOR A
GIVEN A.S.D. DESIGN PRESSURE (p.s.f.), AND FOR 12'-0" (CASE I) & 8'-0" (CASES Ia & II) MAX. MULLION
SPACING (ft) *

INSTALLATION CASES	MAX. A.S.D. DESIGN PRESSURE RATING (p.s.f.)	MAXIMUM MULLION SPACING (ft) *	MAXIMUM MULLION SPAN (ft)						
			ⓐ 4"x6"x1/4" MULLION		ⓑ 4"x8"x1/4" MULLION			ⓓ 4"x4"x1/4" MULLION	
			ORIENTATION #2 ORIENTATION #1		ORIENTATION #2 ORIENTATION #2 ORIENTATION #1			ORIENTATION #2 ORIENTATION #1	
			⇌ †	⏏ †	⇌ †	⇌ †	⏏ †	⇌ †	⏏ †
CASE I	30.0	12'-0"	-	12'-6"	12'-6"	12'-6"	12'-6"	9'-0"	
	35.0	12'-0"	-	12'-6"	12'-6"	11'-11"	12'-6"	8'-6"	
	40.0	12'-0"	-	12'-6"	11'-8"	11'-4"	12'-6"	8'-2"	
	45.0	12'-0"	-	12'-5"	10'-11"	10'-11"	12'-6"	7'-10"	
	50.0	12'-0"	-	12'-0"	10'-4"	10'-7"	12'-6"	7'-5"	
	55.0	12'-0"	-	11'-8"	9'-10"	10'-3"	12'-6"	7'-4"	
	60.0	12'-0"	-	11'-4"	9'-5"	9'-11"	12'-6"	7'-2"	
	60.8	12'-0"	-	11'-3"	9'-4"	9'-11"	12'-6"	7'-0"	
CASE Ia	30.0	8'-0"	-	12'-6"	12'-6"	12'-6"	12'-6"	10'-0"	
	35.0	8'-0"	-	12'-6"	12'-6"	12'-6"	12'-6"	9'-9"	
	40.0	8'-0"	-	12'-6"	12'-6"	12'-6"	12'-6"	9'-4"	
	45.0	8'-0"	-	12'-6"	12'-6"	12'-6"	12'-6"	9'-0"	
	50.0	8'-0"	-	12'-6"	12'-6"	12'-1"	12'-6"	8'-7"	
	55.0	8'-0"	-	12'-6"	12'-6"	11'-8"	12'-6"	8'-5"	
	60.0	8'-0"	-	12'-2"	12'-2"	11'-4"	12'-2"	8'-2"	
	60.8	8'-0"	-	12'-0"	12'-0"	11'-4"	12'-0"	8'-2"	
CASE II	30.0	8'-0"	-	9'-0"	9'-0"	9'-0"	9'-0"	10'-0"	
	35.0	8'-0"	-	9'-0"	9'-0"	9'-0"	9'-0"	9'-9"	
	40.0	8'-0"	-	9'-0"	9'-0"	9'-0"	9'-0"	9'-4"	
	45.0	8'-0"	-	9'-0"	9'-0"	9'-0"	9'-0"	9'-0"	
	50.0	8'-0"	-	9'-0"	9'-0"	9'-0"	9'-0"	8'-7"	
	55.0	8'-0"	-	9'-0"	9'-0"	9'-0"	9'-0"	8'-5"	
	60.0	8'-0"	-	9'-0"	9'-0"	9'-0"	9'-0"	8'-2"	
	65.0	8'-0"	-	9'-0"	9'-0"	9'-0"	9'-0"	7'-11"	
	70.0	8'-0"	-	9'-0"	9'-0"	9'-0"	9'-0"	7'-9"	
	75.0	8'-0"	-	9'-0"	9'-0"	9'-0"	9'-0"	7'-6"	
	80.0	8'-0"	-	9'-0"	9'-0"	8'-9"	9'-0"	7'-5"	
	85.0	8'-0"	-	9'-0"	8'-9"	8'-3"	9'-0"	7'-3"	
	90.0	8'-0"	-	9'-0"	8'-2"	7'-9"	9'-0"	7'-2"	
	95.0	8'-0"	-	9'-0"	7'-8"	7'-4"	9'-0"	7'-0"	
	100.0	8'-0"	-	9'-0"	7'-3"	7'-0"	9'-0"	6'-10"	
* NOTE: USE 9'-0" IF ANCHOR CONSISTS OF ELCO CONFLUX SCREW SEE SCHEDULES 1 & 2 ON SHEET 9									

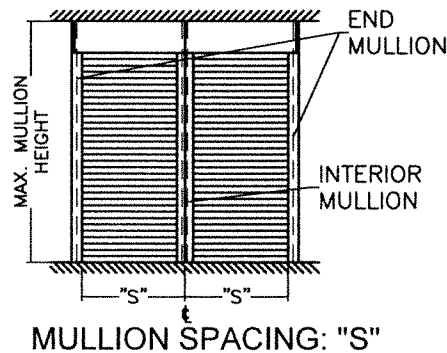

* MAXIMUM MULLION SPACING SHALL BE SUCH THAT
MAX. ALLOWABLE WALL MOUNTED SLAT SPAN FOR
THAT DESIGN LOAD SHALL NOT BE EXCEEDED.

† MULLION ORIENTATION IS AS SEEN FROM THE
OUTSIDE (EXTERIOR) OF PRODUCT



SCHEDULE 2b
WALL MOUNTING MAX. SPAN (ft) FOR END AND INTERIOR MULLIONS FOR A GIVEN A.S.D.
DESIGN PRESSURE RATING (P.S.F.), & A 12'-0" MAX. MULLION SPACING (ft) *

MAX. A.S.D. DESIGN PRESSURE RATING (p.s.f.)	MAXIMUM MULLION SPACING (ft) *	MAXIMUM MULLION SPAN (ft)									
		ⓐ 4"x6"x1/4" MULLION					ⓑ 4"x8"x1/4" MULLION				
		ORIENTATION #2 (⇌) †		ORIENTATION #1 (⏏) †			ORIENTATION #2 (⇌) †		ORIENTATION #1 (⏏) †		
		END	INTERIOR	END	INTERIOR	INTERIOR	END	INTERIOR	END	INTERIOR	INTERIOR
30.0	12'-0"	9'-9"	11'-6"	9'-9"	12'-6"	12'-6"	12'-6"	10'-7"	12'-6"	9'-0"	
35.0	12'-0"	9'-2"	10'-11"	9'-2"	12'-6"	12'-6"	11'-11"	10'-0"	12'-6"	8'-6"	
40.0	12'-0"	8'-9"	10'-5"	8'-9"	12'-6"	11'-8"	11'-4"	9'-6"	12'-6"	8'-2"	
45.0	12'-0"	8'-4"	10'-1"	8'-4"	12'-5"	10'-11"	10'-11"	9'-1"	12'-6"	7'-10"	
50.0	12'-0"	8'-1"	9'-8"	8'-1"	12'-0"	10'-4"	10'-7"	8'-9"	12'-6"	7'-5"	
55.0	12'-0"	7'-10"	9'-5"	7'-10"	11'-8"	9'-10"	10'-3"	8'-6"	12'-6"	7'-4"	
60.0	12'-0"	7'-6"	9'-2"	7'-6"	11'-4"	9'-5"	9'-11"	8'-3"	12'-6"	7'-2"	
65.0	12'-0"	7'-2"	8'-11"	7'-2"	11'-0"	9'-1"	9'-8"	8'-0"	12'-6"	6'-11"	
70.0	12'-0"	6'-11"	8'-8"	6'-11"	10'-9"	8'-9"	9'-5"	7'-10"	12'-6"	6'-9"	
75.0	12'-0"	6'-8"	8'-6"	6'-8"	10'-6"	8'-5"	9'-3"	7'-8"	12'-6"	-	
80.0	12'-0"	6'-5"	8'-4"	6'-5"	10'-3"	8'-2"	9'-0"	7'-5"	12'-6"	-	
85.0	12'-0"	6'-3"	8'-2"	6'-3"	10'-1"	7'-11"	8'-10"	7'-2"	12'-6"	-	
90.0	12'-0"	6'-1"	8'-0"	6'-1"	9'-11"	7'-8"	8'-8"	7'-0"	12'-5"	-	
95.0	12'-0"	5'-11"	7'-10"	5'-11"	9'-8"	7'-6"	8'-6"	6'-10"	12'-1"	-	
100.0	12'-0"	5'-9"	7'-8"	5'-9"	9'-7"	7'-4"	8'-5"	5'-6"	11'-9"	-	
105.0	12'-0"	5'-8"	7'-7"	5'-8"	9'-4"	7'-1"	8'-3"	5'-3"	11'-6"	-	

SCHEDULE 2b' (LIMITED LOAD, MULLION SPACING & SPAN INSTALLATION)
WALL MOUNTED MAX. SPAN (ft) FOR END & INTERIOR MULLIONS FOR A GIVEN
A.S.D. DESIGN PRESSURE RATING (p.s.f.), AND FOR 12'-0" (CASE I) & 8'-0" (CASE II) MAX.
MULLION SPACING (ft) *

INSTALLATION CASES	MAX. A.S.D. DESIGN PRESSURE RATING (p.s.f.)	MAXIMUM MULLION SPACING (ft) *	MAXIMUM MULLION SPAN (ft)						
			ⓐ 4"x6"x1/4" MULLION		ⓑ 4"x8"x1/4" MULLION			ⓓ 4"x4"x1/4" MULLION	
			ORIENTATION #2 ORIENTATION #1		ORIENTATION #2 ORIENTATION #2 ORIENTATION #1			ORIENTATION #2 ORIENTATION #1	
			⇌ †	⏏ †	⇌ †	⇌ †	⏏ †	⇌ †	⏏ †
CASE I'	30.0	12'-0"	-	12'-6"	12'-6"	12'-6"	12'-6"	9'-0"	
	35.0	12'-0"	-	12'-6"	12'-6"	11'-11"	12'-6"	8'-6"	
	40.0	12'-0"	-	12'-6"	11'-8"	11'-4"	12'-6"	8'-2"	
	45.0	12'-0"	-	12'-5"	10'-11"	10'-11"	12'-6"	7'-10"	
	50.0	12'-0"	-	12'-0"	10'-4"	10'-7"	12'-6"	7'-5"	
	55.0	12'-0"	-	11'-8"	9'-10"	10'-3"	12'-6"	7'-4"	
	60.0	12'-0"	-	11'-4"	9'-5"	9'-11"	12'-6"	7'-2"	
	60.8	12'-0"	-	11'-3"	9'-4"	9'-11"	12'-6"	7'-0"	
CASE II'	30.0	8'-0"	-	9'-0"	9'-0"	9'-0"	9'-0"	10'-0"	
	35.0	8'-0"	-	9'-0"	9'-0"	9'-0"	9'-0"	9'-9"	
	40.0	8'-0"	-	9'-0"	9'-0"	9'-0"	9'-0"	9'-4"	
	45.0	8'-0"	-	9'-0"	9'-0"	9'-0"	9'-0"	9'-0"	
	50.0	8'-0"	-	9'-0"	9'-0"	9'-0"	9'-0"	8'-7"	
	55.0	8'-0"	-	9'-0"	9'-0"	9'-0"	9'-0"	8'-5"	
	60.0	8'-0"	-	9'-0"	9'-0"	9'-0"	9'-0"	8'-2"	
	65.0	8'-0"	-	9'-0"	9'-0"	9'-0"	9'-0"	7'-11"	
	70.0	8'-0"	-	9'-0"	9'-0"	9'-0"	9'-0"	7'-9"	
	75.0	8'-0"	-	9'-0"	9'-0"	9'-0"	9'-0"	7'-6"	
	80.0	8'-0"	-	9'-0"	9'-0"	9'-0"	9'-0"	7'-5"	
	85.0	8'-0"	-	9'-0"	9'-0"	9'-0"	9'-0"	7'-3"	
	90.0	8'-0"	-	9'-0"	9'-0"	9'-0"	9'-0"	7'-2"	
	95.0	8'-0"	-	9'-0"	9'-0"	9'-0"	9'-0"	7'-0"	
	100.0	8'-0"	-	9'-0"	9'-0"	9'-0"	9'-0"	6'-10"	

FLORIDA BUILDING CODE (NON HIGH VELOCITY HURRICANE ZONE)

©2023 TILTECO, INC.

TILTECO Inc.
TILIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th St., Ste. 305, VIRGINIA GARDENS, FL 33166
Phone : (305)871-1530 . Fax : (305)871-1531
CA-0006719
WALTER A. TILIT Jr. P.E.
FLORIDA Lic. # 44167

**ROLL-UP SHUTTER SYSTEM
WITH CHD-6 SLAT (END RETENTION)**

W.H.
DRAWN BY:

CARGOR ENTERPRISE LLC.
901 EAST INDUSTRIAL CIRCLE, UNIT 9
CAPE CORAL, FL 33909
PH: 239-540-3034

07/21/2023
DATE:

23-136

DRAWING No.

REV. NO	DESCRIPTION	DATE	REV. No	DESCRIPTION	DATE
1	OLD 21-109	07/21/23	3	-	-
2	-	-	4	-	-

SHEET 21 OF 22

SCHEDULE 1c
FLOOR TO CEILING (TRAPPED) MOUNTING
MAX. SPAN (ft) FOR END AND INTERIOR MULLIONS FOR A GIVEN A.S.D. DESIGN
PRESSURE RATING (p.s.f.), & A 7'-0" MAX. MULLION SPACING (ft) *


MAX. A.S.D. DESIGN PRESSURE RATING (p.s.f.)	MAXIMUM MULLION SPACING (ft) *	MAXIMUM MULLION SPAN (FT)									
		ⓐ 4"x6"x1/4" MULLION				ⓑ 4"x8"x1/4" MULLION				ⓒ 4"x4"x1/4" MULLION	
		ORIENTATION #2 (⇌) †		ORIENTATION #1 (⌈) †		ORIENTATION #2 (⇌) †		ORIENTATION #1 (⌈) †			
		END	INTERIOR	END	INTERIOR	END	INTERIOR	END	INTERIOR	INTERIOR	
30.0	7'-0"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	10'-0"	
35.0	7'-0"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	10'-0"	
40.0	7'-0"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	9'-9"	
45.0	7'-0"	12'-6"	12'-0"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	9'-4"	
50.0	7'-0"	12'-6"	11'-7"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	9'-1"	
55.0	7'-0"	12'-6"	11'-3"	12'-6"	12'-6"	12'-6"	12'-3"	12'-6"	12'-6"	8'-9"	
60.0	7'-0"	12'-6"	10'-11"	12'-6"	12'-6"	12'-6"	11'-11"	12'-6"	12'-6"	8'-6"	
65.0	7'-0"	12'-6"	10'-8"	12'-1"	12'-6"	12'-6"	11'-7"	12'-6"	12'-6"	8'-4"	
70.0	7'-0"	12'-6"	10'-5"	11'-6"	12'-6"	12'-6"	11'-3"	12'-6"	12'-6"	8'-1"	
75.0	7'-0"	12'-1"	10'-2"	10'-11"	12'-6"	12'-6"	11'-0"	11'-11"	12'-6"	7'-11"	
80.0	7'-0"	11'-6"	9'-11"	10'-6"	12'-4"	12'-6"	10'-10"	11'-5"	12'-6"	7'-9"	
85.0	7'-0"	11'-0"	9'-9"	10'-2"	12'-1"	12'-6"	10'-7"	11'-0"	12'-6"	7'-7"	
90.0	7'-0"	10'-7"	9'-7"	9'-10"	11'-10"	12'-5"	10'-5"	10'-8"	12'-6"	7'-5"	
95.0	7'-0"	10'-2"	9'-5"	9'-6"	11'-7"	11'-11"	10'-2"	10'-4"	12'-6"	7'-4"	
100.0	7'-0"	9'-10"	9'-3"	9'-3"	11'-5"	11'-6"	10'-0"	10'-1"	12'-6"	7'-2"	
105.0	7'-0"	9'-6"	9'-1"	9'-1"	11'-3"	11'-2"	9'-10"	9'-10"	12'-6"	7'-1"	
110.0	7'-0"	9'-3"	8'-11"	8'-10"	11'-1"	10'-10"	9'-9"	9'-7"	12'-6"	7'-0"	
115.0	7'-0"	9'-0"	8'-10"	8'-7"	10'-11"	10'-7"	9'-7"	9'-5"	12'-6"	6'-10"	
120.0	7'-0"	8'-9"	8'-8"	8'-5"	10'-9"	10'-3"	9'-5"	9'-3"	12'-6"	6'-9"	
125.0	7'-0"	8'-6"	8'-7"	8'-2"	10'-7"	10'-0"	9'-4"	9'-1"	12'-6"	6'-8"	
130.0	7'-0"	8'-4"	8'-5"	8'-0"	10'-6"	9'-9"	9'-2"	8'-11"	12'-6"	6'-7"	
135.0	7'-0"	8'-2"	8'-4"	7'-9"	10'-4"	9'-7"	9'-1"	8'-9"	12'-6"	6'-6"	
140.0	7'-0"	8'-0"	8'-3"	7'-7"	10'-1"	9'-4"	9'-0"	8'-7"	12'-6"	6'-5"	

SCHEDULE 2c
WALL MOUNTING
MAX. SPAN (FT) FOR END AND INTERIOR MULLIONS FOR A GIVEN A.S.D.
DESIGN PRESSURE RATING (P.S.F.), & AND 7'-0" MAX. MULLION SPACING (FT) *


MAX. A.S.D. DESIGN PRESSURE RATING (p.s.f.)	MAXIMUM MULLION SPACING (ft) *	MAXIMUM MULLION SPAN (FT)									
		ⓐ 4"x6"x1/4" MULLION				ⓑ 4"x8"x1/4" MULLION				ⓒ 4"x4"x1/4" MULLION	
		ORIENTATION #2 (⇌) †		ORIENTATION #1 (⌈) †		ORIENTATION #2 (⇌) †		ORIENTATION #1 (⌈) †			
		END	INTERIOR	END	INTERIOR	END	INTERIOR	END	INTERIOR	INTERIOR	
30.0	7'-0"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	10'-0"	
35.0	7'-0"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	10'-0"	
40.0	7'-0"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	9'-9"	
45.0	7'-0"	12'-6"	12'-0"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	9'-4"	
50.0	7'-0"	12'-6"	11'-7"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	12'-6"	9'-1"	
55.0	7'-0"	12'-6"	11'-3"	12'-6"	12'-6"	12'-6"	12'-3"	12'-6"	12'-6"	8'-9"	
60.0	7'-0"	12'-6"	10'-11"	12'-6"	12'-6"	12'-6"	11'-11"	12'-6"	12'-6"	8'-6"	
65.0	7'-0"	12'-6"	10'-8"	12'-1"	12'-6"	12'-6"	11'-7"	12'-6"	12'-6"	8'-4"	
70.0	7'-0"	12'-6"	10'-5"	11'-6"	12'-6"	12'-6"	11'-3"	12'-6"	12'-6"	8'-1"	
75.0	7'-0"	12'-1"	10'-2"	10'-11"	12'-6"	12'-6"	11'-0"	11'-11"	12'-6"	7'-11"	
80.0	7'-0"	11'-6"	9'-11"	10'-6"	12'-4"	12'-6"	10'-10"	11'-5"	12'-6"	7'-9"	
85.0	7'-0"	11'-0"	9'-9"	10'-2"	12'-1"	12'-6"	10'-7"	11'-0"	12'-6"	7'-7"	
90.0	7'-0"	10'-7"	9'-7"	9'-10"	11'-10"	12'-5"	10'-5"	10'-8"	12'-6"	7'-5"	
95.0	7'-0"	10'-2"	9'-5"	9'-6"	11'-7"	11'-11"	10'-2"	10'-4"	12'-6"	7'-4"	
100.0	7'-0"	9'-10"	9'-3"	9'-3"	11'-5"	11'-6"	10'-0"	10'-1"	12'-6"	7'-2"	
105.0	7'-0"	9'-6"	9'-1"	9'-1"	11'-3"	11'-2"	9'-10"	9'-10"	12'-6"	7'-1"	
110.0	7'-0"	9'-3"	8'-11"	8'-10"	11'-1"	10'-10"	9'-9"	9'-7"	12'-6"	7'-0"	
115.0	7'-0"	9'-0"	8'-10"	8'-7"	10'-11"	10'-7"	9'-7"	9'-5"	12'-6"	6'-10"	
120.0	7'-0"	8'-9"	8'-8"	8'-5"	10'-9"	10'-3"	9'-5"	9'-3"	12'-6"	6'-9"	
125.0	7'-0"	8'-6"	8'-7"	8'-2"	10'-7"	10'-0"	9'-4"	9'-1"	12'-6"	6'-8"	
130.0	7'-0"	8'-4"	8'-5"	8'-0"	10'-6"	9'-9"	9'-2"	8'-11"	12'-6"	6'-7"	
135.0	7'-0"	8'-2"	8'-4"	7'-9"	10'-4"	9'-7"	9'-1"	8'-9"	12'-6"	6'-6"	
140.0	7'-0"	8'-0"	8'-3"	7'-7"	10'-3"	9'-4"	9'-0"	8'-7"	12'-6"	6'-5"	

* MAXIMUM MULLION SPACING SHALL BE SUCH THAT MAX. ALLOWABLE WALL MOUNTED SLAT SPAN FOR THAT A.S.D. DESIGN PRESSURE RATING SHALL NOT BE EXCEEDED.

† MULLION ORIENTATION IS AS SEEN FROM THE OUTSIDE (EXTERIOR) OF PRODUCT.

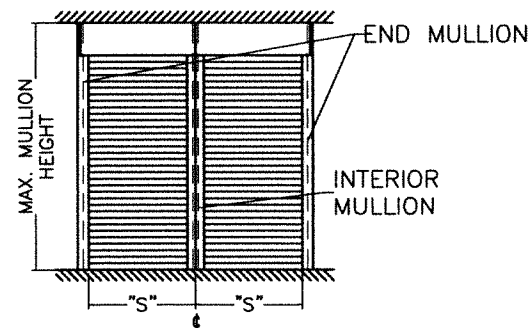

MULLION SPACING: "S"

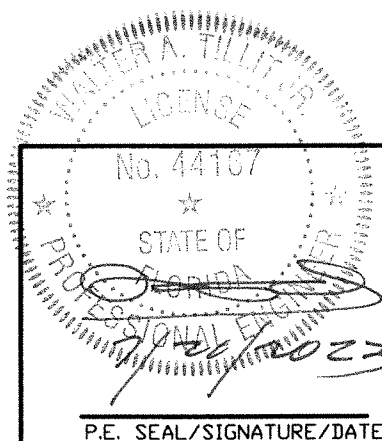

P.E. SEAL/SIGNATURE/DATE

FLORIDA BUILDING CODE (NON HIGH VELOCITY HURRICANE ZONE)

©2023 TILTECO, INC.

TILTECO inc.
TILLIT TESTING & ENGINEERING COMPANY
6355 N.W. 36th St., Ste. 305, VIRGINIA GARDENS, FL 33166
Phone : (305)871-1530 . Fax : (305)871-1531
CA-0006719
WALTER A. TILLIT Jr. P.E.
FLORIDA Lic. # 44167

**ROLL-UP SHUTTER SYSTEM
WITH CHD-6 SLAT (END RETENTION)**

CARGOR ENTERPRISE LLC.

901 EAST INDUSTRIAL CIRCLE, UNIT 9
CAPE CORAL, FL 33909
PH: 239-540-3034

W.H.
DRAWN BY:

07/21/2023
DATE:

23-136

DRAWING No.

SHEET **22** OF 22

REV. NO	DESCRIPTION	DATE	REV. NO	DESCRIPTION	DATE
1	OLD 21-109	07/21/23	3	-	-
2	-	-	4	-	-