

VALDA 90 OOD

SERIES VISION VINYL PICTURE WINDOW

NON-IMPACT

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

GENERAL NOTES:

1. THIS PRODUCT HAS BEEN EVALUATED TO COMPLY WITH THE CURRENT PROVISIONS OF THE FLORIDA BUILDING CODE (FBC) EXCLUDING THE HIGH VELOCITY HURRICANE ZONES (HVHZ) AND IS BASED ON TESTING CONDUCTED TO AAMA/WDMA/CSA101/I.S.2/A440-11 DOCUMENTED IN TEST REPORT NO. NCTL-210-4220-01A.
2. ADEQUACY OF THE EXISTING STRUCTURAL CONCRETE, MASONRY AND 2X FRAMING AS A MAIN WIND FORCE RESISTING SYSTEM CAPABLE OF WITHSTANDING AND TRANSFERRING APPLIED PRODUCT LOADS TO THE FOUNDATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
3. 1X BUCK OVER MASONRY AND/OR CONCRETE IS OPTIONAL. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
4. THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF THE INSTALLATION METHODS DEViate FROM THESE APPROVED DETAILS THIS WOULD REQUIRE FURTHER INVESTIGATION BY A LICENSED OR REGISTERED DESIGN PROFESSIONAL.
5. ALL SETTING BLOCKS AND GASKET MATERIALS SHALL BE IN COMPLIANCE WITH THE CURRENT EDITION OF THE FLORIDA BUILDING CODE. SETTING BLOCKS SHALL BE NEOPRENE WITH A 70 TO 90 SHORE A DUROMETER.
6. IN AREAS WHERE WINDBORNE DEBRIS PROTECTION REQUIREMENTS EXIST, USE OF AN IMPACT PROTECTIVE SYSTEM COMPLYING WITH THE FBC REQUIREMENTS FOR WINDBORNE DEBRIS REGIONS SHALL NOT BE REQ'D.
7. MATERIALS:
FRAME: RIGID PVC / VINYL
8. GLAZING:

8.1. GLASS MEETS THE REQUIREMENTS OF ASTM E1300-12AE1.

8.2. SEE GLAZING DETAILS ON SHEET 3 OF 5.

8.3. GLASS SHALL MEET SAFETY GLAZING REQUIREMENTS PER CURRENT EDITION OF THE FLORIDA BUILDING CODE.
9. PANEL OPERABILITY DESIGNATIONS:

9.2. WINDOW IS AN STATIONARY PANEL (O).

INSTALLATION NOTES:

1. SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR WITH A LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4".
2. FOR ANCHORING THROUGH FRAME OR ANCHOR CLIP INTO MASONRY/CONCRETE USE 1/4" ITW TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE THE FOLLOWING:

2.1. CONCRETE: 1-1/2" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 1-1/2" MINIMUM EDGE DISTANCE.

2.2. CMU/MASONRY: 1" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2" MINIMUM EDGE DISTANCE.
3. ANCHORING INTO WOOD SHALL BE AS FOLLOWS:

3.1. FOR ANCHORING THROUGH ANCHOR CLIP INTO WOOD FRAMING OR 2X BUCK USE #14 WOOD SCREWS PER (ANSI B18.6.1) WITH MINIMUM GRADE 2 STRENGTH AND WITH SUFFICIENT LENGTH TO ACHIEVE 1-1/2" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 1" MINIMUM EDGE DISTANCE.
4. INSTALLATION ANCHOR CAPACITIES FOR PRODUCTS HEREIN ARE BASED ON SUBSTRATE MATERIALS WITH THE FOLLOWING PROPERTIES:

4.1. WOOD - MINIMUM SPECIFIC GRAVITY OF 0.42 (NON-HVHZ).

4.2. CONCRETE - MINIMUM COMPRESSIVE STRENGTH OF 2500 PSI.

4.3. MASONRY - STRENGTH CONFORMANCE TO ASTM C-90 MEDIUM WEIGHT WITH COMPRESSIVE STRENGTH OF 1900 psi (DENSITY > 117 PCF).

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	GENERAL NOTES
2	ELEVATION AND ANCHOR LAYOUT
3	VERTICAL, HORIZONTAL SECTIONS & GLAZING DETAIL
4	ANCHOR DETAILS
5	BILL OF MATERIALS AND COMPONENTS

VALDA 90 OOD

UL. SHEMSHEVSKOS SHOSE 5002 WESTERN INDUSTRIAL ZONE, VELIKO TARNOVO, BULGARIA

SERIES VISION VINYL

NON-IMPACT PICTURE WINDOW

GENERAL NOTES

DRAWN: JRM

DWG NO. NL-0151

REV 0


SCALE SCALE

DATE 07-27-21

SHEET 10F5

ROBERT J. AMORUSO

FL. P.E. NO. 49752




734 S CENTER ST.


ORMOND BEACH, FL 32174

rjaengpe@gmail.com

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED



ELEVATION LAYOUT
PICTURE WINDOW



ANCHOR LAYOUT
ANCHOR CLIP
INSTALLATION

DESIGN PRESSURE RATING (PSF)			
MAX. OVERALL TESTED FRAME SIZE (IN)	MAX. DESIGN PRESSURE (PSF)	QUALIFIED CONFIGURATION	IMPACT RATING
59.063" X 98.433"	+/- 65.0 PSF	O	NONE
SEE GLAZING DETAIL 1 ON SHT. 3			

MAXIMUM SIZES (IN)	
FRAME	59.06 X 98.433
D.L.O	53.25 X 92.25


VALDA 90 OOD UL. SHEMSHEVSKOS SHOSE 5002 WESTERN INDUSTRIAL ZONE, VELIKO TARNOVO, BULGARIA		
SERIES VISION VINYL NON-IMPACT PICTURE WINDOW ELEVATION AND ANCHOR LAYOUT		
DRAWN: JRM	DWG NO. NL-0151	REV 0
SCALE SCALE	DATE 07-27-21	SHEET 2_OF_5

ROBERT J. AMORUSO
FL. P.E. NO. 49752




734 S CENTER ST.
ORMOND BEACH, FL 32174
rjaengpe@gmail.com

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED




A
3 VERTICAL SECTION



B
3 HORIZONTAL SECTION
FRAME JAMB

B OPP
3 HORIZONTAL SECTION
FRAME JAMB




VALDA 90 OOD UL. SHEMSHEVSKOS SHOSE 5002 WESTERN INDUSTRIAL ZONE, VELIKO TARNOVO, BULGARIA			
SERIES VISION VINYL NON-IMPACT PICTURE WINDOW VERTICAL AND HORIZONTAL SECTIONS & GLZG.			
DRAWN: JRM	DWG NO. NL-0151	REV	REVISION
SCALE	SCALE	DATE	07-27-21
SHEET 3_OF_5			

ROBERT J. AMORUSO
FL. P.E. NO. 49752




734 S CENTER ST.
ORMOND BEACH, FL 32174
rjaengpe@gmail.com


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED



B
4 **ANCHOR DETAIL**
INSTALLATION CLIP
FRAME HEAD

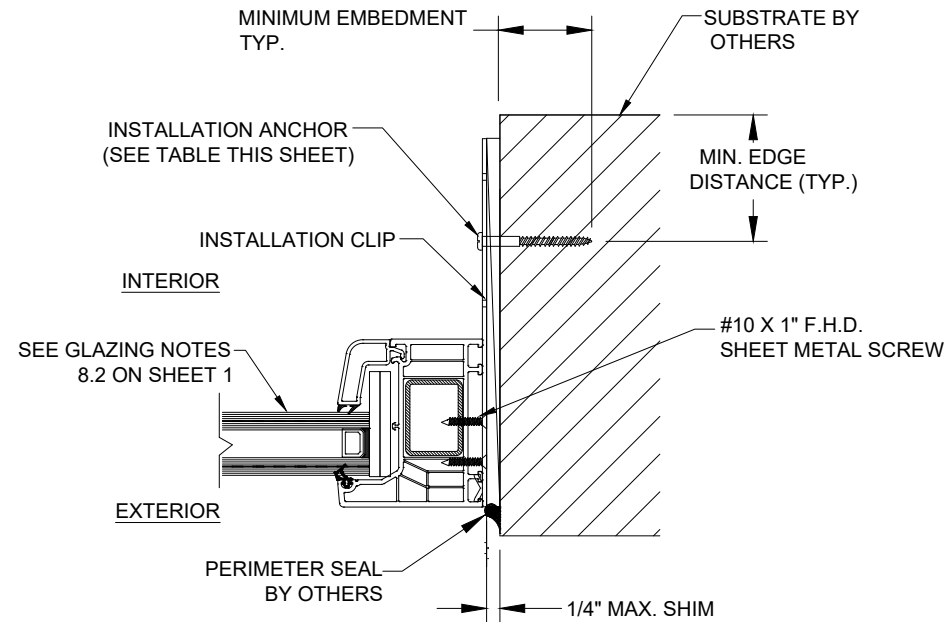

C
4 **ANCHOR DETAIL**
INSTALLATION CLIP
FRAME JAMB




A
4 **ANCHOR DETAIL**
INSTALLATION CLIP
FRAME SILL

INSTALLATION ANCHOR REQUIREMENTS TABLE					
ANCHOR REQUIREMENTS					
ANCHORING METHOD	SUBSTRATE		ANCHOR SCHEDULE	MIN. EMBED. (IN)	MIN. EDGE DISTANCE (IN)
THROUGH STRAP	WOOD	MIN. 0.42 S.G. (NON-HVHZ)	#14 WOOD SCREW	1-1/2	1"
	CONCRETE	2500 PSI MIN. CONCRETE	1/4 ITW TAPCON	1-1/2	1-1/2
	CMU	ASTM C90 MED. WT. (DENSITY) > 117 PCF) MASONRY (CMU) MIN.	1/4 ITW TAPCON	1	2
NOTES:	1)	CONCRETE AND MASONRY (BLOCK/CMU) SUBSTRATE ANCHORS TO BE 1/4" DIAMETER ITW CONCRETE SCREWS.			
	2)	WOOD FRAME SUBSTRATE ANCHORS USE NO. 14 WOOD SCREW ANCHORS (ANSI B18.6.1) WITH MIN. GRADE 2 STRENGTH.			

VALDA 90 OOD UL. SHEMSHEVSKOS SHOSE 5002 WESTERN INDUSTRIAL ZONE, VELIKO TARNOVO, BULGARIA		
SERIES VISION VINYL NON-IMPACT PICTURE WINDOW ANCHOR DETAILS – INSTALLATION CLIP		
DRAWN: JRM	DWG NO. NL-0151	REV 0
SCALE SCALE	DATE 07-27-21	SHEET 4_OF_5



ROBERT J. AMORUSO
FL. P.E. NO. 49752




734 S CENTER ST.
ORMOND BEACH, FL 32174
rjaengpe@gmail.com

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

QTY.	PART NO.	DESCRIPTION	MANUFACTURER
1	12101	MAIN FRAME HEAD, JAMB & SILL UPVC	DECKUENINCK
2	12143	37 MM GLAZING BEAD, UPVC	DECKUENINCK
3	11414	FRAME GALV. STL. REINFORCEMENT	DECKUENINCK
4	13113-	DRAINAGE CAP, UPVC/VINYL	DECKUENINCK
5	-----	#14 PH WOOD SCREW	PURCHASE
6	-----	1/4" DIAM. I.T.W. MASONRY ANCHOR	PURCHASE
7	-----	GLAZING GASKET EPDM RUBBER	PURCHASE
8	-----	ANCHOR STRAP, 14 GA. GALVANIZED STEEL	PURCHASE



TYPICAL CROSS SECTION FOR PARTS IDENTIFICATION EQUAL LEG FRAME



TYPICAL CROSS SECTION FOR PARTS IDENTIFICATION EQUAL LEG FRAME

VALDA 90 00D UL. SHEMSHEVSKOS SHOSE 5002 WESTERN INDUSTRIAL ZONE, VELIKO TARNOVO, BULGARIA		
SERIES VISION VINYL NON-IMPACT PICTURE WINDOW BILL OF MATERIAL & COMPONENTS		
DRAWN: JRM	DWG NO. NL-0151	REV 0
SCALE SCALE	DATE 07-27-21	SHEET 5_OF_5

ROBERT J. AMORUSO
FL. P.E. NO. 49752

734 S CENTER ST.
ORMOND BEACH, FL 32174
rjaengpe@gmail.com