




1. EVALUATED FOR USE IN LOCATIONS ADHERING TO THE FLORIDA BUILDING CODE, EXCLUDING THE HIGH VELOCITY HURRICANE ZONE, AND WHERE PRESSURE REQUIREMENTS AS DETERMINED BY ASCE 7, MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES, DOES NOT EXCEED THE DESIGN PRESSURES LISTED.
2. WHEN INSTALLED IN THE WIND-BORNE DEBRIS REGION, HURRICANE PROTECTIVE SYSTEM (SHUTTERS) IS REQUIRED.

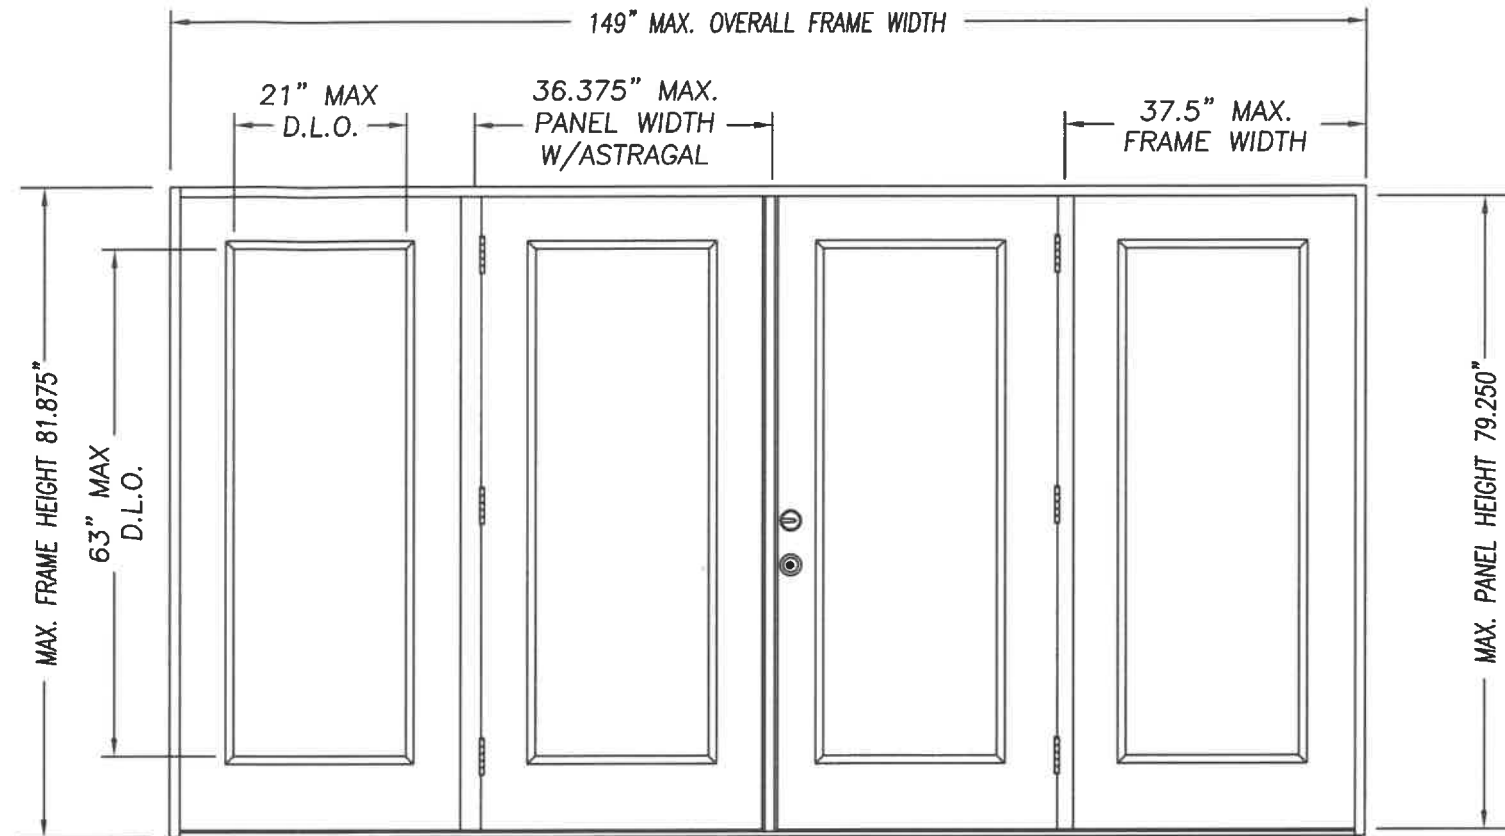

A diagram of a door with a vertical handle and a lock.

A line drawing of a double door. It consists of two vertical panels, each with a rectangular frame. A central handle is located between the two panels. The drawing is simple, using black outlines on a white background.

A diagram of a double door. The left door is closed. The right door is slightly open, revealing a vertical handle on its edge. The handle consists of a long, thin vertical bar with a small circular knob at the top and bottom. The door has a rectangular frame with a double-line border.


A line drawing of a double door. It consists of two vertical panels, each with a rectangular inset. In the center, where the two panels meet, there is a handle consisting of two small circles stacked vertically. The entire door is enclosed in a double-line border.

A line drawing of a three-panel door. It consists of three vertical rectangular panels. The central panel is slightly narrower than the two side panels. On the right side of the central panel, there are two small black circles stacked vertically, representing a handle. The entire door is enclosed in a double-line border.

A technical line drawing of a four-panel folding door system. The drawing shows four vertical rectangular panels arranged side-by-side. The second panel from the left features a central handle consisting of two circular knobs. The panels are connected by vertical tracks, and the entire assembly is shown within a frame.

TABLE OF CONTENTS	
SHEET #	DESCRIPTION
1	TYPICAL ELEVATIONS & GENERAL NOTES
2	ANCHORING LOCATIONS & DETAILS
3	ANCHORING LOCATIONS & DETAILS

		DESIGN PRESSURE RATING	
CONFIG	MAX WIDTH	INSWING	OUTSWING
X	37.5"	+40.0 / -40.0	+40.0 / -40.0
XX	74"	+40.0 / -40.0	+40.0 / -40.0
OX or XO	75"	+40.0 / -40.0	+40.0 / -40.0
OXO	112.5"	+40.0 / -40.0	+40.0 / -40.0
QXXO	149"	+40.0 / -40.0	+40.0 / -40.0



KURT BALTHAZOR
FLORIDA P.E.
#56533

[illegible]

MASONITE INTERNATIONAL CORP.
1955 POWIS ROAD
WEST CHICAGO, IL 60185

