

6/12/2023 12:54 PM
z:\projects\arcadia, inc\cc-23-0581 - fbc, 2023 code change.dwg\140953\arc003.dwg

INSTALLATION NOTES:

- ONE (1) INSTALLATION ANCHOR IS REQUIRED AT EACH ANCHOR LOCATION SHOWN.
- THE NUMBER OF INSTALLATION ANCHORS DEPICTED IS THE MINIMUM NUMBER OF ANCHORS TO BE USED FOR PRODUCT INSTALLATION.
- INSTALL INDIVIDUAL INSTALLATION ANCHORS WITHIN A TOLERANCE OF ±1/2 INCH OF THE DEPICTED LOCATION IN THE ANCHOR LAYOUT DETAIL (I.E., WITHOUT CONSIDERATION OF TOLERANCES). TOLERANCES ARE NOT CUMULATIVE FROM ONE INSTALLATION ANCHOR TO THE NEXT.
- SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR WITH LOAD BEARING SHIM(S). MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4 INCH. SHIM WHERE SPACE OF 1/16 INCH OR GREATER OCCURS. SHIM(S) SHALL BE CONSTRUCTED OF HIGH DENSITY PLASTIC OR BETTER.
- FOR INSTALLATION INTO WOOD FRAMING USE #12 WOOD SCREWS OF SUFFICIENT LENGTH TO ACHIEVE 1 1/2 INCH MINIMUM EMBEDMENT INTO WOOD SUBSTRATE.
- FOR INSTALLATION THROUGH 1X BUCK TO CONCRETE/MASONRY, OR DIRECTLY INTO CONCRETE/MASONRY, USE 1/4 INCH DIAMETER ITW TAPCONS OF SUFFICIENT LENGTH TO ACHIEVE 1 1/2 INCH MINIMUM EMBEDMENT.
- FOR INSTALLATION THROUGH METAL STUD USE #12-24 SELF-DRILLING SCREWS, GR. 5 OF SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM PENETRATION BEYOND METAL FRAME SUBSTRATE.
- MINIMUM EMBEDMENT AND EDGE DISTANCE EXCLUDE WALL FINISHES, INCLUDING BUT NOT LIMITED TO STUCCO, FOAM, BRICK VENEER, AND SIDING.
- INSTALLATION ANCHORS AND ASSOCIATED HARDWARE MUST BE MADE OF CORROSION RESISTANT MATERIAL OR HAVE A CORROSION RESISTANT COATING.
- FOR HOLLOW BLOCK AND GROUT FILLED BLOCK, DO NOT INSTALL INSTALLATION ANCHORS INTO MORTAR JOINTS. EDGE DISTANCE IS MEASURED FROM FREE EDGE OF BLOCK OR EDGE OF MORTAR JOINT INTO FACE SHELL OF BLOCK.
- INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS, AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BY THE ANCHOR MANUFACTURER.
- INSTALLATION ANCHOR CAPACITIES FOR PRODUCTS HEREIN ARE BASED ON SUBSTRATE MATERIALS WITH THE FOLLOWING PROPERTIES:
 - WOOD - MINIMUM SPECIFIC GRAVITY OF 0.55.
 - CONCRETE - MINIMUM COMPRESSIVE STRENGTH OF 3000 PSI.
 - MASONRY - UNIT STRENGTH CONFORMS TO ASTM C-90 WITH MINIMUM COMPRESSIVE STRENGTH OF 2000 PSI AND GROUT CONFORMS TO ASTM C476, MINIMUM GROUT COMPRESSIVE STRENGTH OF 2000 PSI.
 - STEEL - MINIMUM YIELD STRENGTH OF 33 KSI. MINIMUM 18 GA. WALL THICKNESS.
 - ALUMINUM - MINIMUM 1/8 INCH THICK, 6063-T5 ALUMINUM.
- INSTALLATION SHALL FOLLOW MANUFACTURERS RECOMMENDATIONS FOR SEALING WINDOWS AND ACCESSORY ITEMS.

GENERAL NOTES:

- THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH THE CURRENT FLORIDA BUILDING CODE (FBC), **EXCLUDING** HVHZ AND HAS BEEN EVALUATED ACCORDING TO THE FOLLOWING:
 - AAMA/WDMA/CSA 101/I.S.2/A440-17
 - ASTM E1886-19
 - ASTM E1996-20
 - ASTM E330-14
 - ASTM E331-00(2009)
- ADEQUACY OF THE EXISTING STRUCTURAL CONCRETE/MASONRY, 2X FRAMING AND METAL STUD FRAMING AS A MAIN WIND FORCE RESISTING SYSTEM CAPABLE OF WITHSTANDING AND TRANSFERRING APPLIED PRODUCT LOADS TO THE FOUNDATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
- 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO THE STRUCTURE. BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
- THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.
- APPROVED IMPACT PROTECTIVE SYSTEM **IS NOT REQUIRED** ON THIS PRODUCT IN WIND ZONE 3 OR LESS.
- APPROVED IMPACT PROTECTIVE SYSTEM **IS REQUIRED** ON THIS PRODUCT IN WIND ZONE 4.
- WINDOW FRAME MATERIAL: ALUMINUM 6063-T6
- DISSIMILAR METALS INCLUDING FASTENERS THAT MAY COME INTO CONTACT WITH ALUMINUM UNIT FRAMING SHALL BE PROTECTED IN ACCORDANCE WITH THE CURRENT FBC.
- GLASS MEETS THE REQUIREMENTS OF ASTM E 1300 GLASS CHARTS. SEE SHEET 3 FOR GLAZING DETAIL.

TABLE OF CONTENTS	
SHEET	SHEET DESCRIPTION
1	INSTALLATION & GENERAL NOTES
2	ELEVATION, ANCHOR LAYOUT, & DESIGN PRESSURE TABLE
3	GLAZING DETAIL AND GLASS CAPACITY TABLE
4	VERTICAL SECTIONS
5	HORIZONTAL SECTIONS
6	BILL OF MATERIALS AND COMPONENTS

DESIGN PRESSURE TABLE		
MAX. FRAME SIZE	MAX. DP	IMPACT RATING
34.25" X 58.25"	+60/-60 PSF	MISSILE LEVEL C

NOTES:

- MAXIMUM SIZE LISTED ABOVE IS AS-TESTED OVERALL SINGLE UNIT FRAME SIZE, SEE SHEET 2 FOR ALTERNATE APPROVED FRAME SIZES & HARDWARE OPTIONS.
- SEE SHEET 3 FOR DESIGN PRESSURES LIMITED BY GLASS SIZE AND FOR GLAZING DETAIL.
- MAXIMUM FRAME SQUARE FOOTAGE SHALL NOT EXCEED 13.85 SQ. FT.



2301 EAST VERNON AVE.
VERNON, CA 90058
PH: (323) 771-9819

TITLE:
SERIES T-200
CASEMENT WINDOW
(WZ3) (IMPACT)

INSTALLATION & GENERAL NOTES

PREPARED BY:
BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com

BUILDING DROPS

REMARKS	BY	DATE
2023 CODE CHANGE	MG	06/23

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

Digitally signed by Hermes F. Norero, P.E.
Reason: I am approving this document
Date: 2023.07.11 10:34:28 -02'00'

HERMES F. NORERO, P.E.
FLORIDA PROFESSIONAL ENGINEER
398 E. DANIA BEACH BLVD. # 338
DANIA BEACH, FL 33004
FBPE CERT. OF AUTHORIZATION No. 29578

FL #:
FL40953

DATE: **01.31.22**

DWG. BY:
SH


CHK. BY:
HN

SCALE: **NTS**


DWG. #: **ARC003**

SHEET:
1
OF 6

ELEVATION, ANCHOR LAYOUT, & DESIGN PRESSURE TABLE

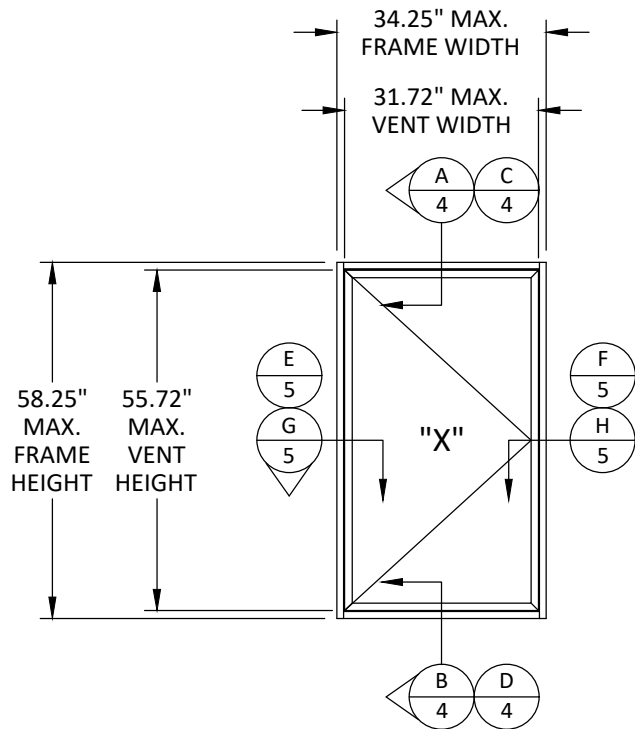

ELEVATION

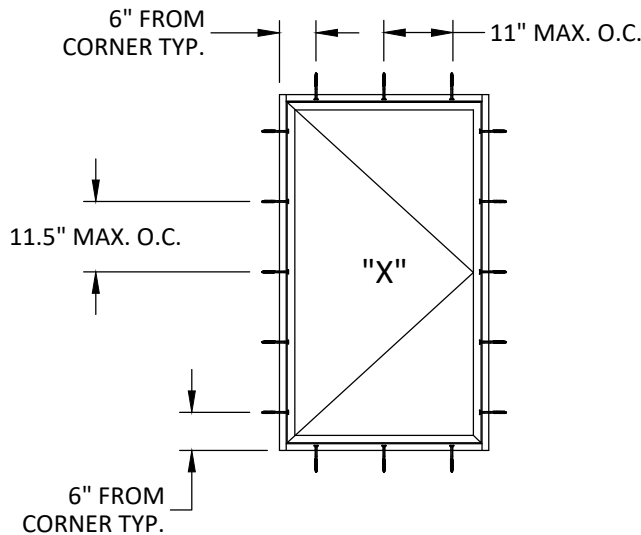

ANCHOR LAYOUT
THRU FRAME

DESIGN PRESSURE (PSF)			
NOMINAL DIMS.		"X" CONFIGURATION	
FRAME WIDTH 'in.'	FRAME HEIGHT 'in.'	EXT. (+)	INT. (-)
16.25	34.25	60.0	60.0
22.25		60.0	60.0
28.25		60.0	60.0
34.25		60.0	60.0
40.25		51.1	51.1
46.25		44.4	44.4
52.25	40.25	39.3	39.3
16.25		60.0	60.0
22.25		60.0	60.0
28.25		60.0	60.0
34.25		60.0	60.0
40.25		51.1	51.1
46.25		44.4	44.4
49.25		41.7	41.7
16.25	46.25	60.0	60.0
22.25		60.0	60.0
28.25		60.0	60.0
34.25		60.0	60.0
40.25		51.1	51.1
42.25		48.6	48.6

DESIGN PRESSURE (PSF)			
NOMINAL DIMS.		"X" CONFIGURATION	
FRAME WIDTH 'in.'	FRAME HEIGHT 'in.'	EXT. (+)	INT. (-)
16.25	52.25	60.0	60.0
22.25		60.0	60.0
28.25		60.0	60.0
34.25		60.0	60.0
37.25		55.2	55.2
16.25	58.25	60.0	60.0
22.25		60.0	60.0
28.25		60.0	60.0
34.25		60.0	60.0
16.25	64.25	60.0	60.0
22.25		60.0	60.0
28.25		60.0	60.0
30.25		60.0	60.0
16.25	70.25	60.0	60.0
22.25		60.0	60.0
28.25		60.0	60.0

HARDWARE SCHEDULE

HARDWARE TYPE	DESCRIPTION
HURRICANE CAM HANDLES	THREE CAM HANDLES 12" FROM EACH INTERIOR CORNER AND CENTERED. SECURED WITH TWO (2) #10 X 1/2" PFH SCREWS AND A 3/16" ALUMINUM SPACER.
HURRICANE STRIKES	THREE STRIKES 12" FROM EACH INTERIOR CORNER AND CENTERED. SECURED WITH TWO (2) #10 X 3/8" PFH SCREWS.
TRUTH EGRESS HINGES	TWO (2) HINGES SECURED TO THE FRAME WITH THREE (3) #10 X 1/2" PRH SCREWS AND TO THE SASH RAILS WITH #10 X 3/8" PRH SCREWS.



2301 EAST VERNON AVE.
VERNON, CA 90058
PH: (323) 771-9819

TITLE: SERIES T-200
CASEMENT WINDOW
(WZ3) (IMPACT)
ELEVATION, ANCHOR LAYOUT,
& DESIGN PRESSURE TABLE

PREPARED BY:
BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com

REMARKS	BY	DATE
2023 CODE CHANGE	MG	06/23

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

HERMES F. NORERO, P.E.
FLORIDA PROFESSIONAL ENGINEER
No. 73778
STATE OF FLORIDA
398 E. DANIA BEACH BLVD., # 338
DANIA BEACH, FL 33004
FBPE CERT. OF AUTHORIZATION No. 29578

FL #: FL40953

DATE: 01.31.22

DWG. BY: SH

CHK. BY: HN


SCALE: NTS

DWG. #: ARC003

SHEET:

GLAZING DETAIL & GLASS CAPACITY TABLE

GLASS LOAD CAPACITY (PSF)		
DAYLIGHT OPENING (IN)		GLASS TYPE 1
DLO WIDTH	DLO HEIGHT	EXT. (+) INT. (-)
17.25	35.25	60.0
23.25		60.0
29.25		60.0
35.25		49.8
41.25		53.9
43.25	41.25	49.7
17.25		60.0
23.25		60.0
29.25		60.0
35.25		49.8
37.25		47.1
17.25	47.25	60.0
23.25		60.0
29.25		60.0
32.25		54.4
17.25		60.0
23.25	53.25	60.0
29.25		60.0
17.25		60.0
23.25	59.25	60.0
26.25		60.0
17.25		60.0
23.25	65.25	60.0

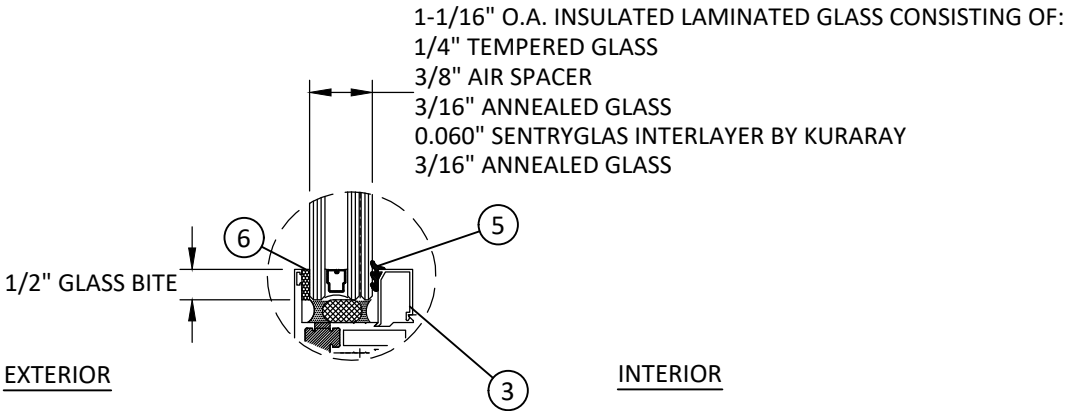

- GLAZING NOTES:
- GLASS TYPE COMPLIES WITH ASTM E1300 REQUIREMENTS .
 - WHERE SAFETY GLAZING IS REQUIRED SACRIFICIAL LITE SHALL USE 1/4" TEMPERED GLASS.
 - SETTING BLOCKS TO BE LOCATED AT 1/4 SPAN LENGTH FOR GLASS WIDER THAN 36" AS PER FBC CHAPTER 24.
 - SETTING BLOCK DUROMETER HARDNESS OF 70-90 (SHORE A) AS REFERENCED IN FBC CHAPTER 24.



2301 EAST VERNON AVE.
VERNON, CA 90058
PH: (323) 771-9819


TITLE:
SERIES T-200
CASEMENT WINDOW
(WZ3) (IMPACT)
GLAZING DETAIL &
GLASS CAPACITY TABLE

PREPARED BY:
BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com

BUILDING DROPS

REMARKS	BY	DATE
2023 CODE CHANGE	MG	06/23

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

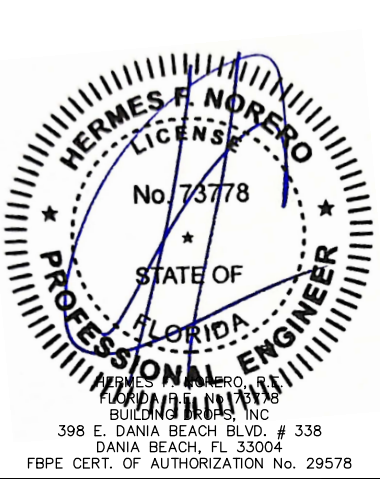

FL #:
FL40953

DATE: **01.31.22**

DWG. BY:
SH

CHK. BY:
HN


SCALE: **NTS**

DWG. #: **ARC003**


SHEET:
3
OF 6

6/12/2023 12:54 PM


z:\projects\arcadia - inc\2023 code change\dwgs\140953\arc003.dwg

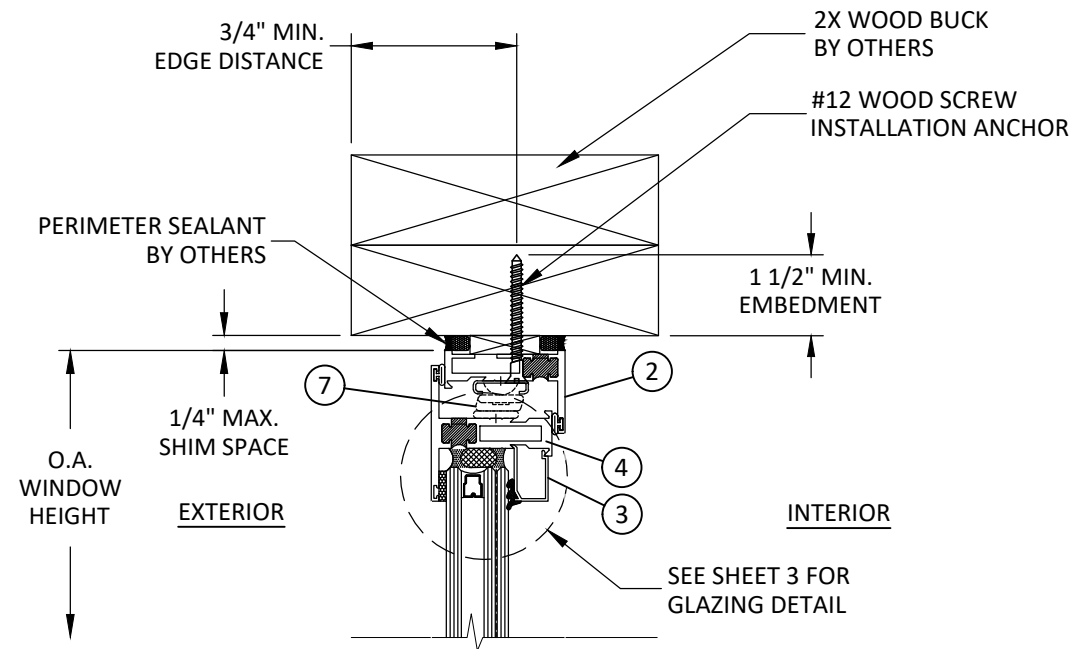


A
4 VERTICAL SECTION
2X WOOD BUCK

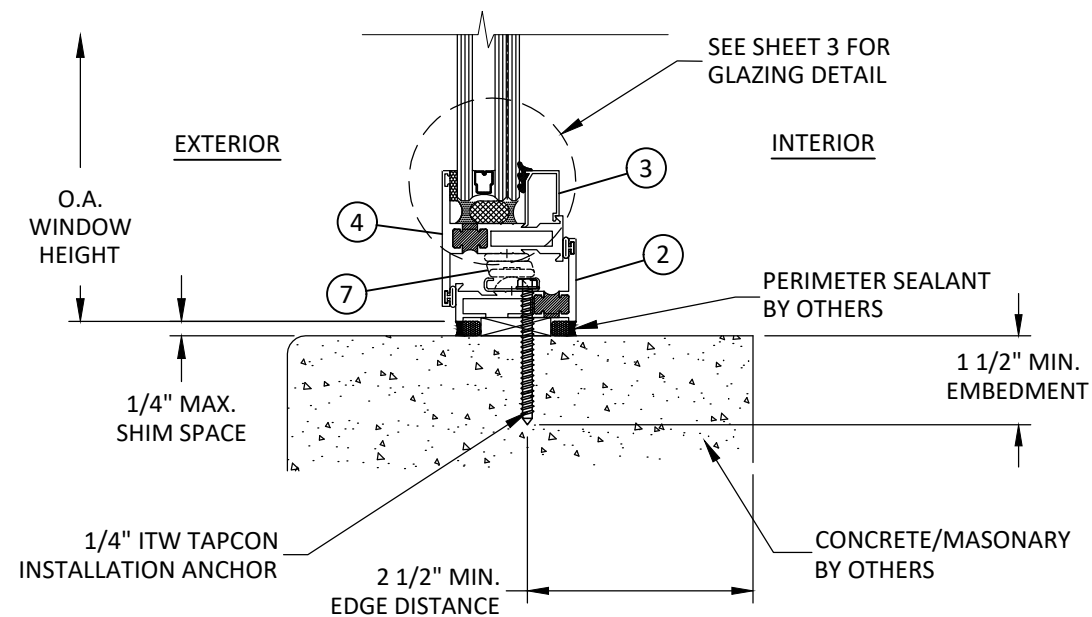

B
4 VERTICAL SECTION
CONCRETE/MASONRY

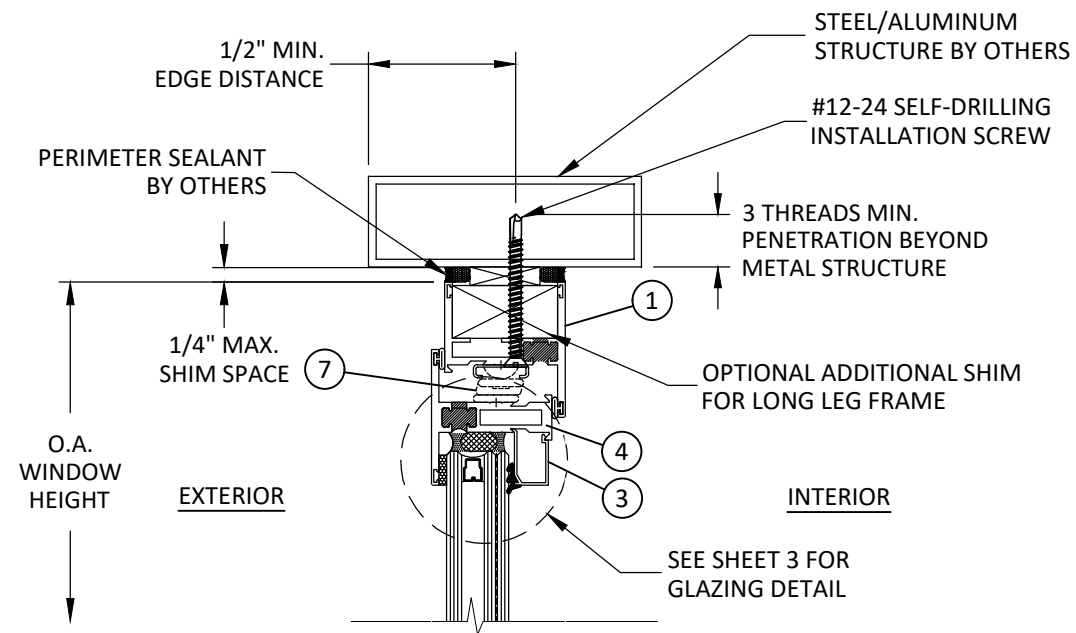

C
4 VERTICAL SECTION
STEEL/ALUMINUM STRUCTURE

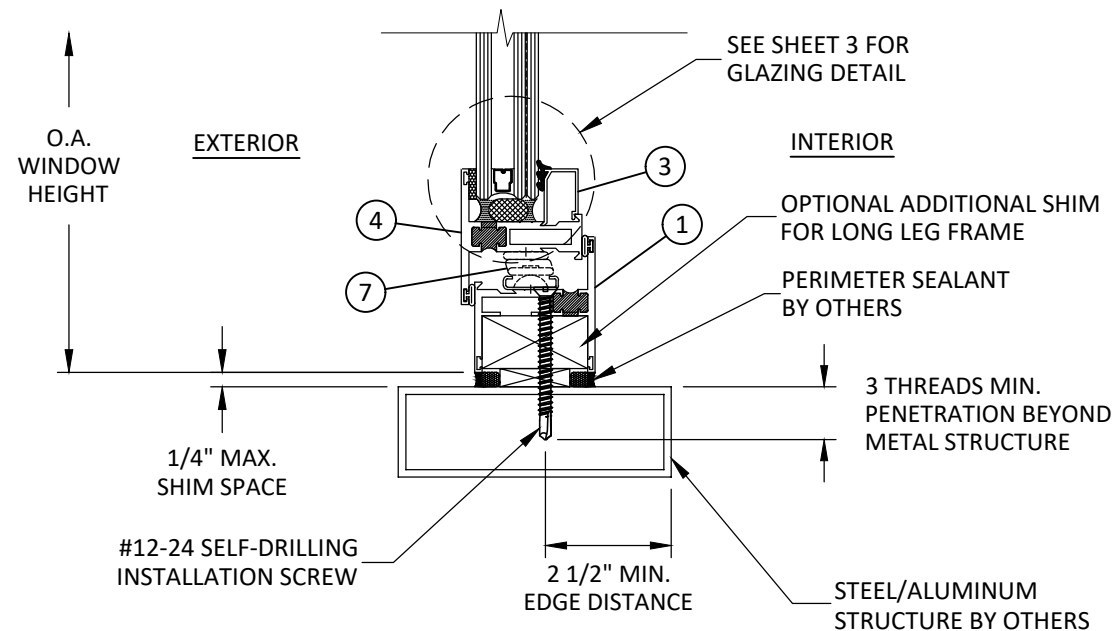

D
4 VERTICAL SECTION
STEEL/ALUMINUM STRUCTURE



2301 EAST VERNON AVE.
VERNON, CA 90058
PH: (323) 771-9819

TITLE: SERIES T-200
CASEMENT WINDOW
(WZ3) (IMPACT)

VERTICAL SECTIONS

PREPARED BY: BUILDING DROPS, INC.

398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004

PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com




REMARKS	BY	DATE
2023 CODE CHANGE	MG	06/23

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.




FL #:	FL40953
DATE:	01.31.22
DWG. BY:	SH
CHK. BY:	HN
SCALE:	NTS
DWG. #:	ARC003
SHEET:	4


6/12/2023 12:55 PM
z:\projects\arcadia_in\cc-23-0581 - fbc 2023 code change.dwg
z:\projects\arcadia_in\cc-23-0581 - fbc 2023 code change.dwg

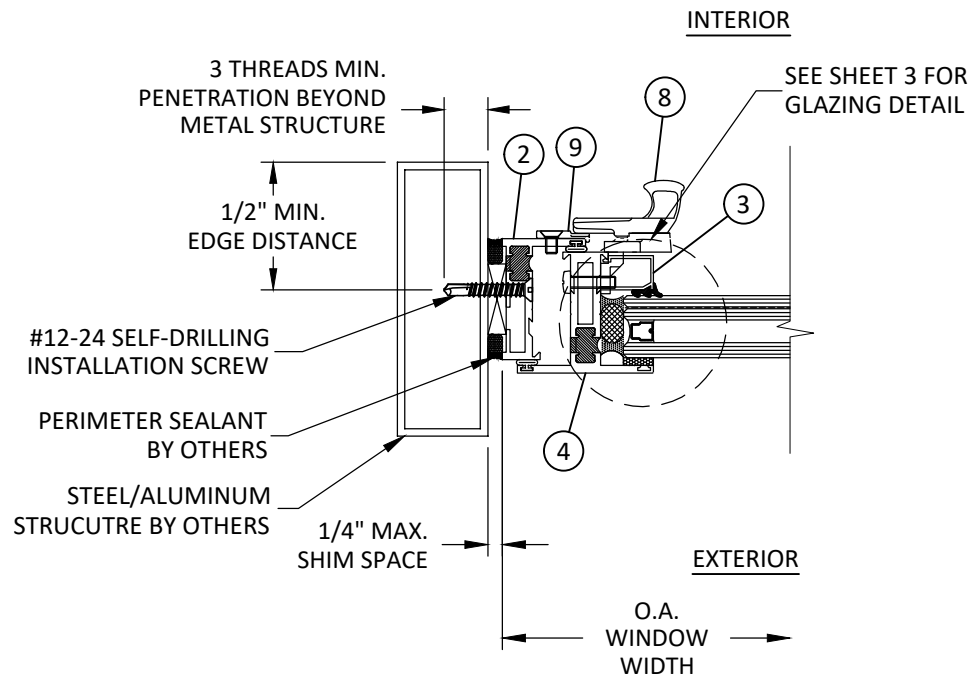


E
5 HORIZONTAL SECTION
STEEL/ALUMINUM STRUCTURE

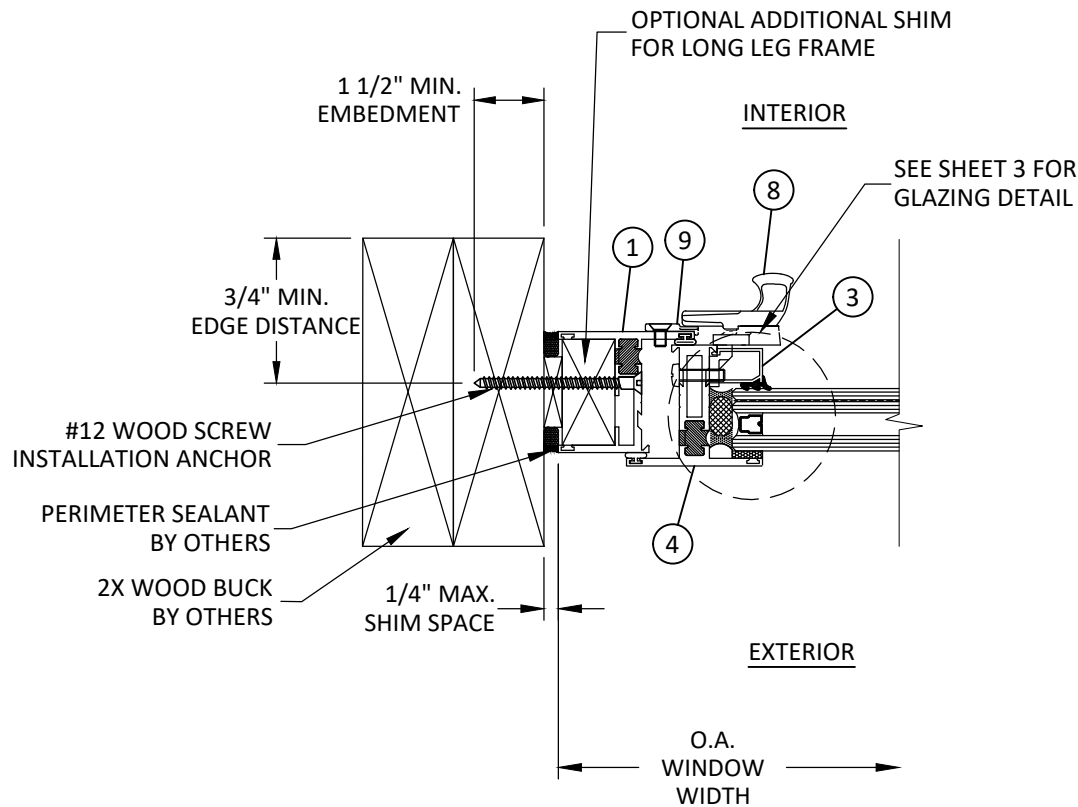

G
5 HORIZONTAL SECTION
2X WOOD BUCK

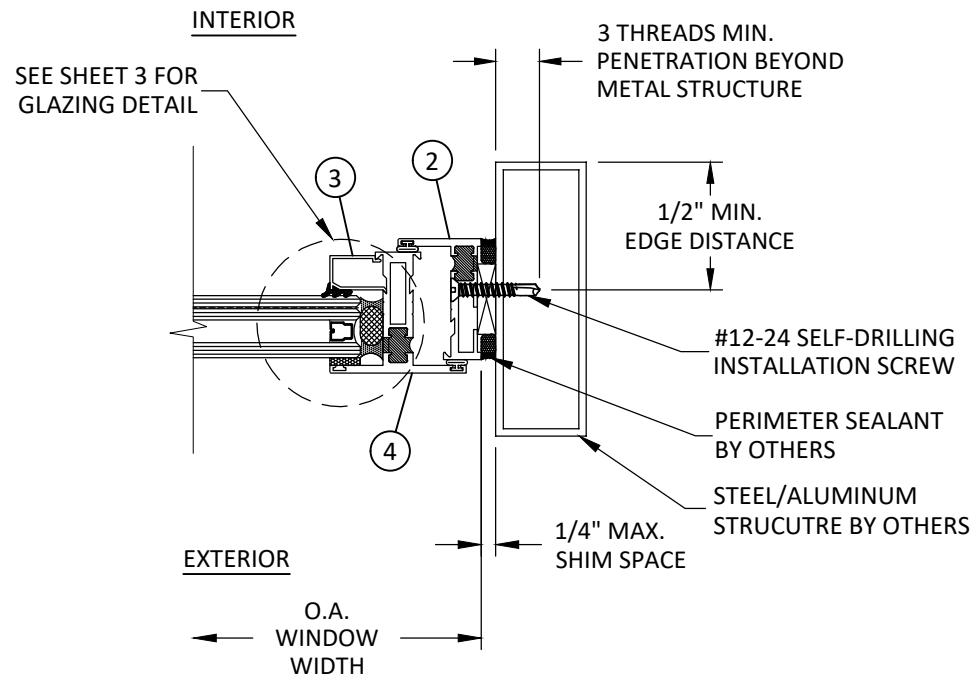

F
5 HORIZONTAL SECTION
STEEL/ALUMINUM STRUCTURE

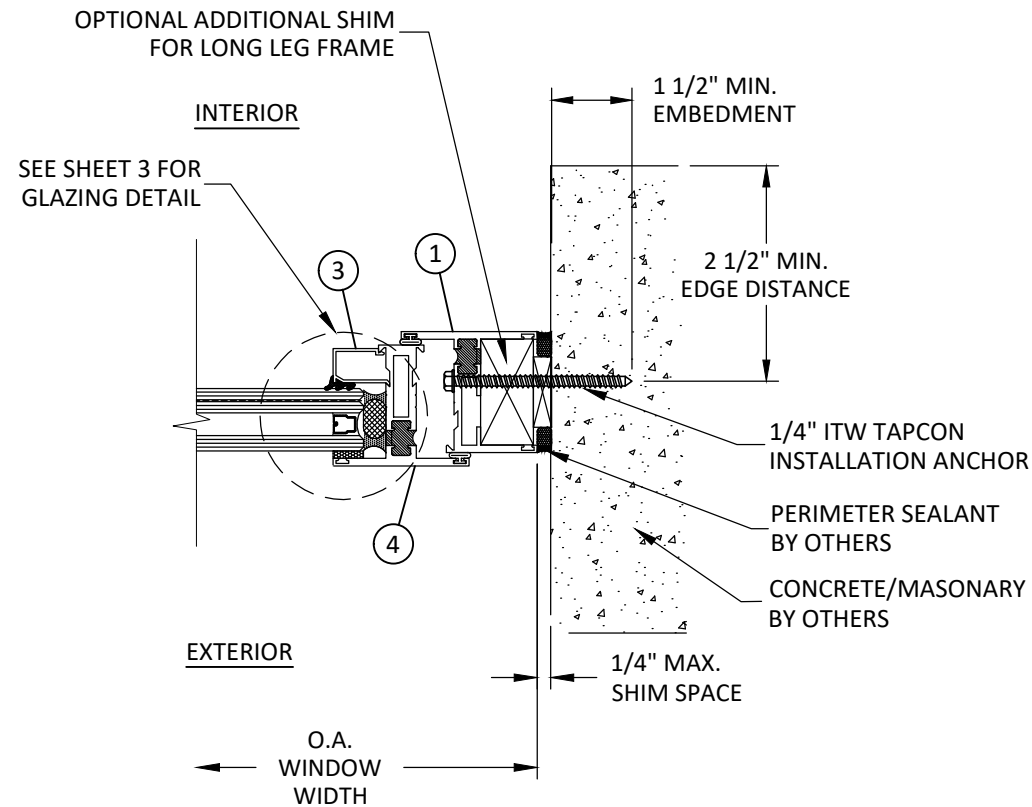

H
5 HORIZONTAL SECTION
CONCRETE/MASONRY



2301 EAST VERNON AVE.
VERNON, CA 90058
PH: (323) 771-9819

TITLE: SERIES T-200
CASEMENT WINDOW
(WZ3) (IMPACT)

HORIZONTAL SECTIONS


PREPARED BY: BUILDING DROPS, INC.

398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE
2023 CODE CHANGE	MG	06/23


THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

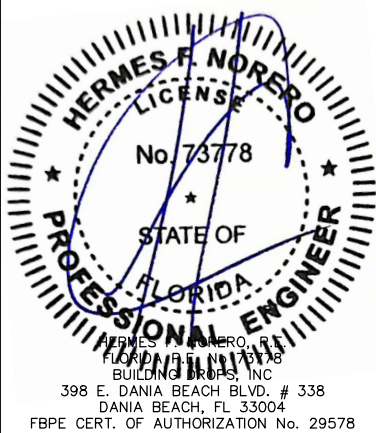


FL #:	FL40953
DATE:	01.31.22
DWG. BY:	SH
CHK. BY:	HN
SCALE:	NTS
DWG. #:	ARC003
SHEET:	5

6/12/2023 12:55 PM
z:\projects\arcadia_in\cc-23-0581 - fbc 2023 code change\dwgs\140953\arc003.dwg


BILL OF MATERIALS				
ITEM	PART No.	DESCRIPTION	MATERIAL	MANUF./SUPPLIER/REMARKS
1	WTH-01	FRAME HEAD, SILL, & JAMB (LONG LEG)	6063-T6	ARCADIA INC.
2	WTH-02	FRAME HEAD, SILL, & JAMB (SHORT LEG)	6063-T6	ARCADIA INC.
3	WWB-03	GLAZING STOP	6063-T6	ARCADIA INC.
4	WTT-02	SASH RAIL	6063-T6	ARCADIA INC.
5	E260	GLAZING GASKET	E.P.D.M	VIP RUBBER
6	V994	GLAZING TAPE	-	NORTON
7	331	EGRESS HINGE	STAINLESS STEEL	TRUTH HARDWARE
8	162-001	CAM LOCK	STAINLESS STEEL	BRONZE CRAFT
9	282-055	LOCK STRIKE	STAINLESS STEEL	BRONZE CRAFT
10	S5051-5	WEATHER-STRIP	-	VIP RUBBER

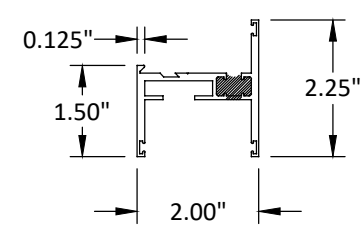


1 FRAME (LONG LEG)
6063-T6

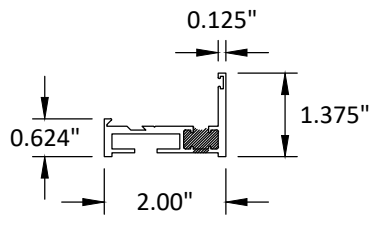

2 FRAME (SHORT LEG)
6063-T6



3 GLAZING STOP
6063-T6



4 SASH RAIL
6063-T6



2301 EAST VERNON AVE.
VERNON, CA 90058
PH: (323) 771-9819

TITLE: SERIES T-200
CASEMENT WINDOW
(WZ3) (IMPACT)

BILL OF MATERIALS
AND COMPONENTS

PREPARED BY:

BUILDING DROPS, INC.

398 E. DANIA BEACH BLVD., STE. 338

DANIA BEACH, FL 33004

PH: (954)399-8478

FAX: (954)744-4738

WEB: www.buildingdrops.com



REMARKS

BY


DATE

2023 CODE CHANGE

MG

06/23

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

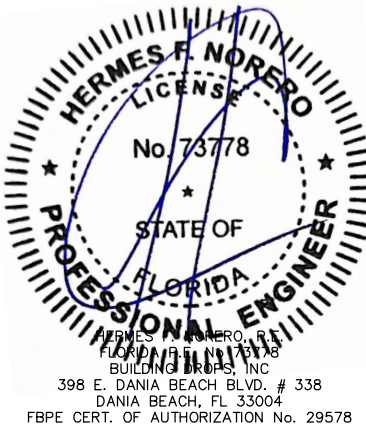

FL #:

FL40953

DATE: 01.31.22

DWG. BY:
SH

CHK. BY:
HN

SCALE: NTS

DWG. #: ARC003

SHEET:

6

OF 6