



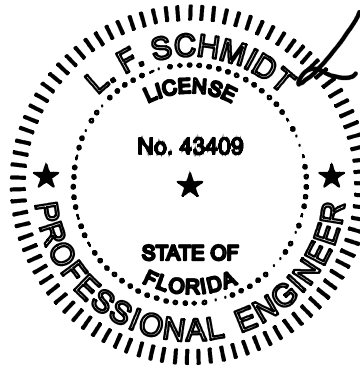

Digitally signed by Lyndon F Schmidt
Date: 2023.08.21 11:01:04 -04'00'

This item has been digitally signed and sealed by
L. F. Schmidt, P.E. on the date adjacent to the seal.
Printed copies of this document are not
considered signed and sealed and the signature
must be verified on any electronic copies.


THIS PRODUCT APPROVAL IS VALID
ONLY FOR THE STATE OF FLORIDA

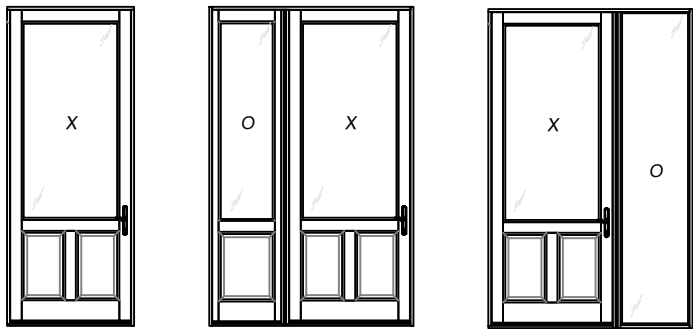

GLAZED WOOD ENTRY DOOR SINGLES w/ or w/out SIDELITE(S) INSWING "IMPACT"

GENERAL NOTES

1. This product has been evaluated and is in compliance with the 8th Edition (2023) Florida Building Code (FBC) structural requirements excluding the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection, this product complies with FBC Sections 1609.1.2 & R301.2.1.2 and does not require an impact resistant covering. This product meets missile level "D" and excludes Wind Zone 4 as defined in ASTM E1996 & FBC Sections 1609.1.2.2 & R301.2.1.2.1.
4. For 2x stud framing construction, anchoring of these units shall be the same as that shown for 2x buck masonry construction.
5. Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.

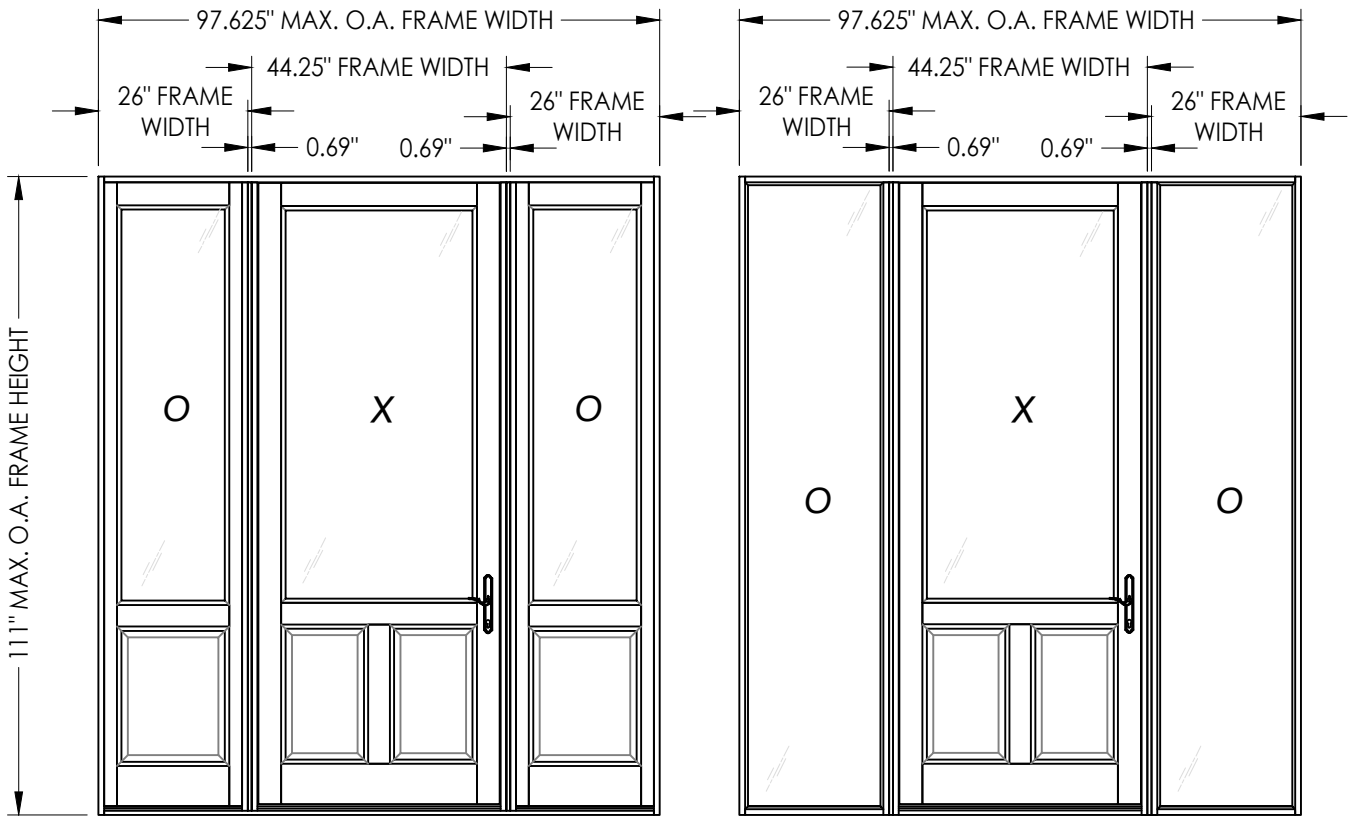

SHOWN w/ 3/4 LITE SIDELITES

SHOWN w/ DIRECT SET SIDELITES

TABLE OF CONTENTS	
SHEET #	DESCRIPTION
1	Typical Elevations, Design Pressures & General Notes
2	Door Panel Details
3	Sidelite Panel Details
4	Elevations
5	Horizontal & Vertical Cross Sections (2X Buck)
6	Horizontal & Vertical Cross Sections (1X Buck)
7	Horizontal & Vertical Cross Sections (Direct to Masonry)
8	Horizontal & Vertical Cross Sections
9	Buck Anchoring
10	Frame Anchoring & Hardware Details
11	Bill of Materials & Components

CONFIGURATION	MAX. FRAME DIMENSION	DESIGN PRESSURE (PSF) INSWING	
		POSITIVE	NEGATIVE
X	44.25" x 111.0"	+60.0	-65.0
XO, OX	70.94" x 111.0"	+60.0	-65.0
OXO	97.625" x 111.0"	+60.0	-65.0

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

MW MILLWORKS
WOOD DOOR

PART OR ASSEMBLY:
TYPICAL ELEVATION, DESIGN
PRESSURES & GENERAL NOTES

DATE: 8/08/22

SCALE: N.T.S.

DWG. BY: LFS

CHK. BY: RW

DRAWING NO.: FL-41636.1

SHEET 1 OF 11

1 8/21/23 UPDATE TO 8TH ED. (2023) FBC



NO. DATE

REVISIONS



Building Consultants, Inc.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

© 2022 R.W. BUILDING CONSULTANTS INC.


Z:\2023 FBC Drawings\Wood-On dba MW Millworks\FL-41636 R1\FL-41636.1-2.dwg

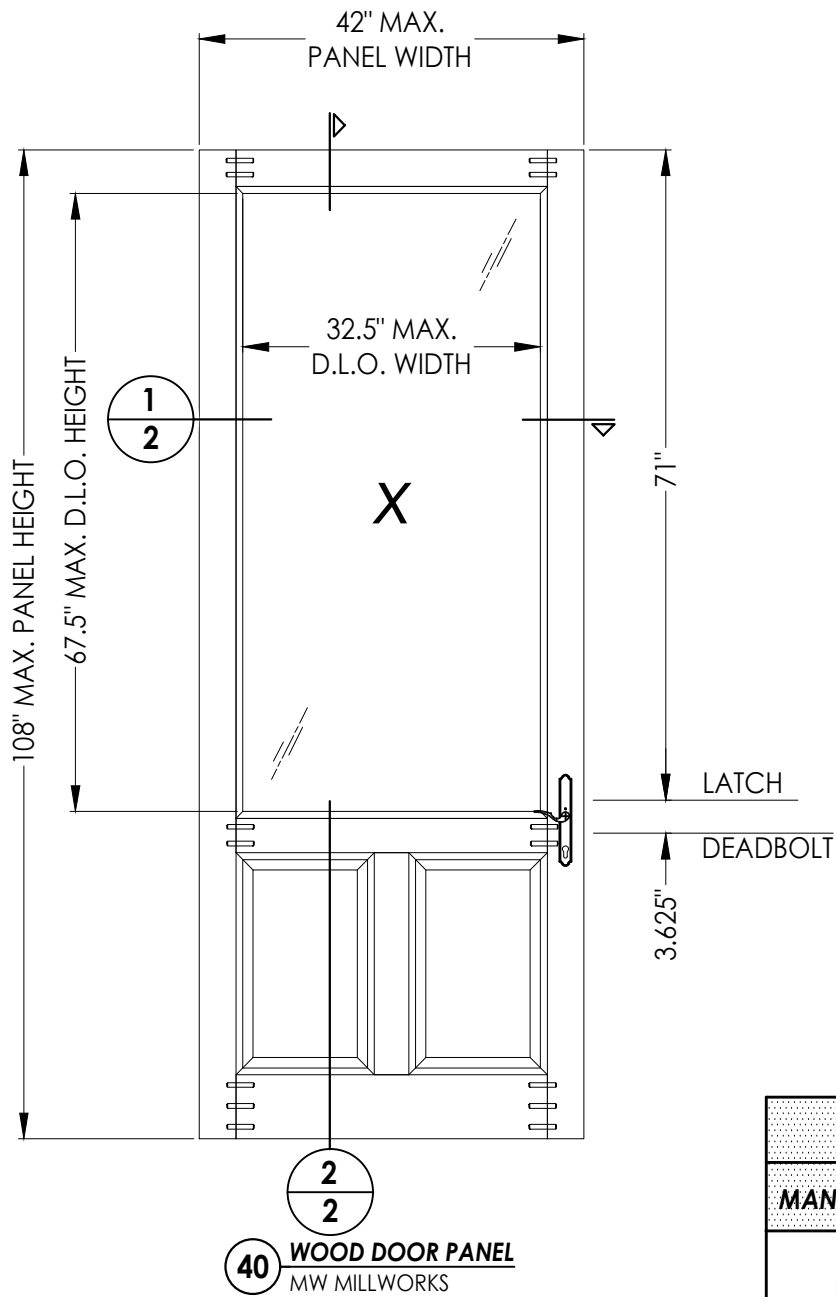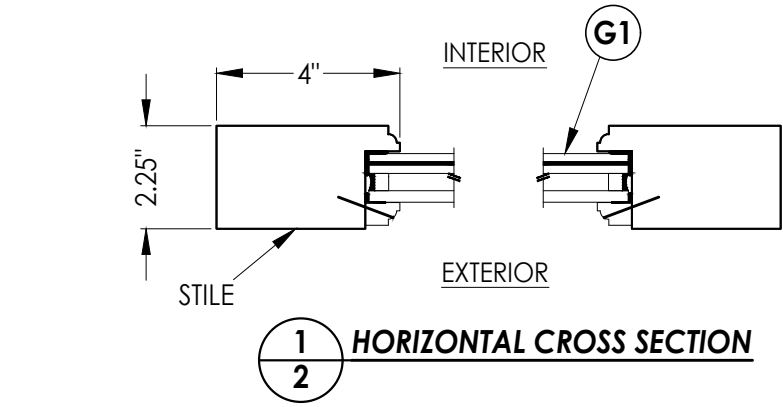

WOOD DOOR COMPONENTS:
SAPEL: (G = 0.60)

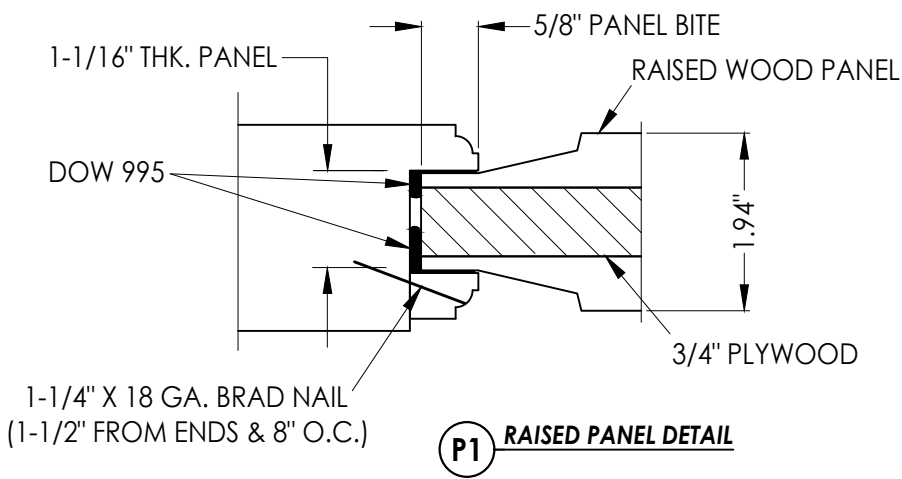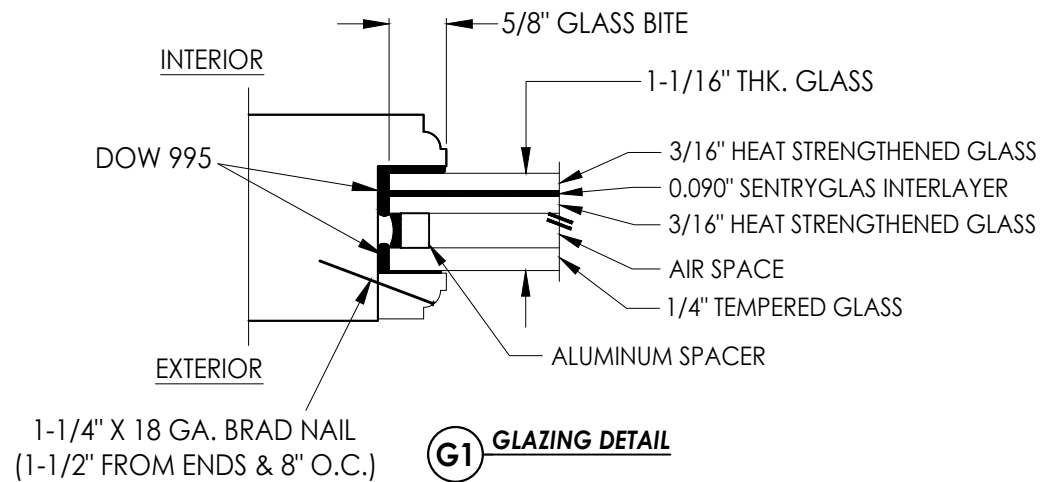

HARDWARE TABLE	
MANUFACTURER	MODEL
HOPPE	HLS 9000 SERIES MULTIPOINT HARDWARE: ACTIVE: TONGUE/SHOOTBOLT INACTIVE: SHOOTBOLT

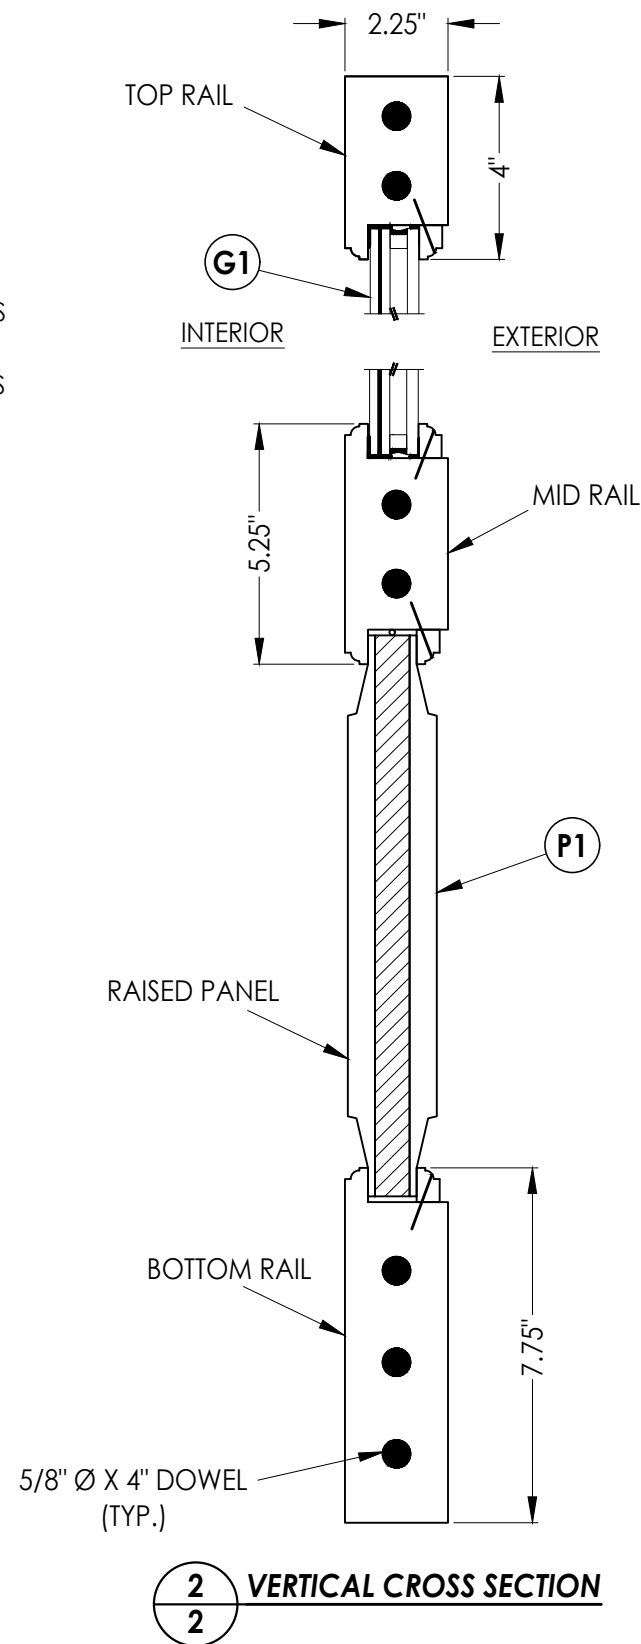

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: MW MILLWORKS
WOOD DOOR

PART OR ASSEMBLY:
DOOR PANEL DETAILS

NO.	DATE	REVISIONS	
		LFS	BY
1	8/21/23	UPDATE TO 8TH ED. (2023)	FBC

DATE: 8/08/22

SCALE: N.T.S.



DWG. BY: LFS

CHK. BY: RW





DRAWING NO.: FL-41636.1

SHEET 2 OF 11

Z:\2023 FBC Drawings\Wood-On dba MW Millworks\FL-41636 R1\FL-41636.1-2.dwg

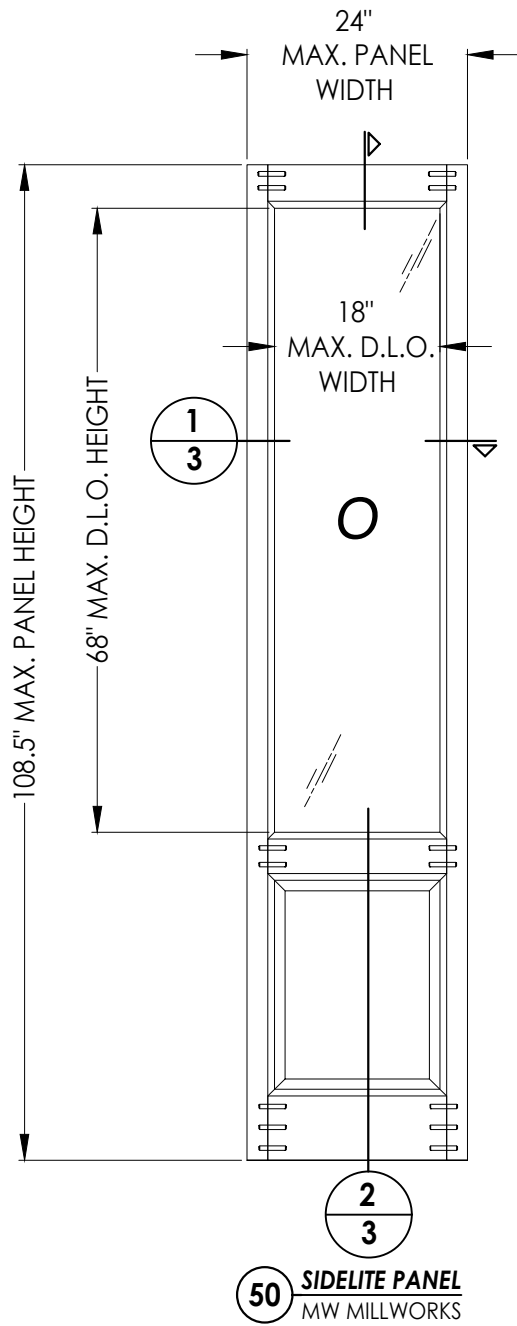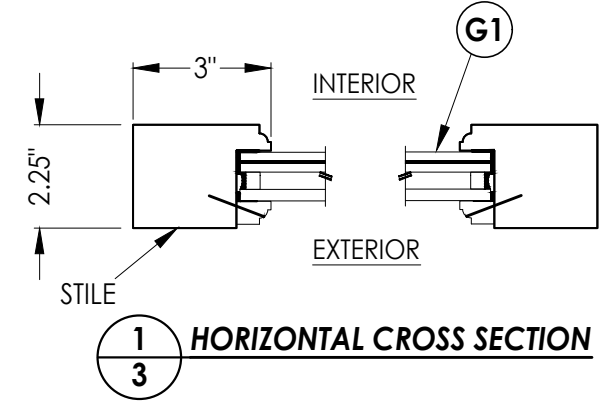

WOOD SIDELITE COMPONENTS:
SAPELE: (G = 0.60)

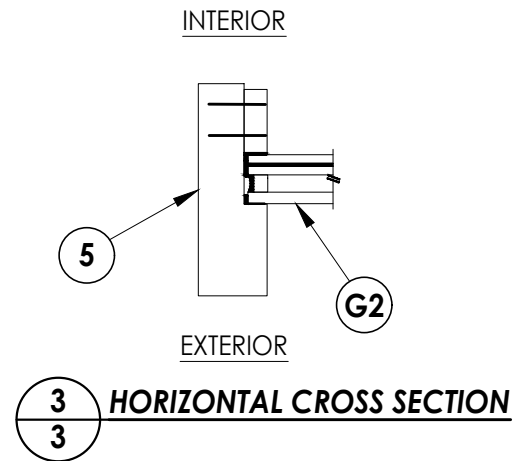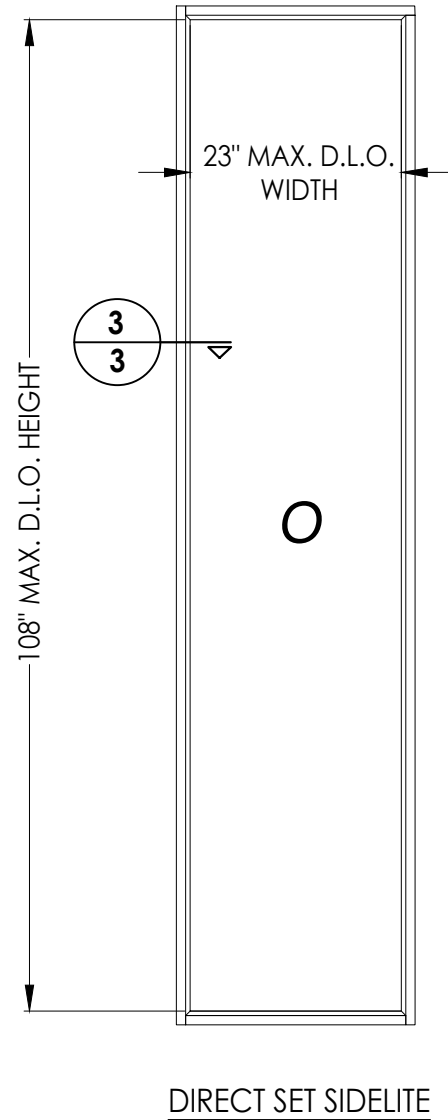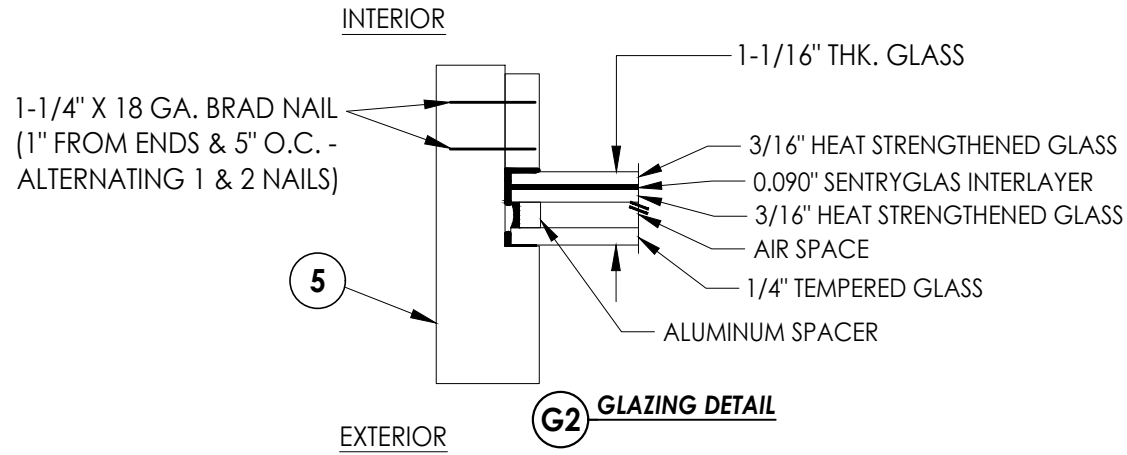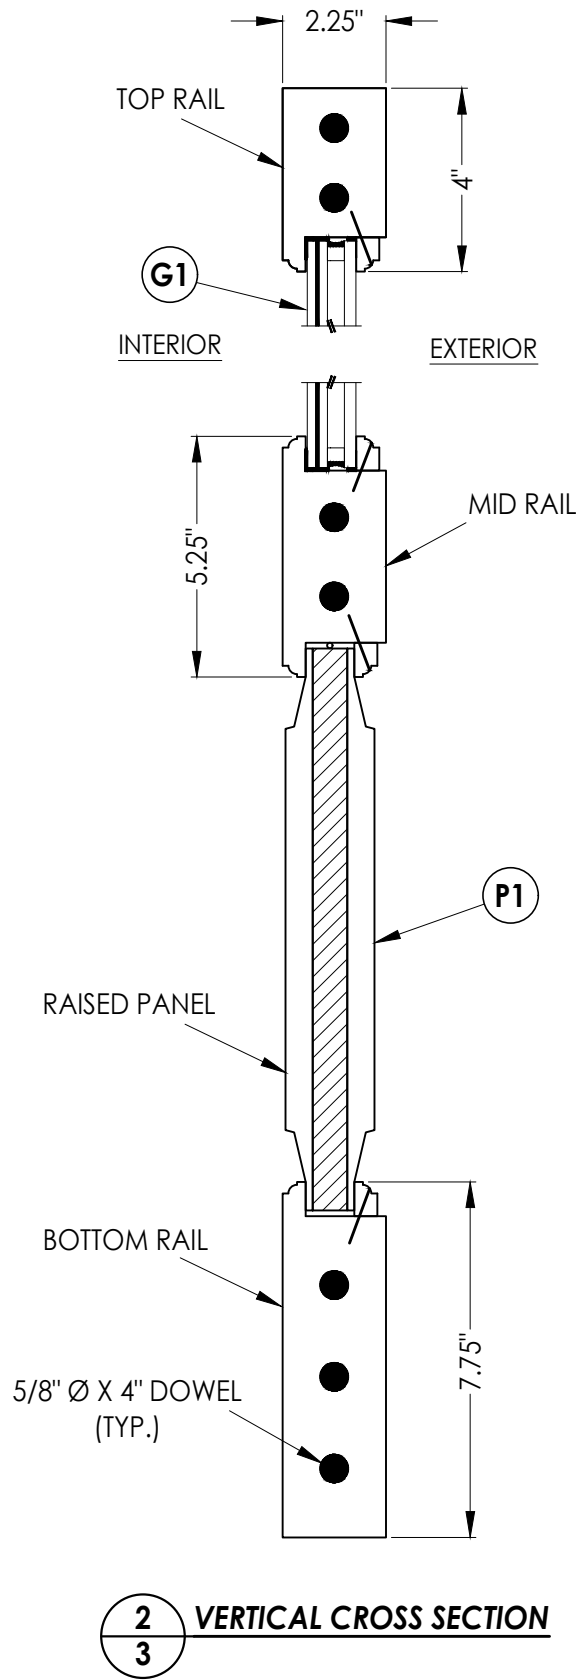

DATE: 8/08/22

SCALE: N.T.S.

DWG. BY: LFS

CHK. BY: RW

DRAWING NO.: FL-41636.1

SHEET 3 OF 11

NO.	DATE	REVISIONS
1	8/21/23	UPDATE TO 8TH ED. (2023) FBC
LFS		
BY		


PRODUCT:	MW MILLWORKS WOOD DOOR
PART OR ASSEMBLY:	SIDELITE PANEL DETAILS

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW

BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

Z:\2023 FBC Drawings\Wood-On dba MW Millworks\FL-41636 R1\FL-41636.1-2.dwg

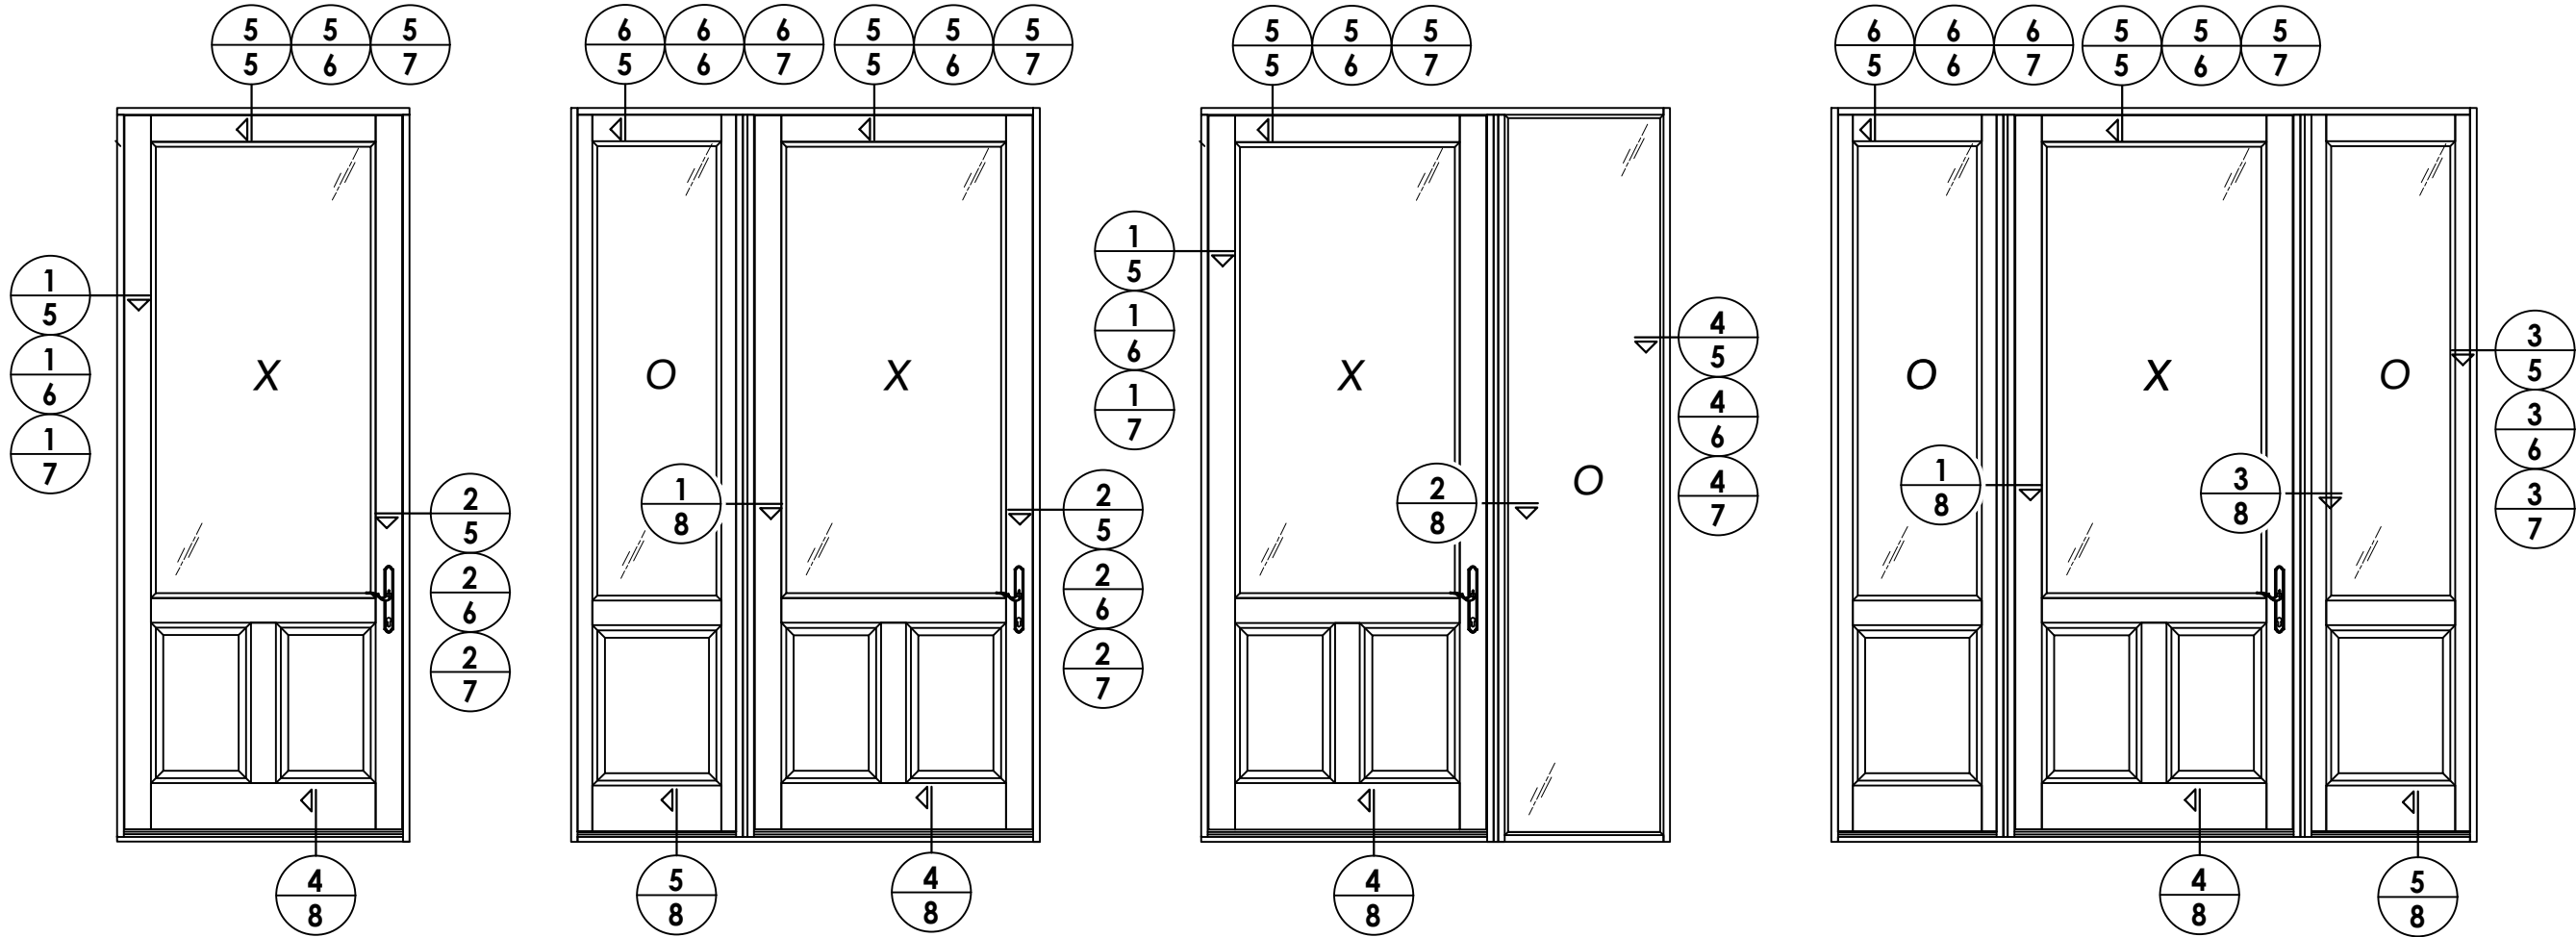

																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					</
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----


PRODUCT: MW MILLWORKS WOOD DOOR	
PART OR ASSEMBLY: ELEVATIONS	

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409


RW

BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


Z:\2023 FBC Drawings\Wood-On dba MW Millworks\FL-41636 R1\FL-41636.1-2.dwg

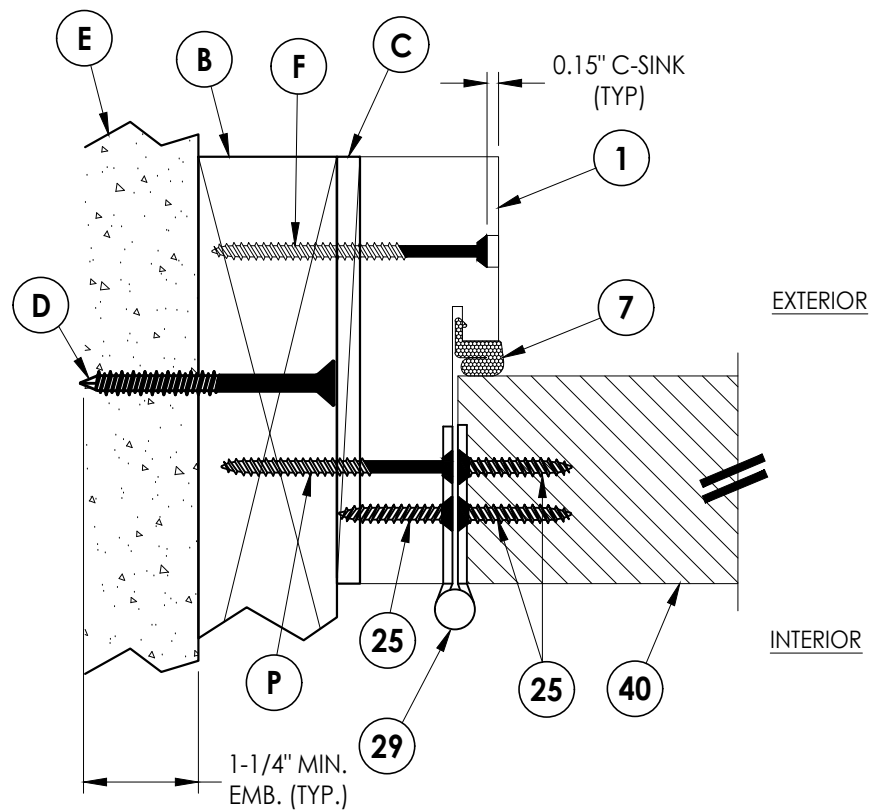


1
5 **HORIZONTAL CROSS SECTION**
2X Buck Construction

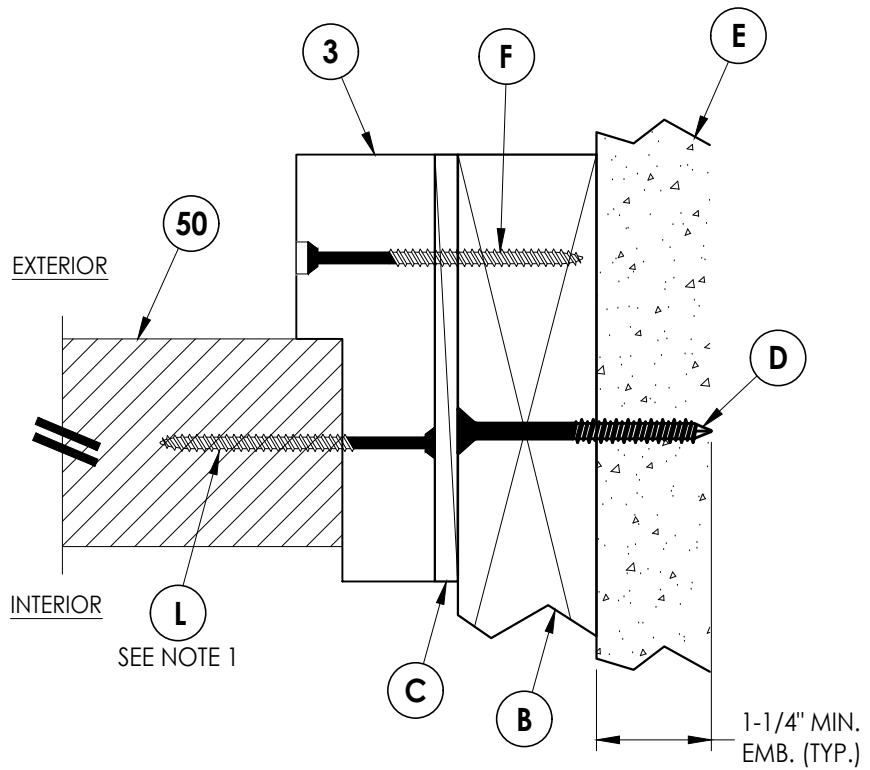


3
5 **HORIZONTAL CROSS SECTION**
2X Buck Construction

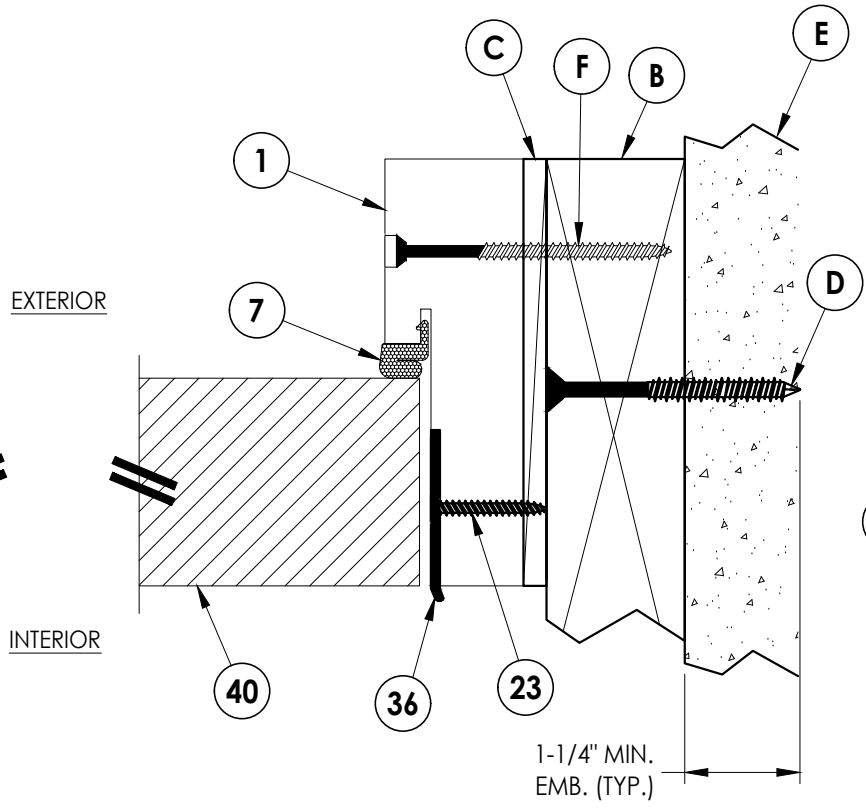


2
5 **HORIZONTAL CROSS SECTION**
2X Buck Construction

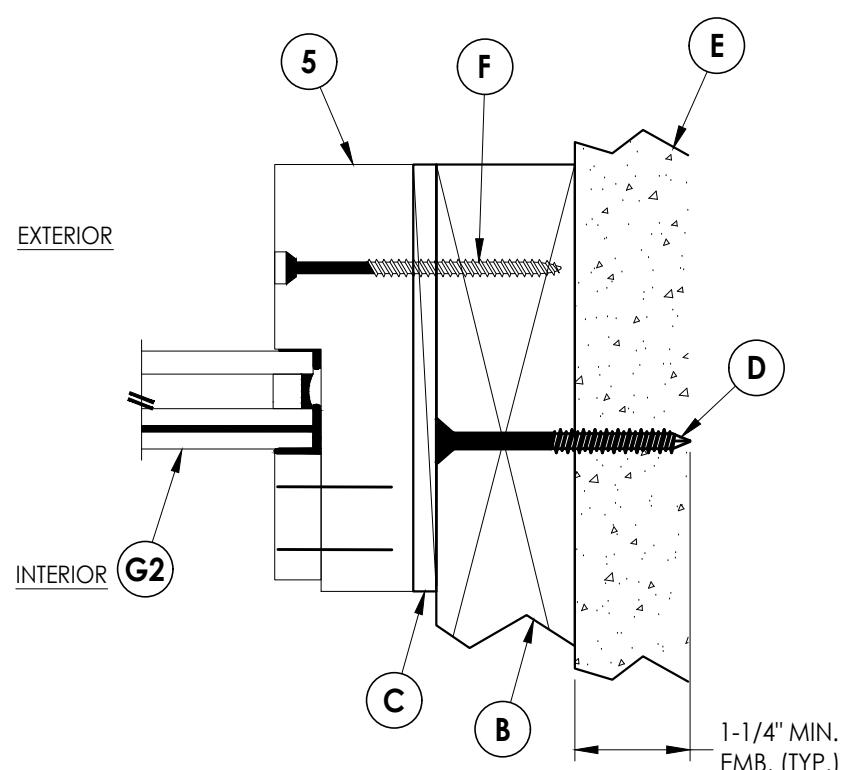

4
5 **HORIZONTAL CROSS SECTION**
2X Buck Construction

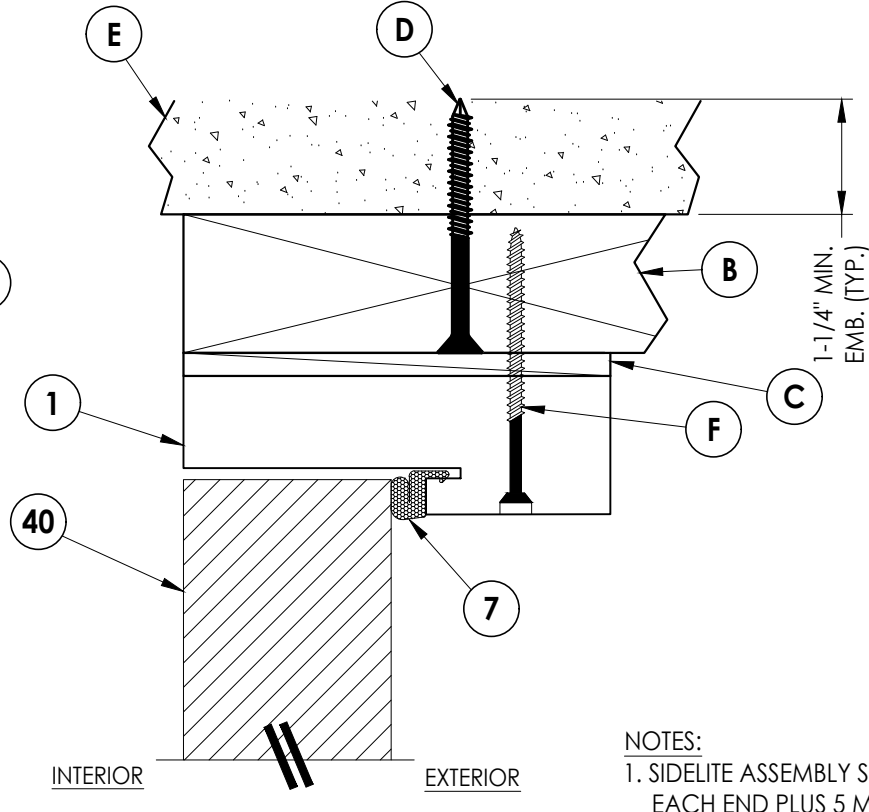

5
5 **VERTICAL CROSS SECTION**
2X Buck Construction

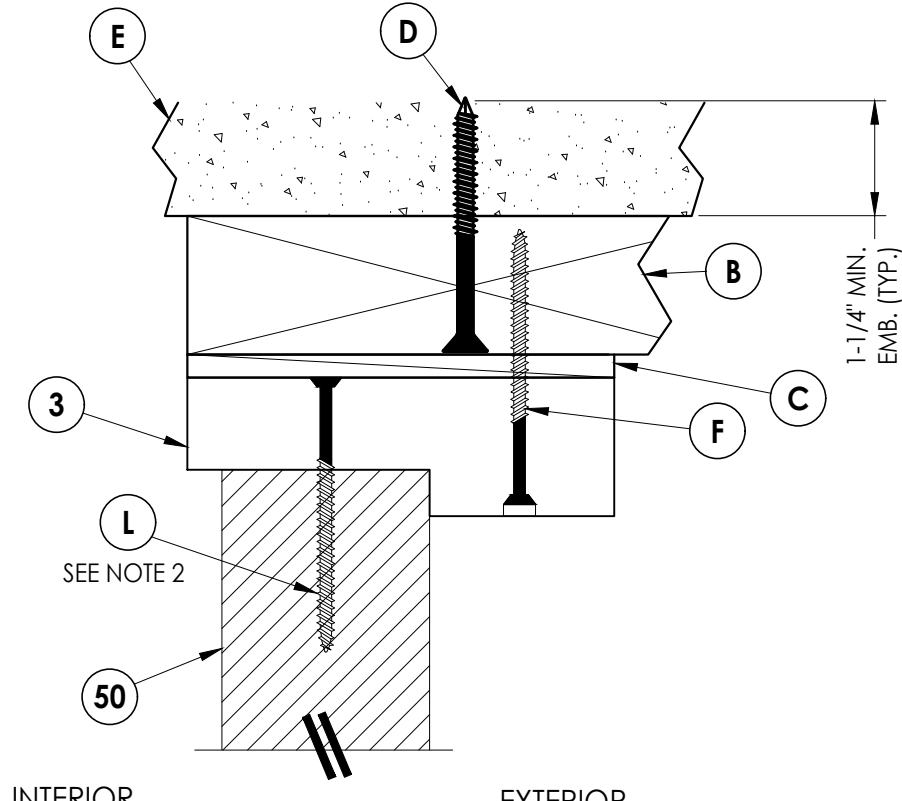


6
5 **VERTICAL CROSS SECTION**
2X Buck Construction


- NOTES:
1. SIDELITE ASSEMBLY SCREWS LOCATED 6" FROM EACH END PLUS 5 MORE EQUALLY SPACED (7 TOTAL ALONG JAMB).
 2. SIDELITE ASSEMBLY SCREWS LOCATED 6" FROM EACH END (2 TOTAL ALONG HEAD).

Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409		BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813	
PRODUCT: MW MILLWORKS WOOD DOOR		PART OR ASSEMBLY: HORIZONTAL & VERTICAL CROSS SECTIONS (2X BUCK)	
	</		


Z:\2023 FBC Drawings\Wood-On dba MW Millworks\Wood-41636 R1\FL-41636.1-2.dwg

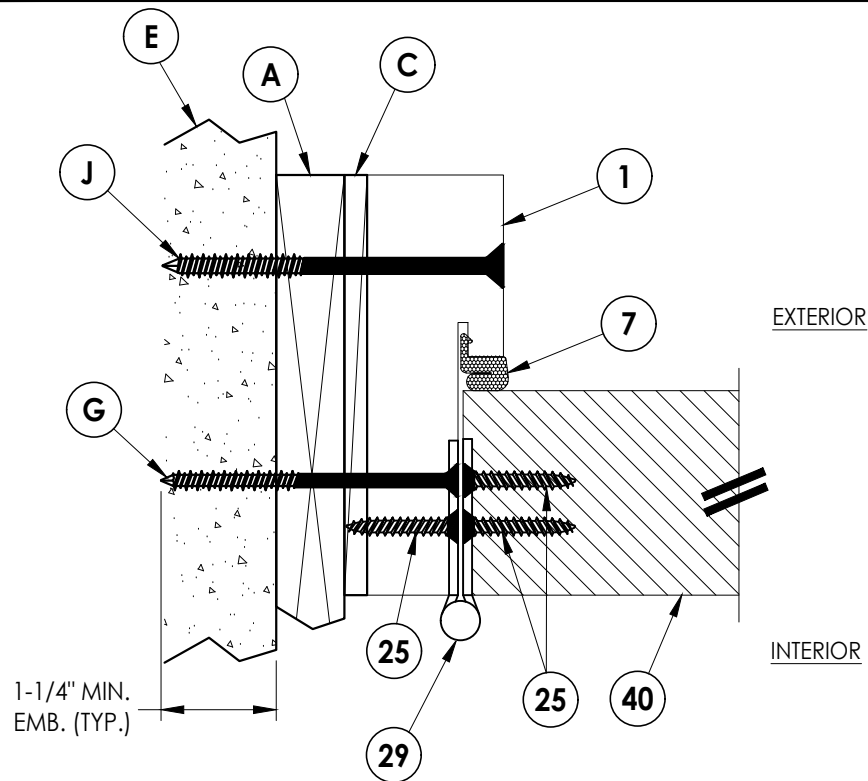

1
6 HORIZONTAL CROSS SECTION
1X Buck Construction

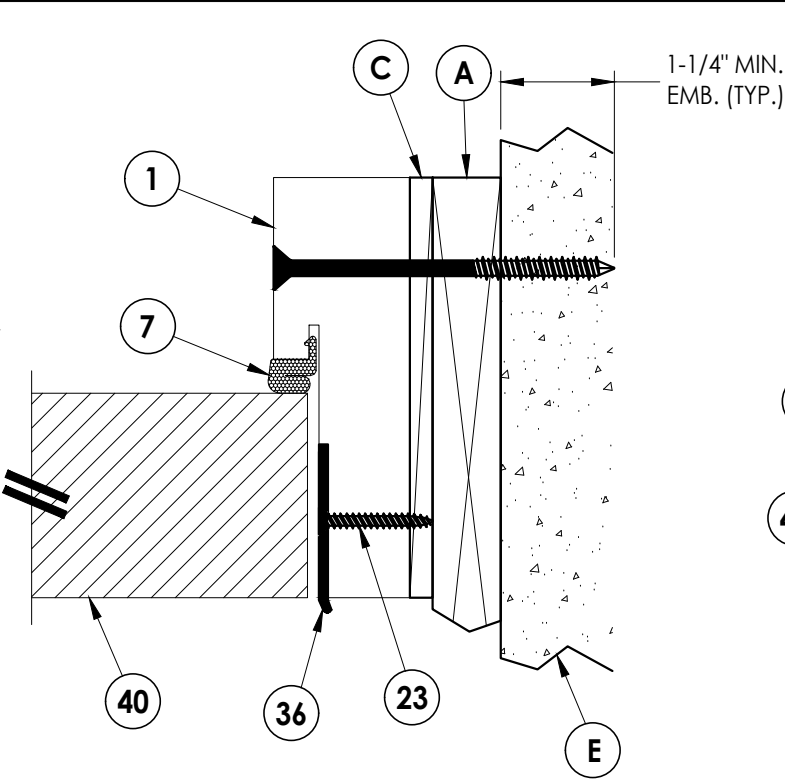


2
6 HORIZONTAL CROSS SECTION
1X Buck Construction

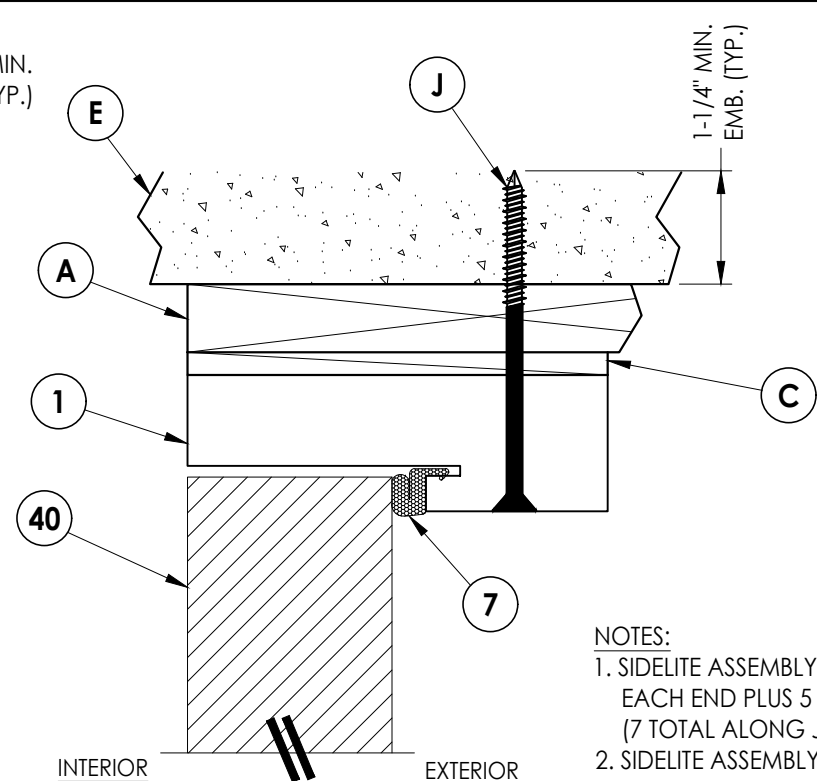


5
6 VERTICAL CROSS SECTION
1X Buck Construction


- NOTES:
1. SIDELITE ASSEMBLY SCREWS LOCATED 6" FROM EACH END PLUS 5 MORE EQUALLY SPACED (7 TOTAL ALONG JAMB).
 2. SIDELITE ASSEMBLY SCREWS LOCATED 6" FROM EACH END (2 TOTAL ALONG HEAD).

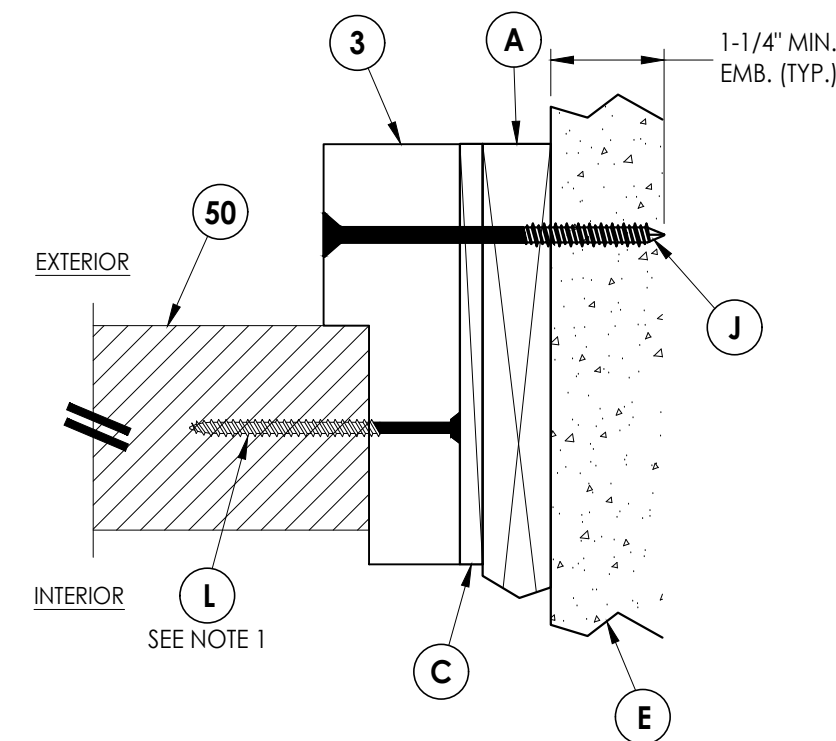

3
6 HORIZONTAL CROSS SECTION
1X Buck Construction

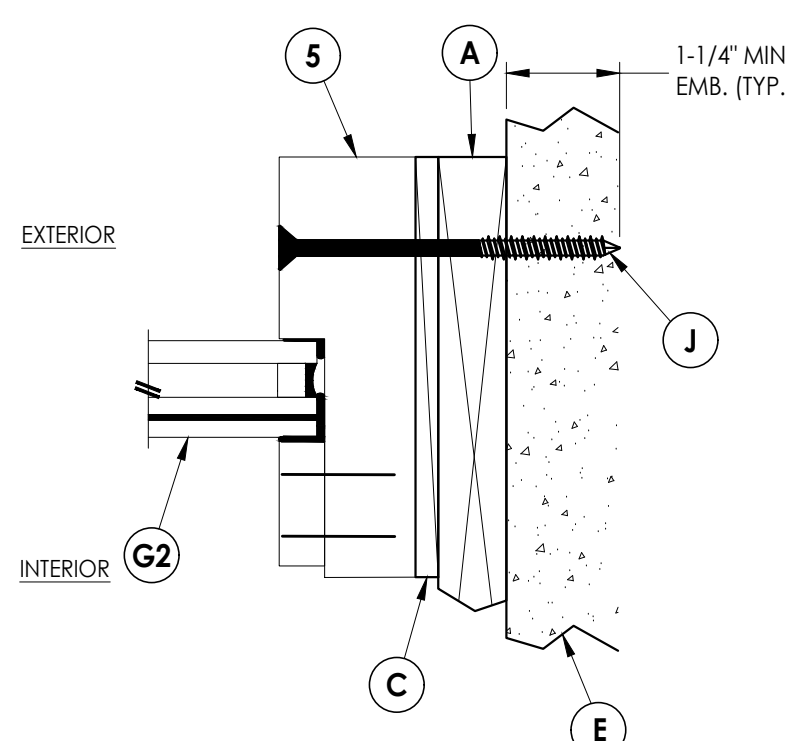

4
6 HORIZONTAL CROSS SECTION
1X Buck Construction

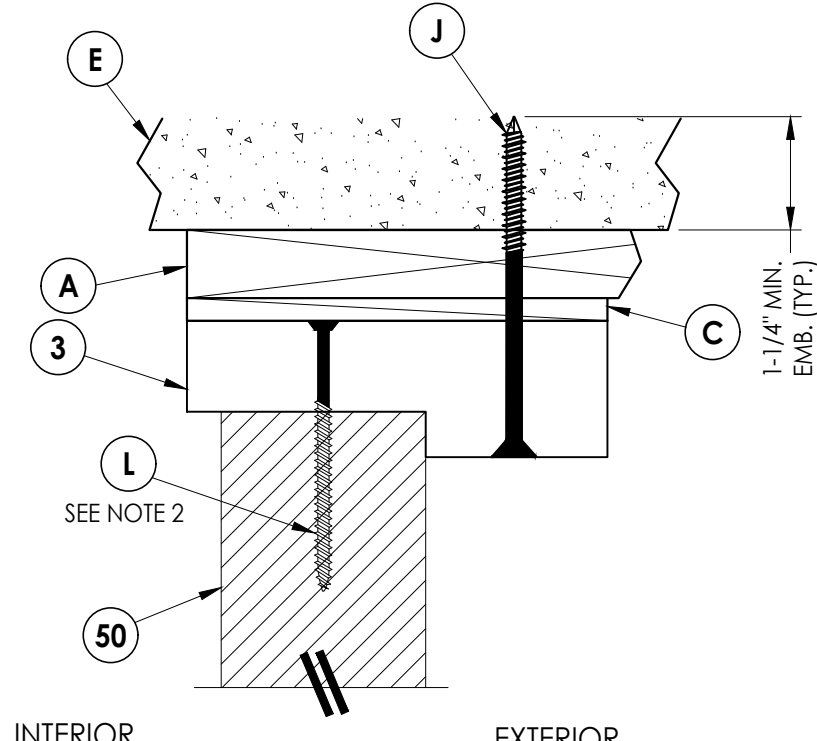

6
6 VERTICAL CROSS SECTION
1X Buck Construction

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: MW MILLWORKS
WOOD DOOR

PART OR ASSEMBLY:
HORIZONTAL & VERTICAL
CROSS SECTIONS (1X BUCK)

NO.	DATE	REVISIONS
1	8/21/23	UPDATE TO 8TH ED. (2023) FBC

DATE: 8/08/22

SCALE: N.T.S.


DWG. BY: LFS

CHK. BY: RW


DRAWING NO.: FL-41636.1

SHEET 6 OF 11


Z:\2023 FBC Drawings\Wood-On dba MW Millworks\FL-41636 R1\FL-41636.1-2.dwg

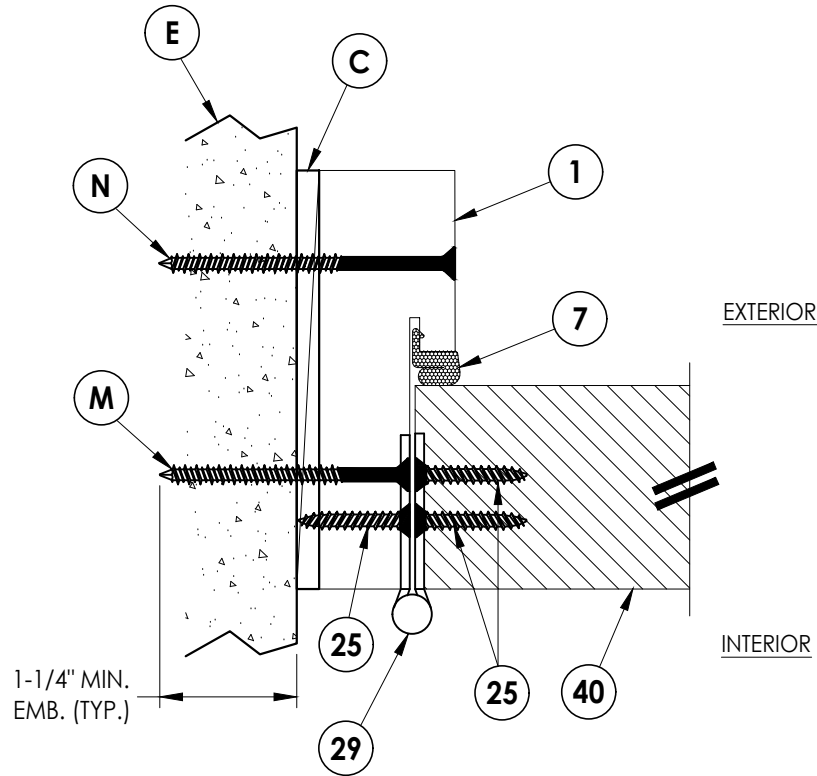

1
7 **HORIZONTAL CROSS SECTION**
Shown Direct to Masonry

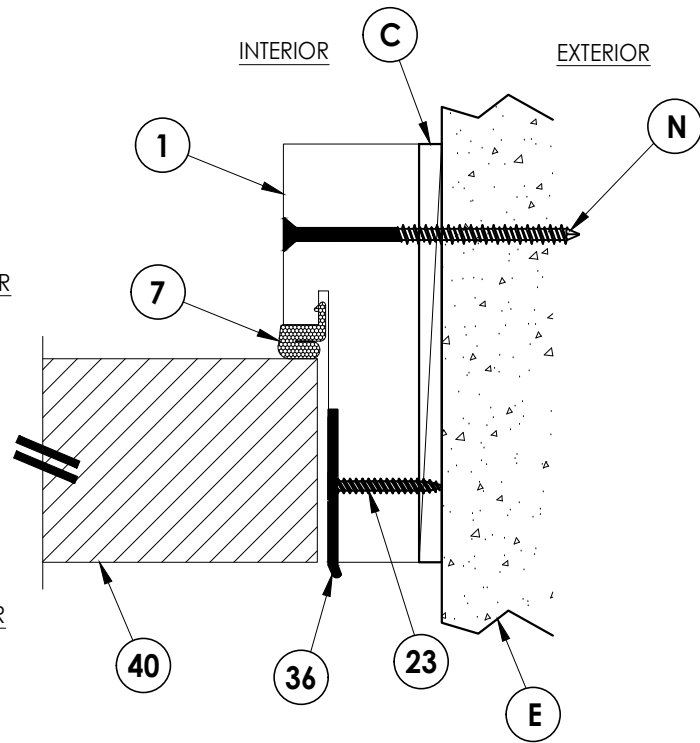


2
7 **HORIZONTAL CROSS SECTION**
Shown Direct to Masonry

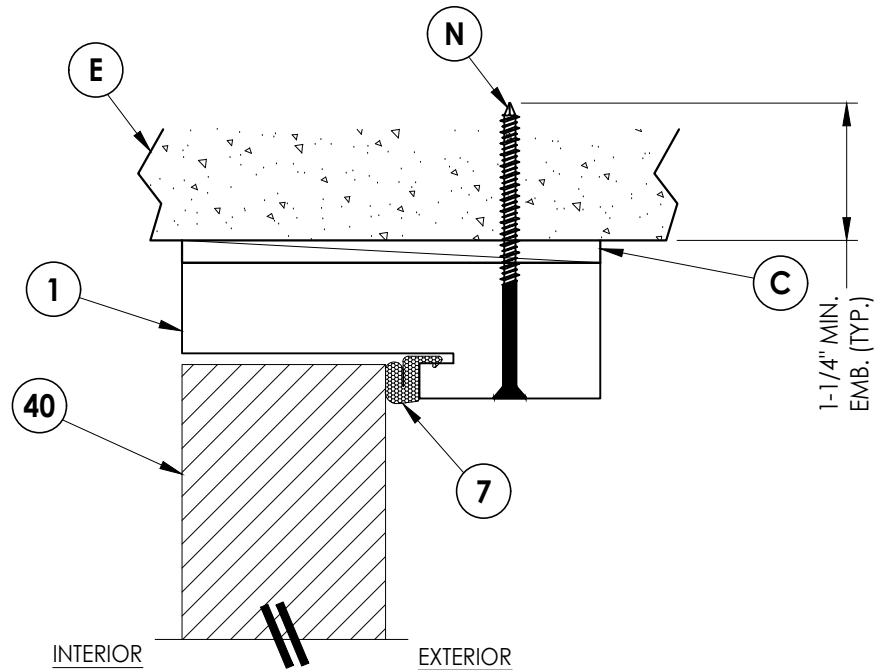


5
7 **VERTICAL CROSS SECTION**
Shown Direct to Masonry


- NOTES:
1. SIDELITE ASSEMBLY SCREWS LOCATED 6" FROM EACH END PLUS 5 MORE EQUALLY SPACED (7 TOTAL ALONG JAMB).
 2. SIDELITE ASSEMBLY SCREWS LOCATED 6" FROM EACH END (2 TOTAL ALONG HEAD).

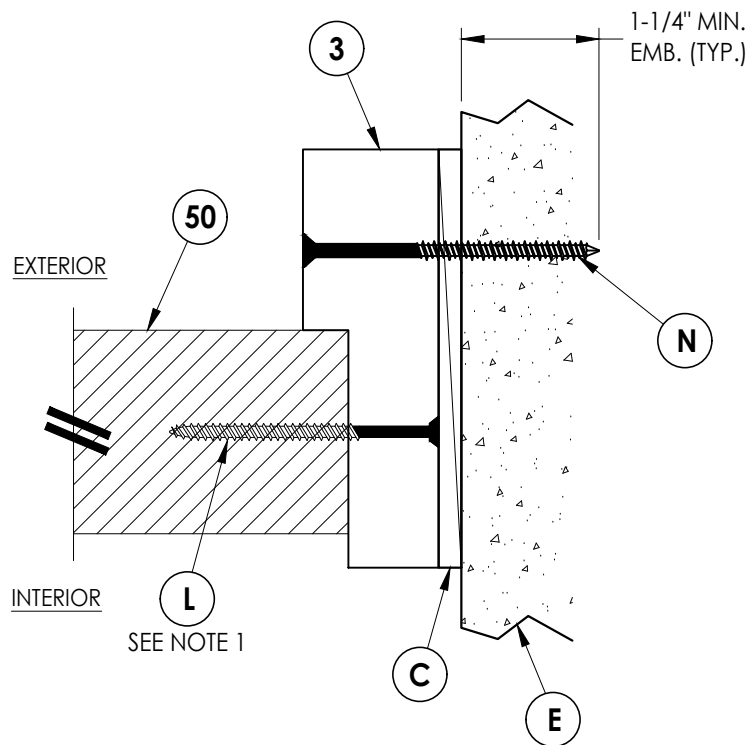

3
7 **HORIZONTAL CROSS SECTION**
Shown Direct to Masonry

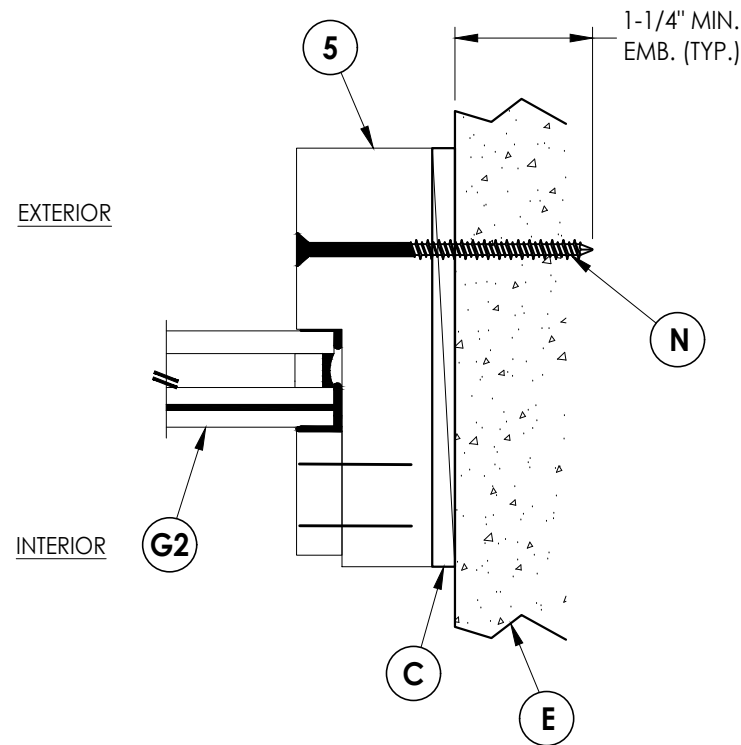

4
7 **HORIZONTAL CROSS SECTION**
Shown Direct to Masonry

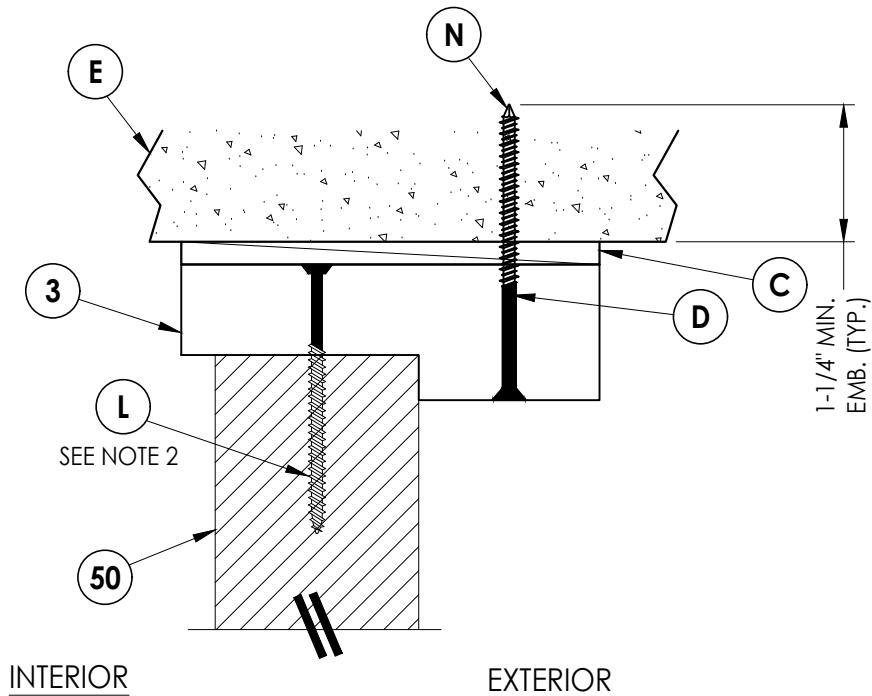

6
7 **VERTICAL CROSS SECTION**
Shown Direct to Masonry

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

BUILDING CONSULTANTS, INC.
P.O. Box 230, Vairico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

RW

PRODUCT:	MW MILLWORKS WOOD DOOR	
	PART OR ASSEMBLY: HORIZONTAL & VERTICAL CROSS SECTIONS (DIRECT TO MASONRY)	

NO.	DATE	BY	LFS	FBC	REVISIONS
1	8/21/23	DATE	UPDATE TO 8TH ED. (2023)		



DATE:	8/08/22
SCALE:	N.T.S.
DWG. BY:	LFS
CHK. BY:	RW
DRAWING NO.:	FL-41636.1
SHEET	7 OF 11




- NOTES:
1. SIDELITE ASSEMBLY SCREWS LOCATED 6" FROM EACH END PLUS 5 MORE EQUALLY SPACED (7 TOTAL).
 2. MULLION ASSEMBLY SCREWS (2) LOCATED UNDER EACH HINGE (6 TOTAL).
 3. MULLION ASSEMBLY SCREWS LOCATED 6" FROM EACH END PLUS 3 MORE EQUALLY SPACED (5 TOTAL - COUNTERSUNK 1/4").

[illegible]

Z:\2023 FBC Drawings\Wood-On dba MW Millworks\FL-41636 R1\FL-41636.1-2.dwg

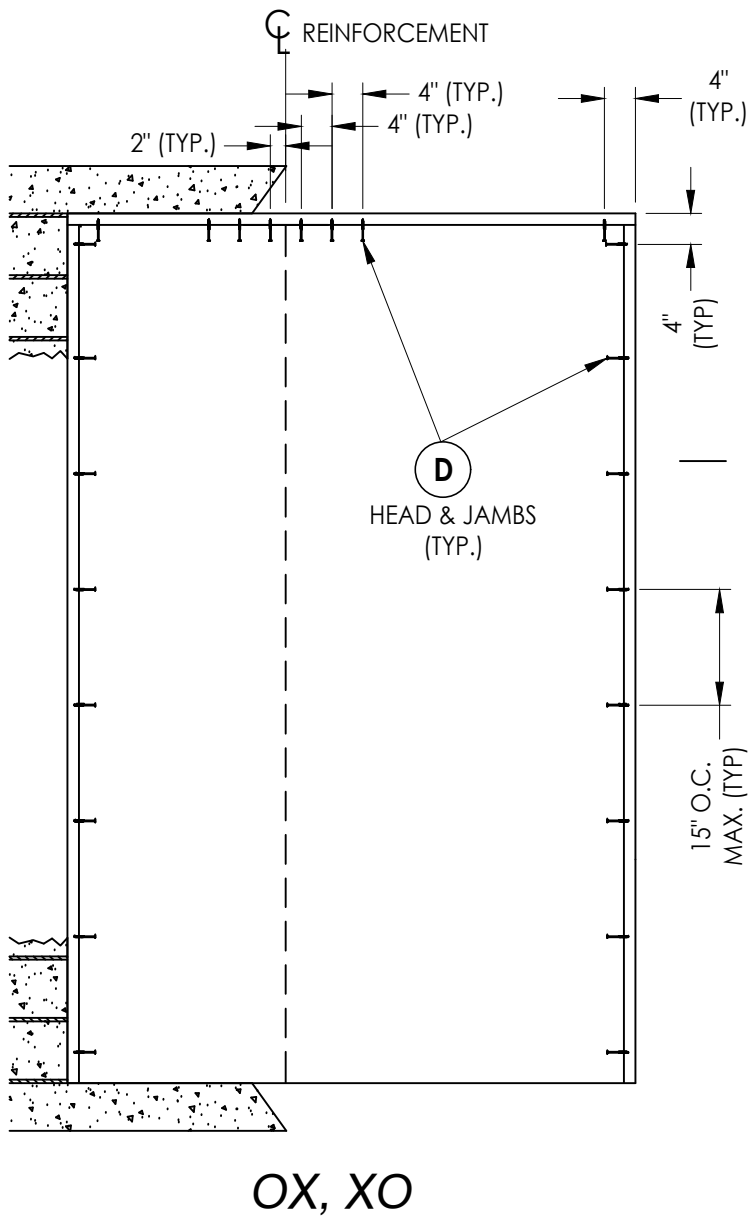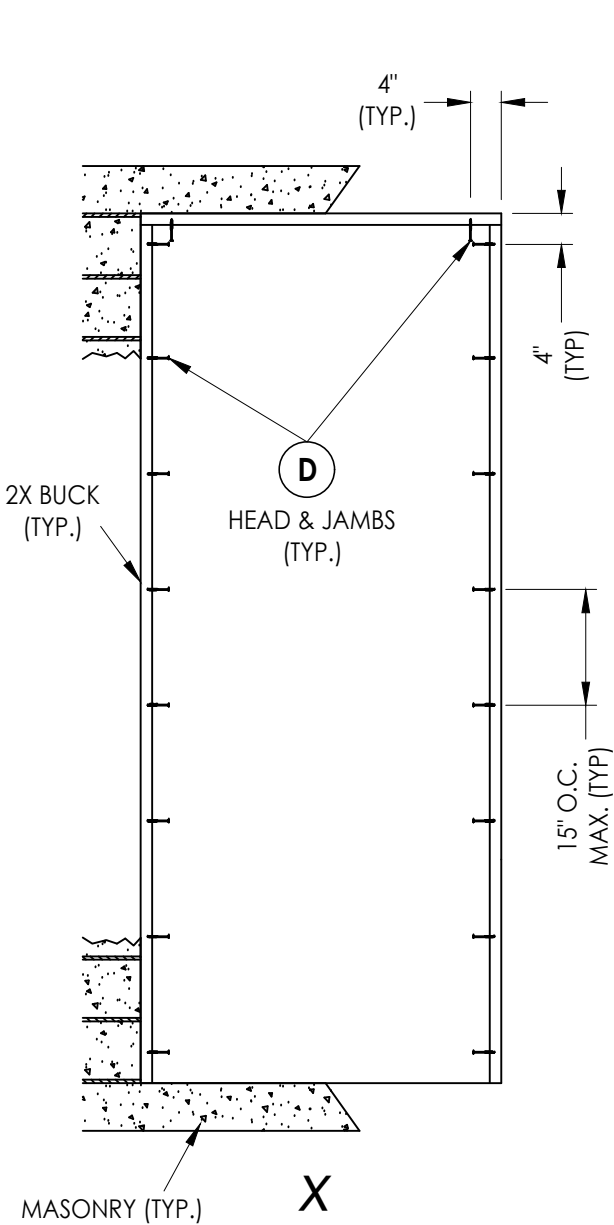

2X BUCK ANCHORING

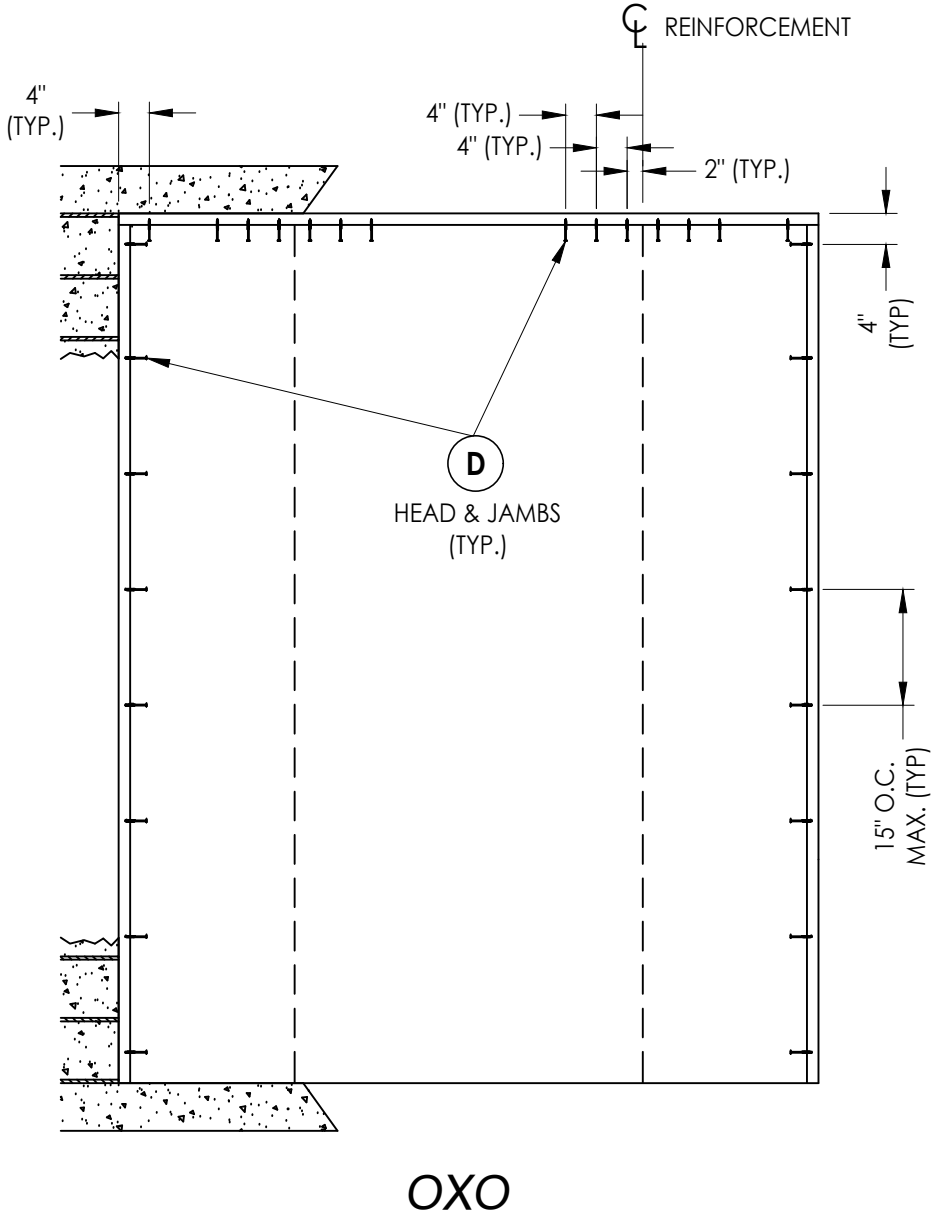

DATE: 8/08/22

SCALE: N.T.S.

DWG. BY: LFS

CHK. BY: RW

DRAWING NO.:

FL-41636.1

SHEET 9 OF 11


NO.	DATE	REVISIONS
1	8/21/23	UPDATE TO 8TH ED. (2023) FBC
		LFS
		BY

PRODUCT:	MW MILLWORKS WOOD DOOR
PART OR ASSEMBLY:	BUCK ANCHORING

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

Z:\2023 FBC Drawings\Wood-On dba MW Millworks\FL-41636 R1\FL-41636.1-2.dwg

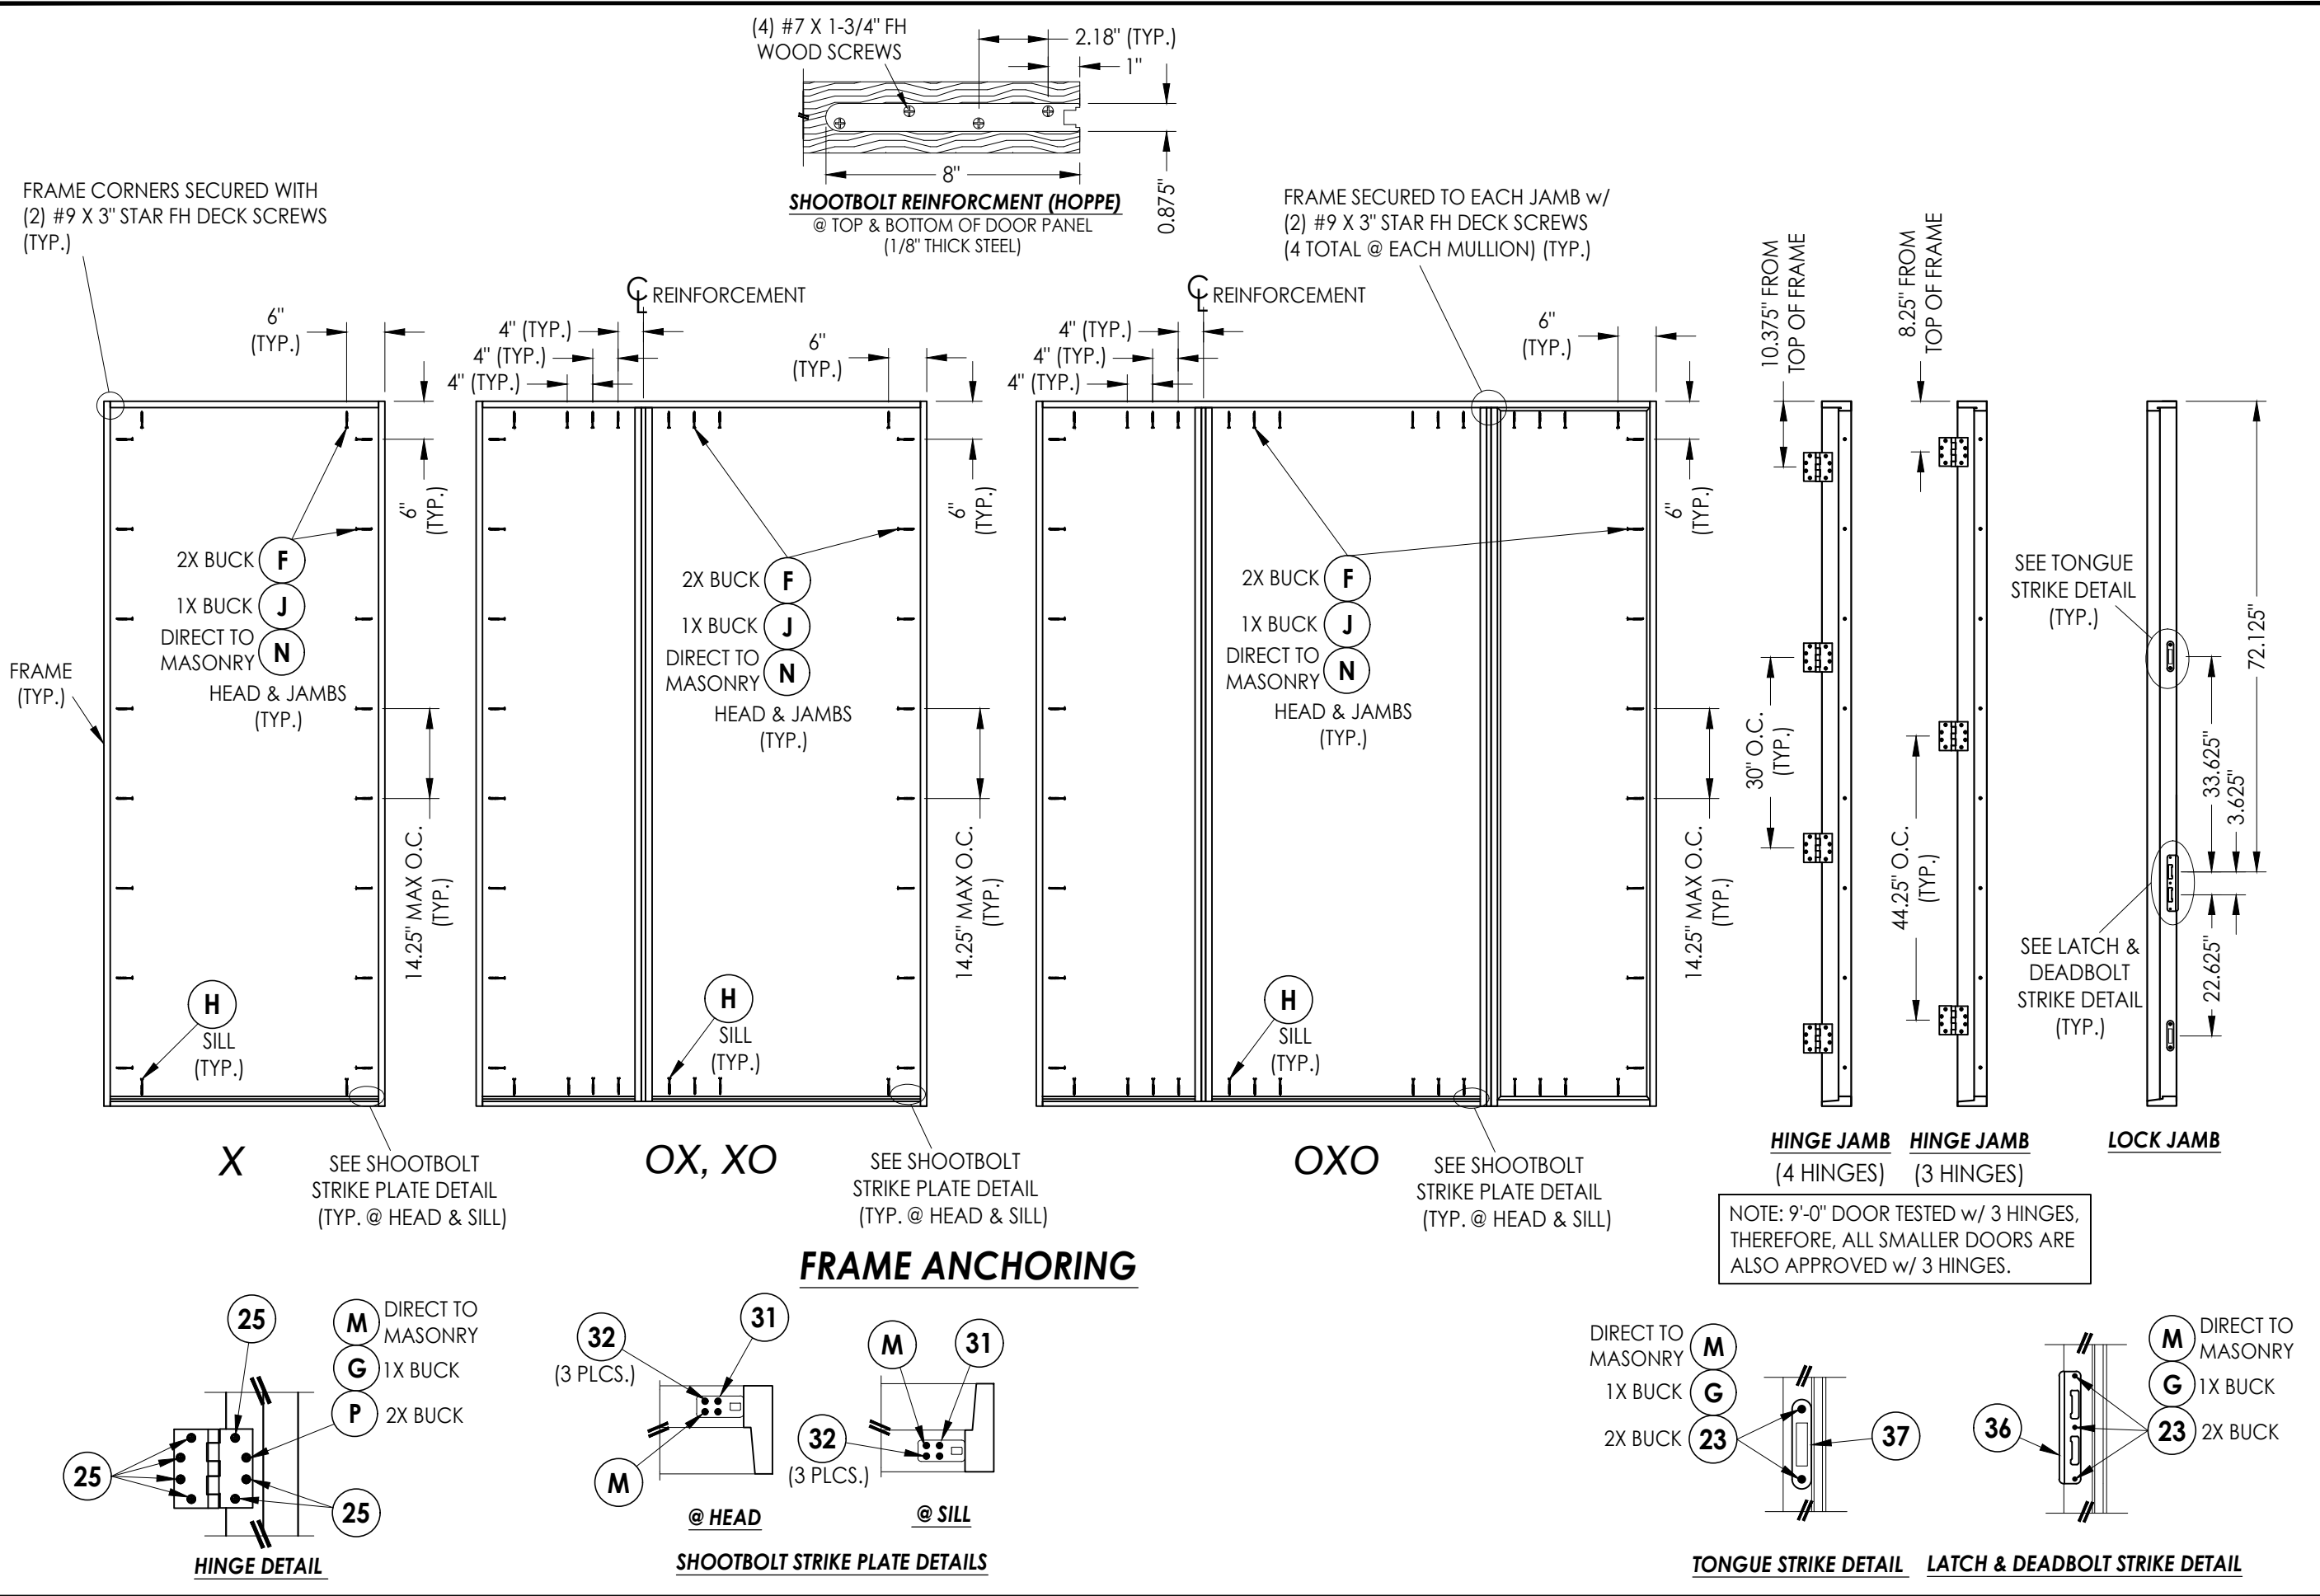

Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409		BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813	
PRODUCT: MW MILLWORKS WOOD DOOR		PART OR ASSEMBLY: FRAME ANCHORING & HARDWARE DETAILS	
		DATE	BY
		8/21/23	LFS
		UPDATE TO 8TH ED. (2023)	FBC
		NO.	REVISIONS
DATE: 8/08/22			
SCALE: N.T.S.			
DWG. BY: LFS			
CHK. BY: RW			
DRAWING NO.: FL-41636.1			
SHEET 10 OF 11			

Z:\2023 FBC Drawings\Wood-On dba MW Millworks\Wood-FL-41636 R1\FL-41636.1-2.dwg

BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL
A	1X BUCK (G >= 0.42)	WOOD
B	2X BUCK (G >= 0.42)	WOOD
C	1/4" MAX. SHIM SPACE	-
D	1/4" X 2-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301 OR HOLLOW BLOCK CONFORMING TO ASTM C90	CONCRETE
F	#10 X 3" PFH WOOD SCREW (1-3/8" MIN. EMBEDMENT)	STEEL
G	3/16" X 3-1/4" PFH ITW CONCRETE SCREW	STEEL
H	1/4" X 2-1/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
J	1/4" X 3-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
K	#12 X 4" STAR FH DECK SCREW	STEEL
L	#10 X 3" STAR FH DECK SCREW	STEEL
M	3/16" X 2-3/4" PFH ITW CONCRETE SCREW	STEEL
N	1/4" X 3-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
P	#12 X 2-1/2" PFH WOOD SCREW	STEEL
Q	#9 X 2" STAR FH DECK SCREW	STEEL
1	DOOR JAMB	WOOD
2	DOOR SILL	WOOD
3	SIDELITE JAMB	WOOD
4	SIDELITE SILL	WOOD
5	DIRECT SET SIDELITE JAMB	WOOD
7	WEATHERSTRIP	FOAM
8	DOOR SWEEP	VINYL
23	#7 X 1-1/4" PFH WOOD SCREW	STEEL
25	#12 X 1-1/4" PFH WOOD SCREW	STEEL
29	4.5" X 4.5" HINGE	STEEL
31	SHOOTBOLT STRIKE PLATE	STEEL
32	#8 X 3/4" PFH WOOD SCREW	STEEL
36	MULTIPOINT LATCH & DEADBOLT STRIKE PLATE	STEEL
37	MULTIPOINT TONGUE STRIKE PLATE	STEEL
40	DOOR PANEL - SEE DOOR PANEL DETAIL SHEET FOR DETAILS	-
50	SIDELITE PANEL - SEE SIDELITE PANEL DETAIL SHEET FOR DETAILS	-

WOOD DOOR FRAME COMPONENTS:
SAPELE: (G = 0.60)


CONCRETE ANCHOR NOTES:

- Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
- Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
- Concrete anchor table:


ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW BUILDEX TAPCON®	3/16"	1-1/4"	3"	1-1/2"
	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON®	1/4"	1-1/4"	1"	4"

WOOD SCREW INSTALLATION NOTES:


- Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

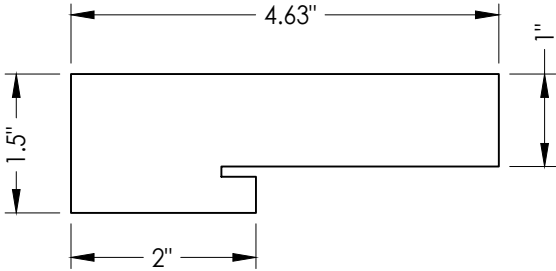


1 WOOD DOOR JAMB

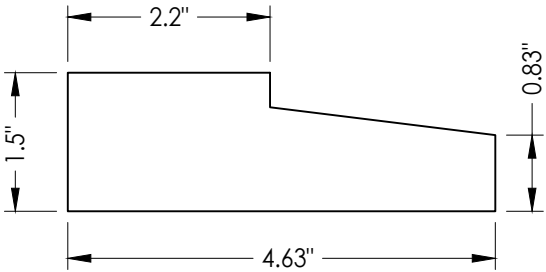


2 WOOD DOOR SILL

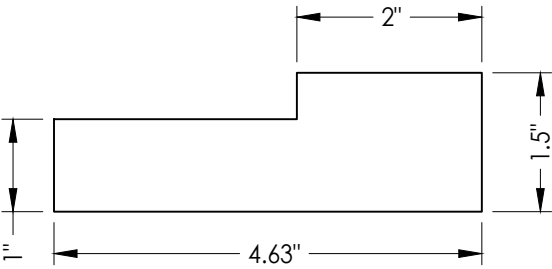

3 WOOD SIDELITE JAMB

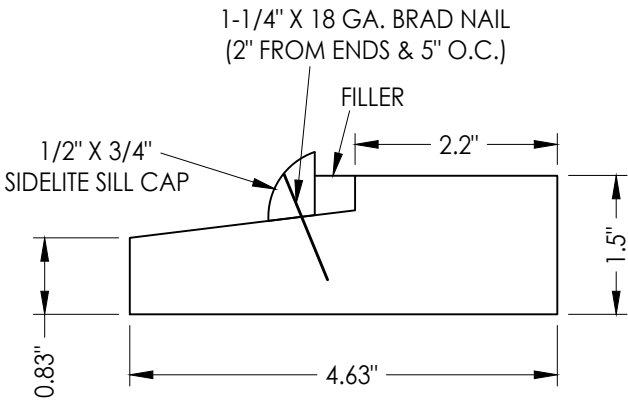

4 WOOD SIDELITE SILL

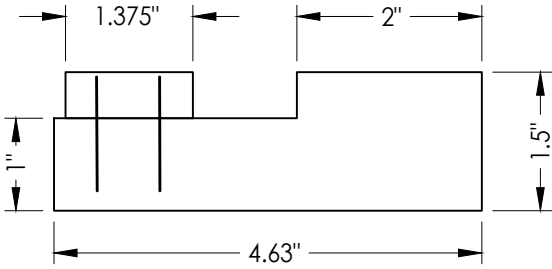

5 WOOD DIRECT SET SIDELITE JAMB

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
MW MILLWORKS
WOOD DOOR

PART OR ASSEMBLY:
BILL OF MATERIALS
& COMPONENTS

NO.	DATE	REVISIONS
1	8/21/23	UPDATE TO 8TH ED. (2023) FBC
LFS	BY	

DATE: 8/08/22

SCALE: N.T.S.

DWG. BY: LFS

CHK. BY: RW

DRAWING NO.:

FL-41636.1

SHEET 11 OF 11