



Product Evaluation Report
CARPORTS ANYWHERE

Hampton Rib Wall Panel over open framing

Florida Product Approval # 27403.1 R4

Florida Building Code 2026

Per Rule 61G20-3

Method: 2-B

Category: Structural Components

Subcategory: Structural Wall

Compliance Method: 61G20-3.005(2)(b)

NON HVHZ

Product Manufacturer:

Carport Anywhere

10858 S.E. County Road 221

Starke, Florida 32091

Engineer Evaluator:


Johnathan Green, P.E. # 88223

Florida Evaluation ANE ID: 12901

Contents:

Evaluation Report: Page 1 - 3

Installation Detail: Page 4

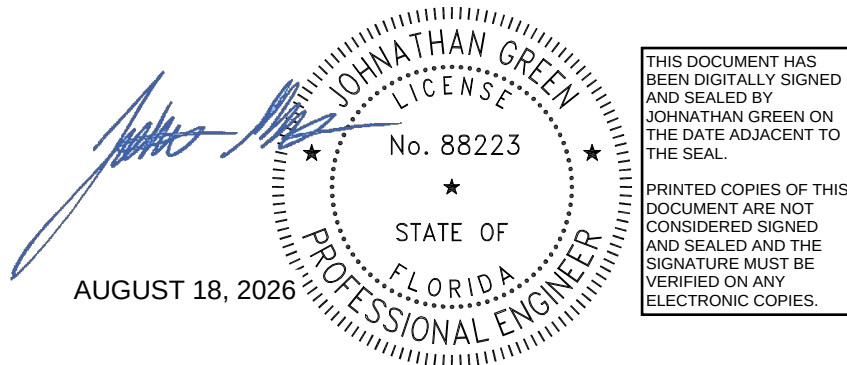



Compliance Statement: The product as described in this report has demonstrated compliance with the Florida Building Code 2026, Sections 1709.2.

Product Description: Hampton Rib 26 Ga. and 29 Ga. Steel Wall Panel, 36" Wide, through fastened structural wall panel. Structural Application.

Panel Material/Standards: Material:
26 Ga. Steel, ASTM A792 or ASTM A653 G90 Grade 50
29 Ga. Steel, ASTM A792 or ASTM A653 G90 Grade 80
Conforming to Florida Building Code 2026 Section 1405.2.

Panel Dimension(s): Thickness: 26 Ga.: 0.0185" min. order thickness
29 Ga.: 0.0142" min. order thickness
Width: 36" maximum coverage
Rib Height: ¾" major rib at 9" O.C.
Panel Rollformer: MRS Metal Rollforming Systems

Panel Fastener: #12-14 x ¾" HWH SD#3 with 14mm neoprene bonded washing or approved equal.
Corrosion Resistance: Per Florida Building Code 2026 and Section 1711 for installations within 3000 ft. of a saltwater coastline.

Substrate Description: Minimum 14 Ga. (Grade 50) Steel framing, Minimum 16 Ga. (Grade 50) Steel framing, or Minimum 18 Ga. (Grade 50) Steel framing. See Table A & B for steel gauge. Framing must be designed in accordance w/ Florida Building Code 2026.

Allowable Design Pressures:

Table "A" 26 Ga. Hampton Rib Wall Panel

Maximum Design Pressure:	-57.3 psf	-72.9 psf	-67.7 psf	+46.9 psf	+54.7 psf
Panel Fastener Pattern:	2-1-2-1	2-1-2-1	2-1-2-1	2-1-2-1	2-1-2-1
Panel Span:	5'-0" O.C.	4'-0" O.C.	4'-0" O.C.	5'-0" O.C.	4'-0" O.C.
Substrate:	Min. 14 Ga. Steel Framing	Min. 14 Ga. Steel Framing	Min. 14 Ga. Steel Framing	Min. 18 Ga. Steel Framing	Min. 18 Ga. Steel Framing

*Design Pressure includes a Safety Factor = 2.0.


Table "B" 29 Ga. Hampton Rib Wall Panel

Maximum Design Pressure:	-57.3 psf	-150.9 psf	+39.0 psf	+143.1 psf
Fastener Pattern:	6"-3"-6"-3"-6"-3"-6"	6"-3"-6"-3"-6"-3"-6"	6"-3"-6"-3"-6"-3"-6"	6"-3"-6"-3"-6"-3"-6"
Fastener Spacing:	4'-0" O.C.	2'-0" O.C.	4'-0" O.C.	2'-0" O.C.
Substrate:	Min. 16ga. Steel Framing	Min. 16ga. Steel Framing	Min. 16ga. Steel Framing	Min. 16ga. Steel Framing

*Design Pressure includes a Safety Factor = 2.0.




Code Compliance:	The product described herein has demonstrated compliance with The Florida Building Code 2026, Section 1709.2.
Evaluation Report Scope:	The product evaluation is limited to compliance with the structural wind load requirements of the Florida Building Code 2026, as relates to Rule 61G20-3.
Performance Standards:	The product described herein has demonstrated compliance with: ▪ ASTM E 1592-05 (2017) Test method for structural performance of sheet metal roof and siding systems by uniform static air pressure difference
Reference Data:	1. ASTM E 1592-05 (2012) Test Force Engineering & Testing, Inc. (FBC Organization # TST-5328) Report No. 667-0060T-18A-E, 667-0061T-18A-D 2. Certificate of Independence By Johnathan Green, P.E. (No. 88223) @ Force Engineering & Testing (FBC Organization # ANE ID: 12901)
Test Standard Equivalency:	The ASTM E 1592-05(2012) test standard is equivalent to the ASTM E 1592-05 (2017) test standard.
Quality Assurance Entity:	The manufacturer has established compliance of roof panel products in accordance with the Florida Building Code and Rule 61G20-3.005 (3) for manufacturing under a quality assurance program audited by an approved quality assurance entity.
Installation:	Install per manufacturer's recommended details.
Insulation:	Manufacturer's approved product (Optional)
Panel Fire Classification:	Fire classification is not part of this acceptance.
Shear Diaphragm:	Shear diaphragm values are outside the scope of this report.
Design Procedure:	Based on the dimensions of the structure, appropriate wind loads are determined using Chapter 16 of the Florida Building Code 2026 for wall cladding wind loads. These component wind loads for wall cladding are compared to the allowable pressure listed above. The design professional shall select the appropriate erection details to reference in his drawings for proper fastener attachment to his structure and analyze the panel fasteners for pullout and pullover. Support framing must be in compliance with Florida Building Code 2026 Chapter 22 for steel, and Chapter 16 for structural loading.

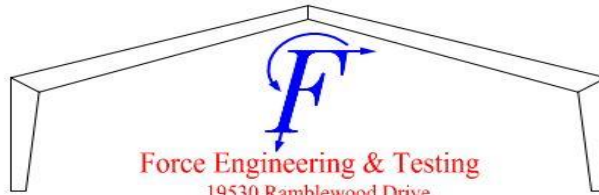

Force Engineering & Testing
19530 Ramblewood Drive
Humble, Texas 77338
Office: (281) 540-6603 Test Lab: (832) 720-4251
www.forceengineeringtesting.com

26 GA. HAMPTON RIB FASTENER PATTERN 2-1-2-1

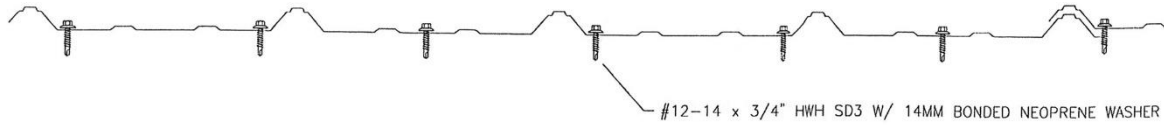

29 GA. HAMPTON RIB FASTENER PATTERN 6"-3"-6"-3"-6"-3"-6"

