

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

NOTES:


1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
2. WOOD FRAMING, METAL STRUCURE AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1-1/2" UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
4. WHERE WOOD BUCK THICKNESS IS 1-1/2" OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS.
5. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
6. BUCKS SHALL EXTEND BEYOND UNIT FRAME INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
7. SHIM AS NEEDED AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4".
8. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
9. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
10. FRAME MATERIAL: EXTRUDED RIGID PVC.
11. UNITS MUST BE GLAZED PER ASTM E1300, SEE SHEET 2 FOR GLASS DETAILS.
12. APPROVED IMPACT PROTECTIVE SYSTEM IS NOT REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS UP TO WIND ZONE 3.

13. FOR ANCHORING THROUGH FIN INTO WOOD FRAMING OR 2X BUCK USE #6 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 7/8" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
14. FOR ANCHORING THROUGH FIN INTO METAL STRUCTURE USE #6 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
15. FOR ANCHORING THROUGH FRAME INTO WOOD FRAMING OR 2X BUCK USE #10 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
16. FOR ANCHORING THROUGH FRAME INTO MASONRY/CONCRETE USE 3/16" TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
17. FOR ANCHORING THROUGH FRAME INTO METAL STRUCTURE USE #10 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
18. ALL FASTENERS TO BE CORROSION RESISTANT.
19. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:
 - A. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42
 - B. CONCRETE: MINIMUM COMPRESSIVE STRENGTH OF 2,000 PSI.
 - C. MASONRY: HOLLOW/FILLED BLOCK PER ASTM C90 WITH Fm=2,000PSI MINIMUM.
 - D. METAL STRUCTURE: STEEL 18GA (.048") FY=33KSI/FU=52KSI OR ALUMINUM 6063-T5 FU=30KSI .125" THICK MINIMUM

SIGNED: 07/15/2026


TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2	ELEVATIONS
3 - 13	INSTALLATION DETAILS
14	COMPONENTS

NT WINDOW, INC. 2900 WEST SEMINARY DR. FORT WORTH, TX 76133		
G110 PVC SINGLE HUNG WINDOW REINFORCED IMPACT NOTES		
DRAWN: A.R.	DWG NO. 08-04146	REV -
SCALE NTS	DATE 04/28/2025	SHEET 1 OF 14
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

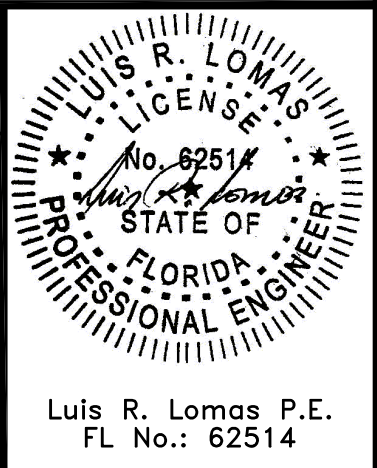


Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

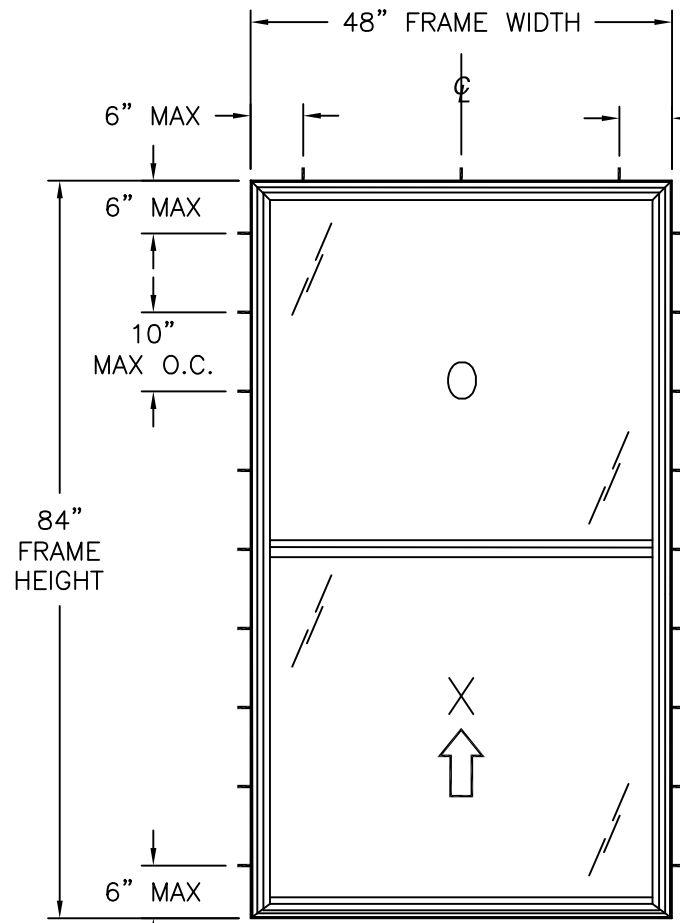


G110 PVC SINGLE HUNG WINDOW
FINLESS INSTALLATION

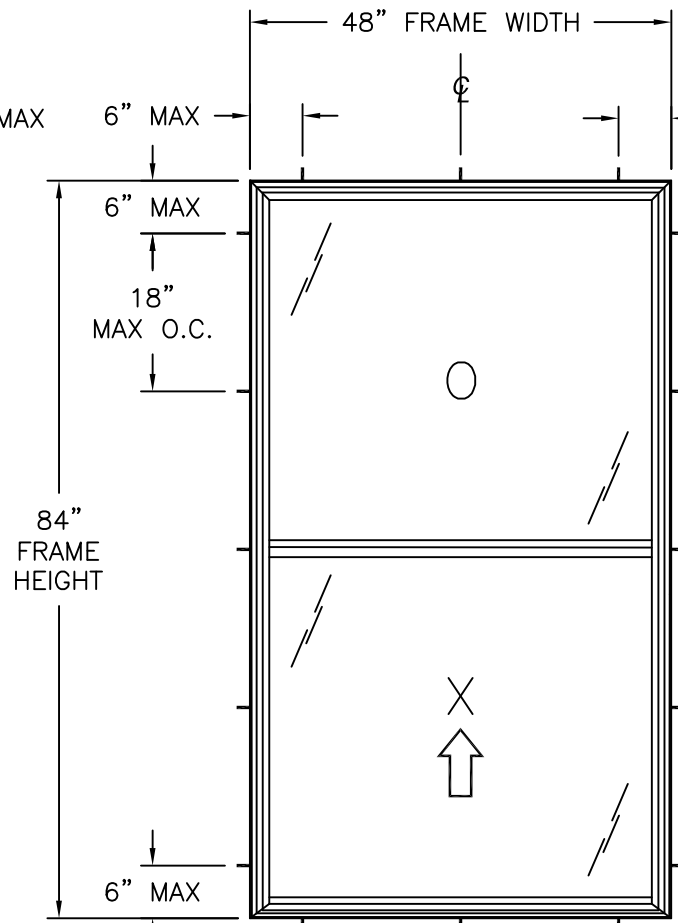

G110 PVC SINGLE HUNG WINDOW
STRAP INSTALLATION

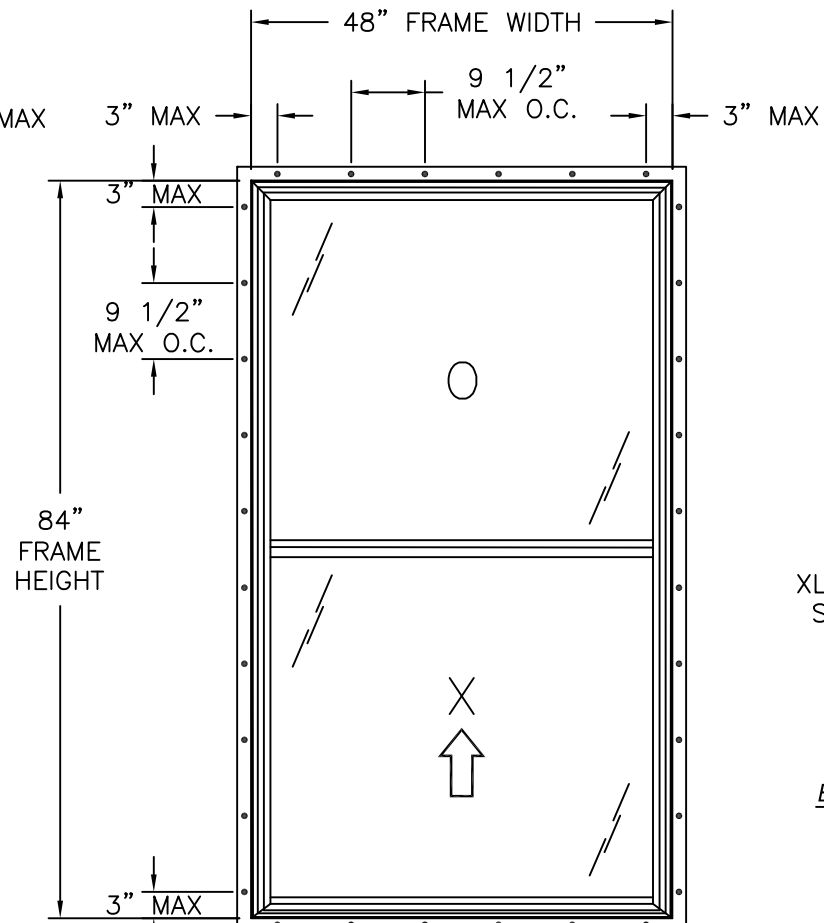

G110 PVC SINGLE HUNG WINDOW
FIN INSTALLATION

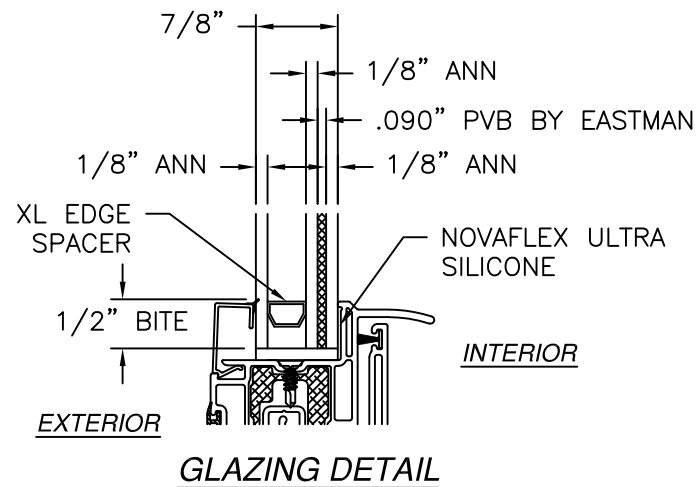

DESIGN PRESSURE RATING	IMPACT RATING
±50.0PSF	LARGE AND SMALL MISSILE IMPACT

MISSILE LEVEL D, WIND ZONE 3
48" X 84" UNIT SHOWN. OTHER SIZES APPROVED AS LONG AS
FRAME AREA DOES NOT EXCEED 28.0 FT²


- NOTES:
- SASH SIZE: 44 3/8" X 41 3/8"
 - FIXED D.L.O.: 43 1/2" X 41 3/8"
 - SASH D.L.O.: 41 1/2" X 38 3/8"

HARDWARE SCHEDULE

A.	(2) METALLIC SWEEP LOCK WITH KEEPER AT 7" ON CENTER FROM EACH END OF SASH TOP RAIL
B.	(3) CONSTANT FORCE TANDEM COIL BALANCE AT EACH FRAME JAMB
C.	(2) PLASTIC COMPOSITE TILT LATCH WITH METALLIC HOUSING AT EACH END OF SASH TOP RAIL
D.	ALUMINUM REINFORCEMENT (15952) AT FIXED INTERLOCK
E.	ALUMINUM REINFORCEMENT (15955) AT SASH TOP RAIL
F.	ALUMINUM REINFORCEMENT (15953) AT SASH BOTTOM RAIL AND STILES



NT WINDOW, INC. 2900 WEST SEMINARY DR. FORT WORTH, TX 76133		
G110 PVC SINGLE HUNG WINDOW REINFORCED IMPACT ELEVATIONS AND GLAZING DETAIL		
DRAWN: A.R.	DWG NO. 08-04146	REV -
SCALE NTS	DATE 04/28/2025	SHEET 2 OF 14
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

SIGNED: 07/15/2026

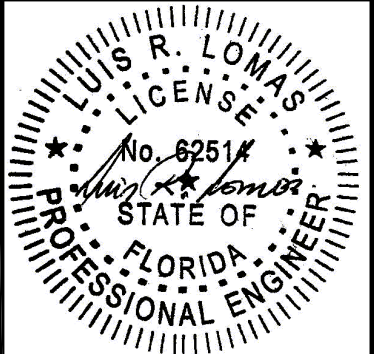


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

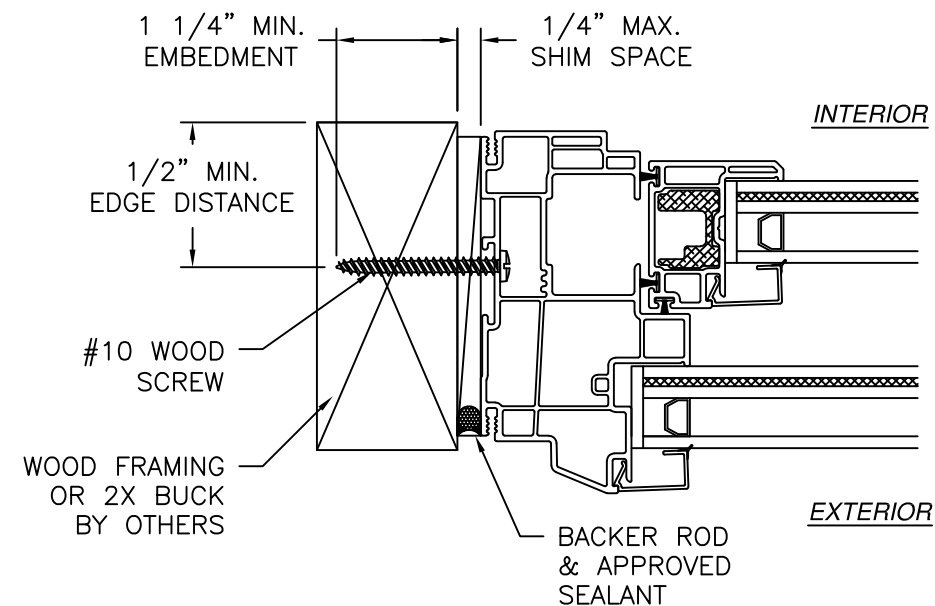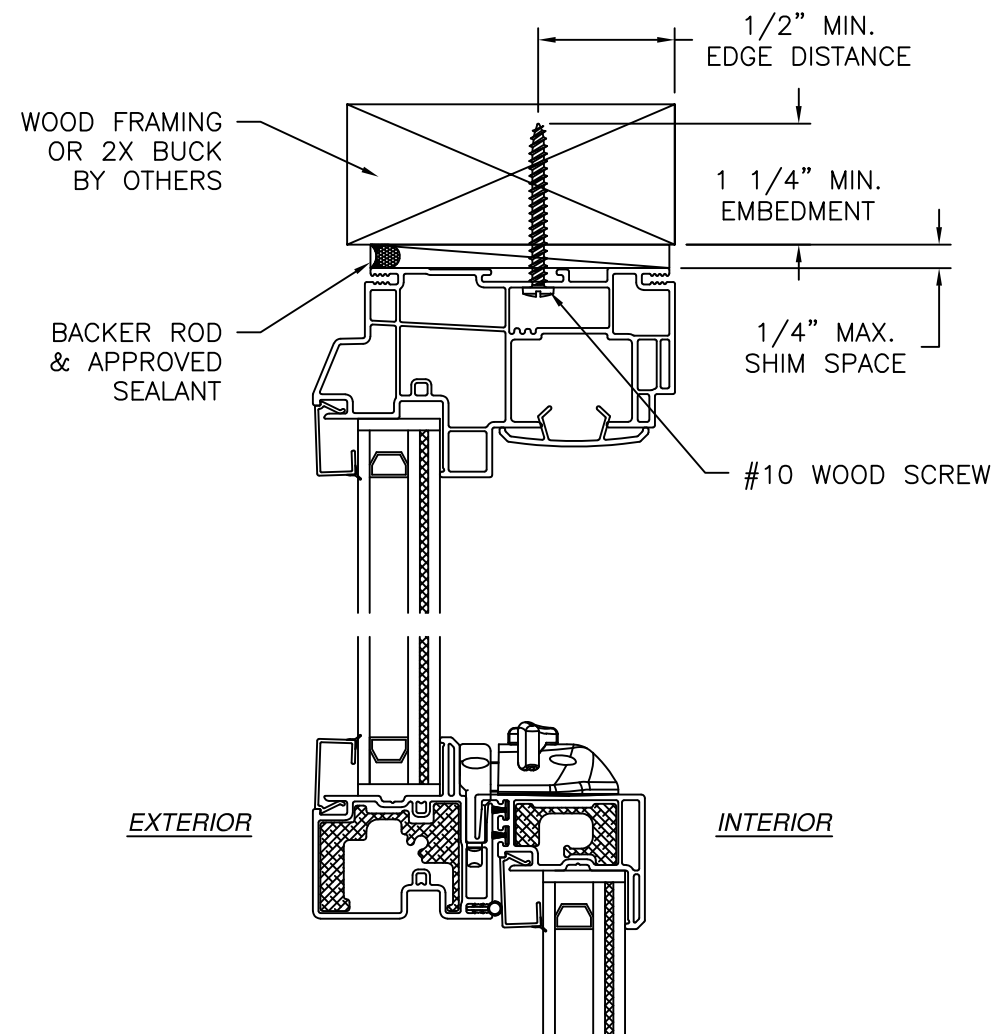


JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

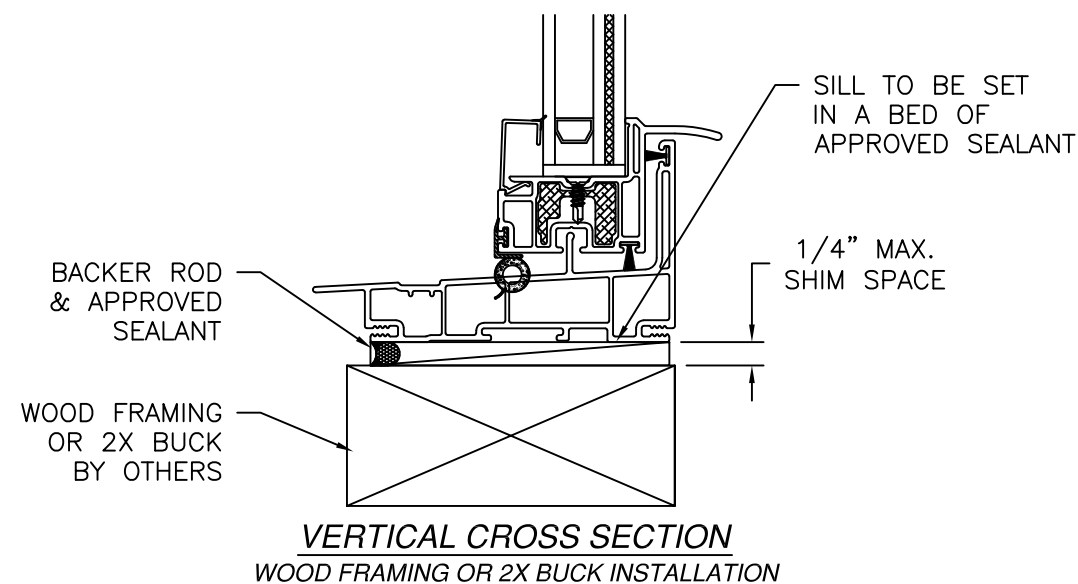

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


SIGNED: 07/15/2026

NT WINDOW, INC. 2900 WEST SEMINARY DR. FORT WORTH, TX 76133		
G110 PVC SINGLE HUNG WINDOW REINFORCED IMPACT FINLESS INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-04146	REV —
SCALE NTS	DATE 04/28/2025	SHEET 3 OF 14
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

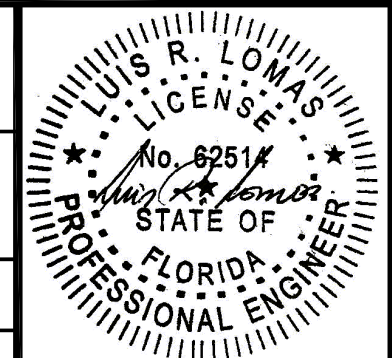


Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

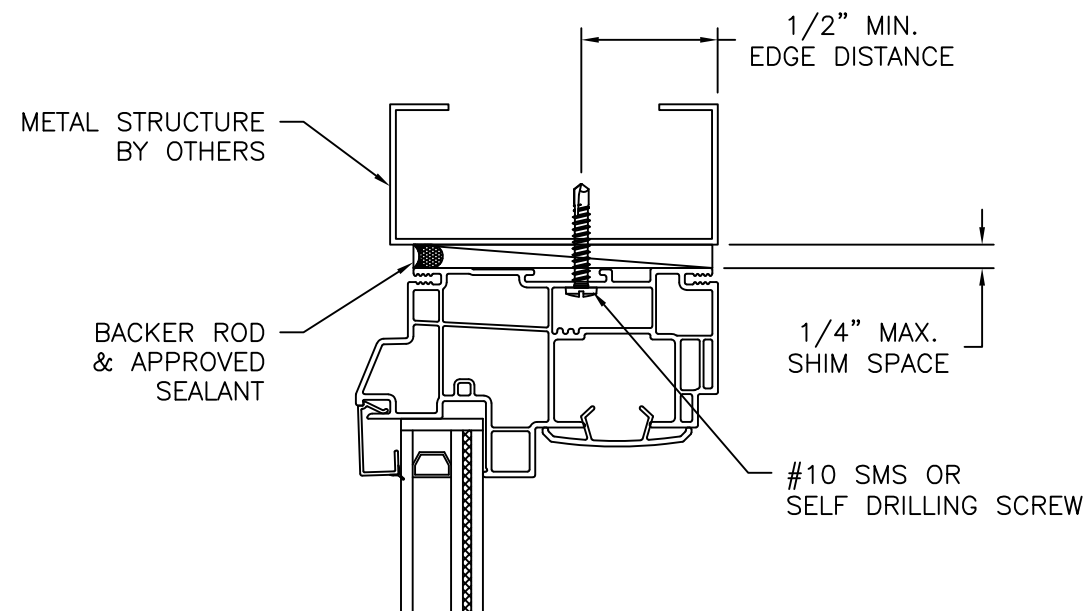

EXTERIOR INTERIOR

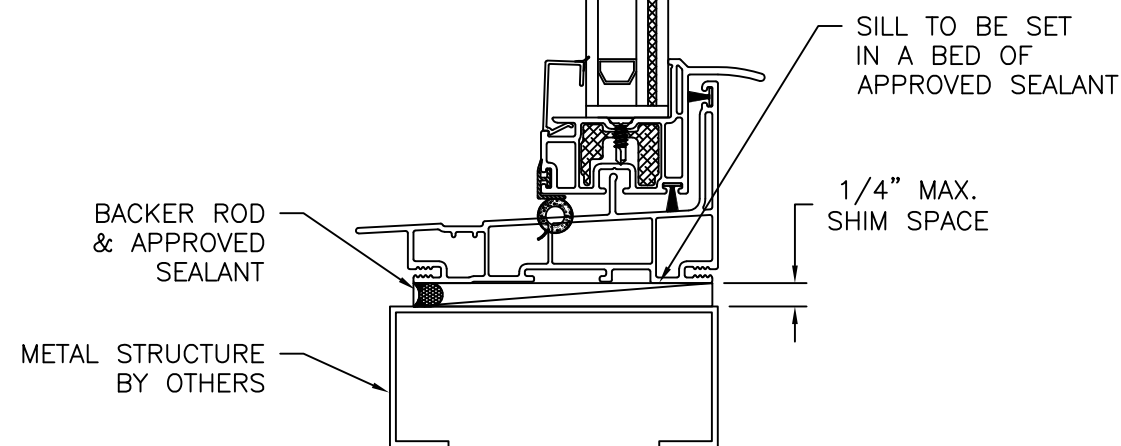

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

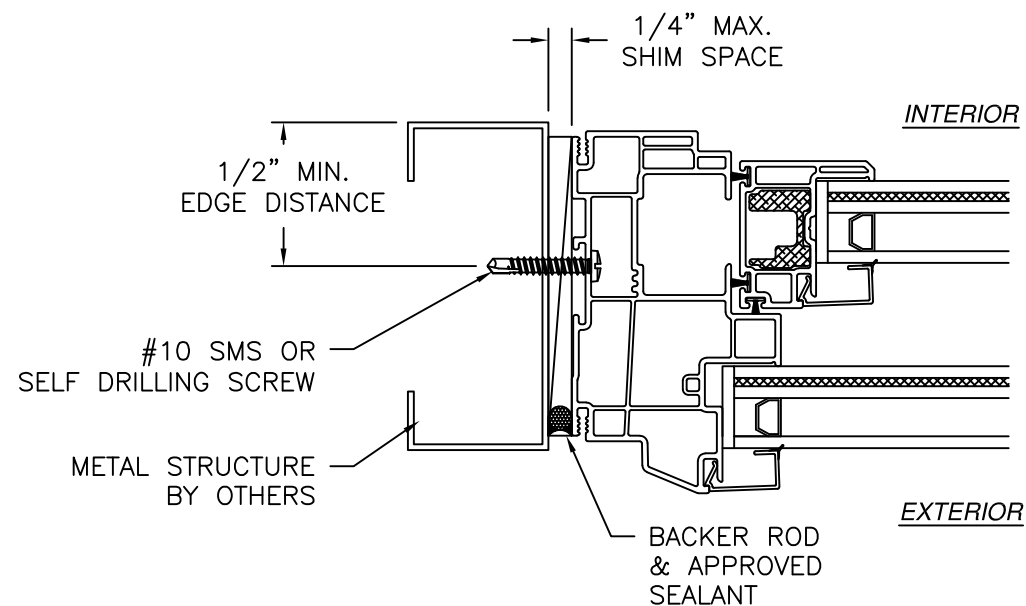


JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION


- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 07/15/2026

NT WINDOW, INC. 2900 WEST SEMINARY DR. FORT WORTH, TX 76133		
G110 PVC SINGLE HUNG WINDOW REINFORCED IMPACT FINLESS INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-04146	REV -
SCALE NTS	DATE 04/28/2025	SHEET 4 OF 14
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

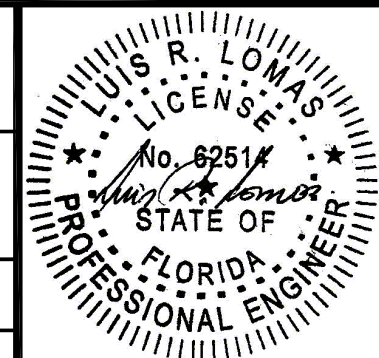


Luis R. Lomas P.E.
FL No.: 62514

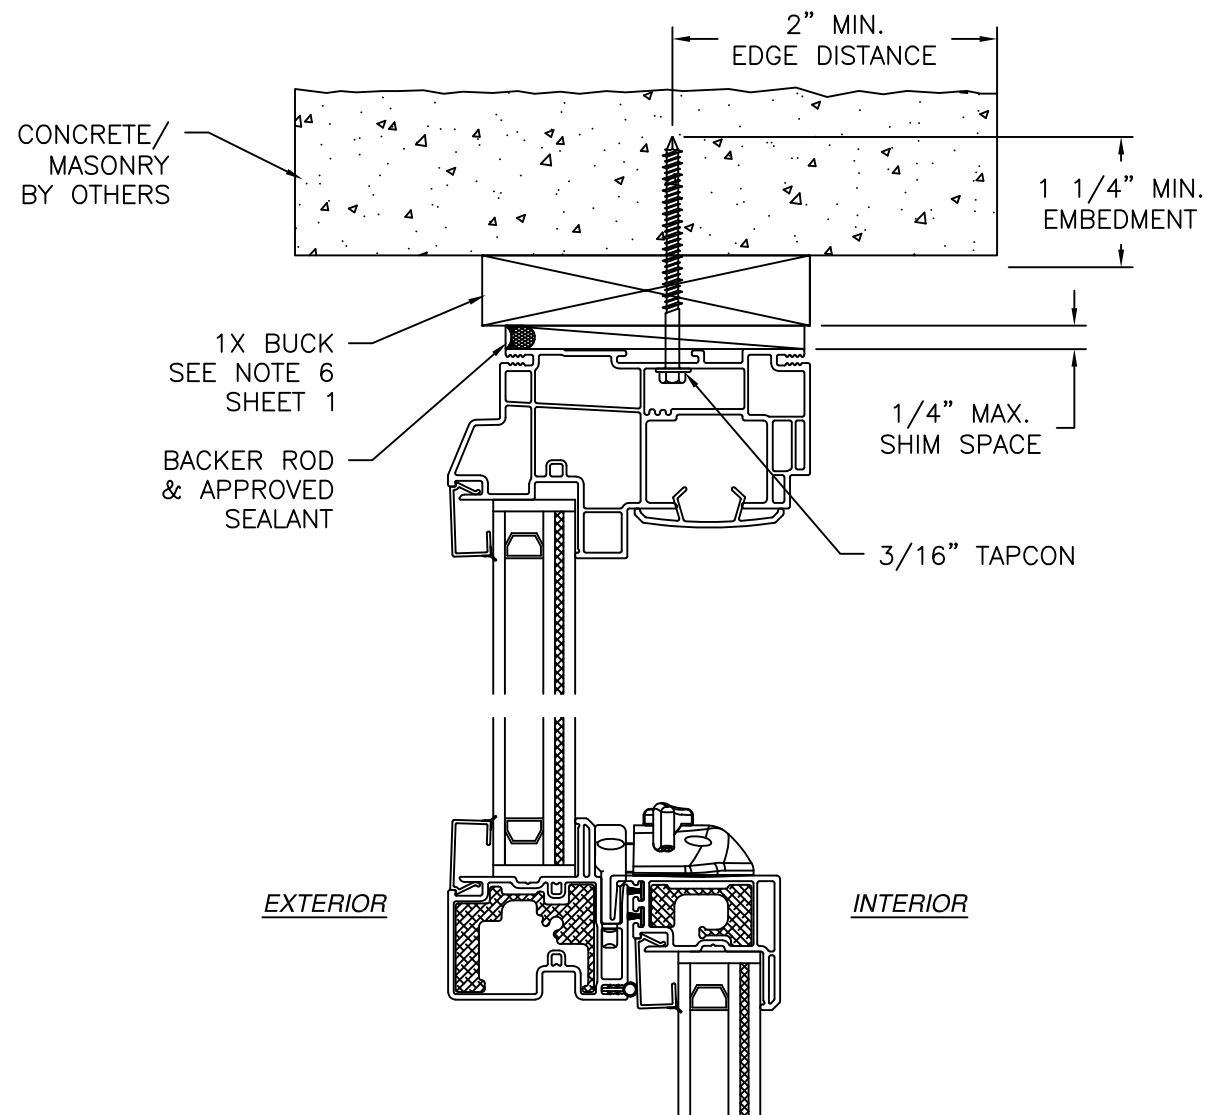

EXTERIOR


INTERIOR

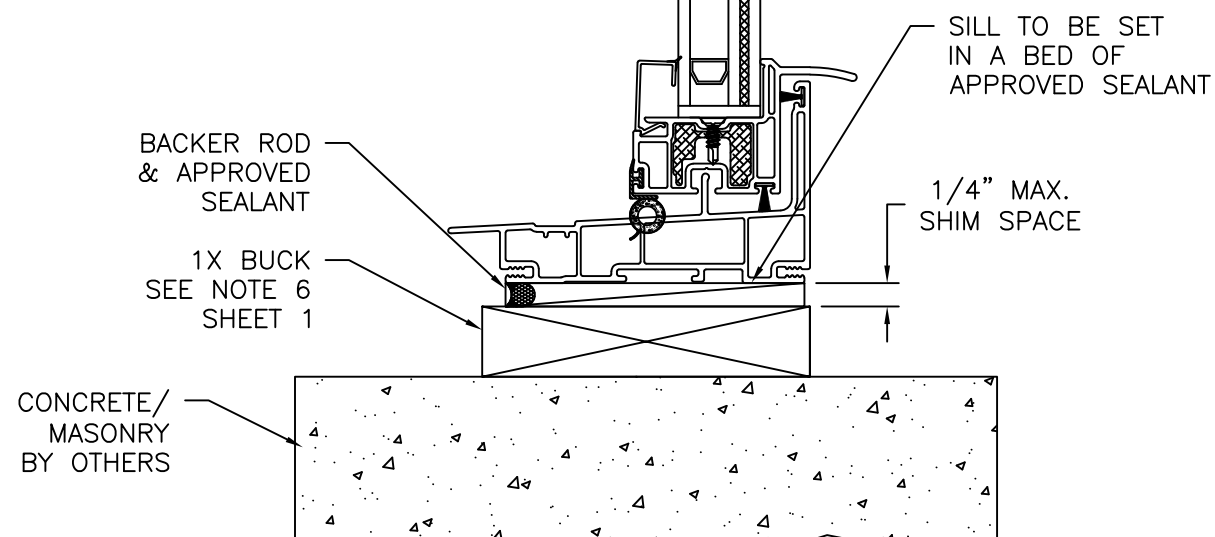

VERTICAL CROSS SECTION

CONCRETE/MASONRY WITH 1X BUCK INSTALLATION
FOR CONCRETE/MASONRY WITHOUT 1X BUCK REFER TO
JAMB INSTALLATION DETAIL

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

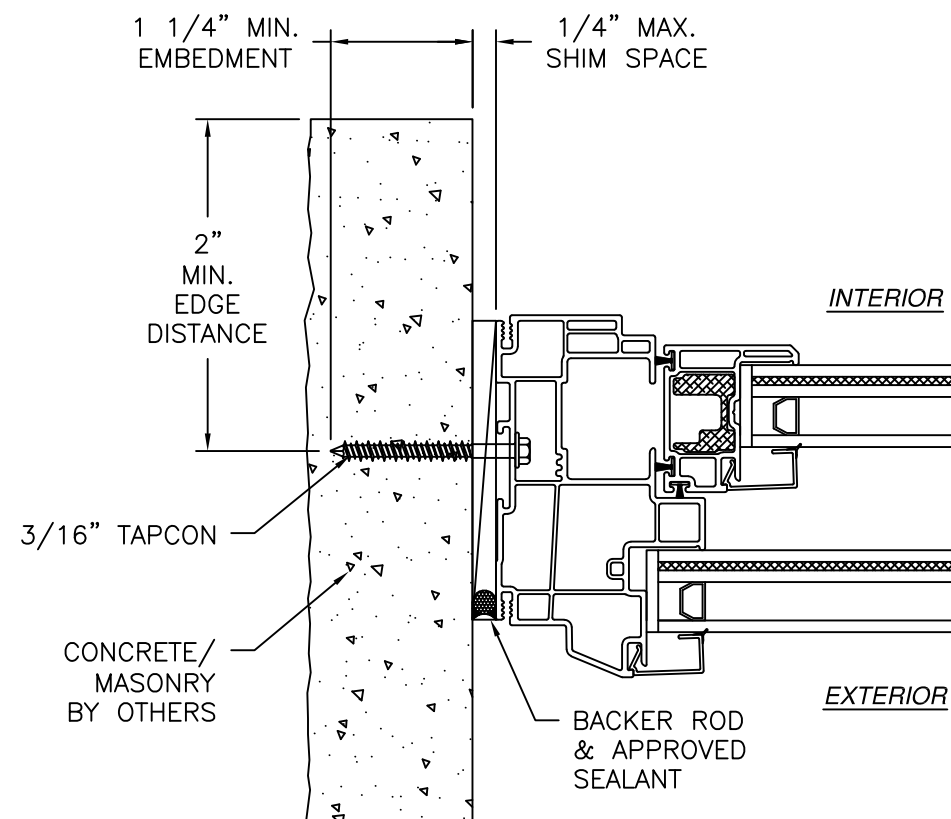

INTERIOR

EXTERIOR

JAMB INSTALLATION DETAIL


CONCRETE/MASONRY WITHOUT 1X BUCK INSTALLATION
FOR CONCRETE/MASONRY WITH 1X BUCK REFER TO
HEAD AND SILL INSTALLATION DETAILS

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112



SIGNED: 07/15/2026

NT WINDOW, INC. 2900 WEST SEMINARY DR. FORT WORTH, TX 76133		
G110 PVC SINGLE HUNG WINDOW REINFORCED IMPACT FINLESS INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-04146	REV -
SCALE NTS	DATE 04/28/2025	SHEET 5 OF 14
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

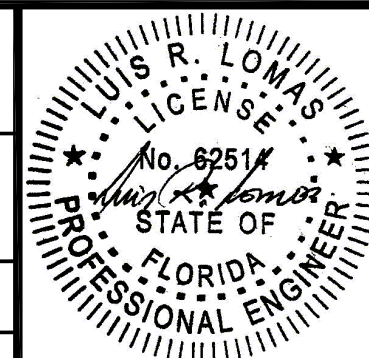


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

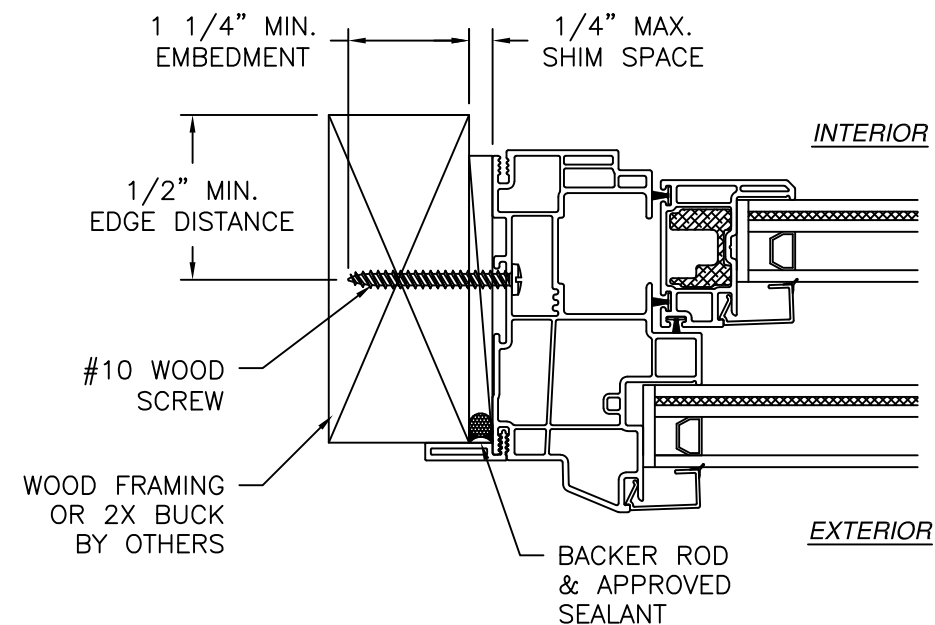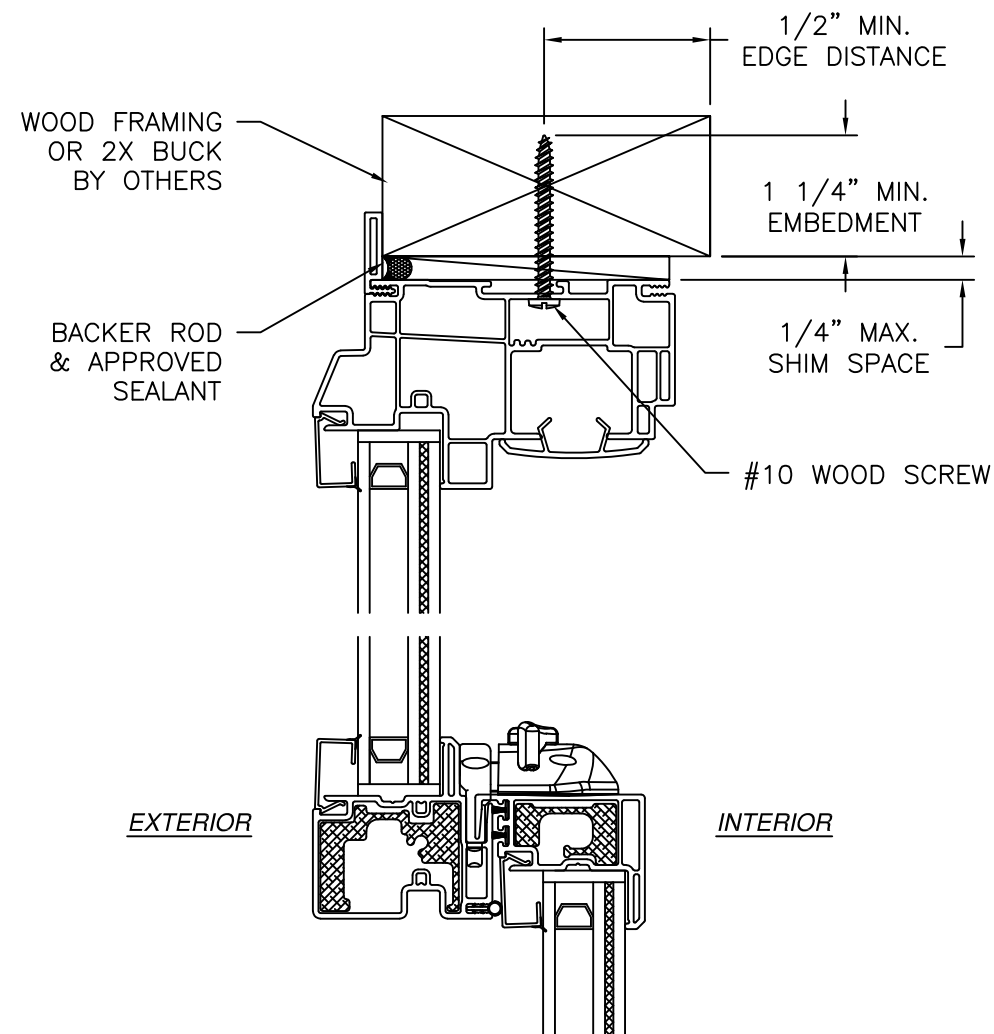

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

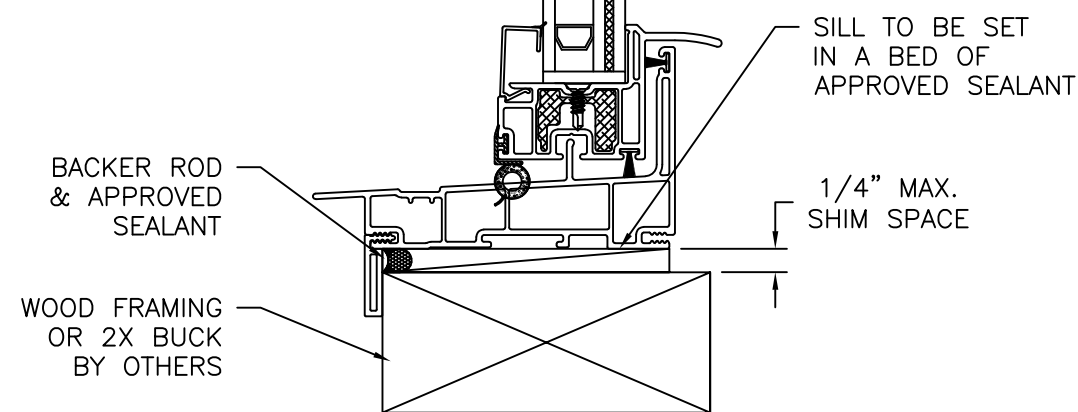


VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112




SIGNED: 07/15/2026

NT WINDOW, INC. 2900 WEST SEMINARY DR. FORT WORTH, TX 76133		
G110 PVC SINGLE HUNG WINDOW REINFORCED IMPACT FLANGE INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-04146	REV -
SCALE NTS	DATE 04/28/2025	SHEET 6 OF 14
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

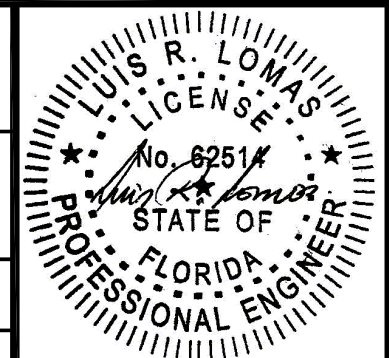

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

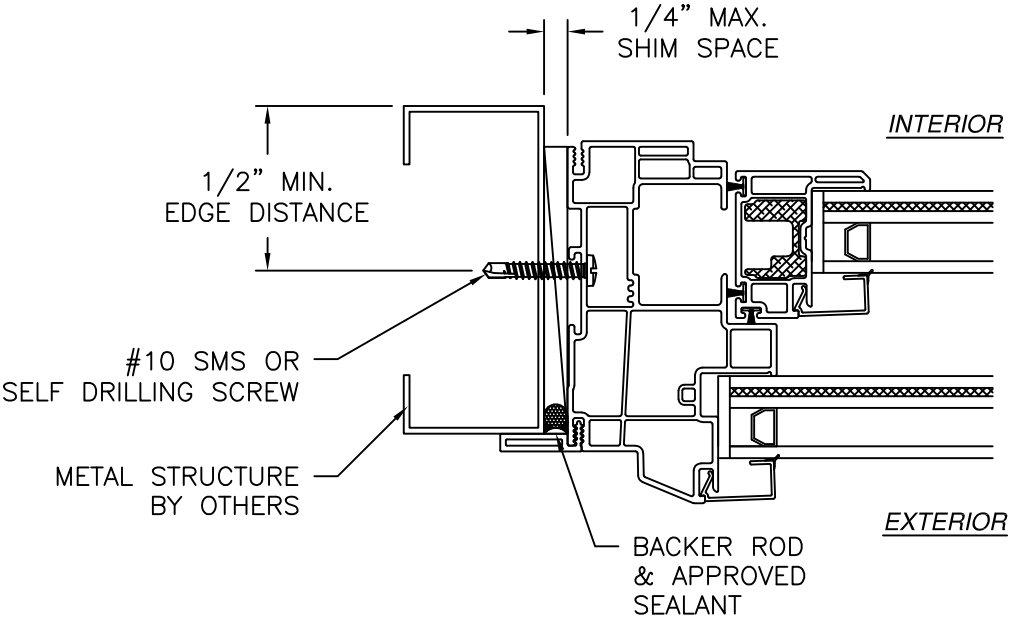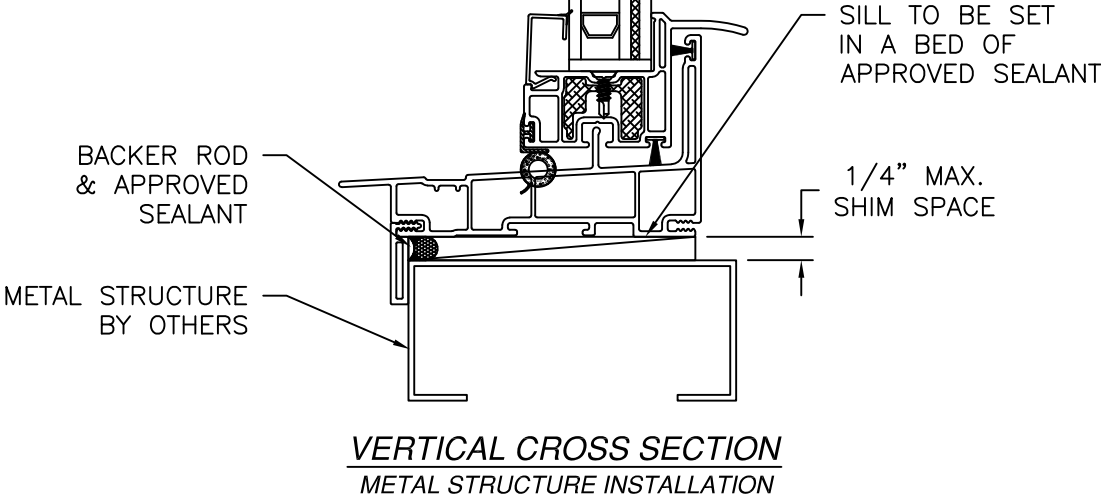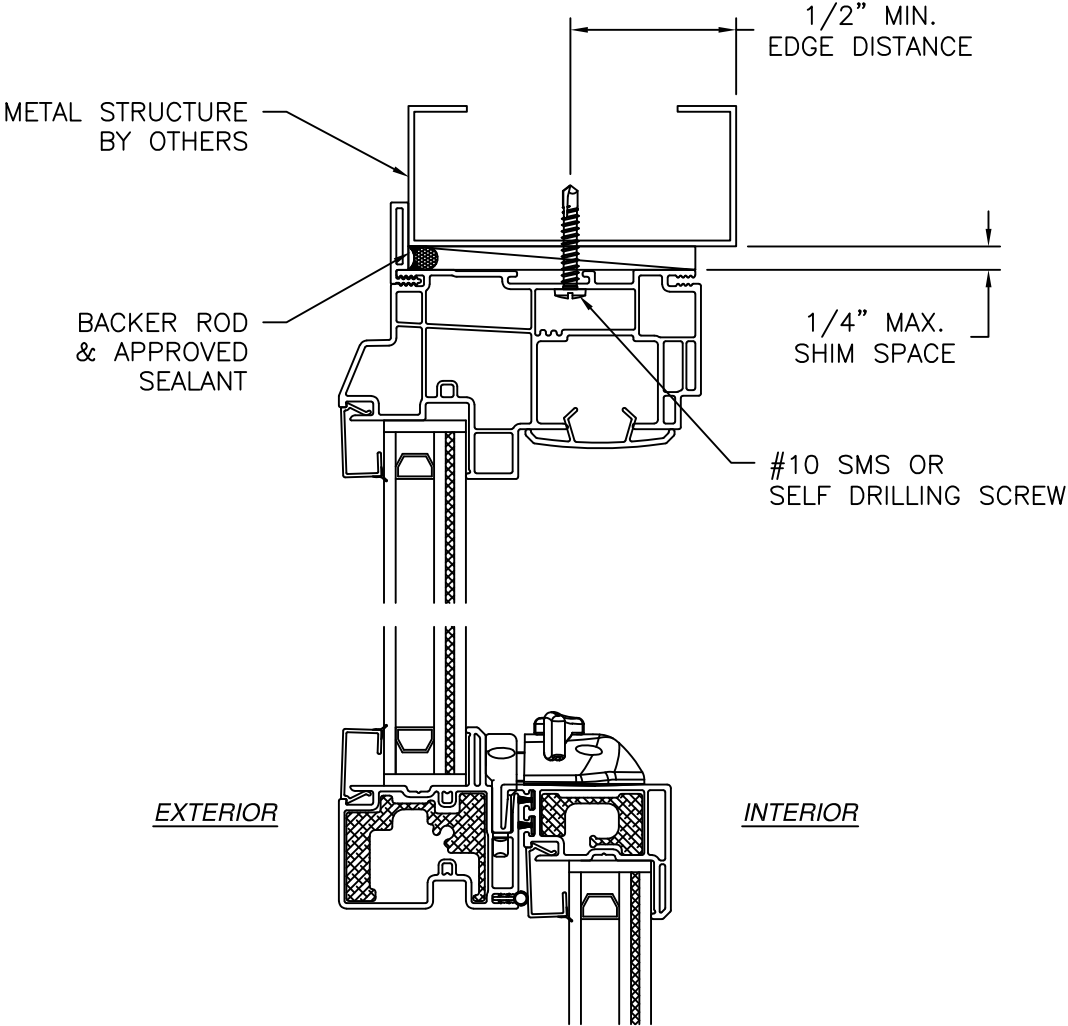

JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 07/15/2026

NT WINDOW, INC.
2900 WEST SEMINARY DR.
FORT WORTH, TX 76133

G110 PVC SINGLE HUNG WINDOW REINFORCED
IMPACT
FLANGE INSTALLATION DETAILS

DRAWN:
A.R.

DWG NO.
08-04146


REV
-

SCALE
NTS


DATE
04/28/2025

SHEET
7 OF 14

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

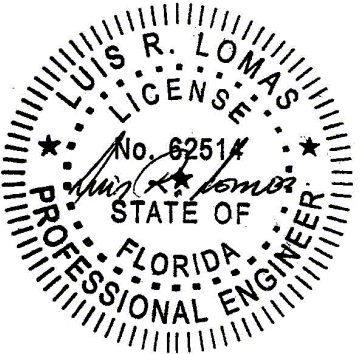


Luis R. Lomas P.E.
FL No.: 62514

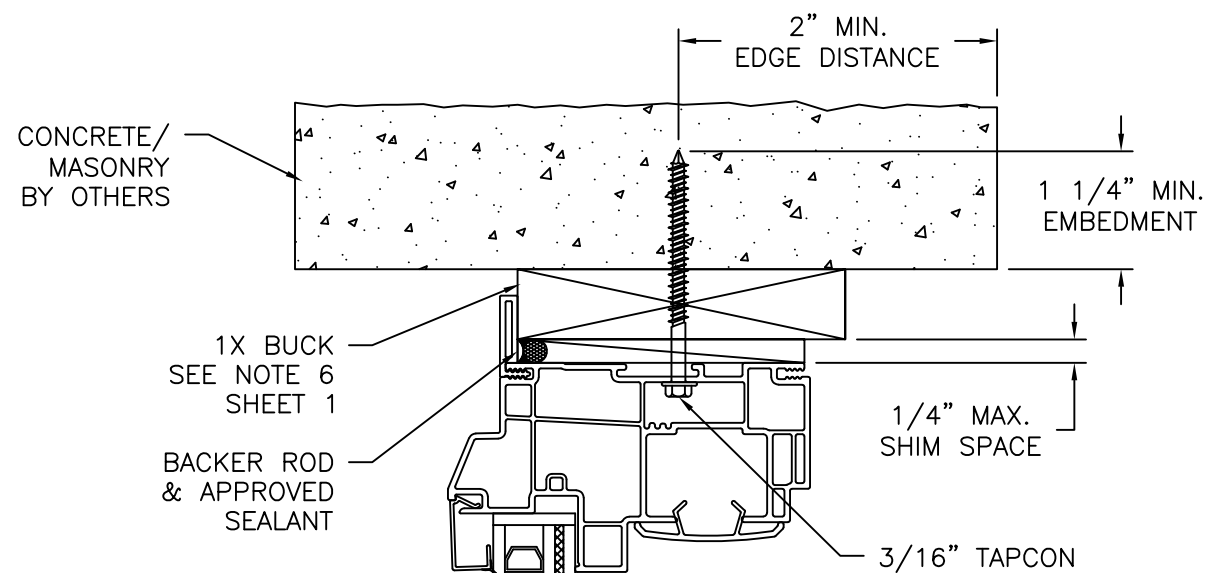


EXTERIOR

INTERIOR

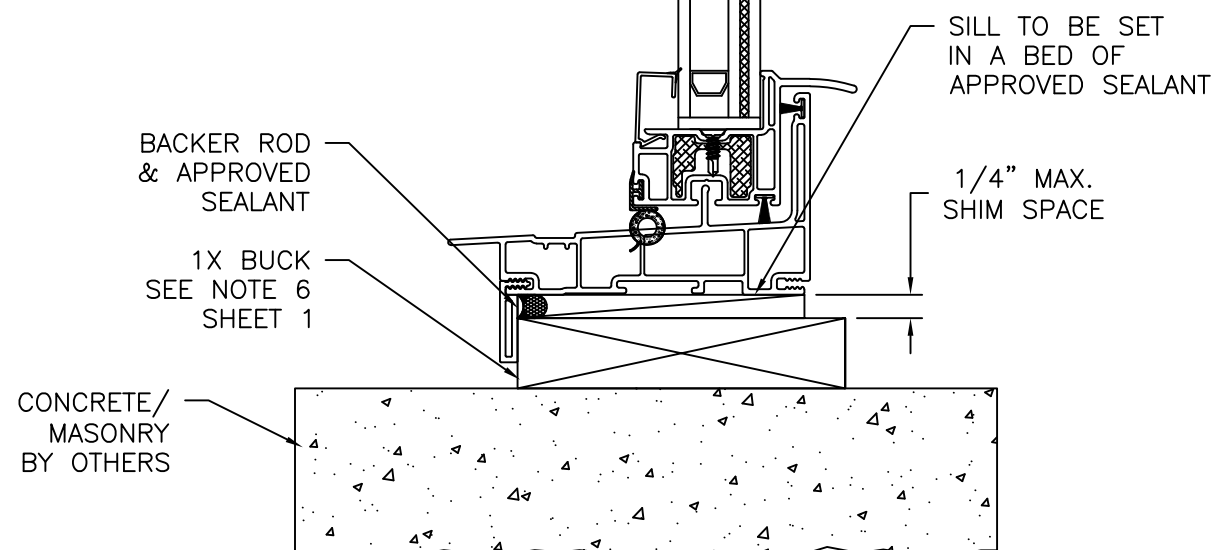

VERTICAL CROSS SECTION
CONCRETE/MASONRY WITH 1X BUCK INSTALLATION
FOR CONCRETE/MASONRY WITHOUT 1X BUCK REFER TO
JAMB INSTALLATION DETAIL

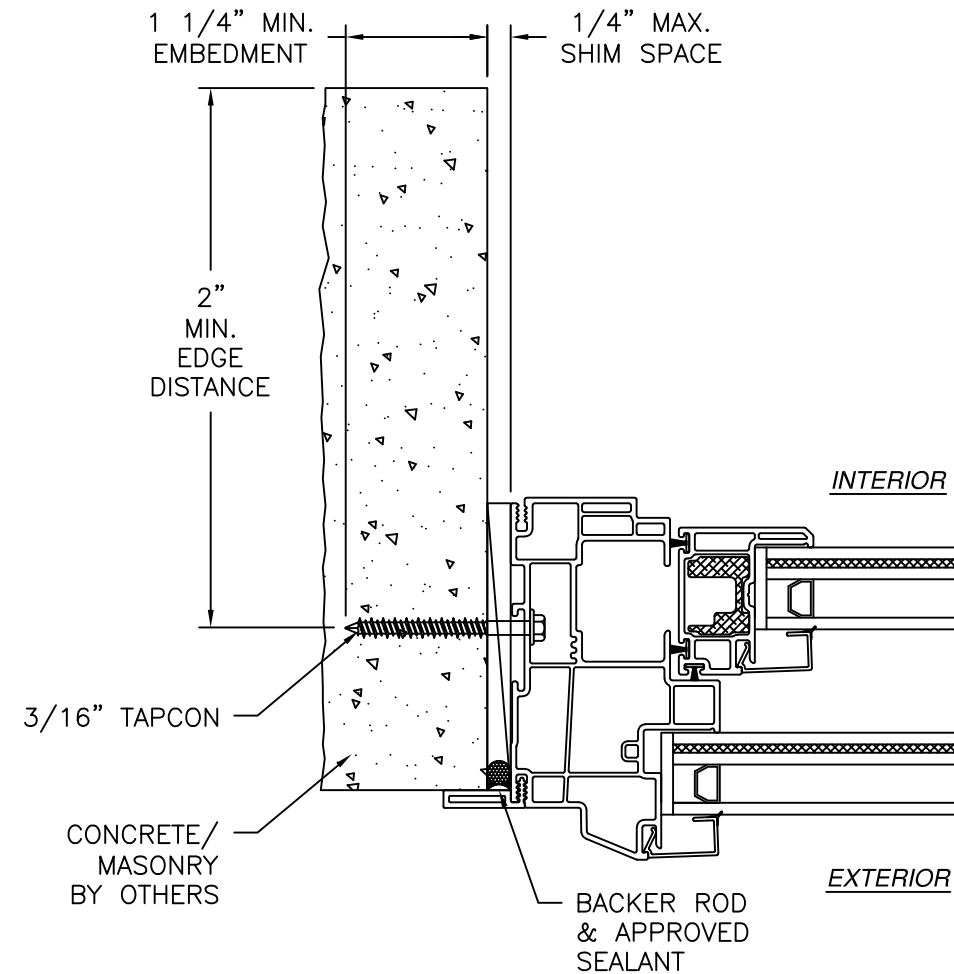


JAMB INSTALLATION DETAIL
CONCRETE/MASONRY WITHOUT 1X BUCK INSTALLATION
FOR CONCRETE/MASONRY INSTALLATION WITH 1X BUCK REFER TO
HEAD AND SILL INSTALLATION DETAILS

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED




NT WINDOW, INC. 2900 WEST SEMINARY DR. FORT WORTH, TX 76133		
G110 PVC SINGLE HUNG WINDOW REINFORCED IMPACT FLANGE INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-04146	REV -
SCALE NTS	DATE 04/28/2025	SHEET 8 OF 14
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

SIGNED: 07/15/2026

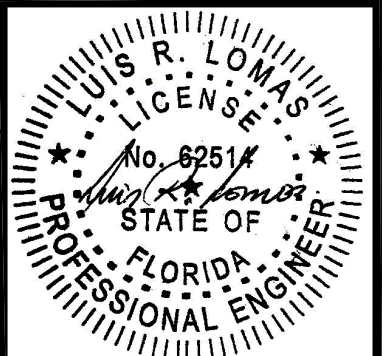

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

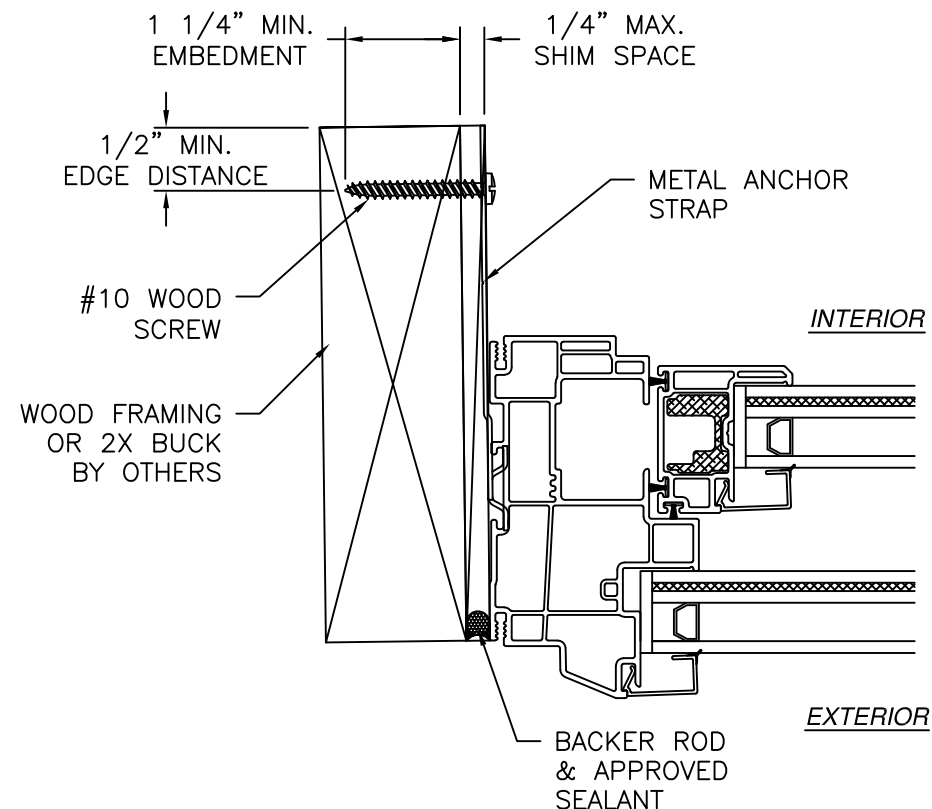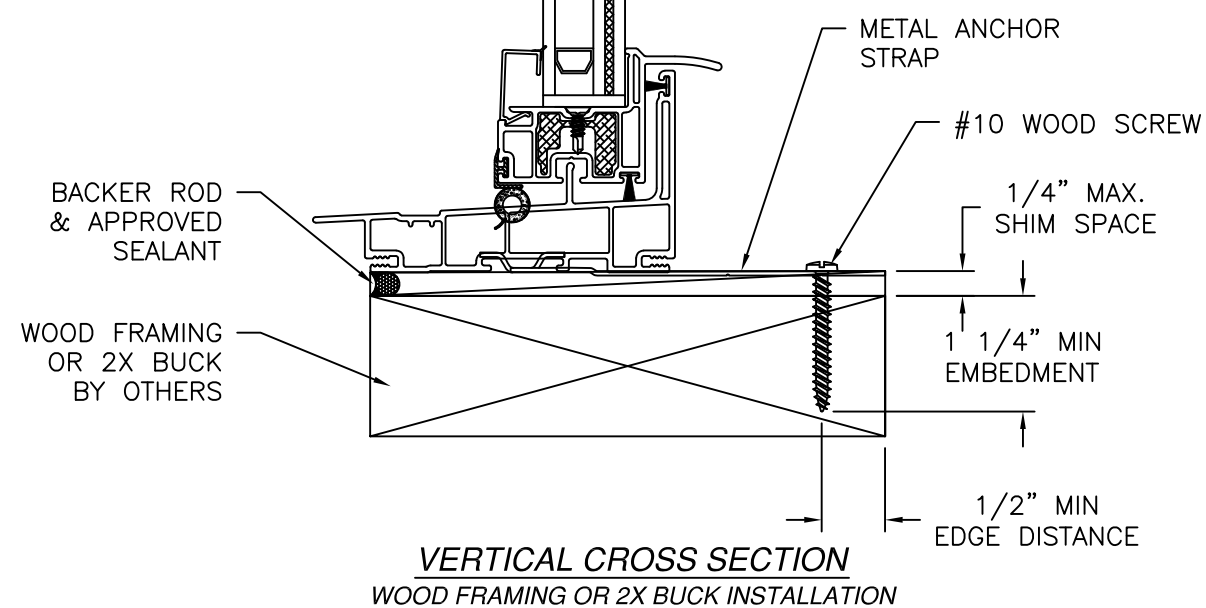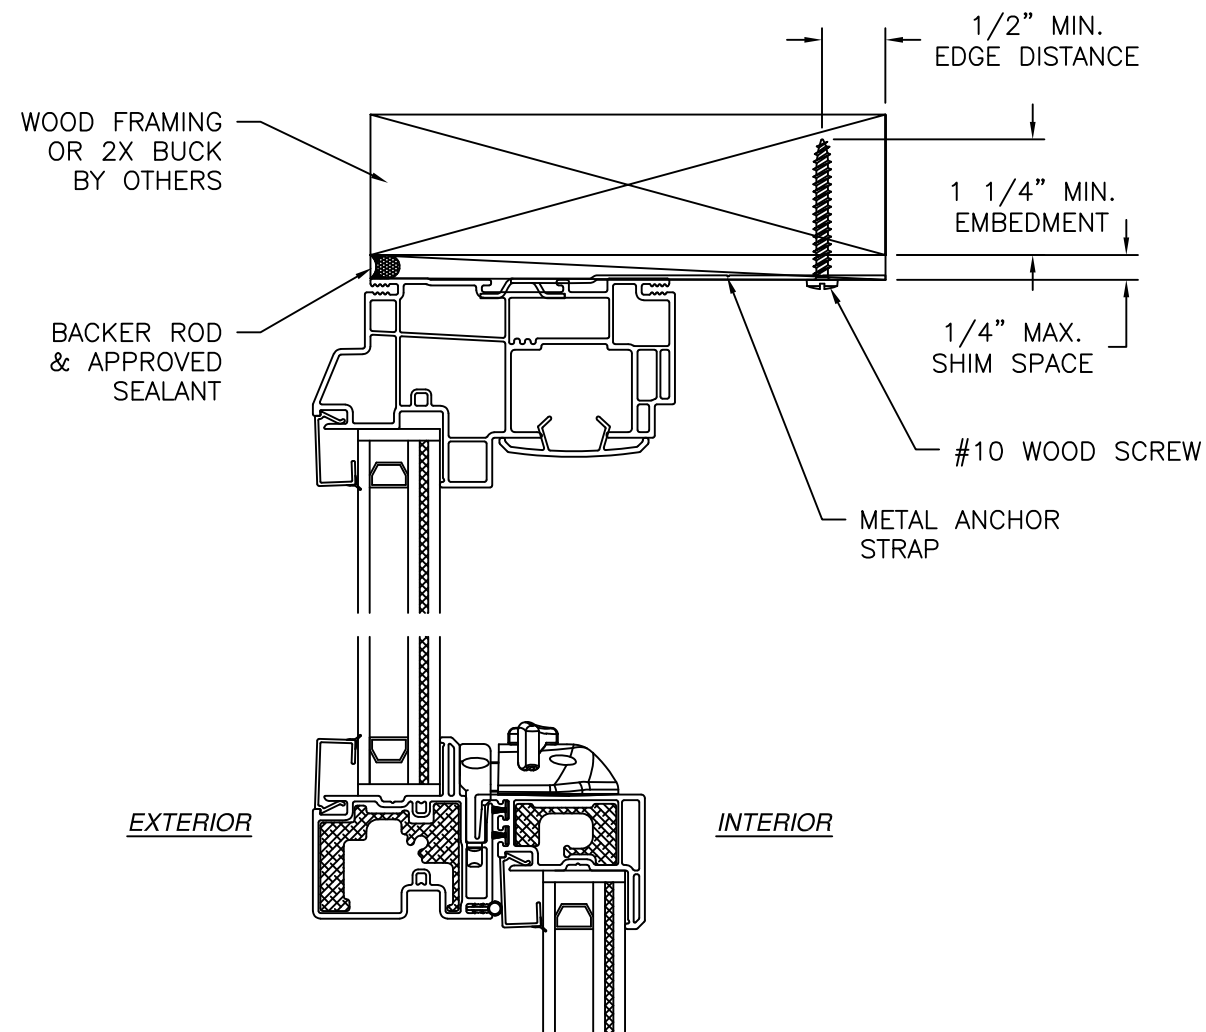


JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112



SIGNED: 07/15/2026

NT WINDOW, INC. 2900 WEST SEMINARY DR. FORT WORTH, TX 76133		
G110 PVC SINGLE HUNG WINDOW REINFORCED IMPACT STRAP INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-04146	REV -
SCALE NTS	DATE 04/28/2025	SHEET 9 OF 14
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

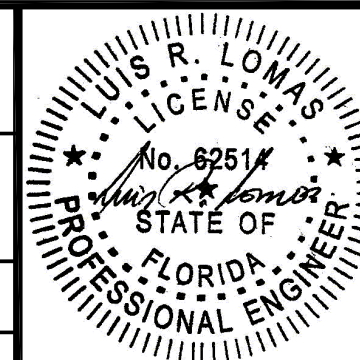


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

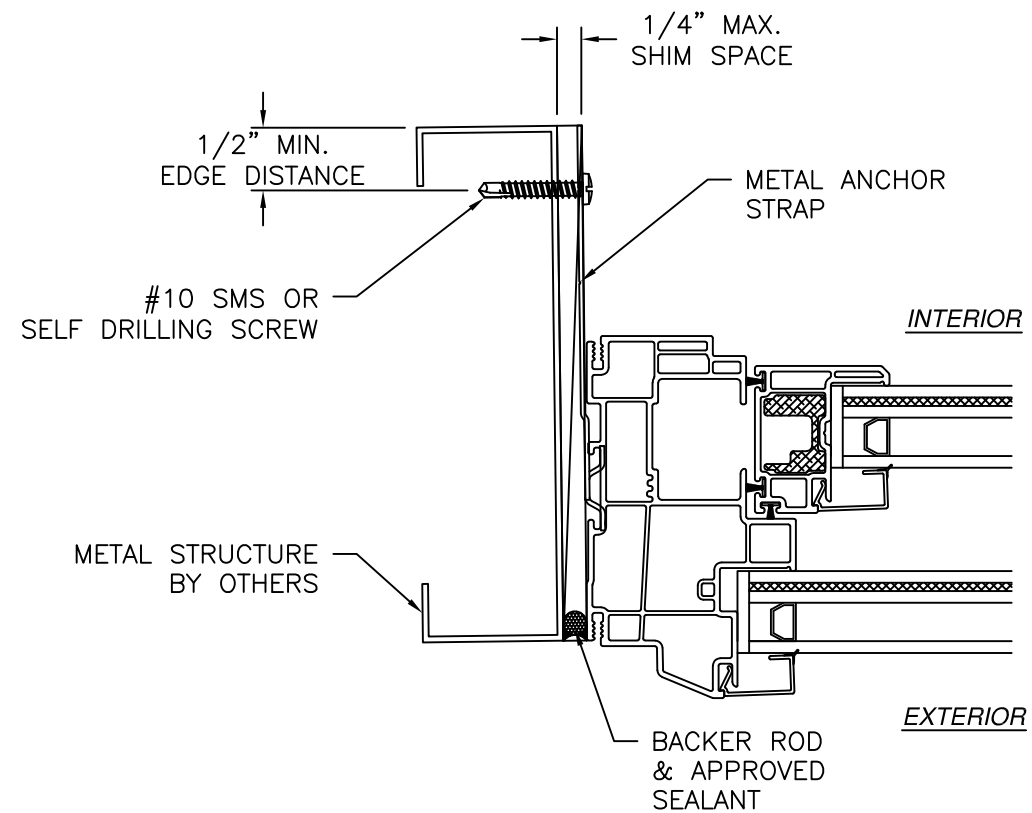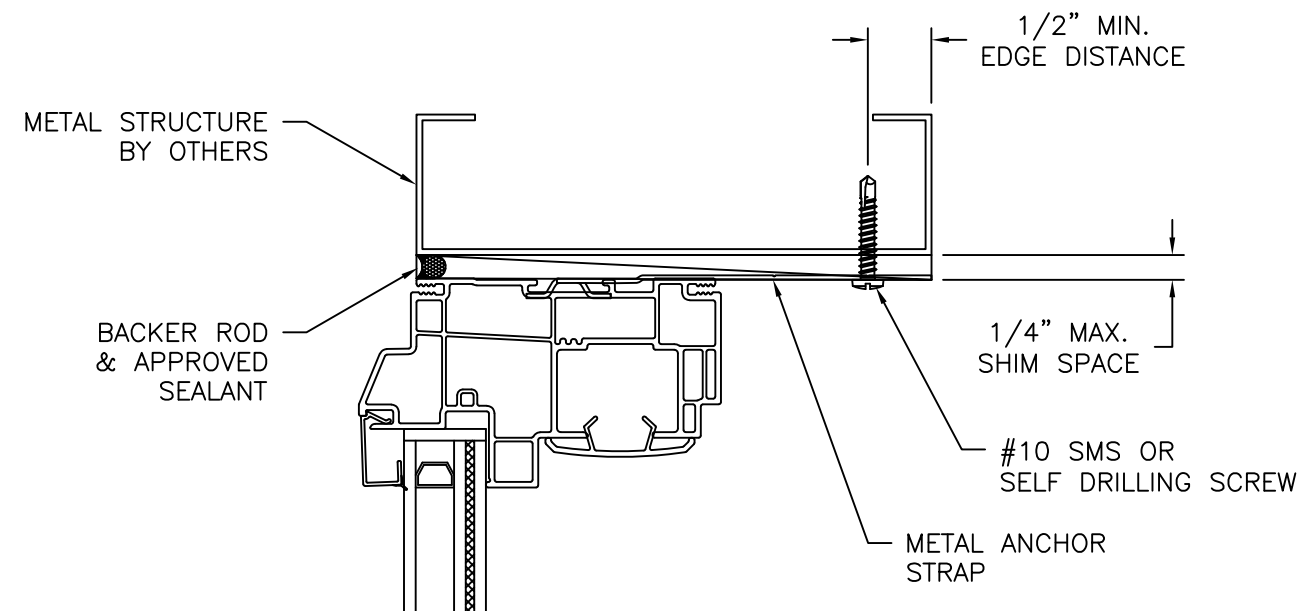

JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION

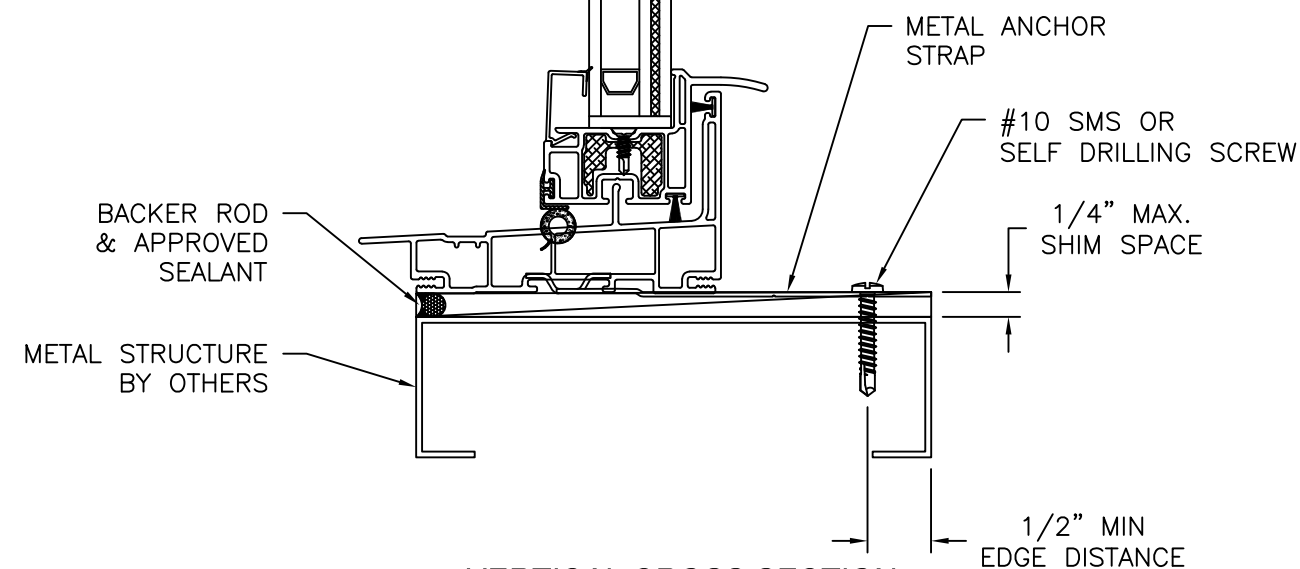


VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION



- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 07/15/2026


NT WINDOW, INC. 2900 WEST SEMINARY DR. FORT WORTH, TX 76133		
G110 PVC SINGLE HUNG WINDOW REINFORCED IMPACT STRAP INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-04146	REV -
SCALE NTS	DATE 04/28/2025	SHEET 10 OF 14
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

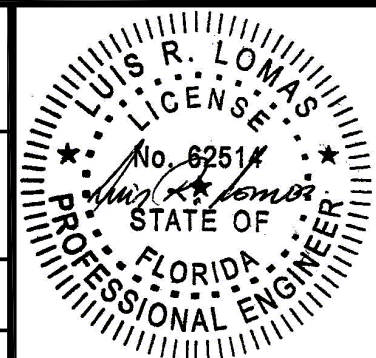

Luis R. Lomas P.E.
FL No.: 62514

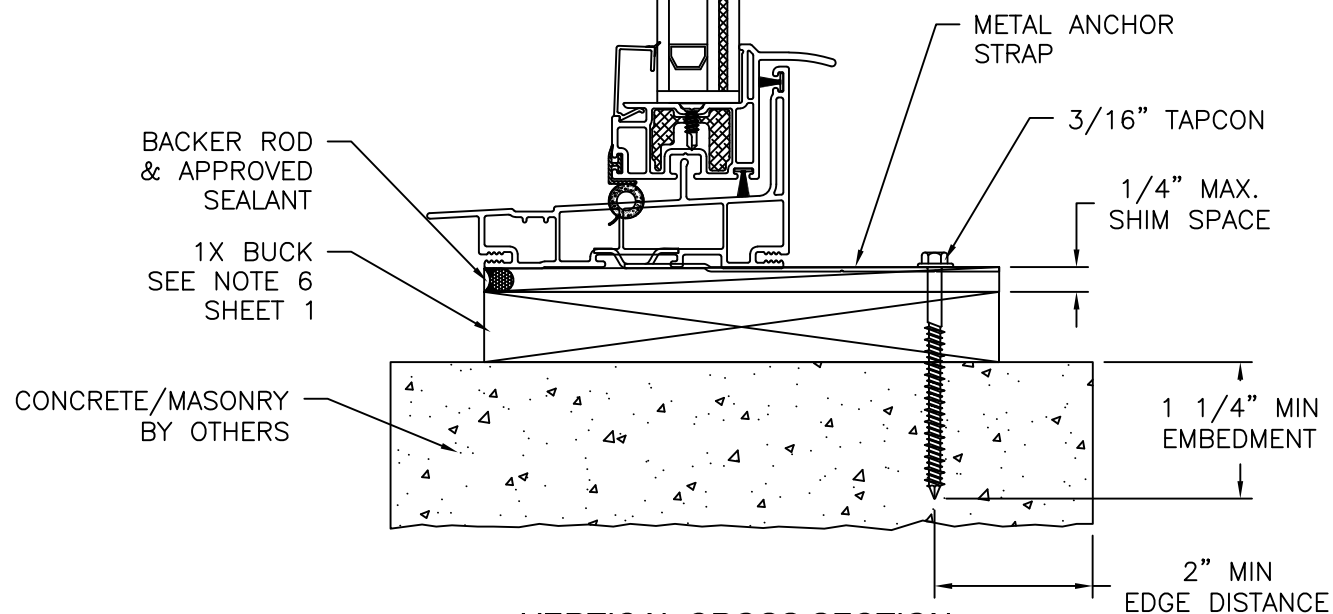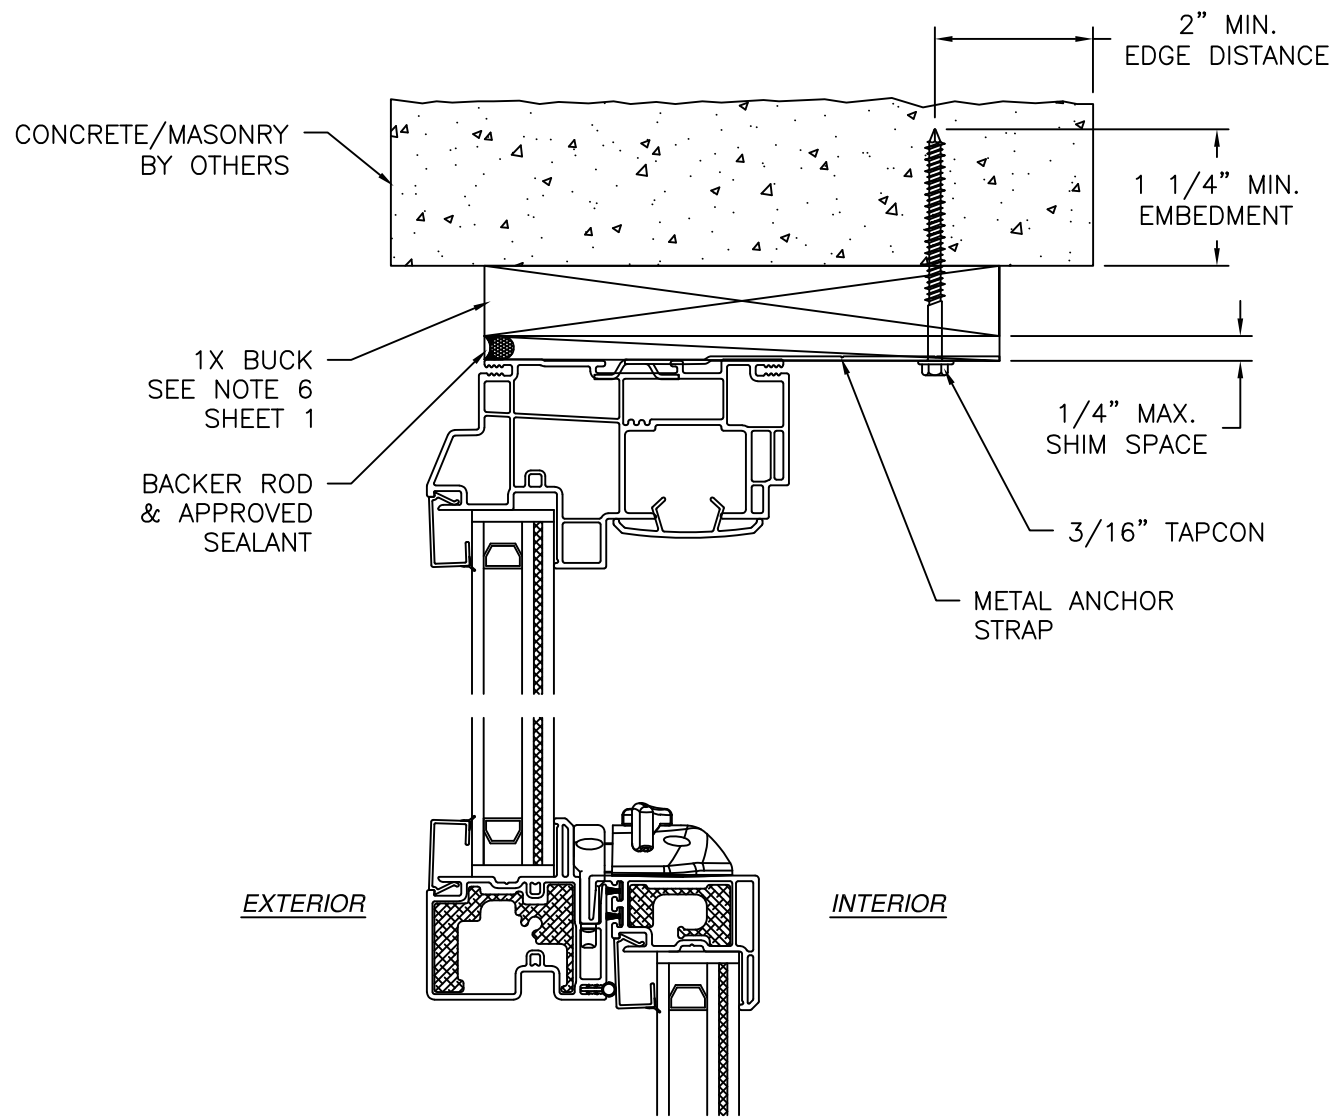

VERTICAL CROSS SECTION
 CONCRETE/MASONRY WITH 1X BUCK INSTALLATION
 FOR CONCRETE/MASONRY WITHOUT 1X BUCK REFER TO
 JAMB INSTALLATION DETAIL

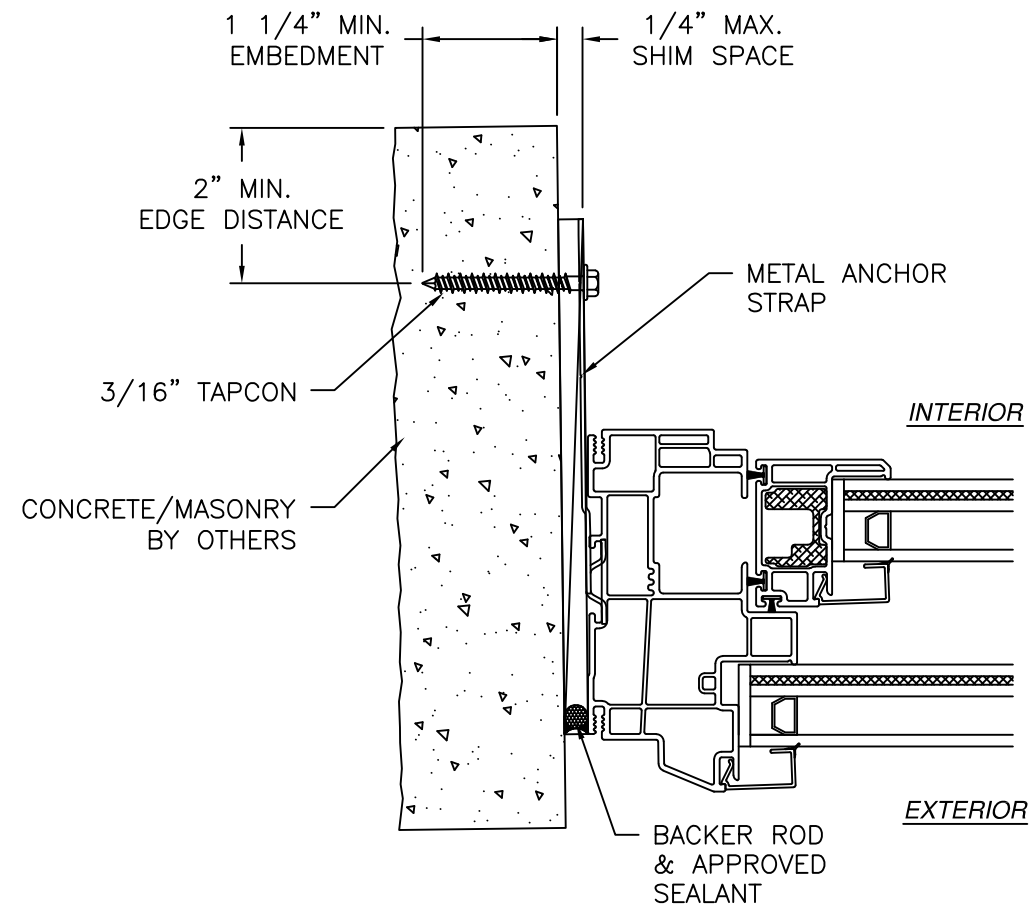


JAMB INSTALLATION DETAIL
 CONCRETE/MASONRY WITHOUT 1X BUCK INSTALLATION
 FOR CONCRETE/MASONRY WITH 1X BUCK REFER TO
 HEAD AND SILL INSTALLATION DETAILS

- NOTES:**
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED




NT WINDOW, INC. 2900 WEST SEMINARY DR. FORT WORTH, TX 76133		
G110 PVC SINGLE HUNG WINDOW REINFORCED IMPACT STRAP INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-04146	REV -
SCALE NTS	DATE 04/28/2025	SHEET 11 OF 14
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

SIGNED: 07/15/2026

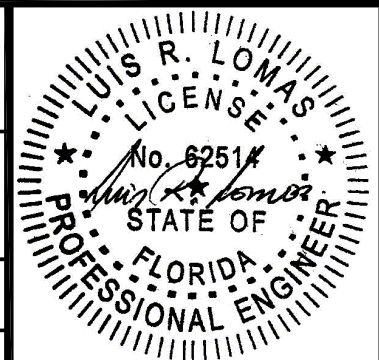

Luis R. Lomas P.E.
 FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

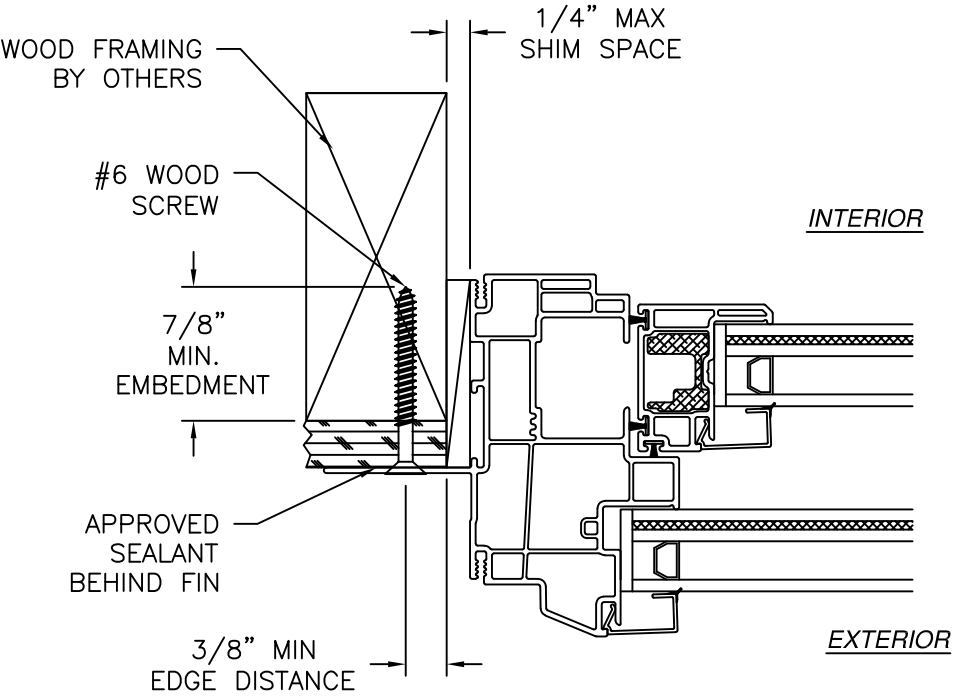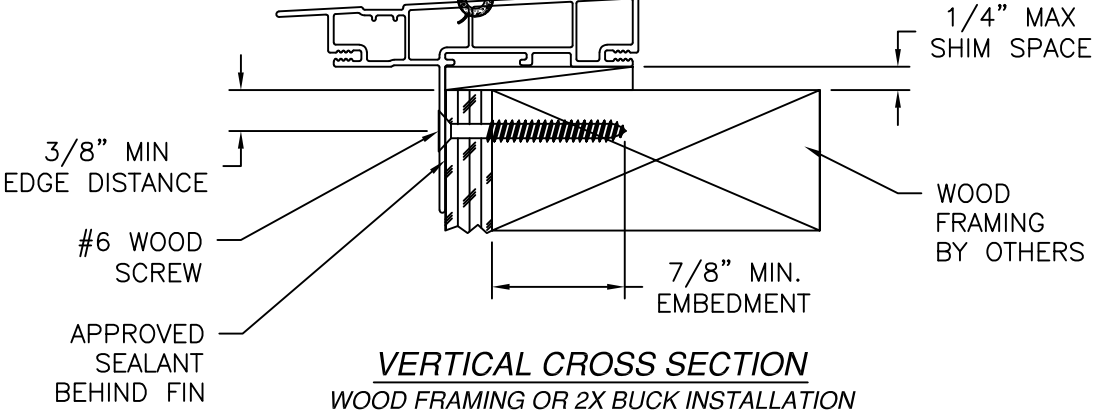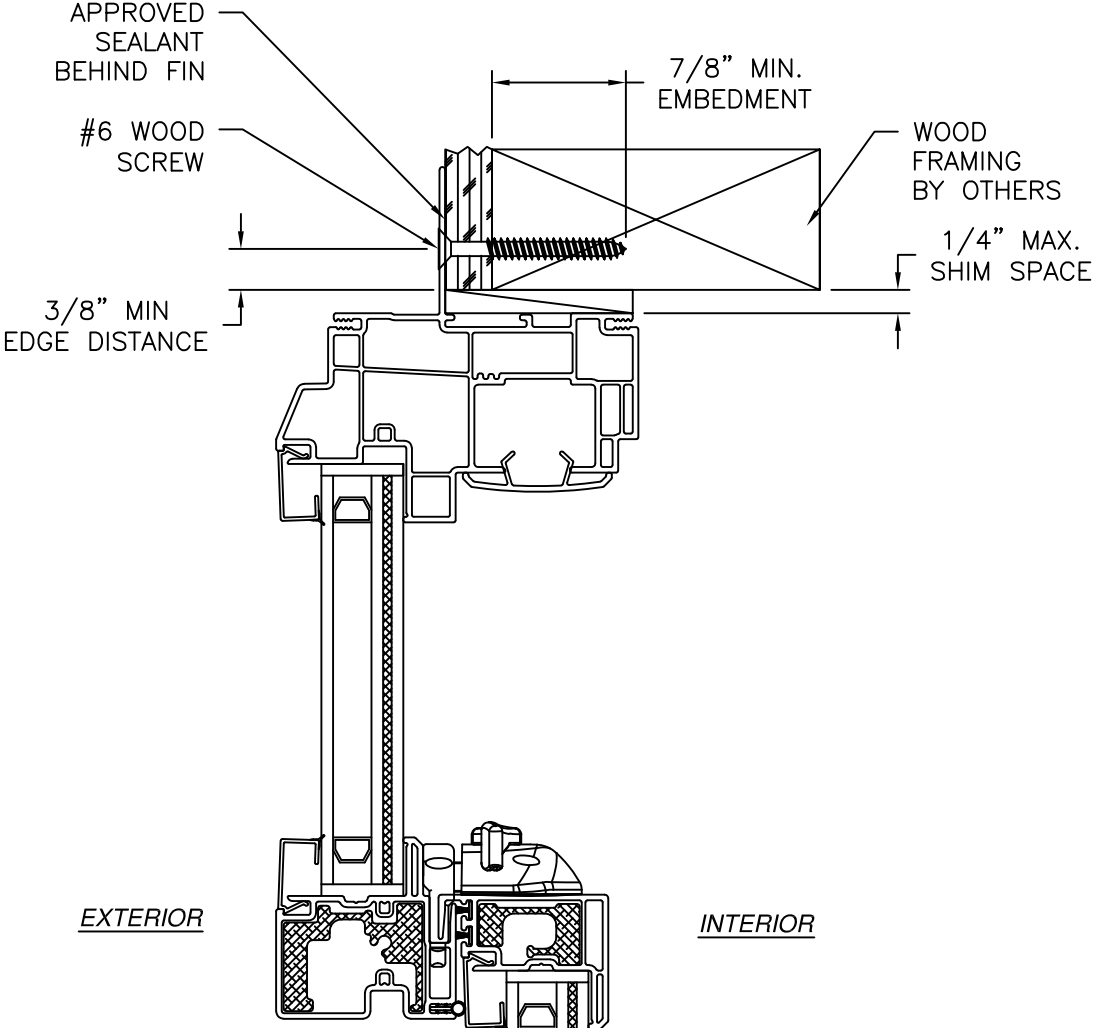

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

- NOTES:
- 1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


SIGNED: 07/15/2026

NT WINDOW, INC.
2900 WEST SEMINARY DR.
FORT WORTH, TX 76133

G110 PVC SINGLE HUNG WINDOW REINFORCED
IMPACT
FIN INSTALLATION DETAILS



DRAWN: A.R.	DWG NO. 08-04146	REV -
SCALE NTS	DATE 04/28/2025	SHEET 12 OF 14

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

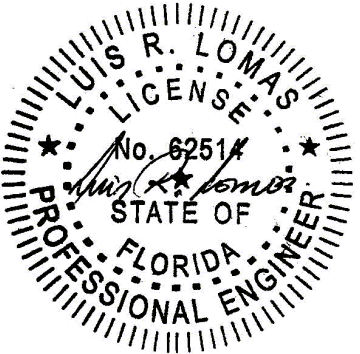

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

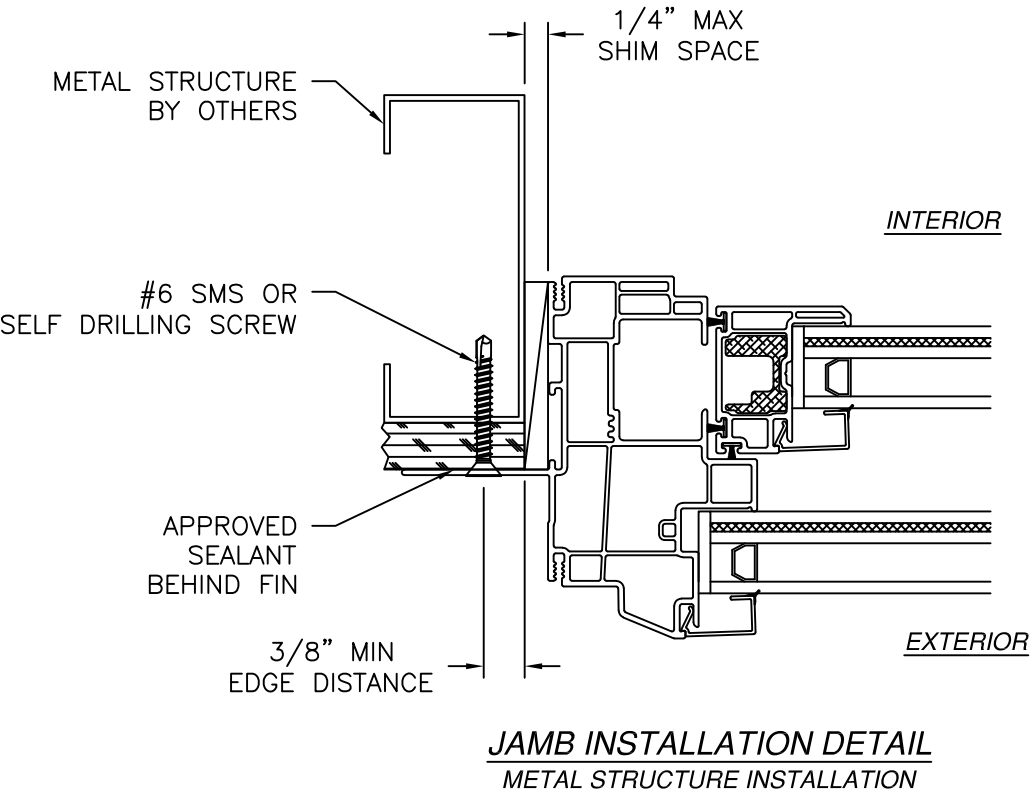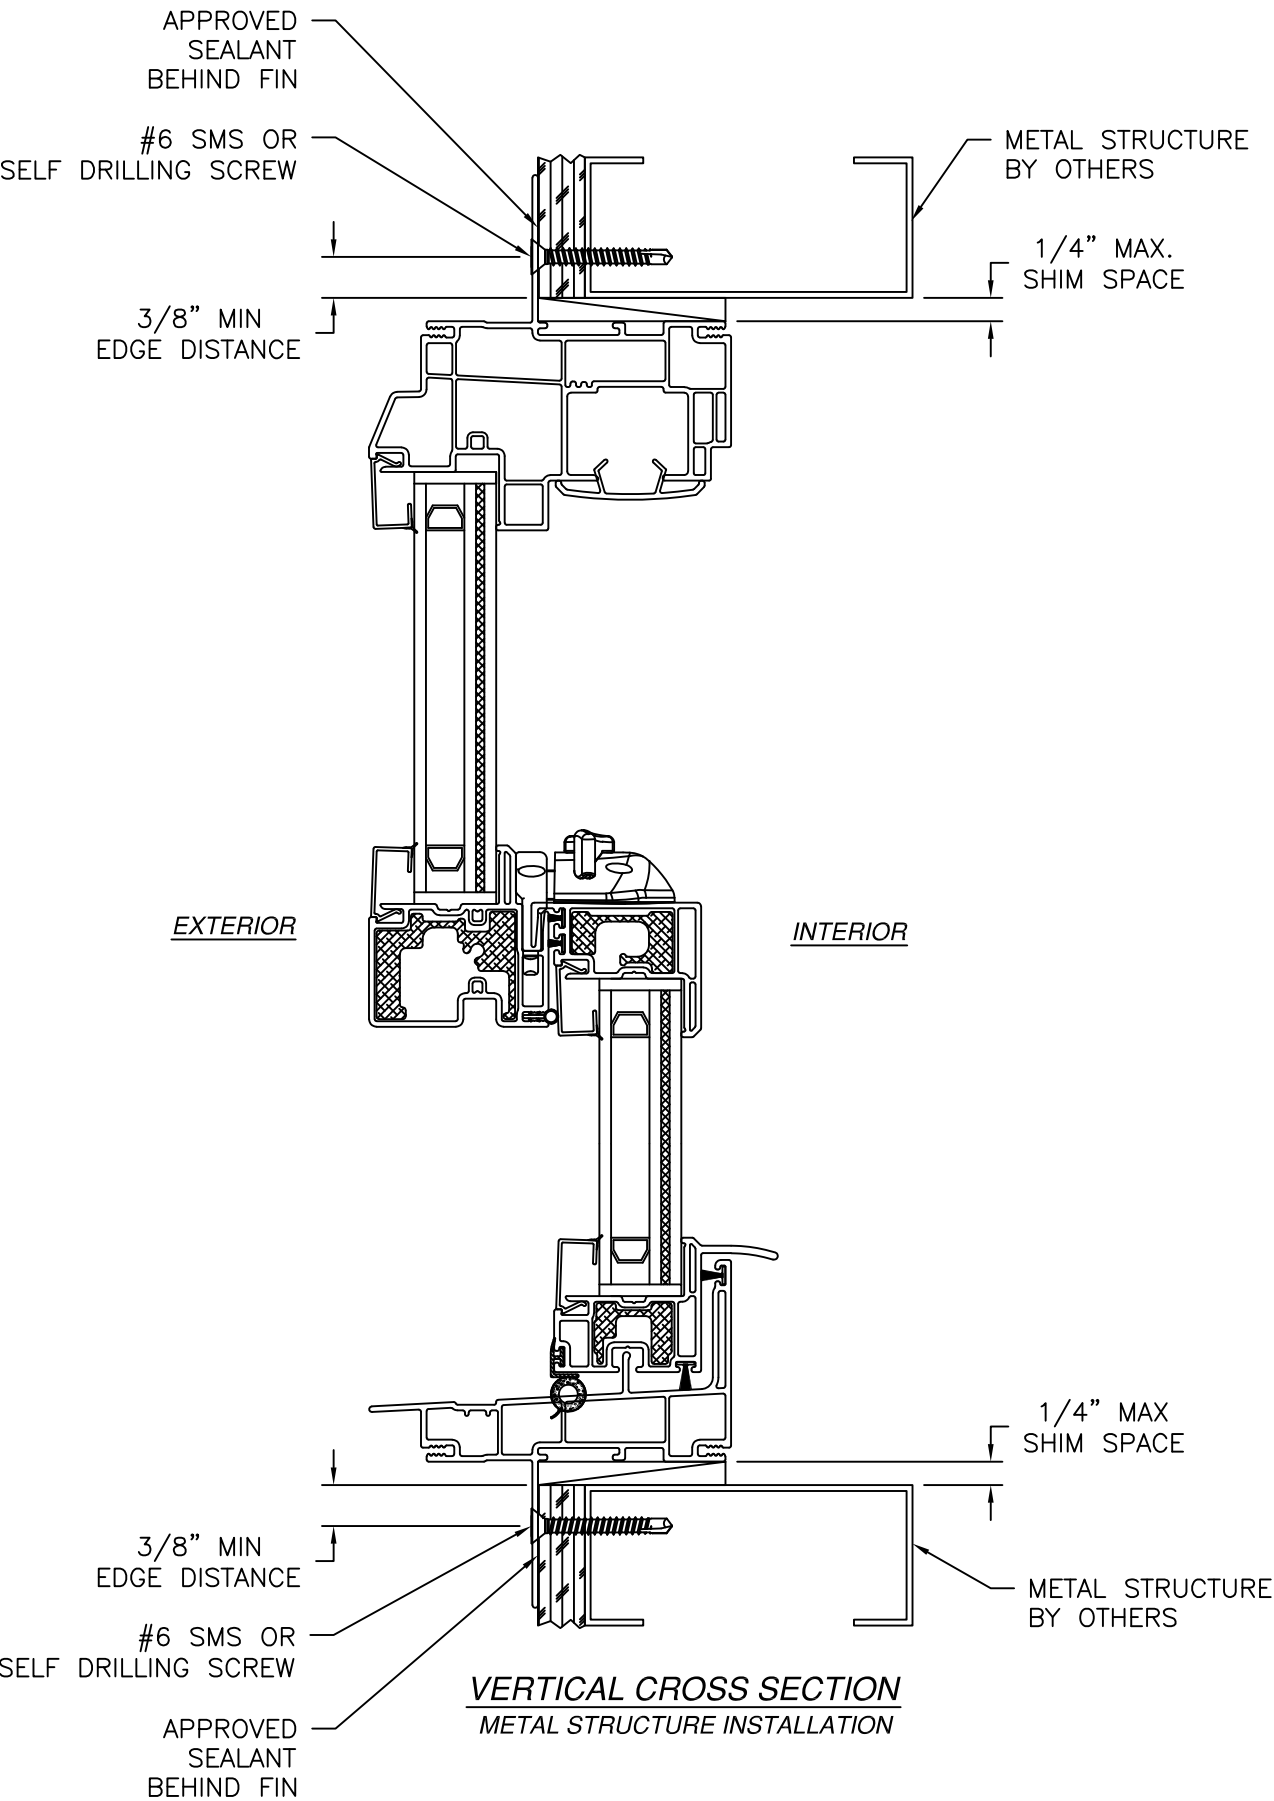

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 07/15/2026

NT WINDOW, INC.
2900 WEST SEMINARY DR.
FORT WORTH, TX 76133

G110 PVC SINGLE HUNG WINDOW REINFORCED
IMPACT
FIN INSTALLATION DETAILS

DRAWN:
A.R.

DWG NO.
08-04146


REV
-

SCALE
NTS

DATE
04/28/2025


SHEET
13 OF 14

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

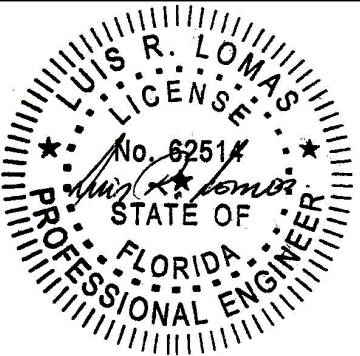


Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

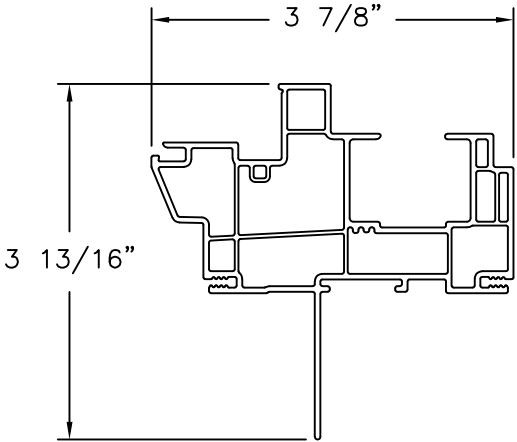


HEAD & JAMB (1853)
EXTRUDED PVC

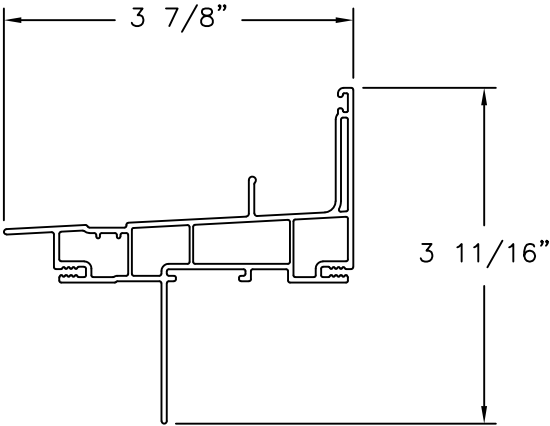


SILL (1852)
EXTRUDED PVC

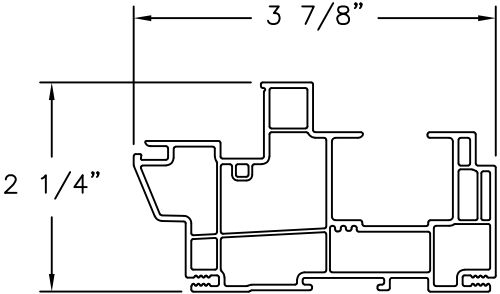


HEAD & JAMB (1833)
EXTRUDED PVC

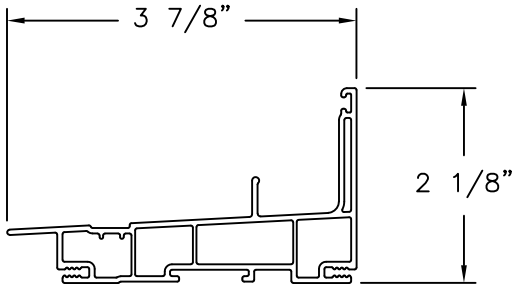


HEAD & JAMB (1832)
EXTRUDED PVC

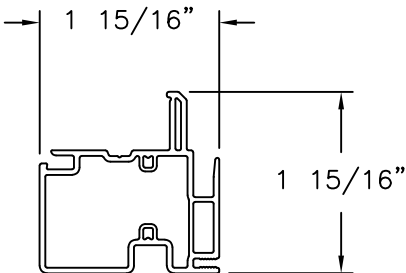


MEETING RAIL (1837)
EXTRUDED PVC

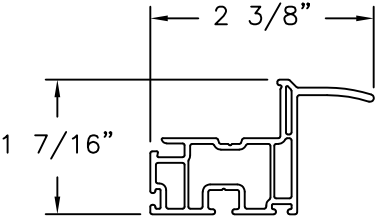


HANDLE RAIL (1805)
EXTRUDED PVC

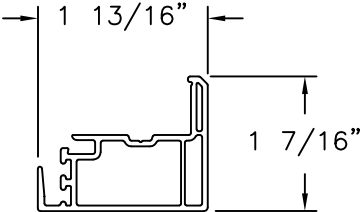


LOCK RAIL (1806)
EXTRUDED PVC

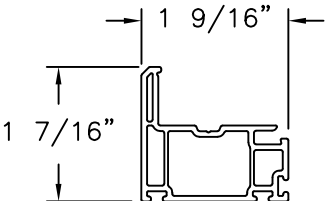


STILE (1808)
EXTRUDED PVC

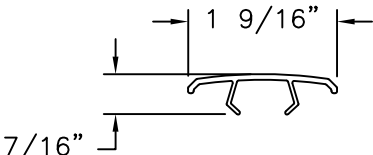


HEAD ADAPTER (1863)
EXTRUDED PVC

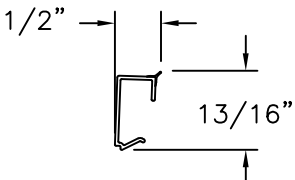


GLAZING BEAD (856)
EXTRUDED PVC

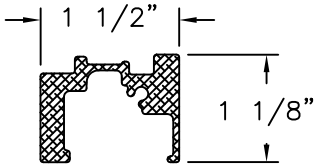


REINFORCEMENT (15952)
ALUMINUM 6063-T5

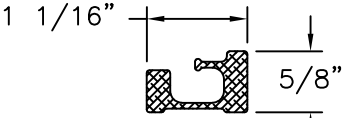


REINFORCEMENT (15955)
ALUMINUM 6063-T5

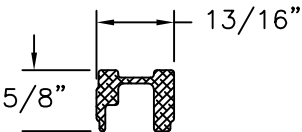

REINFORCEMENT (15953)
ALUMINUM 6063-T5

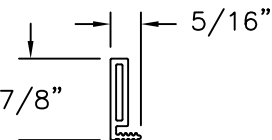

FLANGE
EXTRUDED PVC

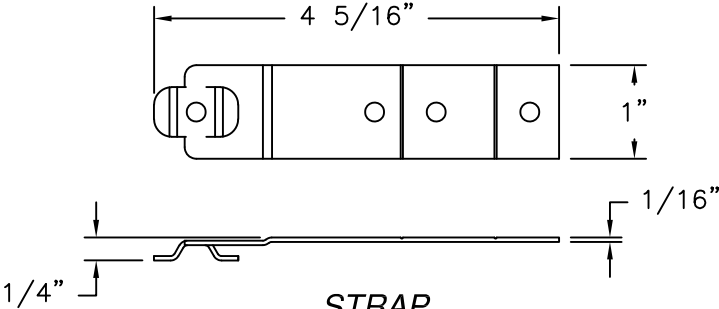

STRAP
18GA STEEL

SIGNED: 07/15/2026

NT WINDOW, INC.
2900 WEST SEMINARY DR.
FORT WORTH, TX 76133

G110 PVC SINGLE HUNG WINDOW REINFORCED
IMPACT
COMPONENTS

DRAWN:
A.R.

DWG NO.
08-04146


REV
-

SCALE
NTS

DATE
04/28/2025

SHEET
14 OF 14

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

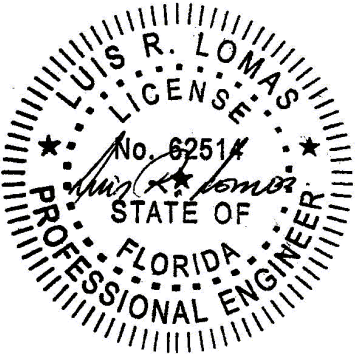

Luis R. Lomas P.E.
FL No.: 62514