



Farabaugh Engineering and Testing Inc.

Project No. T334-22

Report Date: January 5, 2023


No. Pages: 9 (inclusive)

UL 580 / UL1897 UPLIFT RESISTANCE TESTING

**GEORGIA RIB ROOF PANEL
36" WIDE X 29 GA STEEL
(WITH PURLINS OVER 7/16" OSB)**

FOR

GEORGIA METALS, INC.
539 GENERAL DANIELS AVE. NORTH
DANIELSVILLE, GA 30633

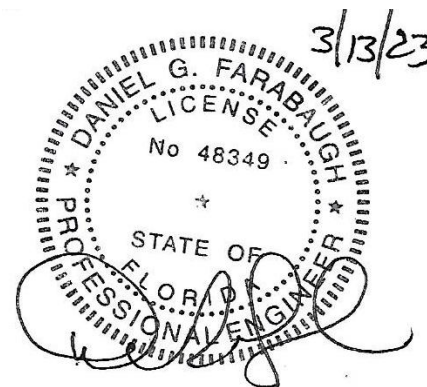

DANIEL G. FARABAUGH, P.E.
255 Saunders Station Rd
Trafford, PA 15085
412-417-5153

Prepared by:

Paul G. Farabaugh

Approved by:

Daniel G. Farabaugh



DADE COUNTY
ACCREDITED
LABORATORY



AAMA
ACCREDITED
LABORATORY



FLORIDA
ACCREDITED
LABORATORY
& QC ENTITY

Purpose

This test method covers the evaluation of uplift resistance of roof assemblies per UL 580-06, rev. 2013 and UL 1897-12, rev. 2015 and as provided herein.

Test Specimen

Manufacturer: Georgia Metals, Inc.
539 General Daniels Ave. N.
Danielsville, GA 30633

Specimen: Georgia Rib Metal Roof Panel, 36" wide (Coverage), 29 ga steel

Substrate: 7/16" Norbord APA OSB (0.418" thick)
Span Rating: 24/16
Exposure 1
PS 2-18 sheathing

Purlins: 1 x 4 planking (#2 SYP.)

Testing Apparatus

Test Chamber: The test chamber consists of three sections: a top section to create a uniform vacuum, a center section in which the roof assembly is constructed, and a bottom section to create a uniform positive pressure.

Pressure Chamber: The air pressure in the pressure chamber was measured at five points. Each of four points were located 42" from chamber corners at a 45 degree angle, with the fifth tube located 18" from the center of the air inlet opening. The end of each tube was 7" above the chamber floor. The tubes were connected to a manifold that, in turn was connected to a manometer.

Vacuum Chamber Measurement: The air pressure in the vacuum chamber was measured at five points. Each of four points was located 18" from chamber corners at a 45 degree angle and 8" above the chamber floor. The fifth tube located 12" from the center of the exhaust opening and 6" below the opening. The tubes were connected to a manifold that, in turn was connected to a manometer. The pressure in the vacuum chamber was controlled by an automatic damper. The damper door was moved by means of an air motor hooked to an air line and controlled by pressure switches located in the control console. An additional pressure line from the manifold to pressure switches controlled the automatic damper.

Installation

- The 7/16" OSB wood deck substrate was attached to the wood joists (2 x 10) supports (spaced at 2'-0" o.c.) using 8d ring shank nails at 6" on center around the perimeter and at interior supports.
- 1 x 4 wood purlins (No. 2 SYP) spaced at 24" o.c. were attached on top of the wood deck and into the wood joists using (2) #10 x 2-1/2" long, bugle head, 17 pt., wood screws located at each joist.
- The metal roof panels were attached thru the wood purlins and into the wood deck substrate using #10 X 2" long, hex head, Wood Binder screws with 7/16" dia. seal washer spaced as shown on the attached drawings. The panels were attached to the perimeter wood purlins and into the wood deck using the same wood screws with 7/16" dia. seal washer (8 per panel at panel ends and 6" on center at longitudinal sides).
- A plastic barrier was located between the panels and the underlying substrate.

Test Procedure

- The test assembly was subjected to positive and negative pressures to form an uplift pressure at the values and time duration per UL 580 as shown in the attached table.
- Vertical movement of the assembly during the tests was recorded.
- Subsequent to the completion of Phase 5 of the Class 90 test sequence, the test specimen was subjected to higher static uplift pressures per UL 1897 as shown on the attached table. The positive uplift pressure supplied from below was maintained at 48.5 psf while the negative uplift pressure supplied from above was increased in increments until failure or the desired uplift pressure was obtained.

TEST #1
UL 580 UPLIFT TEST

Test Date: 12/19/22

Test Specimen: Georgia Rib Metal Roof Panel, 36" wide X 29 ga
Panel to Purlin Fastener Spacing: 2'-0" oc.

Class 30 Deflection Measurements

Phase	Time Duration (min.)	Negative Pressure (psf)	Positive Pressure (psf)	#1 (in)	#2 (in)	#3 (in)	#4 (in)
Initial	0	0	0	6	5-3/8	6-1/8	5-3/16
1	5	16.2	0	5-15/16	5-1/4	6-1/8	5-1/8
2	5	16.2	13.8	5-15/16	5-3/16	6-1/16	5-1/16
3	60	8.1 – 27.7*	13.8	5-7/8	5-1/8	6	5
4	5	24.2	0	5-15/16	5-3/16	6-1/16	5-1/16
5	5	24.2	20.8	5-7/8	5-1/8	6	4-15/16

Class 60 Deflection Measurements

Phase	Time Duration (min.)	Negative Pressure (psf)	Positive Pressure (psf)	#1 (in)	#2 (in)	#3 (in)	#4 (in)
1	5	32.3	0	5-7/8	5-1/8	6	5
2	5	32.3	27.7	5-13/16	5-1/16	6	4-15/16
3	60	16.2 – 55.4*	27.7	5-3/4	5	5-15/16	4-13/16
4	5	40.4	0	5-7/8	5-1/8	6	5
5	5	40.4	34.6	5-3/4	5	5-15/16	4-13/16

Class 90 Deflection Measurements

Phase	Time Duration (min.)	Negative Pressure (psf)	Positive Pressure (psf)	#1 (in)	#2 (in)	#3 (in)	#4 (in)
1	5	48.5	0	5-13/16	5-1/16	6	4-7/8
2	5	48.5	41.5	5-3/4	4-15/16	5-7/8	4-3/4
3	60	24.2 – 48.5*	41.5	5-3/4	4-15/16	5-7/8	4-3/4
4	5	56.5	0	5-13/16	5-1/16	6	4-7/8
5	5	56.5	48.5	5-5/8	4-7/8	5-13/16	4-11/16

* Oscillation frequency as specified in UL 580.

Results: Upon completion of the above loading, there were no specimen failures.

TEST #1 (cont.)

UL 1897 UPLIFT TEST

Test Date: 12/19/22

Test Specimen: Georgia Rib Metal Roof Panel, 36" wide X 29 ga

Panel to Purlin Fastener Spacing: 2'-0" oc.


Deflection Measurements

Total Uplift Pressure (psf)	Time Duration (min.)	#1 (in)	#2 (in)	#3 (in)	#4 (in)
112	1	5-5/8	4-7/8	5-3/4	4-11/16
127	1	5-9/16	4-13/16	5-3/4	4-5/8
142	1	5-9/16	4-3/4	5-11/16	4-9/16
157	1	5-1/2	4-11/16	5-5/8	4-1/2
172	1	5-7/16	4-11/16	5-5/8	4-1/2
187	1	5-7/16	4-5/8	5-9/16	4-7/16
202	1	5-3/8	4-9/16	5-9/16	4-3/8
217	1	5-5/16	4-1/2	5-1/2	4-5/16
232	1	5-5/16	4-1/2	5-1/2	4-5/16


Results:

Maximum Total Uplift Pressure (sustained for 1 min.) = 232 psf


Maximum Total Uplift Test Pressure = 236.0 psf (Panel pulled over fastener.)

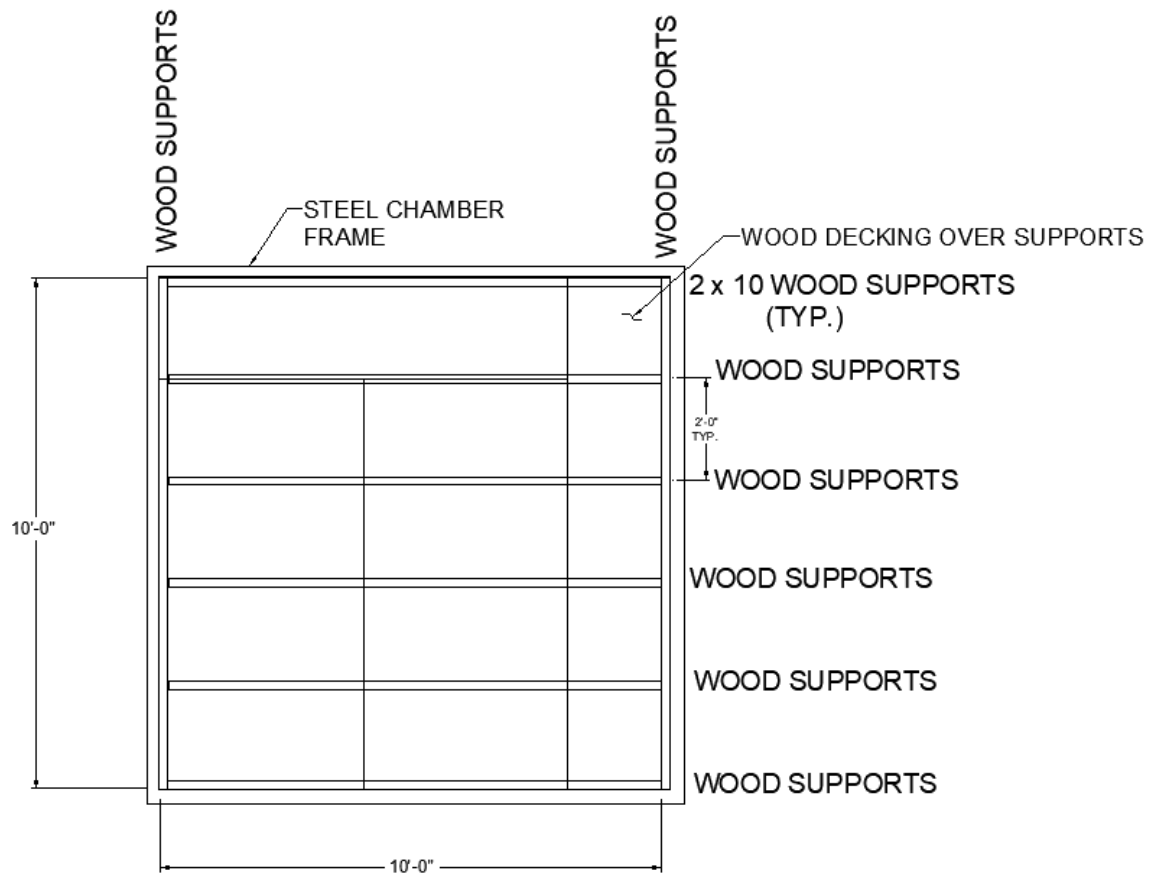


PLAN VIEW OF WOOD DECKING & SUPPORTS

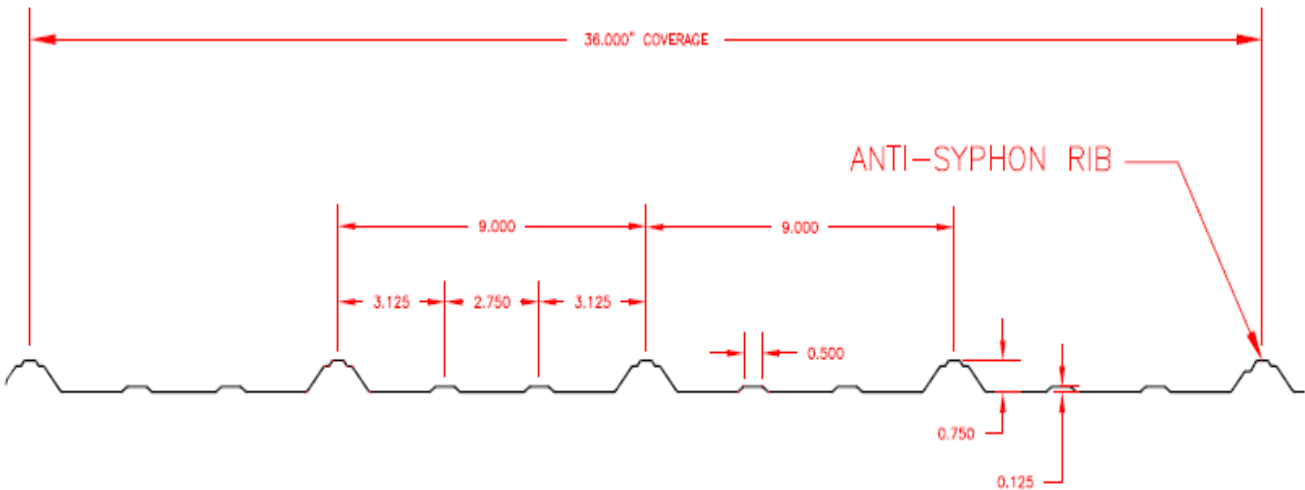

PANEL DETAIL



FASTENING DETAIL AT
FIXED END INTO PURLIN

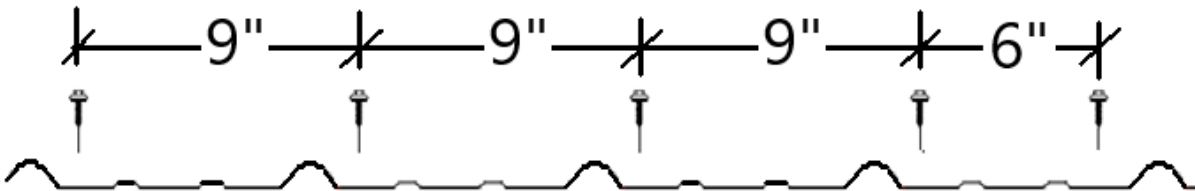

FASTENING DETAIL AT
INTERIOR PURLINS

TENSILE TEST REPORT

Manufacturer: Georgia Metals, Inc.
539 General Daniels Ave. N.
Danielsville, GA 30633

Test Date: January 5, 2023

Test Method: ASTM A370-10

Material Description: Georgia Rib Roof Panel, 36" wide, 29 ga. steel

Sample No.	Width (in)	Thickness (in)	Yield Load (lb)	Max. Load (lb)	0.2% Offset Yield Strength (psi)	Tensile Strength (psi)	Elongation (% in 2 inches)
22024	0.504	0.013	798.4	798.4	(1)	121,850	1.61

Equipment Used: Tensile Machine #QT7-061196-020
Caliper #14682489
Extensometer #10311744D
Micrometer #142-225

(1) 0.2% Offset not achieved due to breakage at Max Load.