


BRAND	MODEL
CLOPAY	VS904
COOKSON	VS904N
CORNELL	VS904L

REVISIONS					
REV. NO.	ZONE:	DATE:	ECN NO.	APPVD:	DESCRIPTION
01	-	9/21/22	DR2762		ROLLER NOTE CHANGE
02	-	2/17/23	DR2804	JJJ	CHANGED SECTION HEIGHT NOTE, UPDATED INSTALL MANUAL DN.
03	-	7/10/2023	DR2844	JJJ	INCLUDE ADDITIONAL SECTION CONFIGURATION INFORMATION

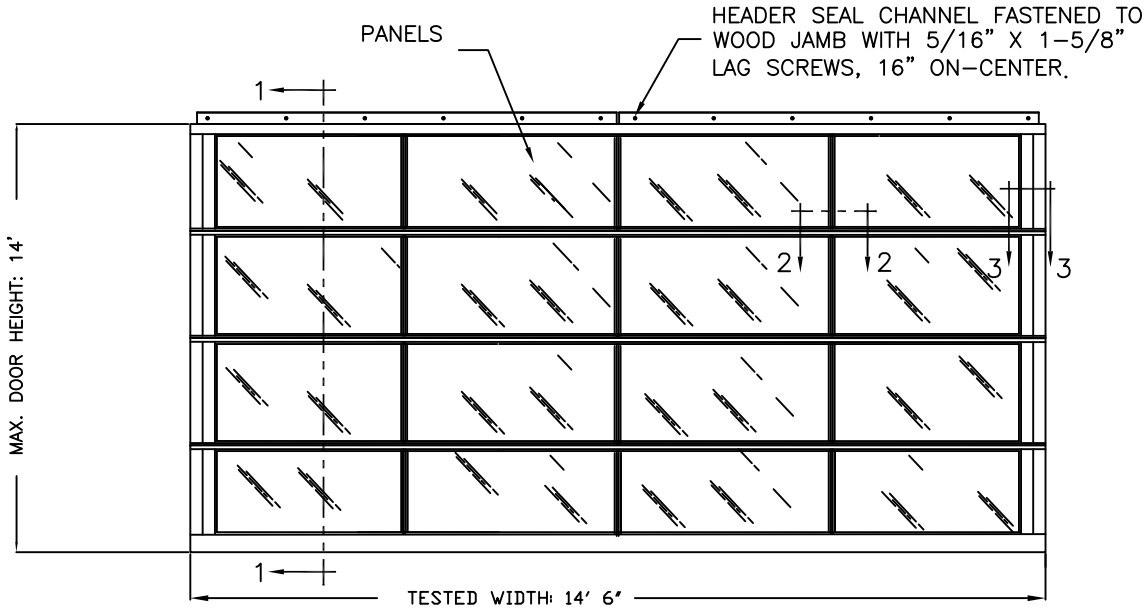


- NOTES:
- VERTI-STACK DOOR INSTALLED PER INSTALLATION MANUAL 105828.
 - MAXIMUM INTERMEDIATE SECTION HEIGHT 21-3/16".
 - MAXIMUM TOP/BOTTOM SECTION HEIGHT 23-7/16".



PANELS PER DOOR WIDTH	
UP TO 4'8"	1
FROM 4'9" TO 9'2"	2
FROM 9'3" TO 13'2"	3
FROM 13'3" TO 14'6"	4

SECTIONS PER DOOR HEIGHT	
UP TO 5'8"	3
FROM 5'9" TO 7'0"	4
FROM 7'1" TO 8'4"	5
FROM 8'5" TO 9'8"	6
FROM 9'9" TO 11'2"	7
FROM 11'3" TO 12'8"	8
FROM 12'9" TO 16'0"	9


TRACK CONFIGURATION

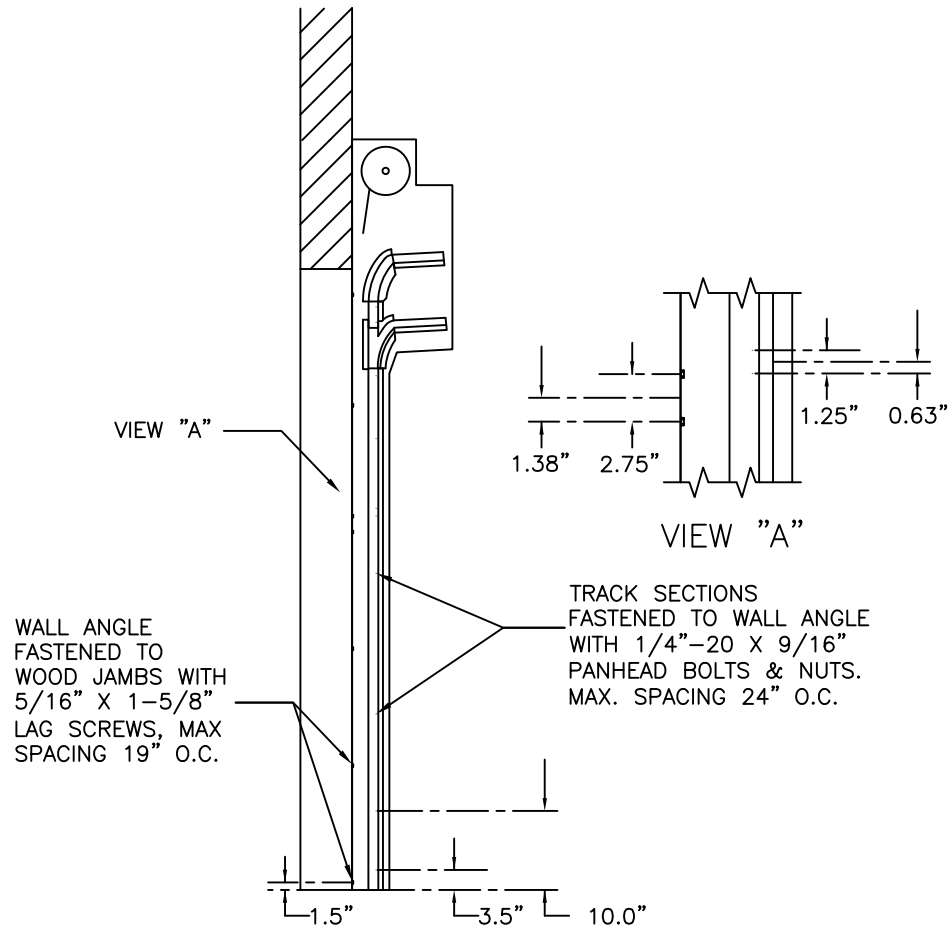

SIDE ELEVATION
VERTI-STACK TRACK DETAILS

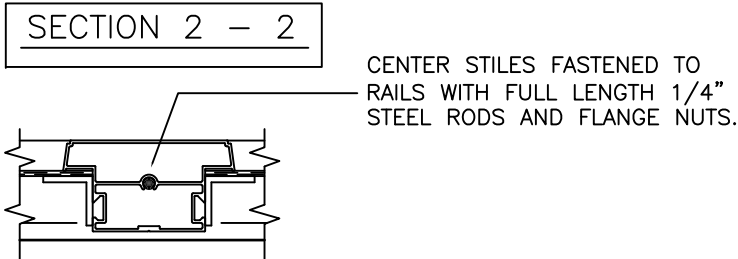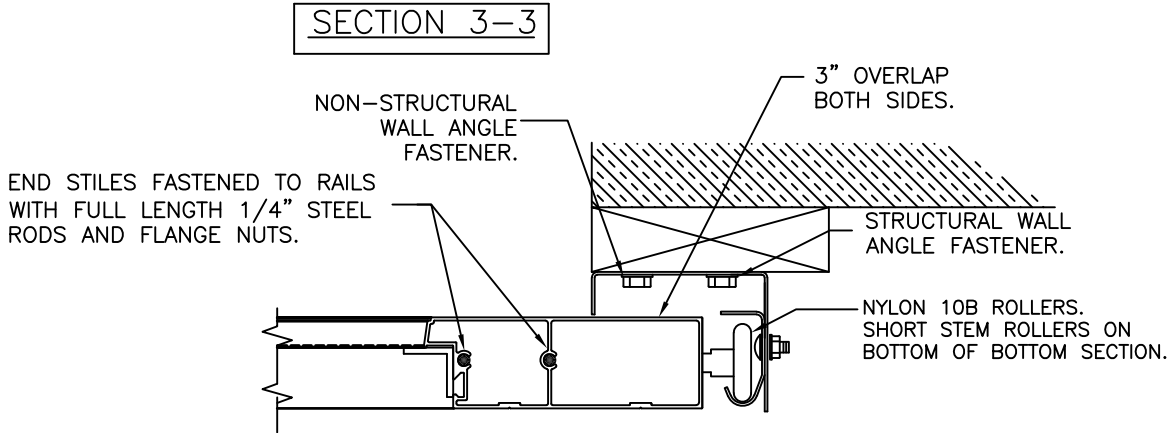

MANUFACTURING PRODUCTION CODE
C-VSA-1F499

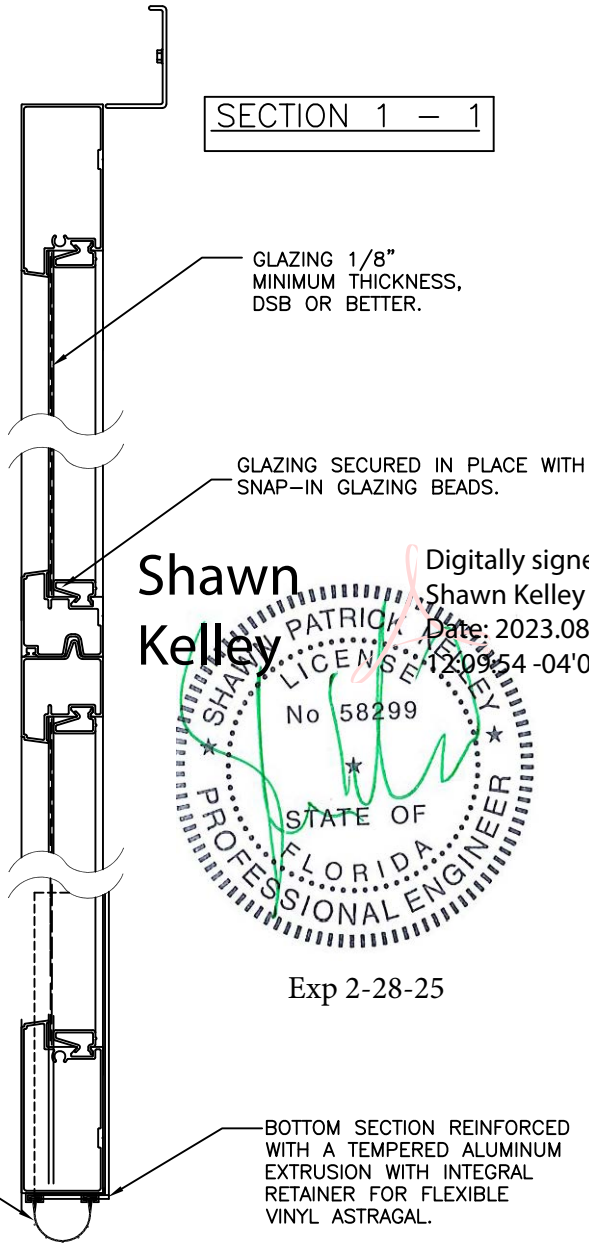

DESIGN LOADS: +25 & -25 P.S.F.
TEST LOADS +37.5 & -37.5 P.S.F.

Third Angle Projection		MPC:	
Unless Stated Otherwise TOLERANCES are .0 = ±.031 .00 = ±.015 .000 = ±.005 .0000 = ±.001 Degrees = ±1/2° Unless Stated Otherwise DIMENSIONS ARE IN INCHES.		Clopay Corporation 8585 Duke Boulevard Mason, OH 45040 USA Tel. No. 513-770-4800 Fax No. 513-770-4853	
DESCRIPTION: M/N VERTI-STACK 14'6" WIDE DES. +/-25 PSF		CLOPAY WINDLOAD RATING W4	
DRAWN BY: JDW	DATE: 06/29/22	SCALE: NONE	DWG. SIZE B
CHECKED BY: JDW	DATE: 06/29/22	SHEET 1 OF 1	
DWG. NO.: 105829	VER: -		

Shawn Kelley
Professionally
Exp 2-28-25

Digitally signed by Shawn Kelley
Date: 2023.08.15 12:09:54 -04'00'

PROFESSIONAL ENGINEER
STATE OF FLORIDA
No 58299