


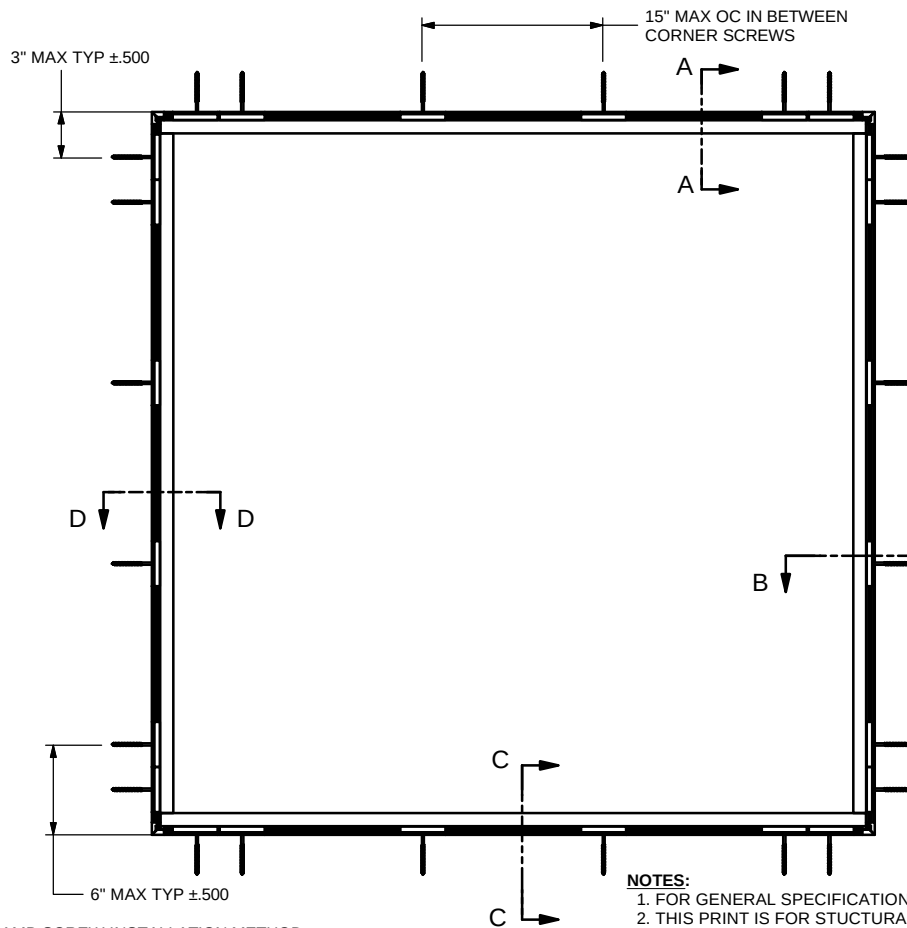

JAMB SCREW INSTALLATION METHOD:
 -UNIT MUST NOT BE IN DIRECT CONTACT WITH EITHER CONCRETE OR TREATED BUCK MATERIAL. IF SHIM SPACE IS LESS THAN 1/8" WRAPPING THE UNIT ON ALL 4 SIDES WITH WINDOW FLASHING TAPE IS REQUIRED AS A BARRIER BETWEEN THE UNIT AND CONCRETE OR TREATED LUMBER.
 -MINIMUM OF 2 PER SIDE
 -SHIM AT EACH SCREW LOCATION.


NOTES:

1. FOR GENERAL SPECIFICATIONS, REFER TO DOC 00003952
2. THIS PRINT IS FOR STUCTURAL PERFORMANCE ONLY. FOR FLASHING & SEALING INSTRUCTIONS, REFER TO THE INSTALLATION INSTRUCTIONS.
3. IF CHEMICALLY TREATED LUMBER IS USED FOR BUCK MATERIAL, FASTENERS INTO THE BUCK MUST BE A MINIMUM OF 0.90 OZ/FT² ZINC HOT DIPPED GALVANIZED OR STAINLESS STEEL TYPE 304 OR 316


CATEGORY:
DIRECT GLAZE

UNIT TYPE:
MDGRECT, MDGPOLY

1.250" MIN PENETRATION TYP

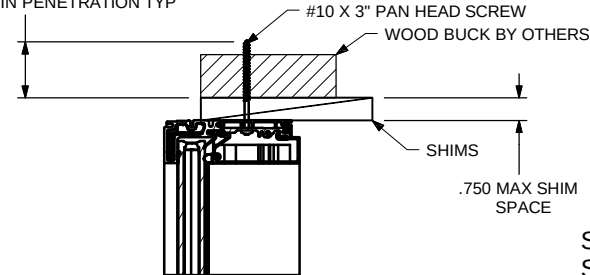

SECTION A-A
SCALE 1:4


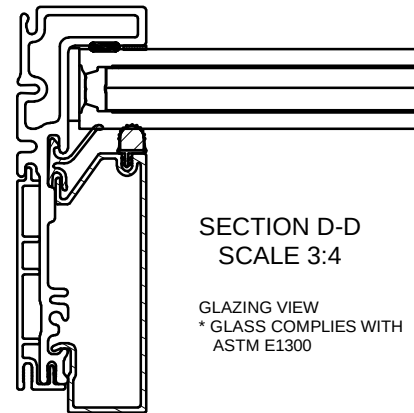


SECTION D-D
SCALE 3:4

GLAZING VIEW
 * GLASS COMPLIES WITH
 ASTM E1300

FRAME SIZE	DP RATING
145.375 X 97.375	+60 / -60
145.375 X 97.375	+40 / -40
121.375 X 62.565	+60 / -60
121.375 X 62.565	+40 / -40

SECTION B-B
SCALE 1:4

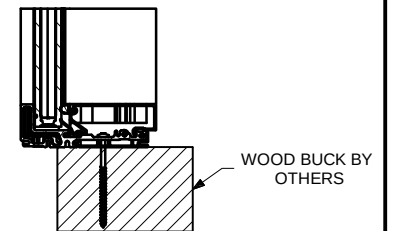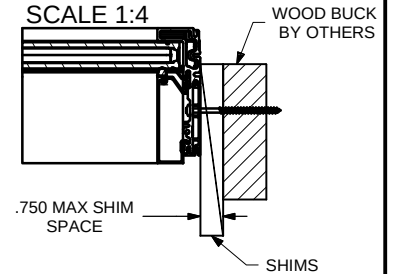

SECTION C-C
SCALE 1:4

5

MARVIN			RESEARCH & DEVELOPMENT	
COLLECTION: MODERN				
DWG TYPE: INSTALLATION				
DESCRIPTION: FL28365				
CHK:	SIZE: B	CLASS: MISC	DWG NO: 00112734	
APP:	SCALE: 1:4	DATE: 04/18/18	DWG BY: BENTOW, TIM	SHEET: 1 OF 1

NOTICE - CONFIDENTIAL INFORMATION

The information in this document is privileged and strictly confidential. The information contained herein shall be used only by Marvin employees and by those agents or suppliers granted official written permission. If the reader of this document is not the intended recipient, or the employee or agent of the intended recipient, please delete this document from all data storage devices, and destroy all hard copies. Any unauthorized dissemination, distribution, copying or other use of the information contained in this document is strictly prohibited.

Template Version 12.0