
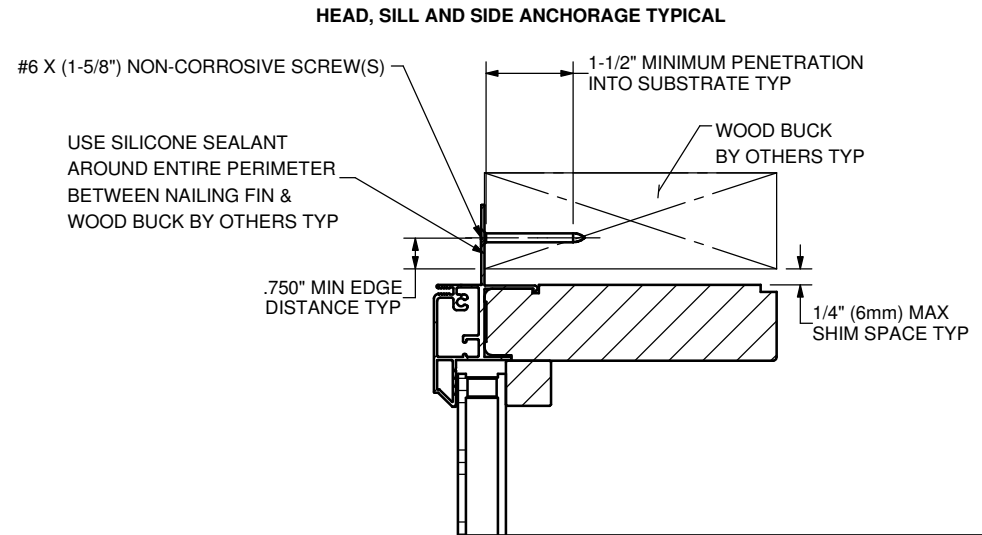


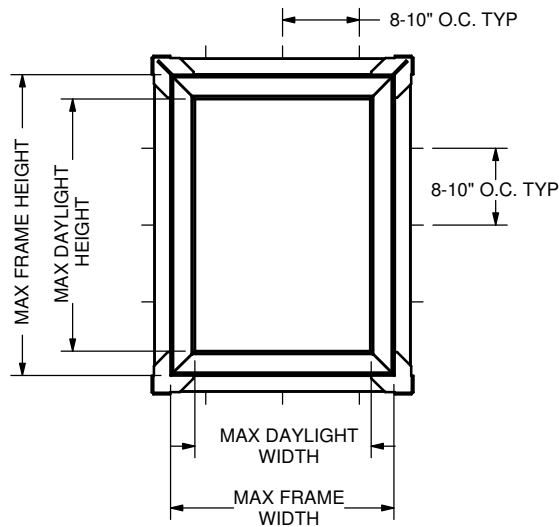

DESC.	MAX FRAME SIZE		MAX DAYLIGHT OPENING		DESIGN PRESSURE (psf)	FRAME MATERIAL
	WIDTH (IN.)	HEIGHT (IN.)	WIDTH (IN.)	HEIGHT (IN.)		
8312 DS	72	106	68.19	102.19	+40/-40	WOOD, ALUMINUM
8312 DS	84.75	125.63	80.94	121.82	+50/-50	WOOD, ALUMINUM

NOTE(S):

1. THESE UNITS HAVE BEEN TESTED, ANALYZED, HALLMARK CERTIFIED AND FBC APPROVED.

2. THIS SCHEDULE ADDRESSES ONLY THE FASTENERS REQUIRED TO ANCHOR THE WINDOW(S) TO ACHIEVE THE RATED DESIGN PRESSURE. THOROUGHLY READ AND FOLLOW MANUFACTURERS INSTALLATION INSTRUCTIONS RECEIVED WITH UNIT. THIS GUIDE DOES NOT ADDRESS THE SEALING CONSIDERATIONS THAT MAY ARISE IN DIFFERENT WALL CONDITIONS.

WEATHER SHIELD WINDOWS & DOORS

8312 DIRECT SET NAILING FIN INSTALLATION

TOLERANCES UNLESS SPECIFIED:	
INCHES	ANGLE
.X ± .1"	XX ± 1°
.XX ± .03"	XX.X ± .5° (1/2°)
.XXX ± .015"	XX.XX ± .25° (1/4°)

Weather Shield Windows & Doors

PRODUCTS:
8312

DRAWN BY:
JLK/REF

DATE:
09/09/2016

TITLE:
INSTALLATION

PROPERTY OF WEATHER SHIELD MFG., INC.
DRAWING IS NOT TO BE REPRINTED OR
SUBMITTED FOR USE OUTSIDE OF
WEATHER SHIELD MFG., INC.
ALL RIGHTS RESERVED.

DWG NO.:
45-02505

REV
H

SCALE: 1:1 SHEET NAME: Sheet1 SHEET 1 OF 1

					TYP. WALL THICKNESS:
					WT/FT:
					AREA:
					MAT:
					FINISH:
REV	DATE	DESCRIPTION	PCR NO.	ENG	PDR #:
					PROFILE #:

DO NOT SCALE DRAWING