

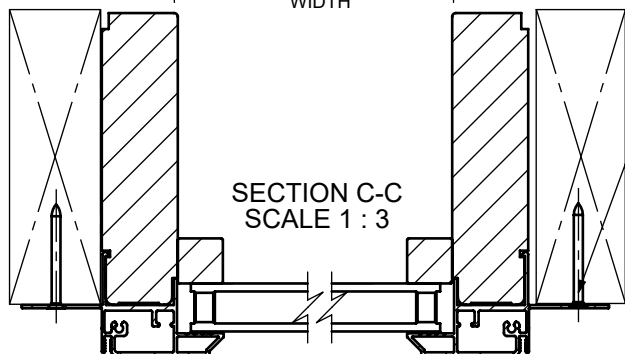


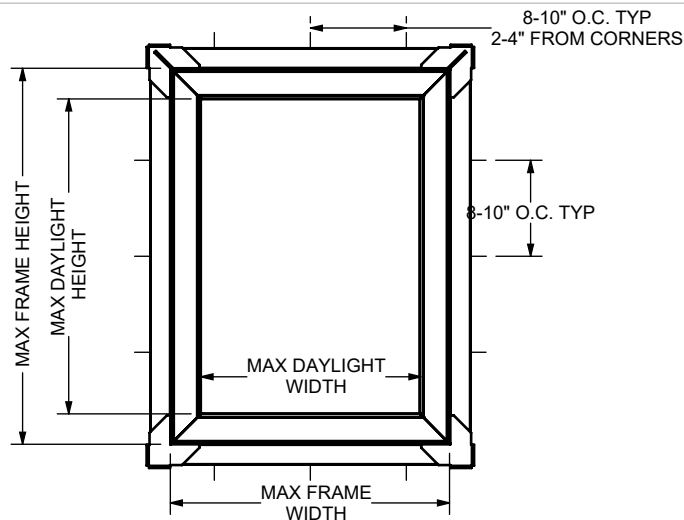

#6 X (1-5/8") NON-CORROSIVE
SCREW(S) SPACED 2-4" FROM
CORNERS AND 8-10" ON CENTER

HEAD, SILL AND SIDE ANCHORAGE TYPICAL

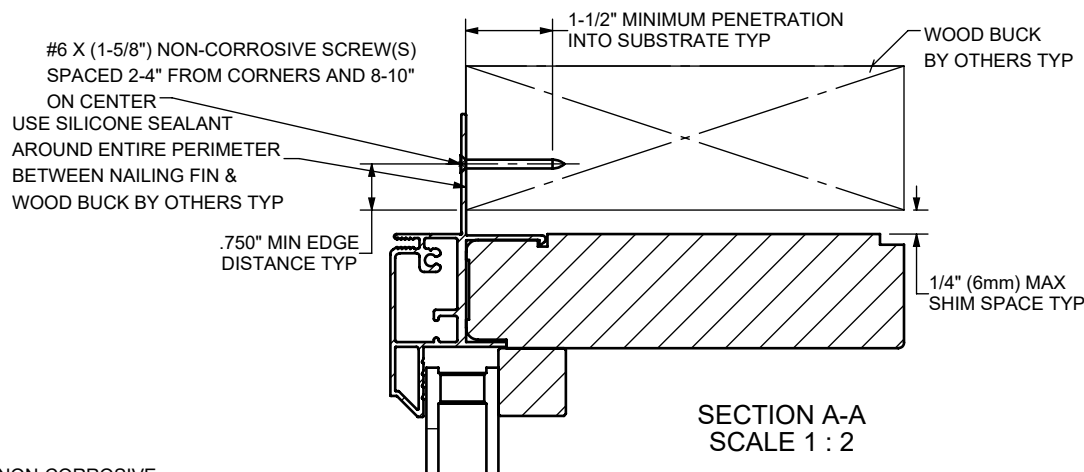

SECTION A-A
SCALE 1 : 2

SECTION C-C
SCALE 1 : 3

DESC.	MAX FRAME SIZE		MAX DAYLIGHT OPENING		DESIGN PRESSURE (psf)	FRAME MATERIAL
	WIDTH (IN.)	HEIGHT (IN.)	WIDTH (IN.)	HEIGHT (IN.)		
8307 DIRECT SET	83.69	89.5	81.01	86.82	+65/-65	WOOD, ALUMINUM
8307 DIRECT SET	143.69	52.5	141.01	49.82	+100/-100	WOOD, ALUMINUM

GENERAL NOTE(S):

- THESE UNITS HAVE BEEN TESTED, ANALYZED, HALLMARK CERTIFIED AND FBC APPROVED.
- THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY THE CURRENT EDITION FLORIDA BUILDING CODE (FBC) EXCLUDING HVHZ. THE PRODUCT HAS BEEN EVALUATED TO THE FOLLOWING:
 - AAMA/ WDMA/ CSA 101/ I.S.2/ A440-17
 - AAMA/ WDMA/ CSA 101/ I.S.2/ A440-22
- THIS SCHEDULE ADDRESSES ONLY THE FASTNERS REQUIRED TO ANCHOR THE WINDOW(S) TO ACHIEVE THE RATED DESIGN PRESSURE. THOROUGHLY READ AND FOLLOW MANUFACTURERS INSTALLATION INSTRUCTIONS RECEIVED WITH UNIT. THIS GUIDE DOES NOT ADDRESS THE SEALING CONSIDERATIONS THAT MAY ARISE IN DIFFERENT WALL CONDITIONS.
- FASTENERS, ANCHORS, AND CONNECTORS SHALL COMPLY WITH THE CORROSION RESISTANCE REQUIREMENTS OF THE 2026 FLORIDA BUILDING CODE, SECTION 1711, BASED ON EXPOSURE CONDITIONS AND PROXIMITY TO A SALTWATER SHORELINE AND NOT ALL THE ONES SHOWN HERE NECESSARILY APPLY.

WEATHER SHIELD

WINDOWS & DOORS

8307, DIRECT SET

NAILING FIN INSTALLATION

Weather Shield
Windows & Doors

TOLERANCES UNLESS SPECIFIED:	
INCHES	ANGLE
.X ± .1"	XX ± 1°
.XX ± .03"	XX.X ± .5° (1/2°)
.XXX ± .015"	XX.XX ± .25° (1/4°)

PRODUCTS:
8307

DRAWN BY:
JLK/REF

DATE:
09/09/2016

TITLE:
8307 DIRECT SET INSTALLATION

DWG NO.:
45-02505

REV
J

SCALE: 1:1 SHEET NAME: Sheet1 SHEET 1 OF 1

DO NOT SCALE DRAWING

REV	DATE	DESCRIPTION	PCR NO.	ENG	PDR #:	PROFILE #:

TYP. WALL THICKNESS:

WT/FT:

AREA:

MAT:

FINISH: