



DRAWING NO.

977WL


STEEL JAMBS



OUTSIDE



INSIDE



WINDLOCK

BLACK NYLON 6/6. WINDLOCKS ARE LOCATED AS REQUIRED TO MEET SPECIFIC WINDLOAD AND SECURED WITH TWO $\frac{3}{16}$ " ZINC PLATED RIVETS.

FASTENERS REQUIRED


MOUNTING CONSTRUCTION	DOOR GUIDE	DOOR BRACKET
STEEL	SELF-DRILLING SCREW 1/4-14X $\frac{7}{8}$ "	3/8-16 X 1" WZLK BOLT
WOOD	LAG SCREW #14 X 1.5"	3/8-7 X 2.5" LAG SCREW
CONCRETE	TAPCON XL $\frac{5}{16}$ " X 2-1/4"	$\frac{3}{8}$ " X 4" POWERS WEDGE

NOTES:

- STRUCTURAL PERFORMANCE UNDER UNIFORM LOAD PER ASTM E 330 TO SAFELY RESIST A POSITIVE OR NEGATIVE WIND LOAD AS NOTED ABOVE. A TEST LOAD OF 1.5 X DESIGN LOAD HAS BEEN USED.
- THE DOOR ASSEMBLY SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S INSTALLATION INSTRUCTIONS.
- THIS PRODUCT EVALUATION IS GENERIC AND IS NOT INFORMATION PREPARED FOR A SPECIFIC SITE.

DOOR MOUNTING BRACKET TO STEEL

10 GAUGE (0.134" MIN.) ASTM A-653 STEEL, HOT DIPPED GALVANIZED PER ASTM A-924.

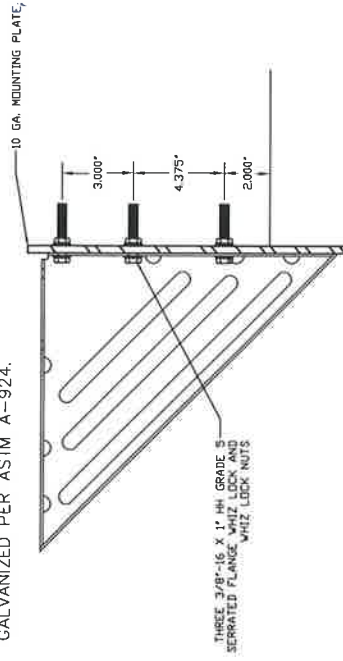

THIS DRAWING AND ALL PARTS THEREOF ARE THE EXCLUSIVE PROPERTY OF TRAC RITE DOOR, INC. AND NO PARTS MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT WRITTEN PERMISSION.

TOLERANCE (UNLESS OTHERWISE SPECIFIED)
LINEAR: $\pm .032$ "
ANGULAR: $\pm 2^\circ$



Door, Inc.

314 Wilburn Road, Sun Prairie, WI 53590
Phone: 800-448-8979 Fax: 800-236-8722
www.tracrite.com

DATE: 01-04-22
BY: JSB
APP'D: JSB
SCALE: N/A
SHEET: 2 OF 2

DESCRIPTION: 977 WINDLOCK DOOR
DRAWING NO: 977WL
REV: --