





215 EAST ROOSEVELT AVE.
ZEELAND, MI 49464

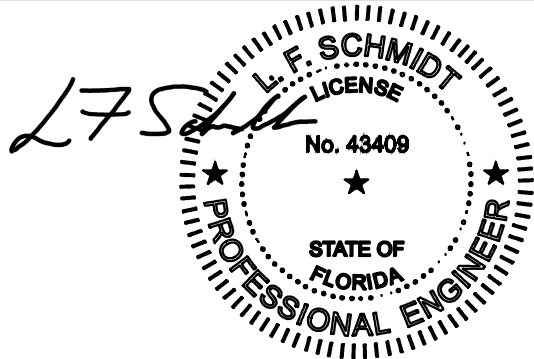


This item has been digitally signed and sealed by
L. F. Schmidt, P.E. on the date adjacent to the seal.
Printed copies of this document are not
considered signed and sealed and the signature
must be verified on any electronic copies.

THIS PRODUCT APPROVAL IS VALID
ONLY FOR THE STATE OF FLORIDA


**FLUSH GLAZED FIBERGLASS DOOR
SINGLE w/ SIDELITE(S)
INSWING/OUTSWING
"NON-IMPACT"**

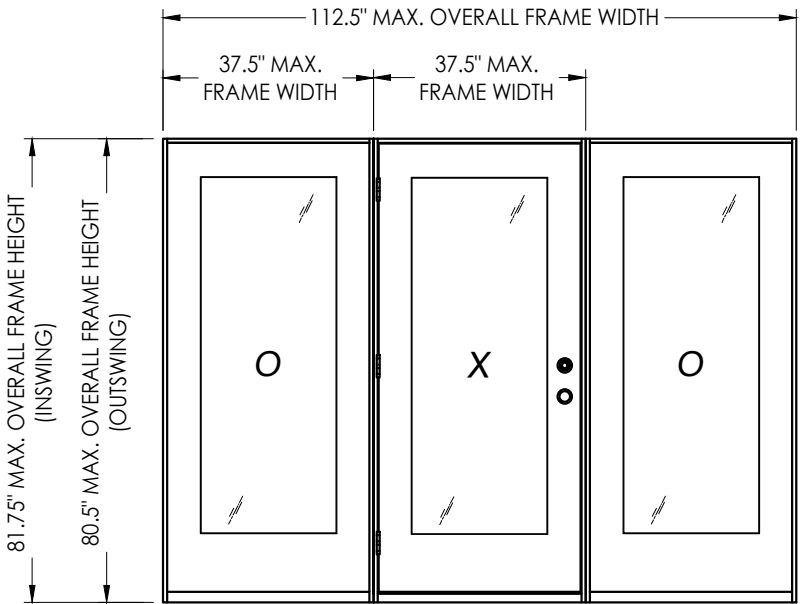


OXO




XO, OX



OX, XO

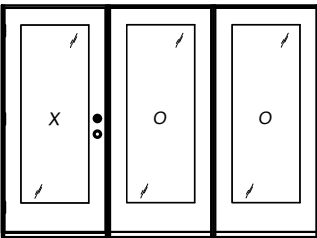

XOO, OOX

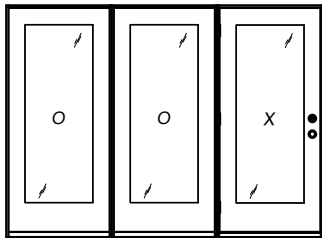

OOX, XOO

GENERAL NOTES

1. This product has been evaluated and is in compliance with the 8th Edition (2023) Florida Building Code (FBC) structural requirements excluding the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection this product is required to be protected with an impact resistant covering that complies with FBC Sections 1609.1.2 & R301.2.1.2 of the FBC.
4. For 2x stud framing construction, anchoring of these units shall be the same as that shown for 2x buck masonry construction.
5. Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.

TABLE OF CONTENTS			
SHEET #	DESCRIPTION	SHEET #	
1	Typical Elevations, Design Pressures & General Notes	7	Horizontal & Vertical Cross Sections (1X Buck)
2	Door Panel Details	8	Horizontal & Vertical Cross Sections (Direct to Masonry)
3	Sidelite Panel & Flush Glazing Details	9	Vertical Cross Sections (Thresholds)
4	Elevations	10	Buck Anchoring
5	Horizontal Cross Sections	11	Frame Anchoring & Hardware Details
6	Horizontal & Vertical Cross Sections (2X Buck)	12	Bill of Materials & Components

CONFIGURATION	MAX. FRAME DIMENSION	DESIGN PRESSURE (PSF) INSWING		DESIGN PRESSURE (PSF) OUTSWING	
		POSITIVE	NEGATIVE	POSITIVE	NEGATIVE
OX, XO	75" x 81.75"	+50.0	-50.0	+50.0	-50.0
OXO, XOO, OOX	112.5" x 81.75"	+50.0	-50.0	+50.0	-50.0

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: ODL FIBERGLASS DOOR
PART OR ASSEMBLY: TYPICAL ELEVATION, DESIGN PRESSURES & GENERAL NOTES

REVISIONS			
NO.	DATE	BY	

DATE: 7/25/24
SCALE: N.T.S.
DWG. BY: LFS
CHK. BY: RW
DRAWING NO.: FL-46118.2
SHEET 1 OF 12



9/16" GLASS BITE

DOUBLE SIDED TAPE

1" OVERALL GLASS THK.

1/8" TEMPERED GLASS

AIR SPACE

1/8" TEMPERED GLASS


INTERCEPT SPACER

DOUBLE SIDED TAPE

This diagram illustrates the cross-section of a glass assembly. It shows a large glass pane on the left, which is secured by a "GLASS BITE" of 9/16" and held in place by "DOUBLE SIDED TAPE". This pane is connected to a smaller, rectangular section of "1/8\" TEMPERED GLASS" via an "INTERCEPT SPACER". The overall thickness of this smaller section is "1\" OVERALL GLASS THK.". This section is also composed of "1/8\" TEMPERED GLASS" layers separated by an "AIR SPACE". The entire assembly is further secured by "DOUBLE SIDED TAPE" on the bottom edge.

G1 **GLAZING DETAIL**
CLEAR GLASS

HARDWARE CHART		
MANUFACTURER	MODEL	
Kwikset	Knob:	Signature Series
	Deadbolt:	Signature Series (980)
Schlage	Knob:	F Series
	Deadbolt:	B60 Series



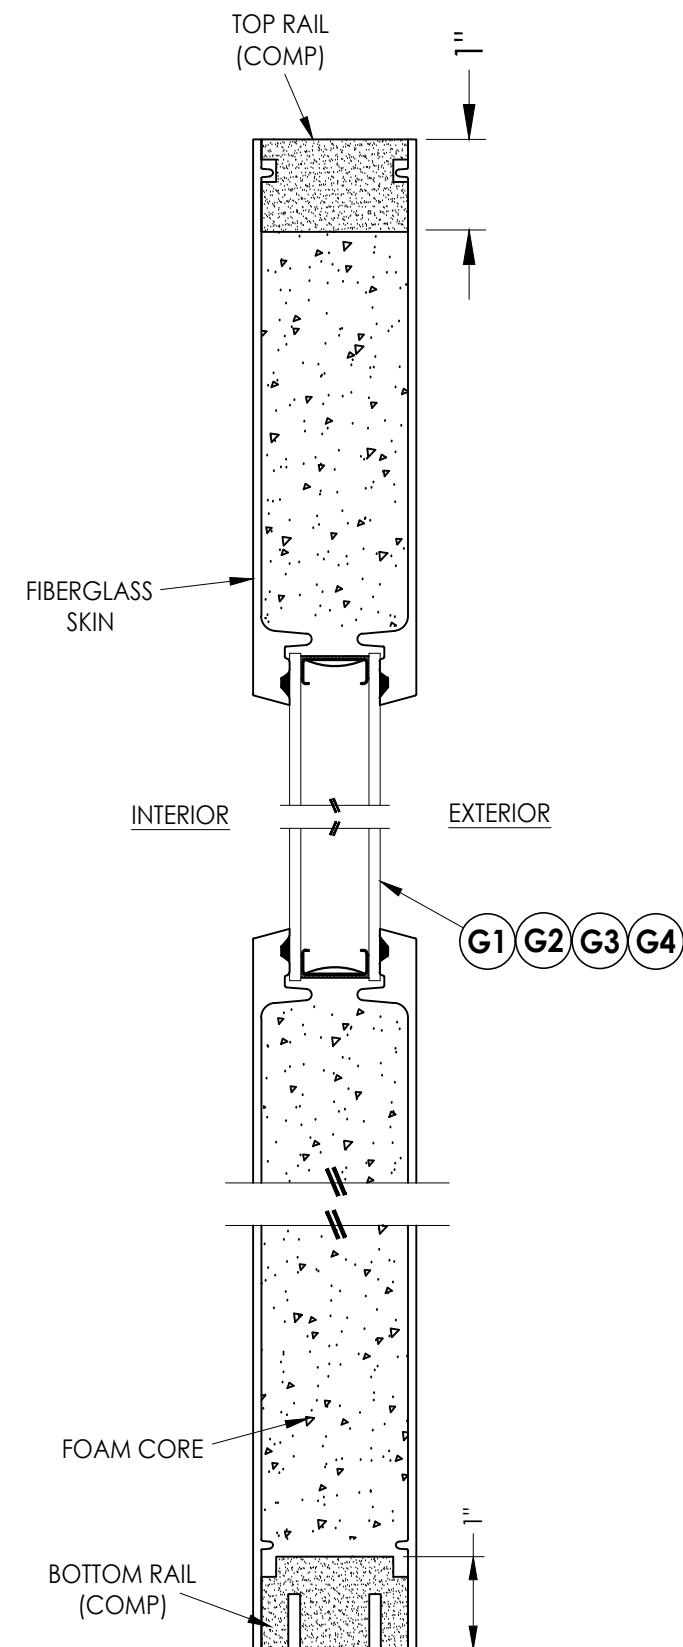


2 VERTICAL CROSS SECTION

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813



[illegible]

Z:\2023 FBC Drawings\ODL, Inc\FL-46118\FL-46118.2.dwg

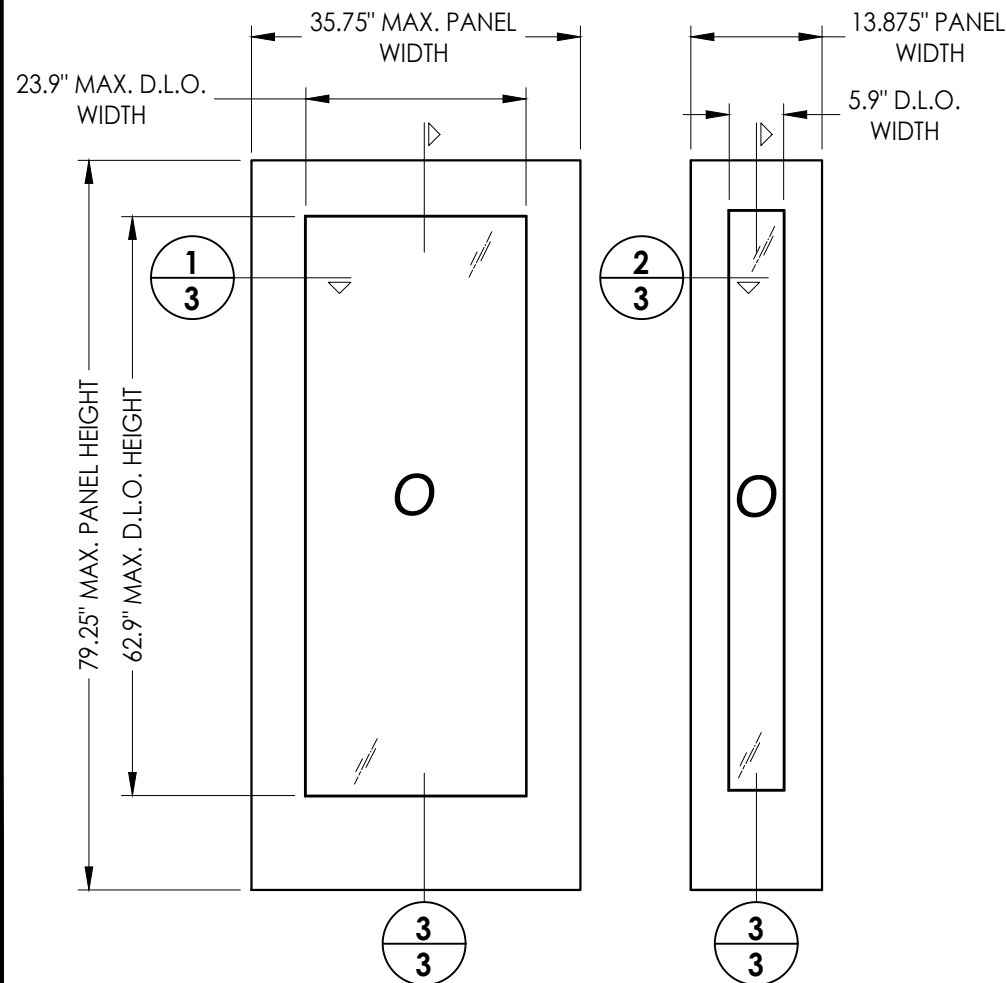
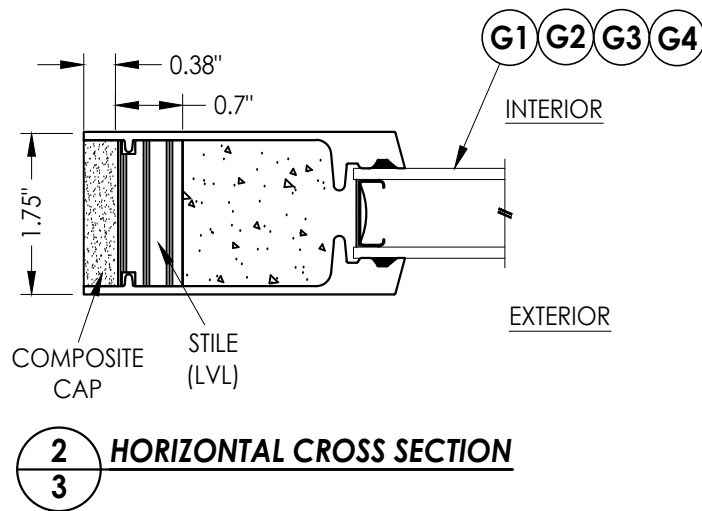
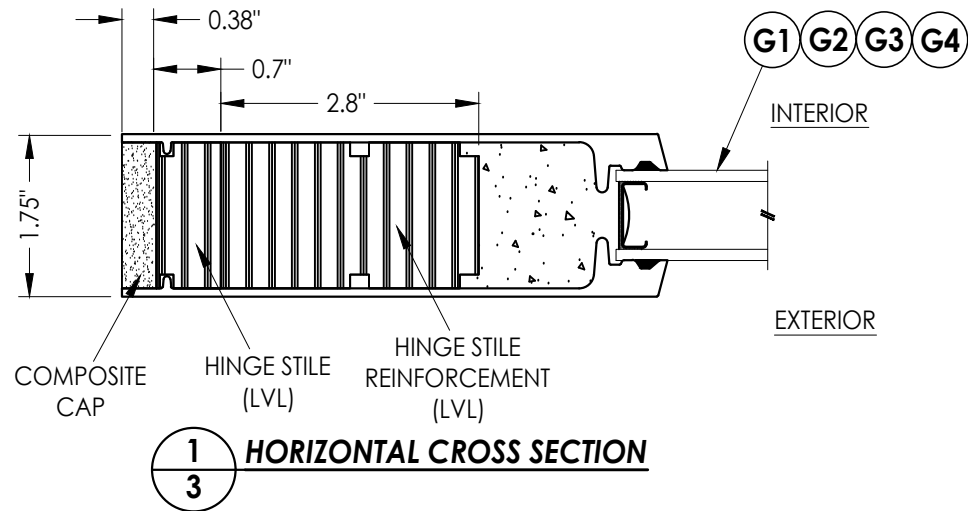


50 **FIBERGLASS SIDELITE PANELS**
ODL

FIBERGLASS SKIN: 0.070" MIN. THK.
FOAM CORE: POLYSTYRENE

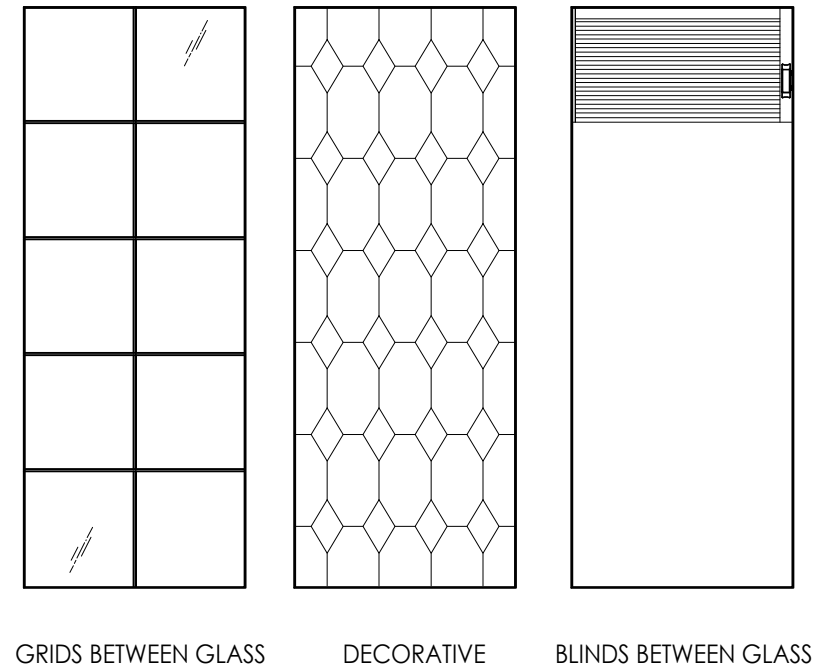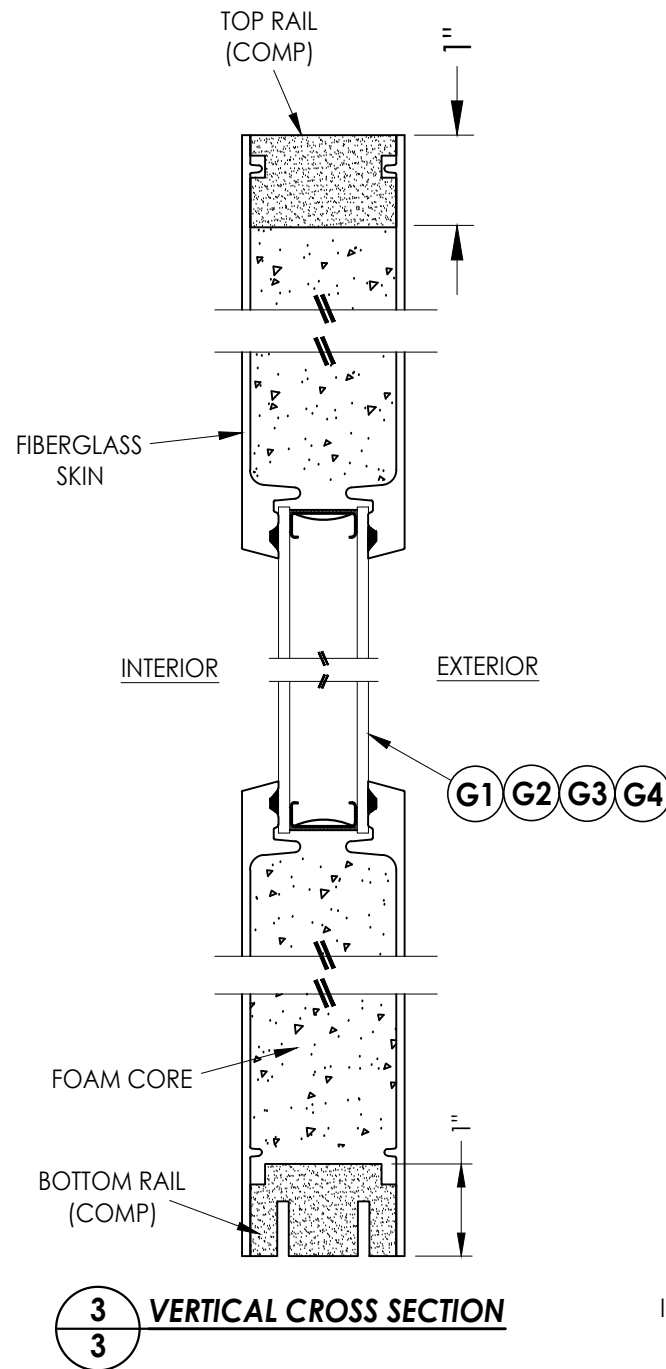

ALTERNATE GLAZING DETAILS

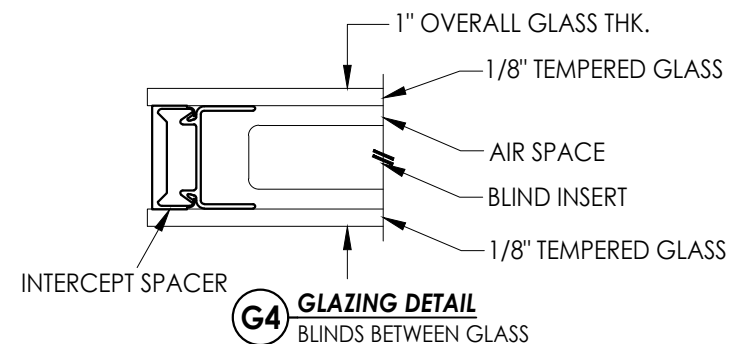
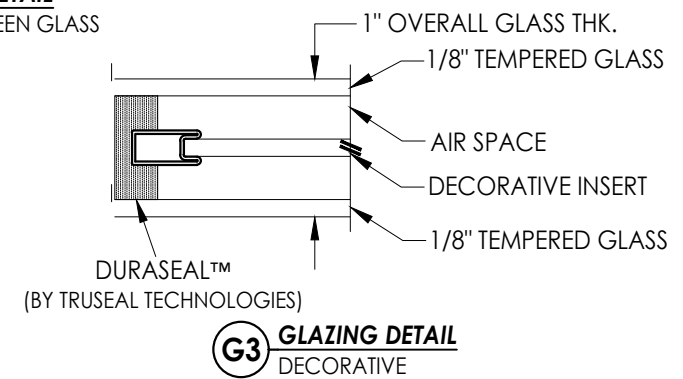
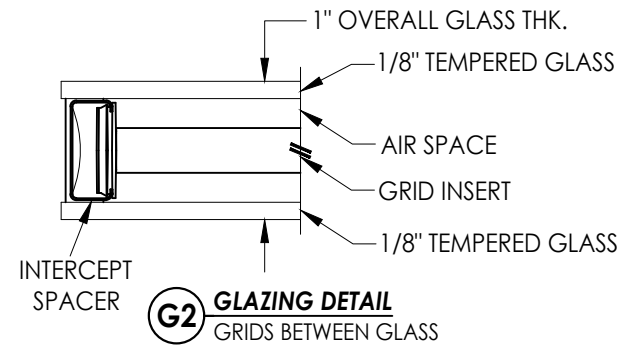


Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: ODL FIBERGLASS DOOR									
PART OR ASSEMBLY: SIDELITE PANEL & FLUSH GLAZING DETAILS									
		NO.		DATE				BY	
		REVISIONS							
DATE: 7/25/24									
SCALE: N.T.S.									
DWG. BY: LFS									
CHK. BY: RW									
DRAWING NO.: FL-46118.2									
SHEET 3 OF 12									


Z:\2023 FBC Drawings\ODL, Inc\FL-46118\FL-46118.2.dwg

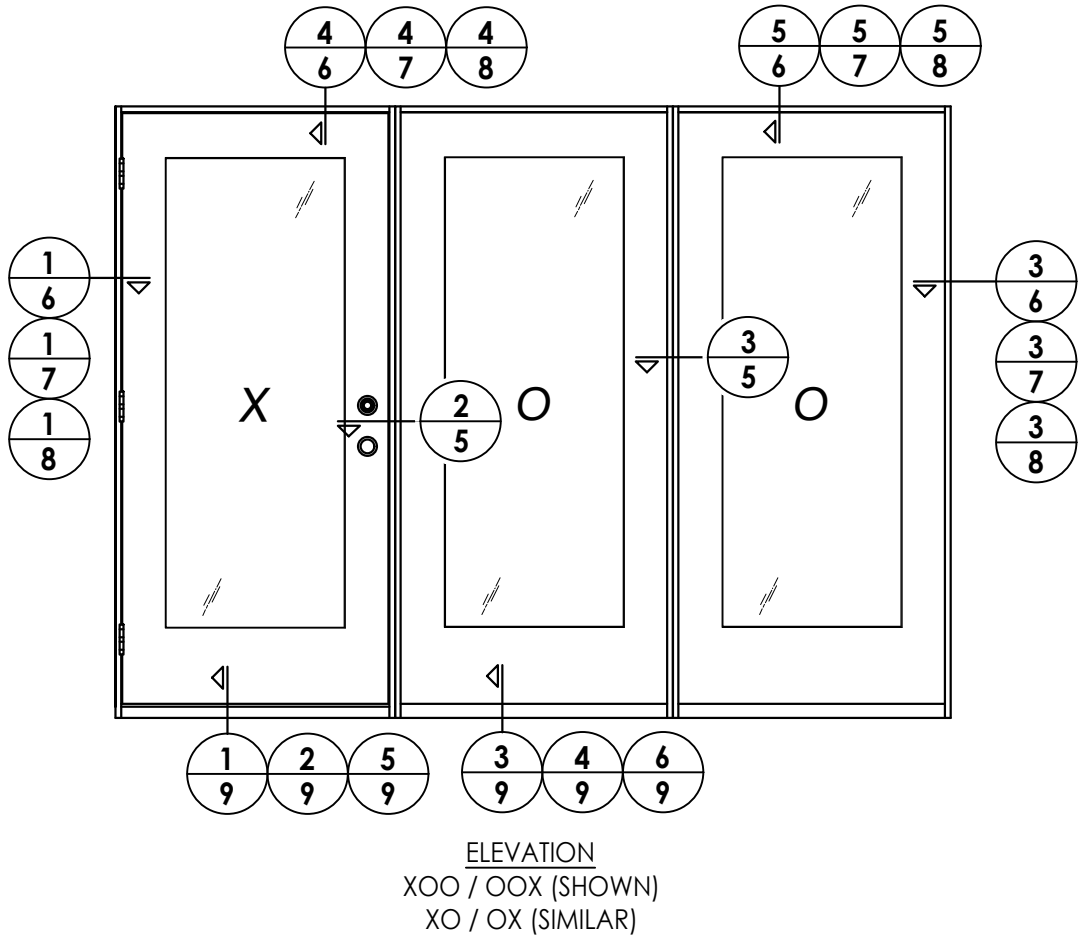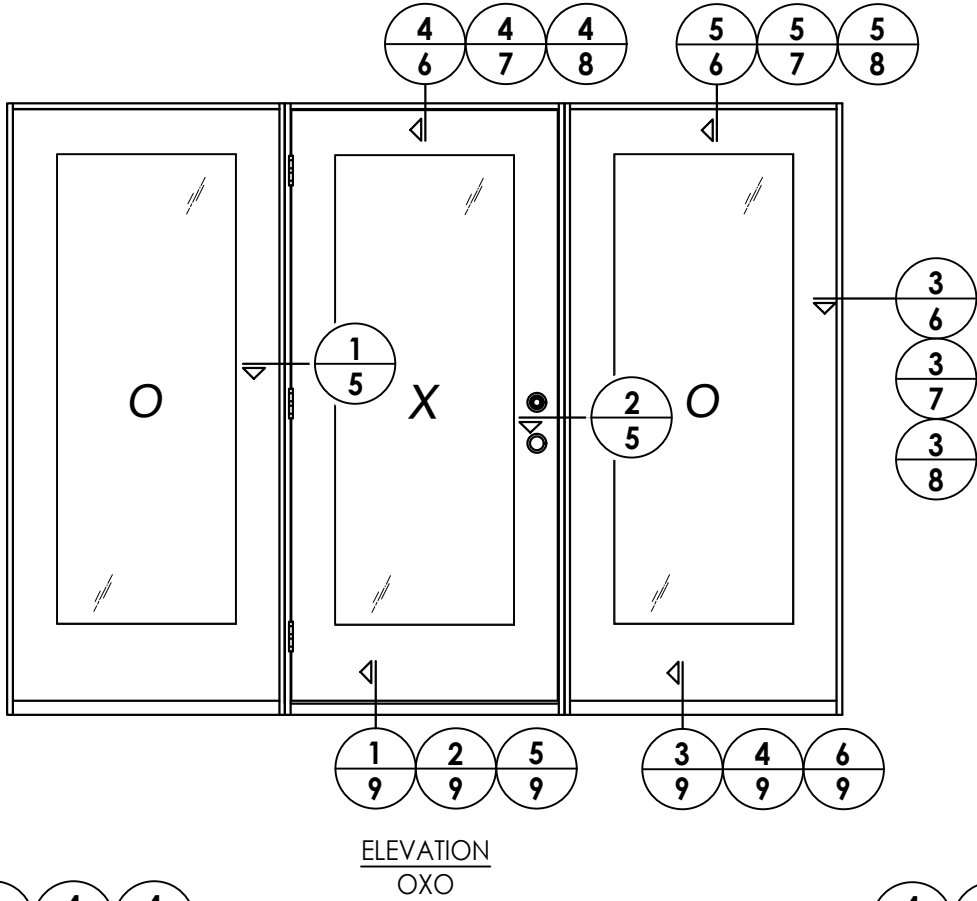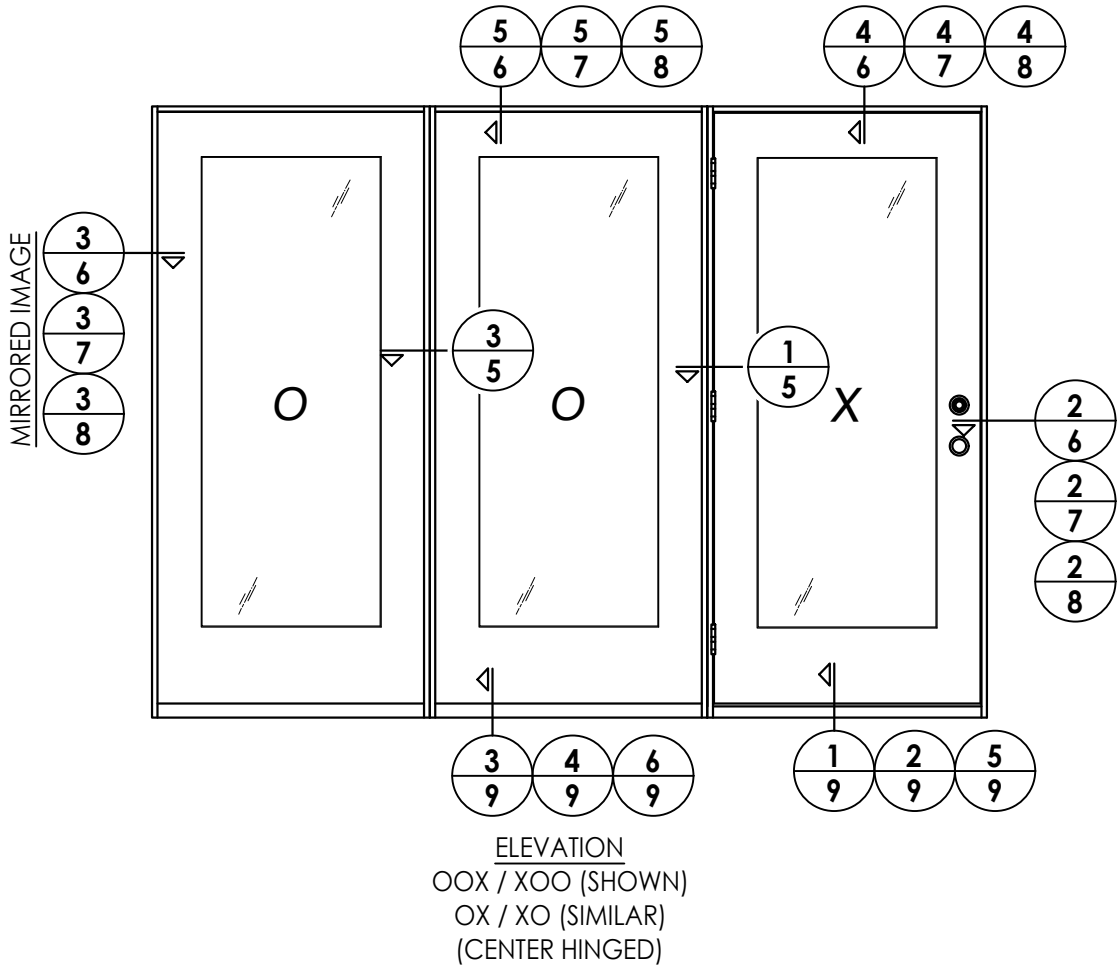


DATE: 7/25/24
SCALE: N.T.S.
DWG. BY: LFS
CHK. BY: RW
DRAWING NO.: FL-46118.2
SHEET 4 OF 12

PRODUCT:		PART OR ASSEMBLY:	
ODL FIBERGLASS DOOR		ELEVATIONS	
		NO.	DATE
		BY	
		REVISIONS	


Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409
RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

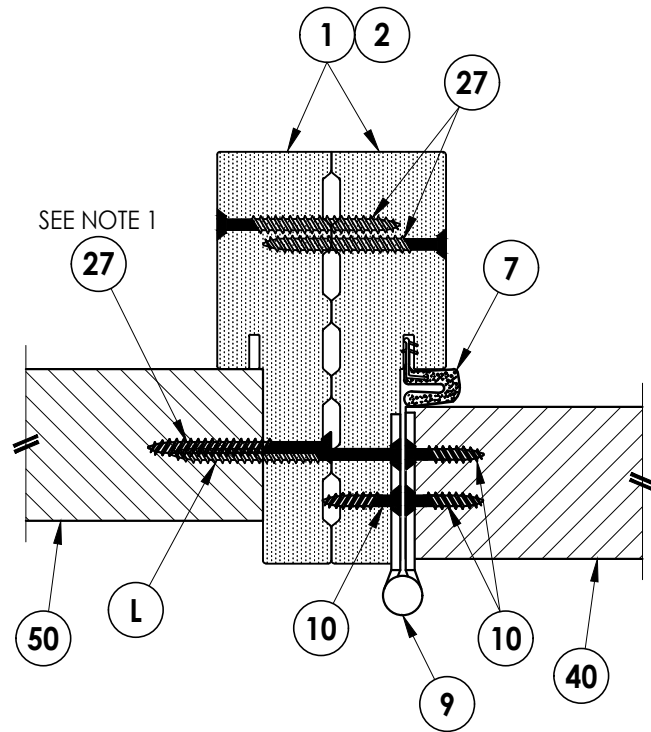

1 **HORIZONTAL CROSS SECTION**
5 Outswing Shown (Inswing Similar)

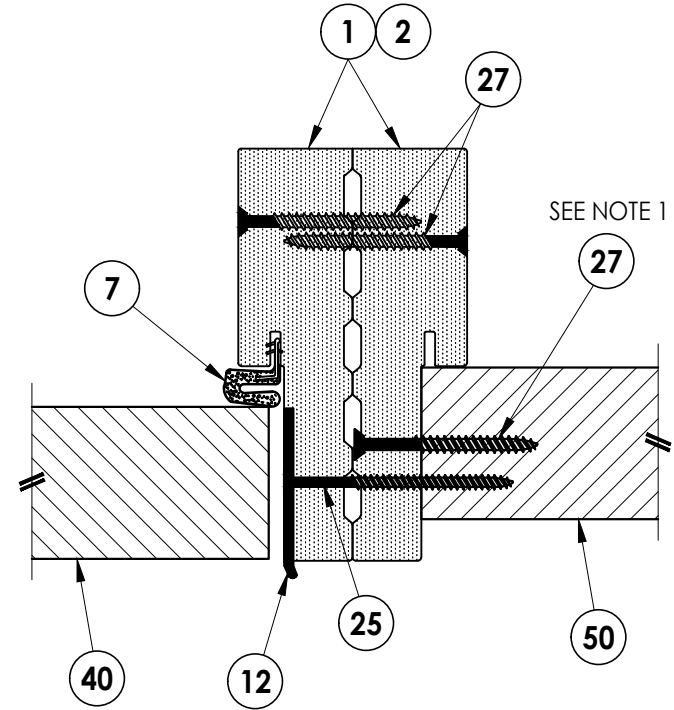

2 **HORIZONTAL CROSS SECTION**
5 Outswing Shown (Inswing Similar)

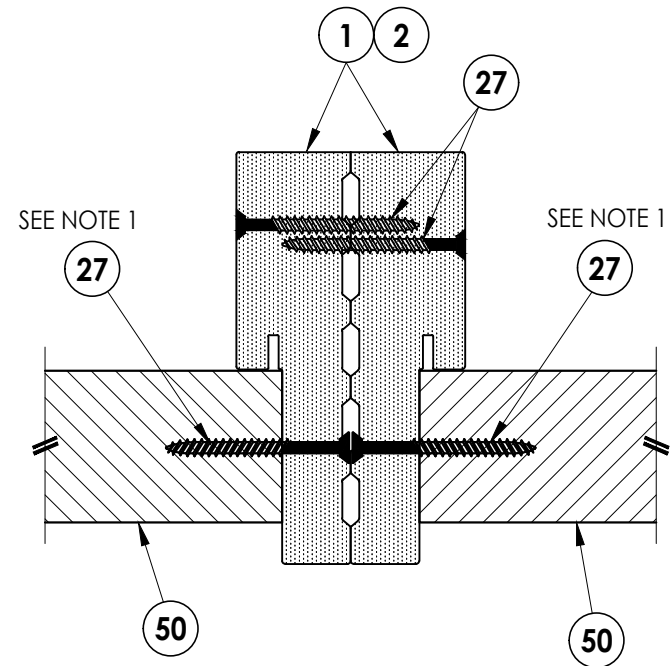


3 HORIZONTAL CROSS SECTION

5 Outswing Shown (Inswing Similar)

Notes:


1. Sidelite assembly screws located 6" from each end and 4 more screws equally spaced between (6 screws total per side jamb).

[illegible]

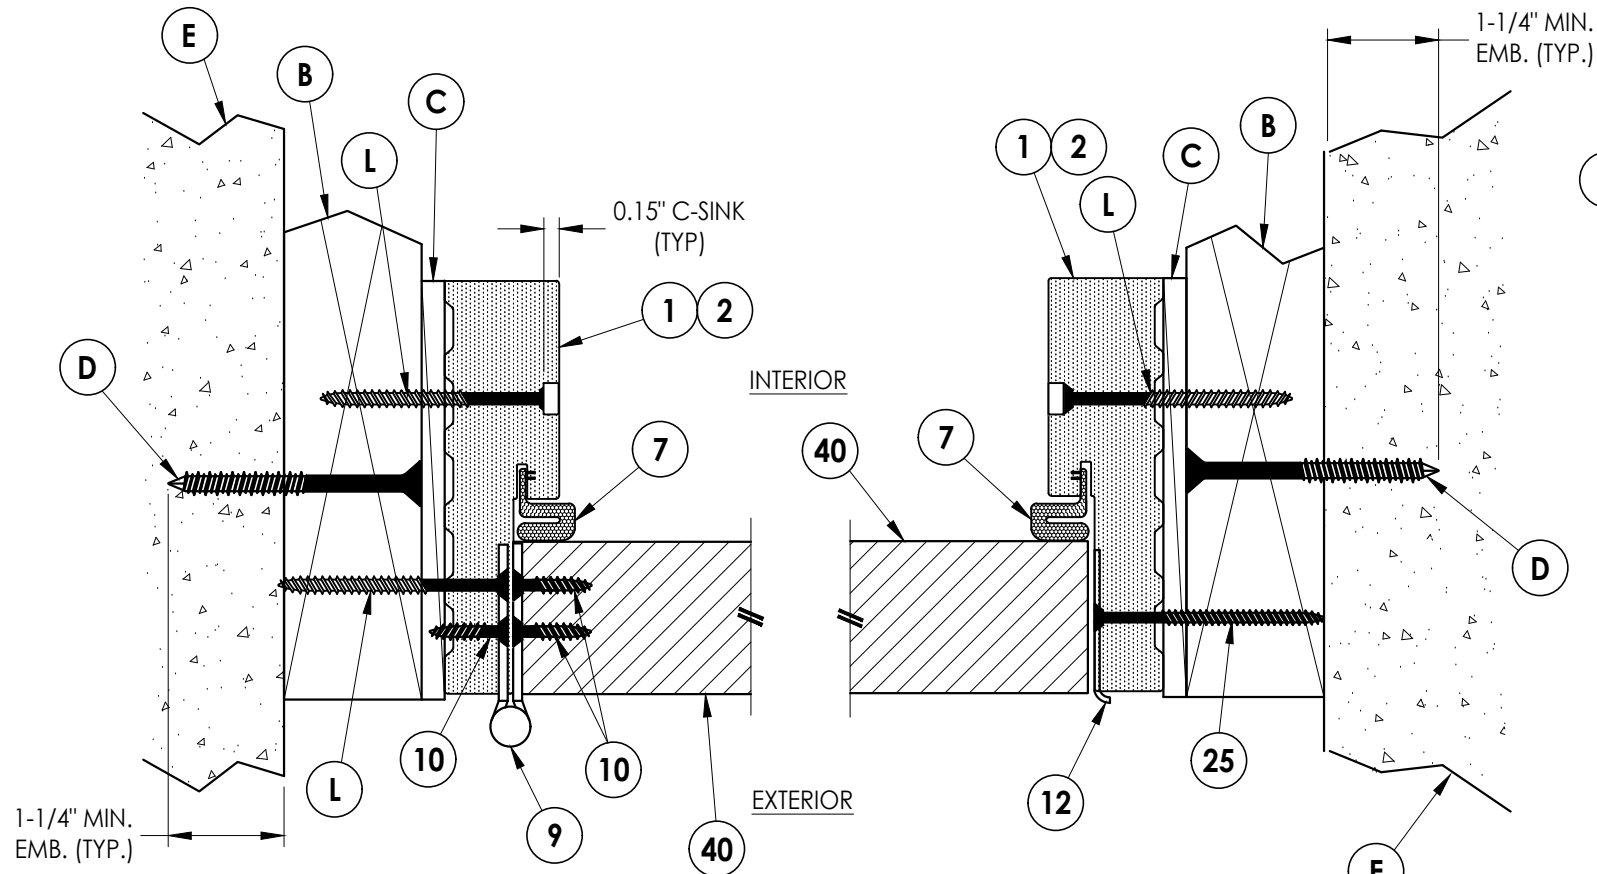


1
6 **HORIZONTAL CROSS SECTION**
Outswing Shown (Inswing Similar)
Shown w/ 2X Buck


2
6 **HORIZONTAL CROSS SECTION**
Outswing Shown (Inswing Similar)
Shown w/ 2X Buck

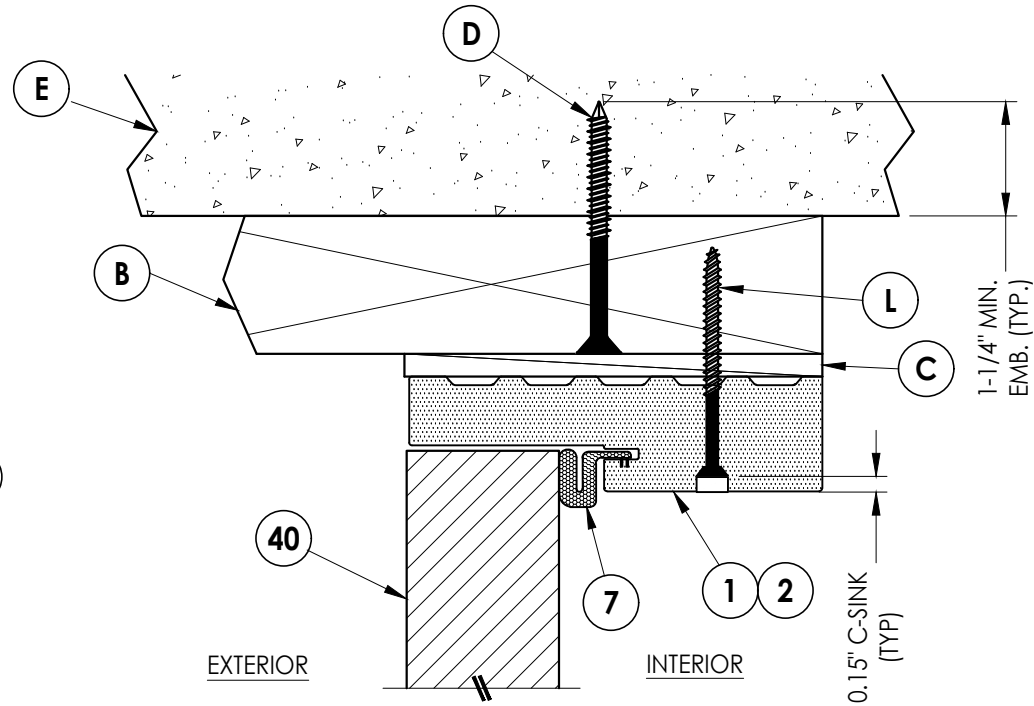

4
6 **VERTICAL CROSS SECTION**
Outswing Shown (Inswing Similar)
Shown w/ 2X Buck

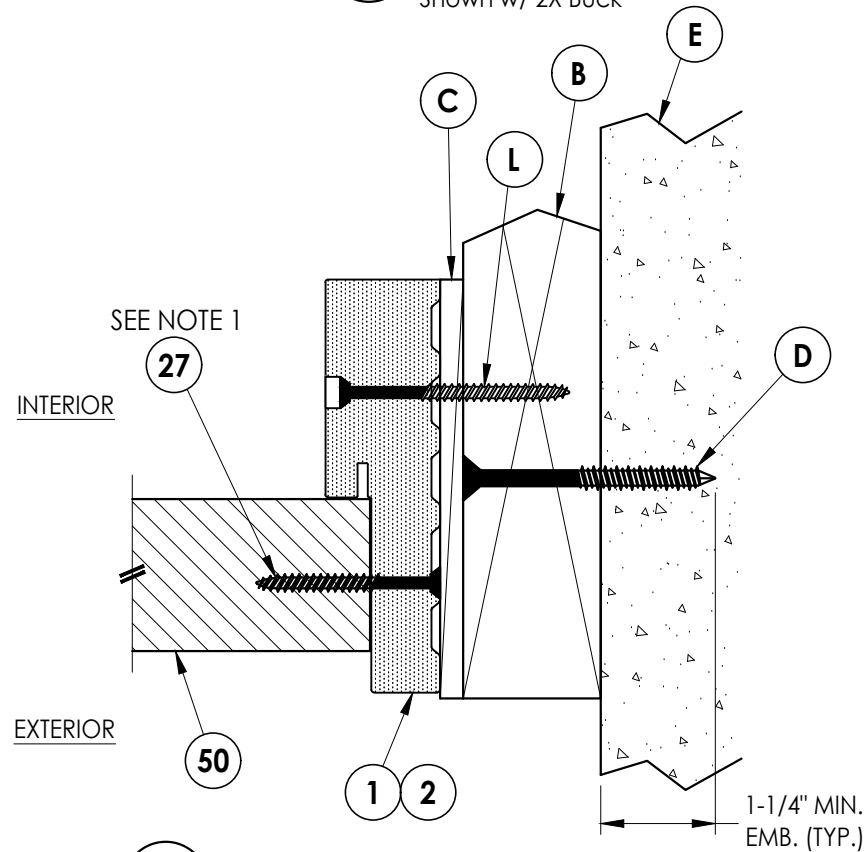

3
6 **HORIZONTAL CROSS SECTION**
Outswing Shown (Inswing Similar)
Shown w/ 2X Buck

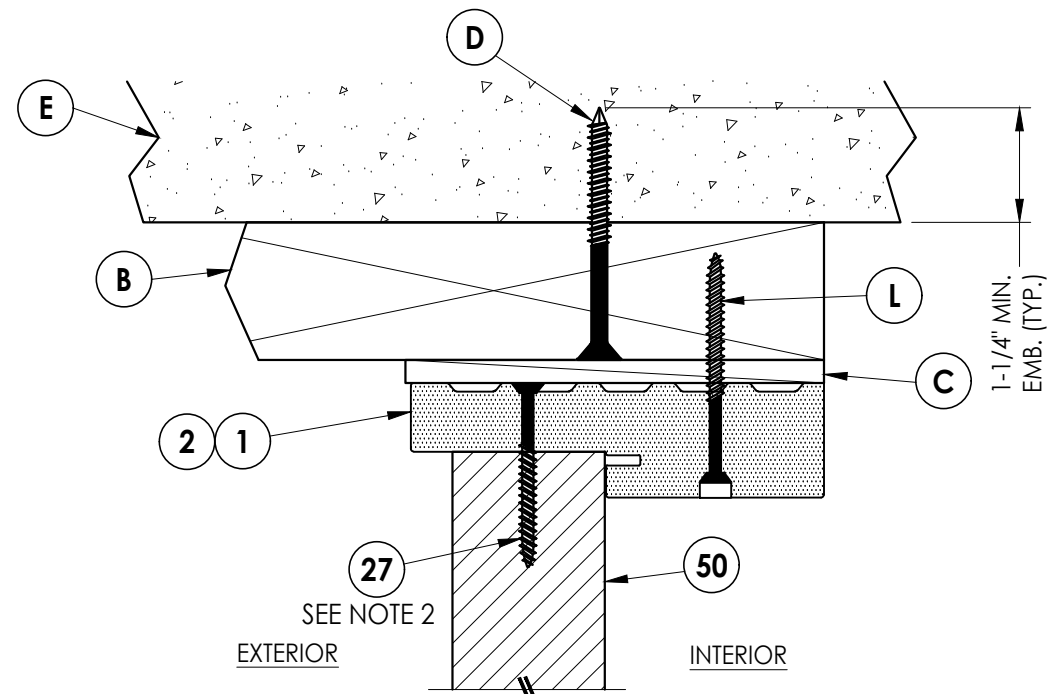

5
6 **VERTICAL CROSS SECTION**
Outswing Shown (Inswing Similar)
Shown w/ 2X Buck

Notes:

- Sidelite assembly screws located 6" from each end and 4 more screws equally spaced between (6 screws total per side jamb).
- Sidelite assembly screws located 10" from each end (2 screws total along head & sill).

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: ODL
FIBERGLASS DOOR

PART OR ASSEMBLY:
HORIZONTAL & VERTICAL
CROSS SECTIONS (2X BUCK)

NO.	DATE	BY	REVISIONS

DATE: 7/25/24

SCALE: N.T.S.


DWG. BY: LFS

CHK. BY: RW


DRAWING NO.:

FL-46118.2


SHEET 6 OF 12

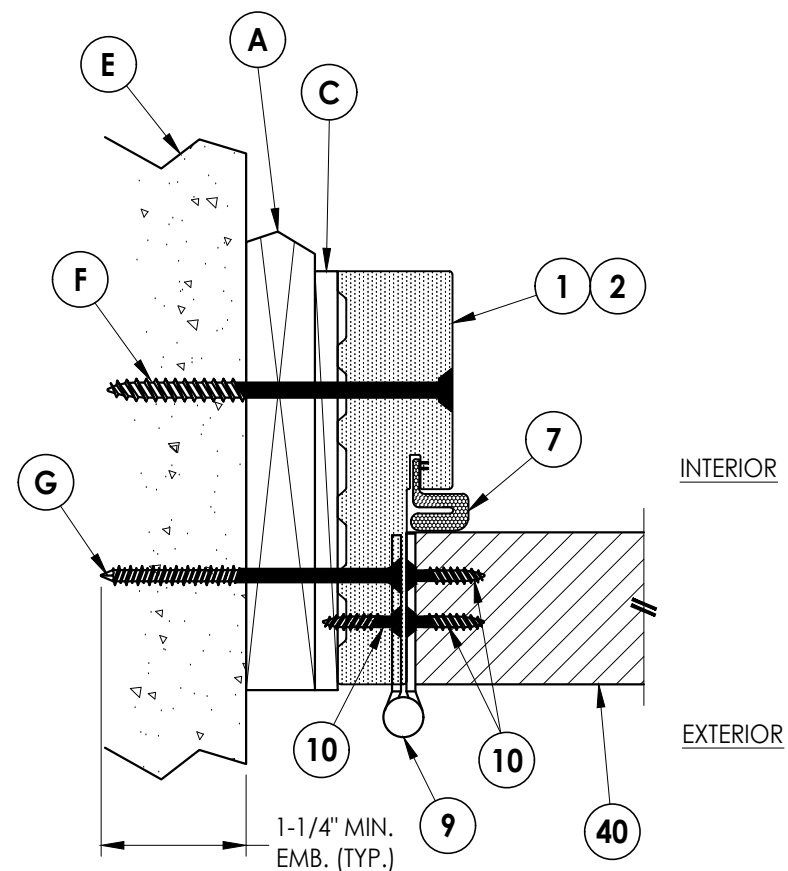


1 7 **HORIZONTAL CROSS SECTION**

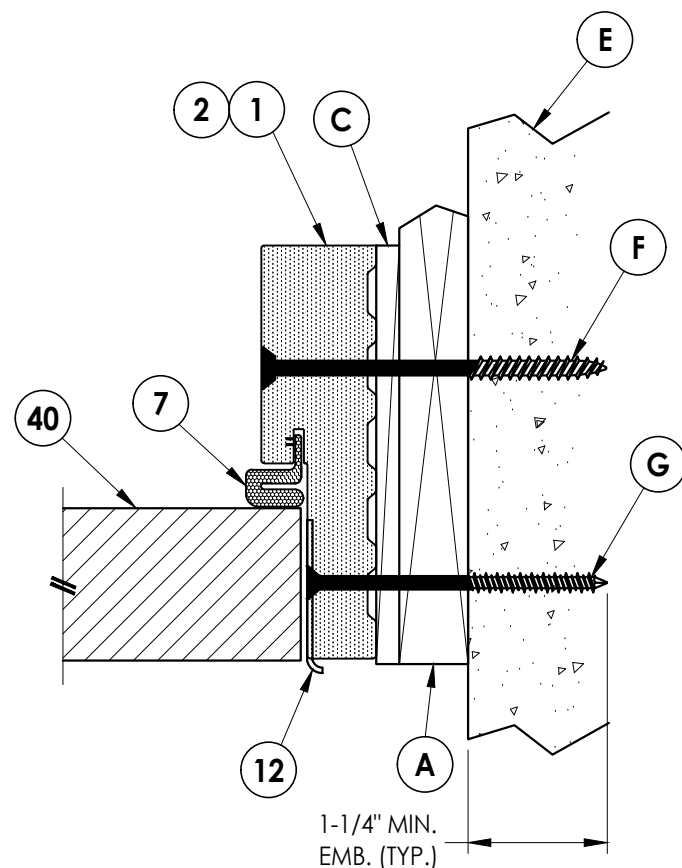


2 **HORIZONTAL CROSS SECTION**
7 Outswing Shown (Inswing Similar)
 Shown w/ 1X Buck

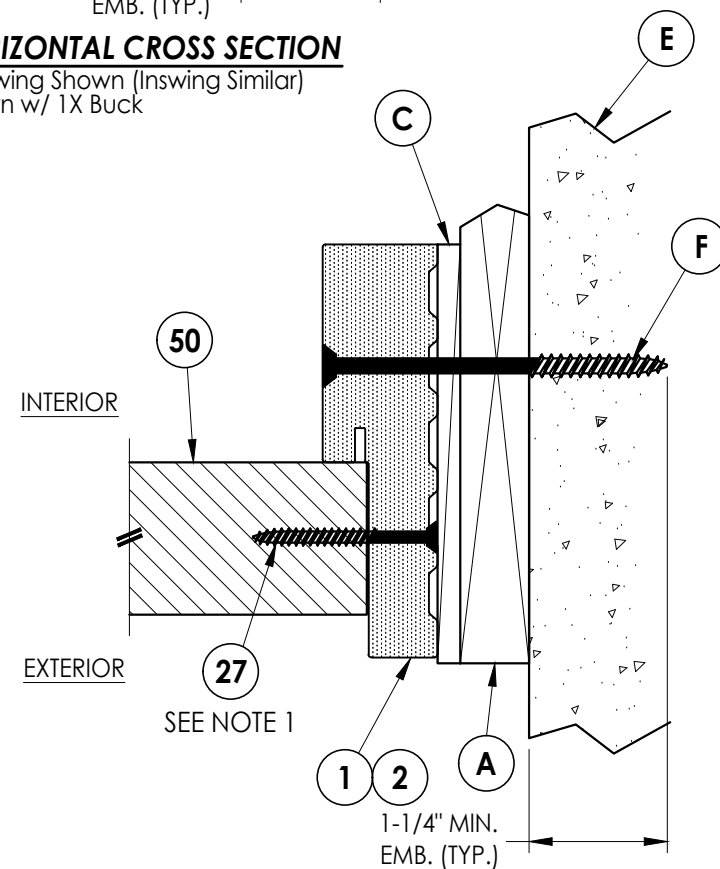

3 **HORIZONTAL CROSS SECTION**
7 Outswing Shown (Inswing Similar)
 Shown w/ 1X Buck

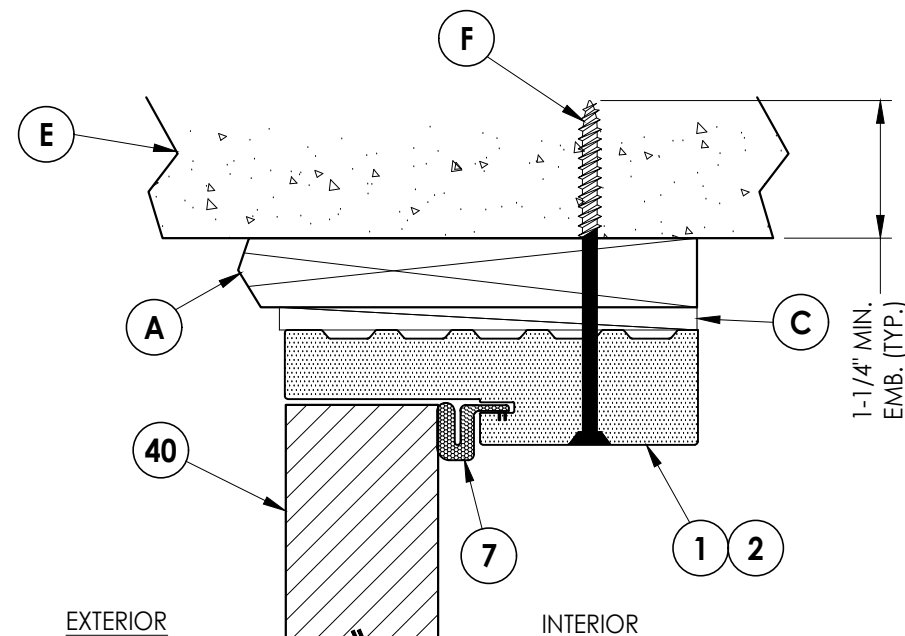

4 **VERTICAL CROSS SECTION**
7 Outswing Shown (Inswing Similar)
 Shown w/ 1X Buck

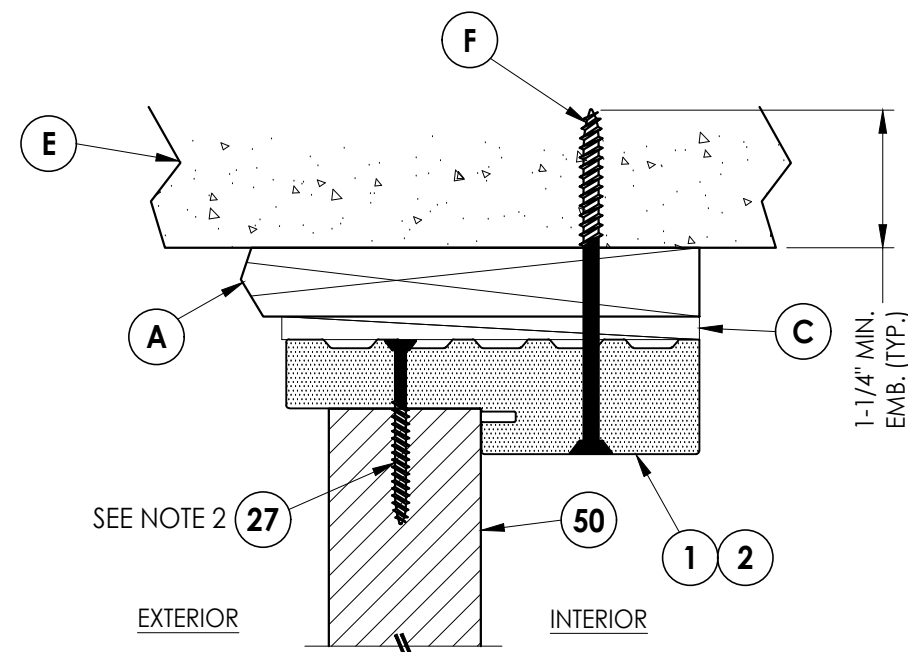

5 **VERTICAL CROSS SECTION**
7 Outswing Shown (Inswing Similar)
 Shown w/ 1X Buck


Notes:

1. Sidelite assembly screws located 6" from each end and 4 more screws equally spaced between (6 screws total per side jamb).
2. Sidelite assembly screws located 10" from each end (2 screws total along head & sill).

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409


R^W BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

DATE: 7/25/24		PRODUCT: ODL FIBERGLASS DOOR	
SCALE: N.T.S.			
DWG. BY: LFS			
CHK. BY: RW			
DRAWING NO.: FL-46118.2			
SHEET 7 OF 12			
PART OR ASSEMBLY: HORIZONTAL & VERTICAL CROSS SECTIONS (1X BUCK)		NO. DATE BY	
		REVISIONS	

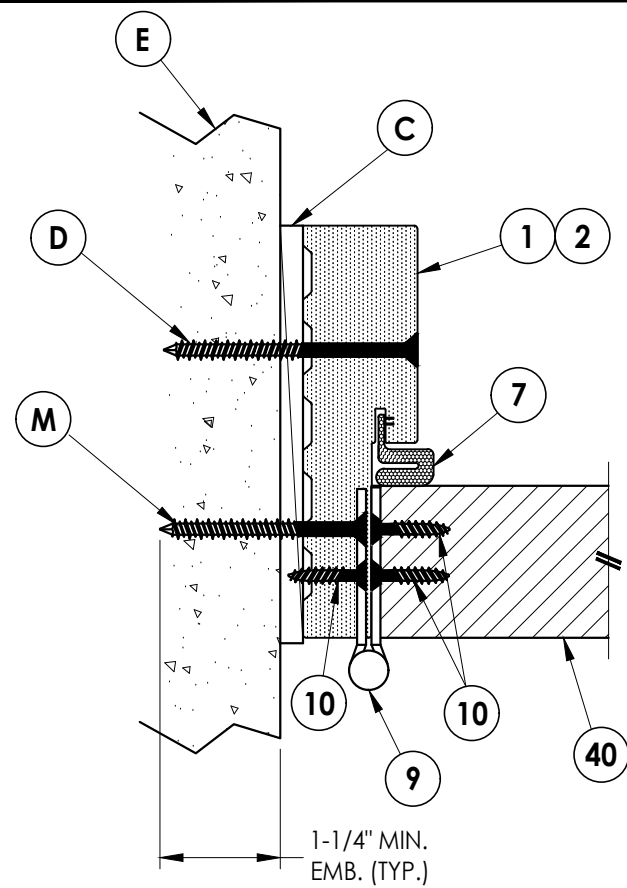


1 8 **HORIZONTAL CROSS SECTION**


Outswing Shown (Inswing Similar)
Shown Direct to Masonry

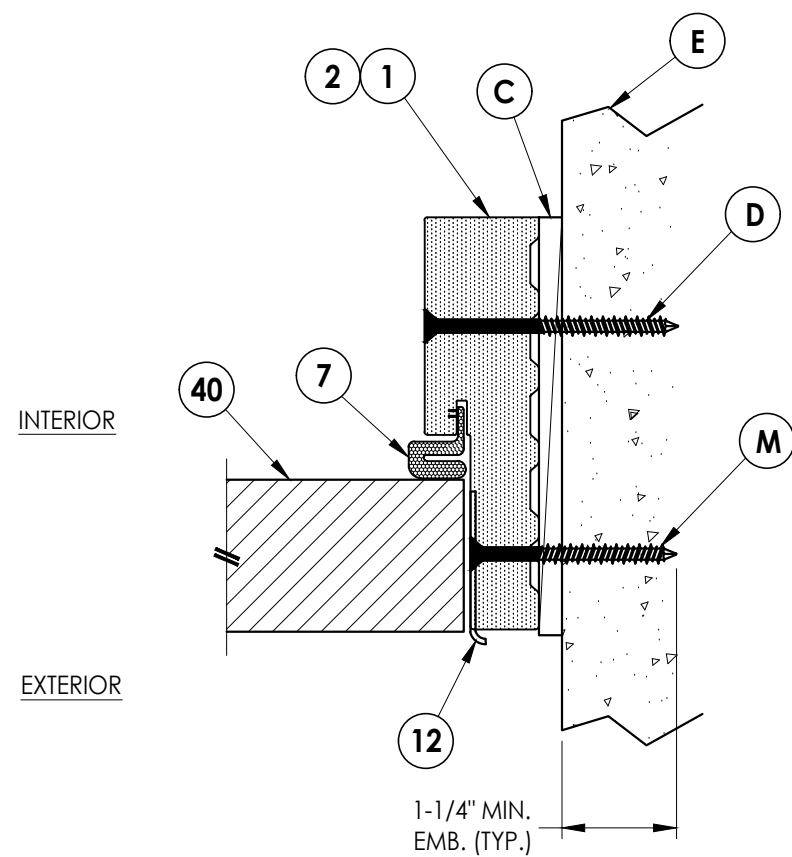


2 **HORIZONTAL CROSS SECTION**
8 Outswing Shown (Inswing Similar)
 Shown Direct to Masonry

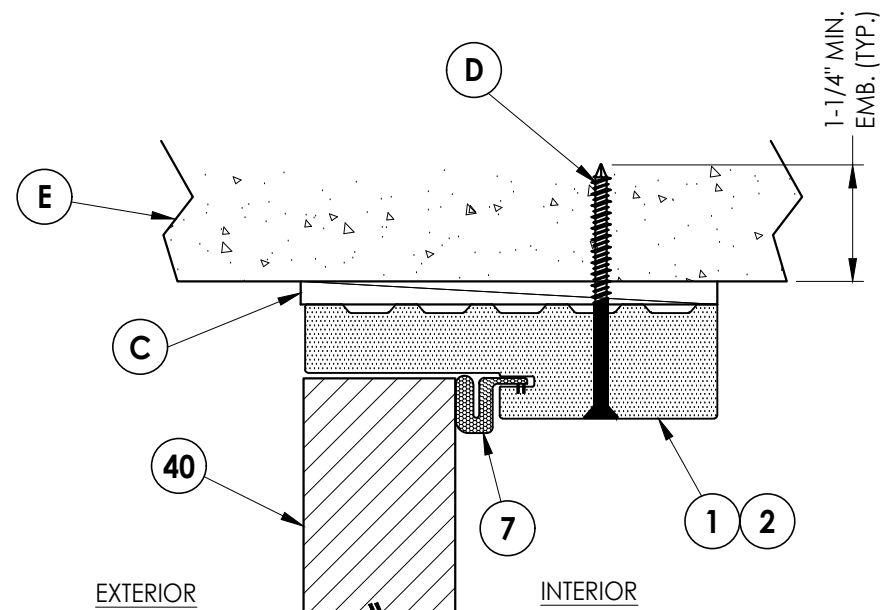

4 **VERTICAL CROSS SECTION**
8 Outswing Shown (Inswing Similar)
Shown Direct to Masonry

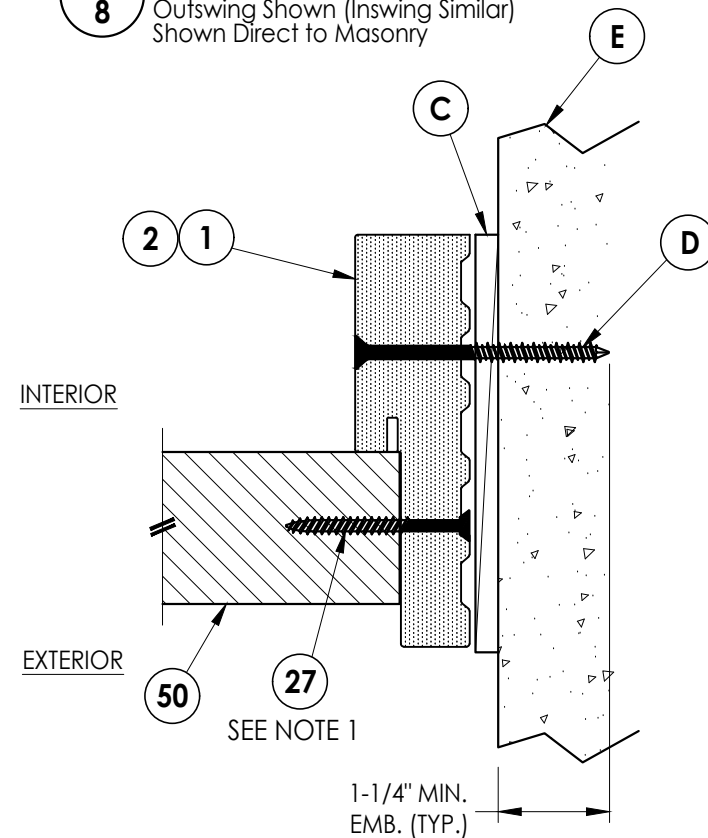

3 HORIZONTAL CROSS SECTION
8 Outswing Shown (Inswing Similar)
 Shown Direct to Masonry

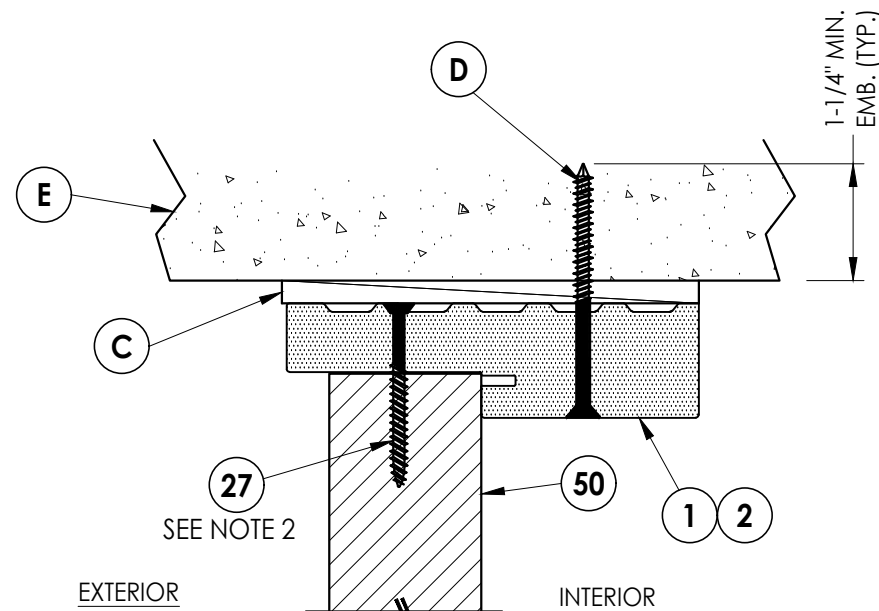

5 VERTICAL CROSS SECTION
8 Outswing Shown (Inswing Similar)
 Shown Direct to Masonry

Notes:

1. Sidelite assembly screws located 6" from each end and 4 more screws equally spaced between (6 screws total per side jamb).
2. Sidelite assembly screws located 10" from each end (2 screws total along head & sill).

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

R^W BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: ODL
FIBERGLASS DOOR

PART OR ASSEMBLY:
HORIZONTAL & VERTICAL CROSS SECTIONS (DIRECT TO MASONRY)

[illegible]

DATE: 7/25/24

SCALE: N.T.S.


DWG. BY: *LFS*

CHK. BY: RW


DRAWING NO.:
FI-461182

SHEET 8 OF 12


Note:
1. Sidelite assembly screws located 10" from each end (2 screws total along head & sill). Note: Screws not required on 14" Sidelites.

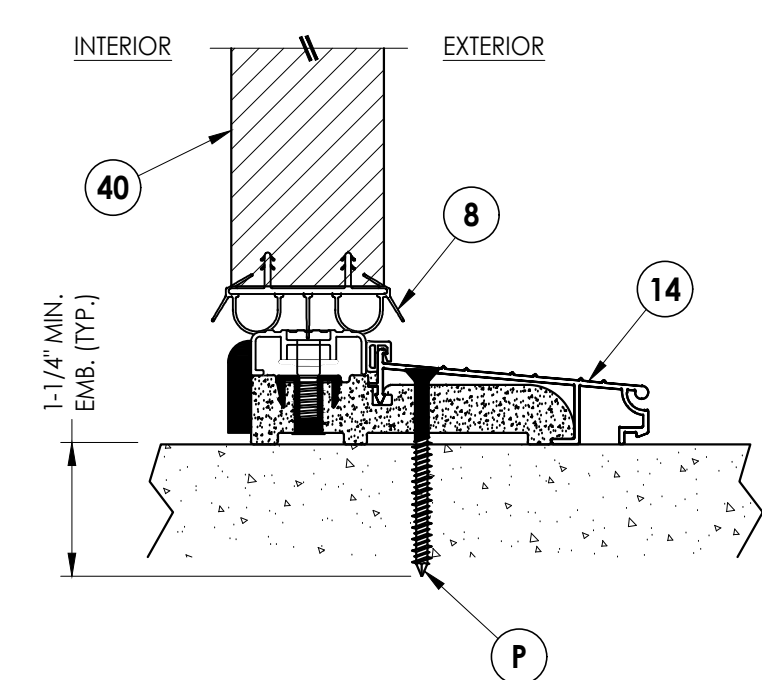


1
9 VERTICAL CROSS SECTION
Inswing Sill

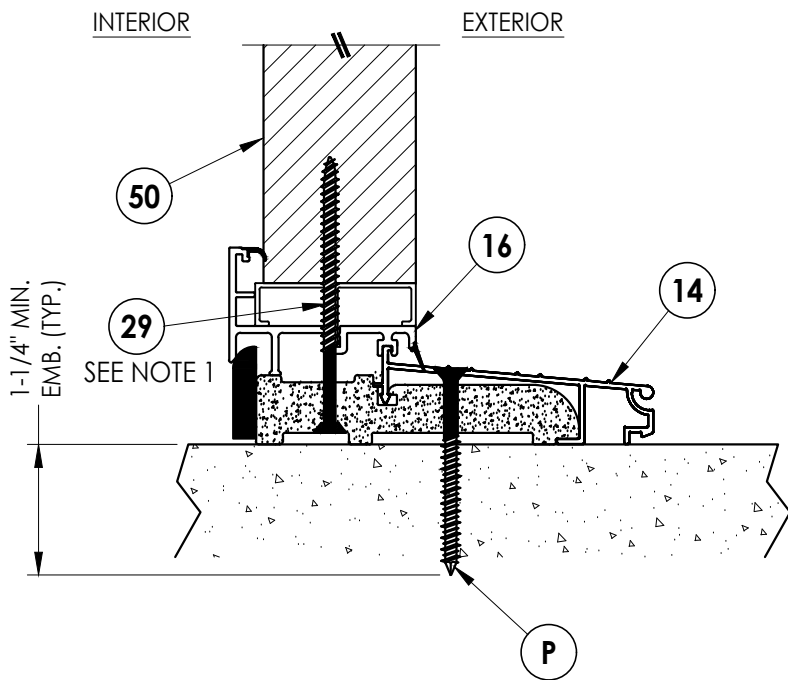


3
9 VERTICAL CROSS SECTION
Inswing Sill

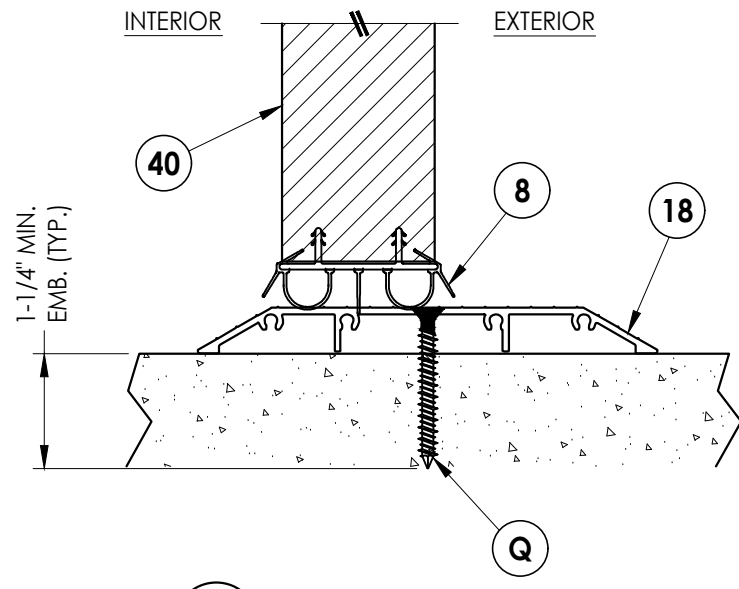


5
9 VERTICAL CROSS SECTION
ADA Sill

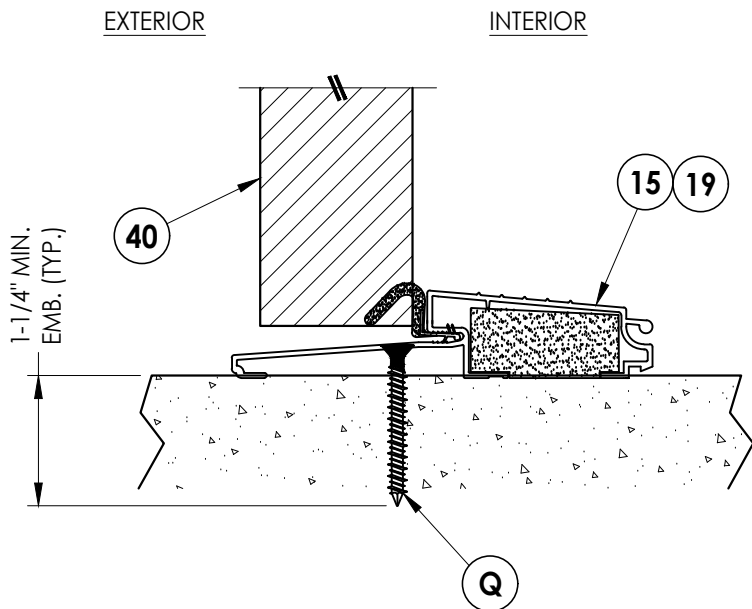

2
9 VERTICAL CROSS SECTION
Outswing Sill

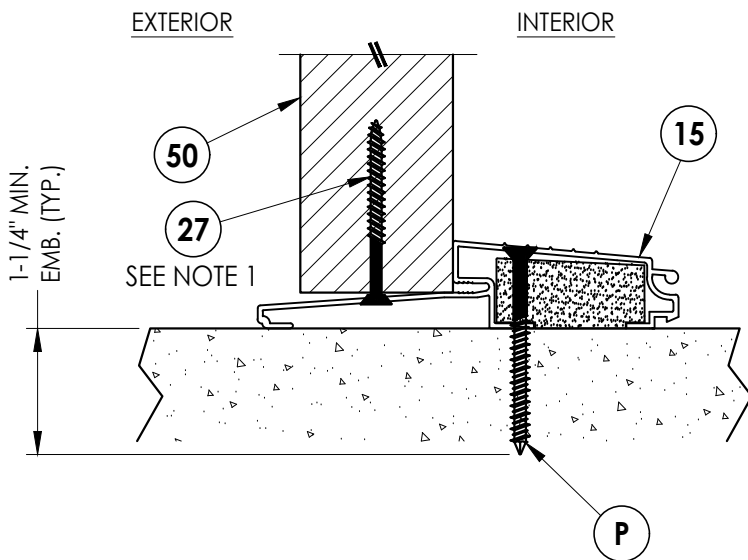

4
9 VERTICAL CROSS SECTION
Outswing Sill

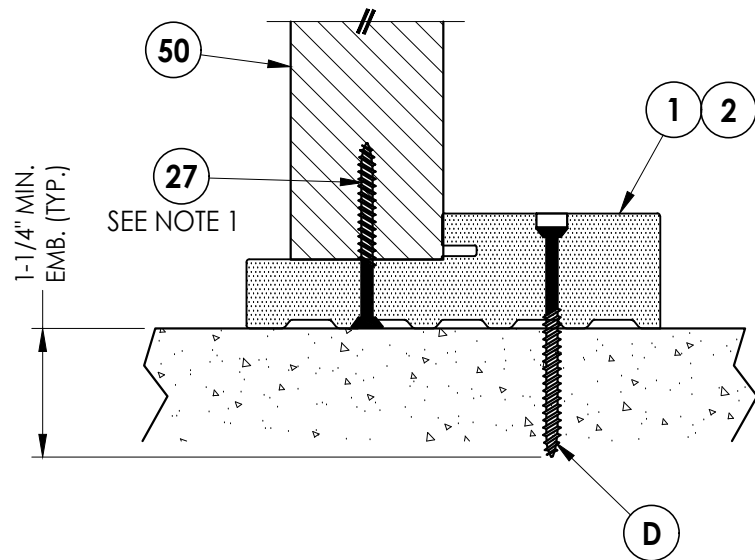

6
9 VERTICAL CROSS SECTION
Boxed Sidelite Sill

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: ODL
FIBERGLASS DOOR

PART OR ASSEMBLY:
VERTICAL CROSS
SECTIONS (THRESHOLDS)

REVISIONS	
NO.	DATE

DATE: 7/25/24


SCALE: N.T.S.

DWG. BY: LFS


CHK. BY: RW

DRAWING NO.:
FL-46118.2

SHEET 9 OF 12

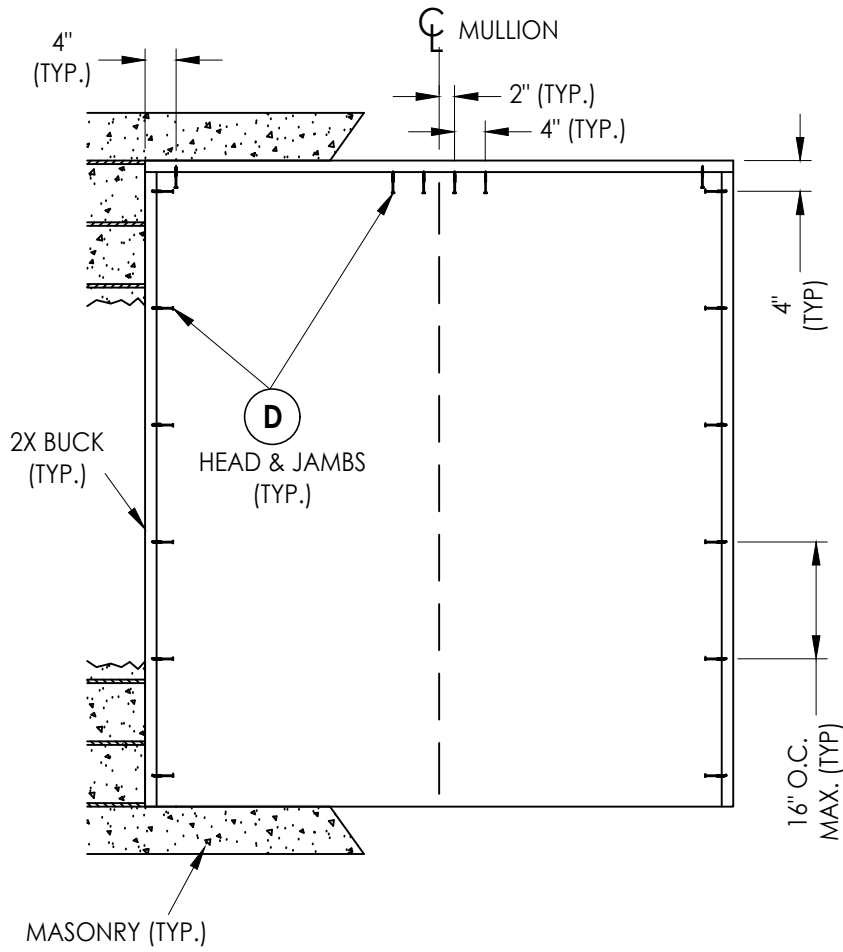

XO, OX

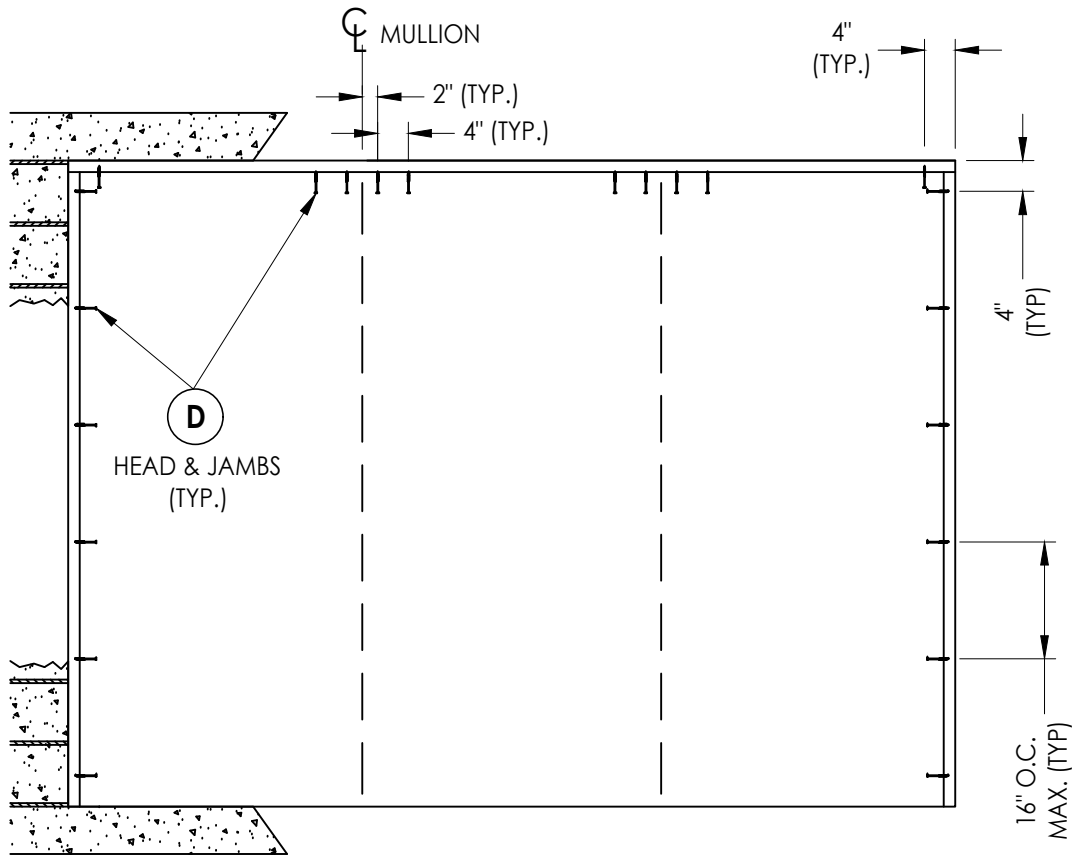

OXO, OOX, XOO







2X BUCK ANCHORING

[illegible]



DATE:	7/25/24
SCALE:	N.T.S.
DWG. BY:	LFS
CHK. BY:	RW
DRAWING NO.:	FL-46118.2
SHEET	10 OF 12

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

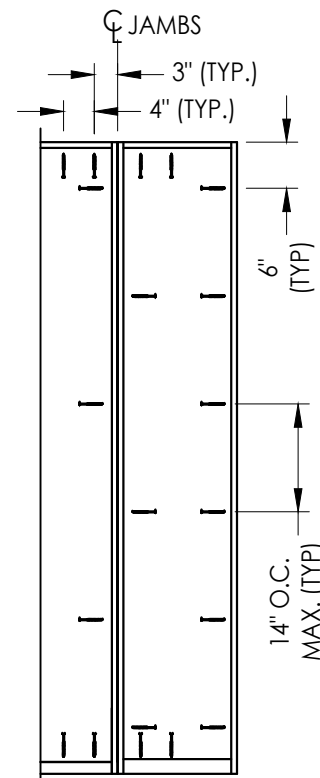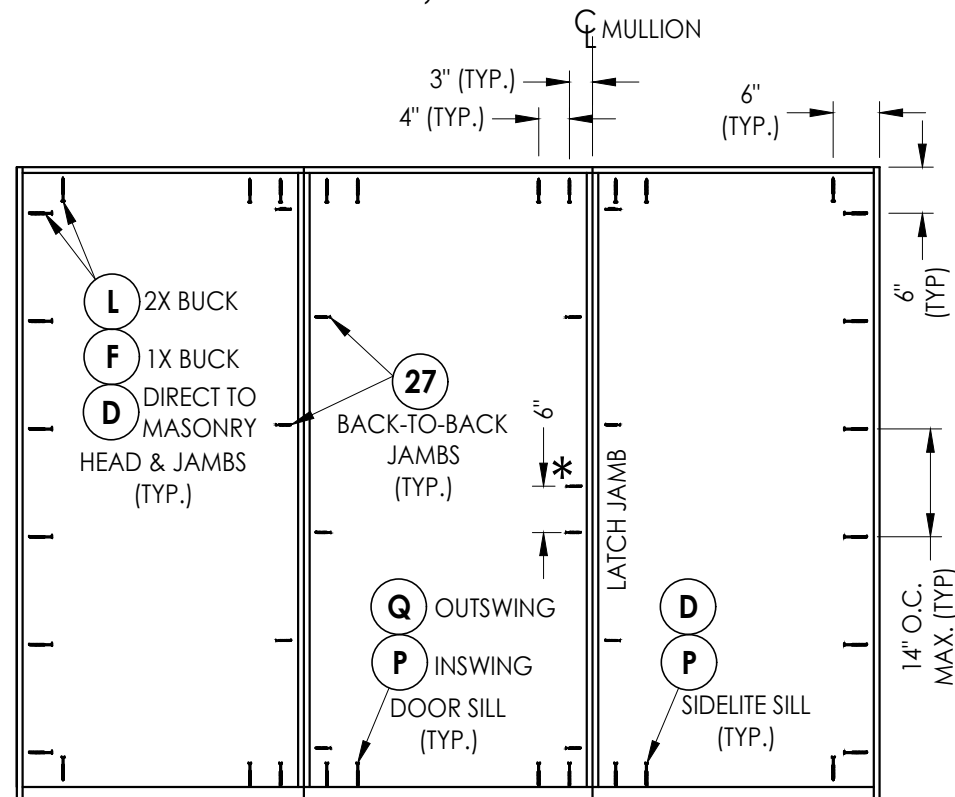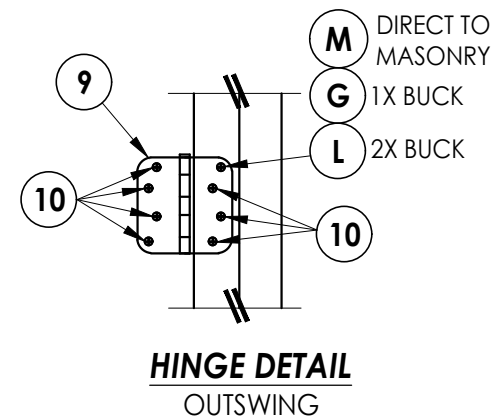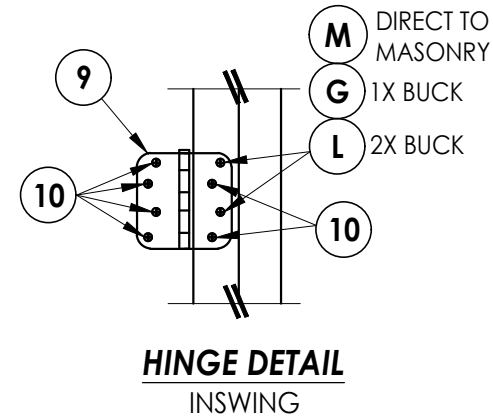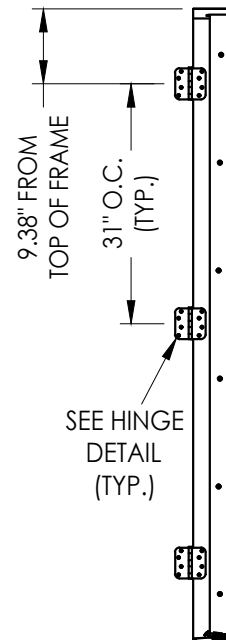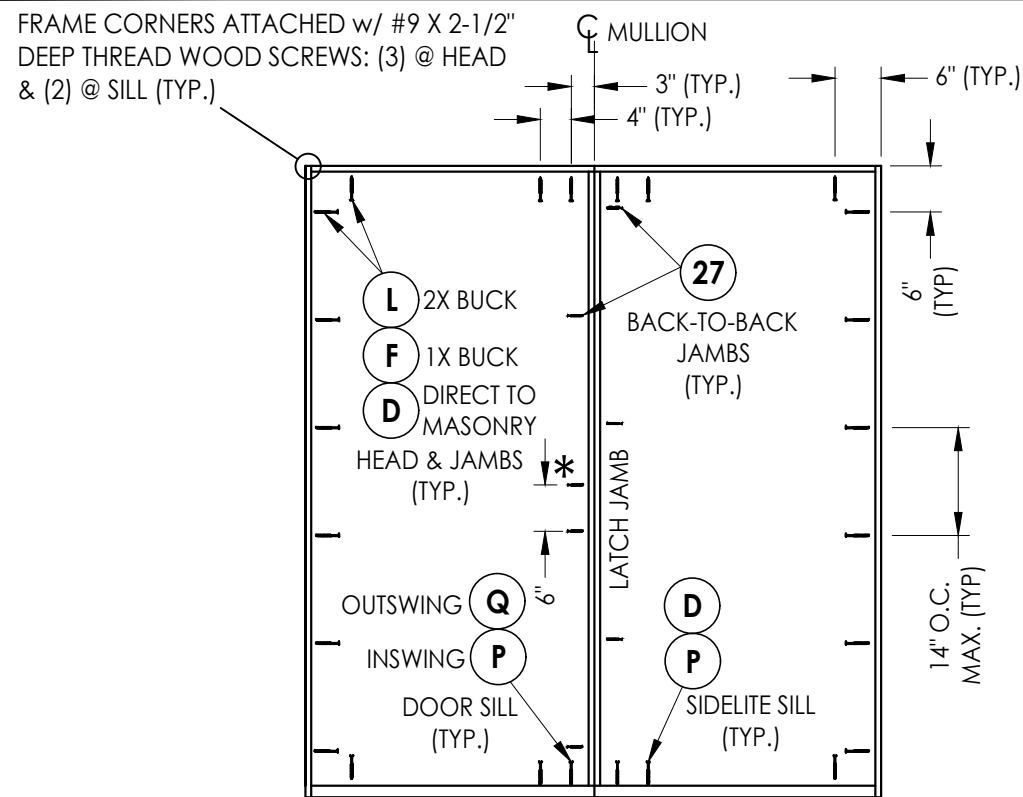

Shown w/ 14" Sidelite

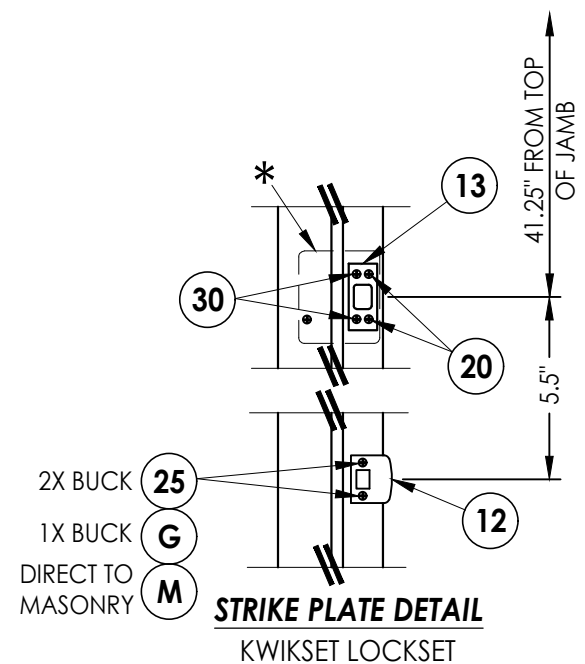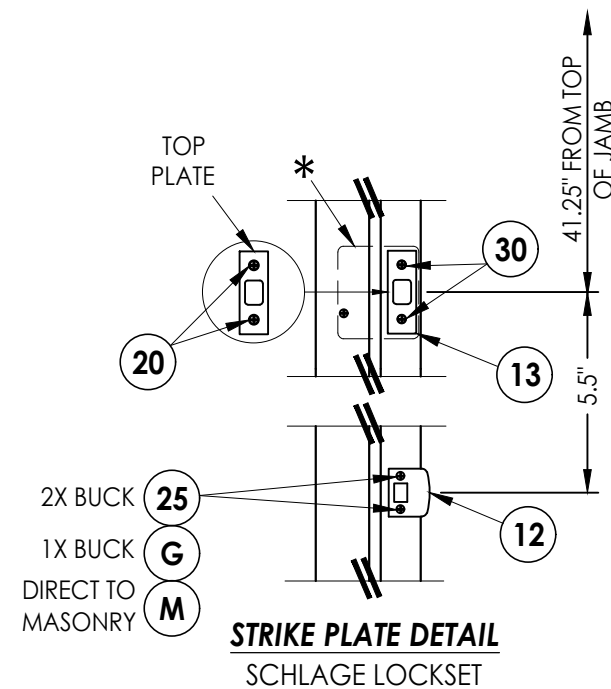

*4" X 4" 20 GA. STEEL PLATE ATTACHED TO BACK OF JAMB w/ (2)
3/8" T50 STAPLES PLUS ADDITIONAL ANCHOR THRU LATCH JAMB

HARDWARE DETAILS

[illegible]

Z:\2023 FBC Drawings\ODL, Inc\FL-46118\FL-46118.2.dwg

BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL
A	1X BUCK (G >= 0.42)	WOOD
B	2X BUCK (G >= 0.42)	WOOD
C	1/4" MAX. SHIM SPACE	-
D	1/4" X 2-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301 OR HOLLOW BLOCK CONFORMING TO ASTM C90	CONCRETE
F	1/4" X 3-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
G	3/16" X 3-1/4" PFH ITW CONCRETE SCREW	STEEL
L	#10 X 2-1/2" PFH WOOD SCREW (1.15" MIN. EMB.)	STEEL
M	3/16" X 2-1/4" PFH ITW CONCRETE SCREW	STEEL
P	1/4" X 2-1/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
Q	1/4" X 1-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
1	COMPOSITE JAMB	COMP
2	WOOD JAMB	WOOD
7	WEATHERSTRIP	FOAM
8	DOOR SWEEP	VINYL
9	4" X 4" HINGE	STEEL
10	#9 X 3/4" PFH WOOD SCREW	STEEL
12	LATCH STRIKE PLATE	STEEL
13	DEADBOLT STRIKE PLATE	STEEL
14	INSWING THRESHOLD	ALUM/COMP
15	OUTSWING THRESHOLD	ALUM/COMP
16	INSWING SIDELITE ADAPTER	PVC
18	ADA THRESHOLD	ALUM
19	ADA OUTSWING THRESHOLD	ALUM
20	#8 X 1/2" PFH WOOD SCREW	STEEL
25	#8 X 2-1/2" PFH WOOD SCREW	STEEL
27	#10 X 2" PFH SMS	STEEL
29	#10 X 3" PFH WOOD SCREW	STEEL
30	#12 X 2-1/2" PFH WOOD SCREW	STEEL
40	DOOR PANEL	-
50	SIDELITE PANEL	-


CONCRETE ANCHOR NOTES:

- Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
- Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
- Concrete anchor table:


ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW BUILDEX TAPCON®	3/16"	1-1/4"	3"	1-1/2"
	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON®	1/4"	1-1/4"	1"	4"

WOOD SCREW INSTALLATION NOTES:


- Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

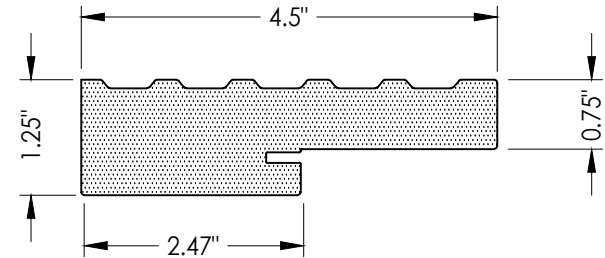


1 COMPOSITE JAMB
STARLINK SURE JAMB

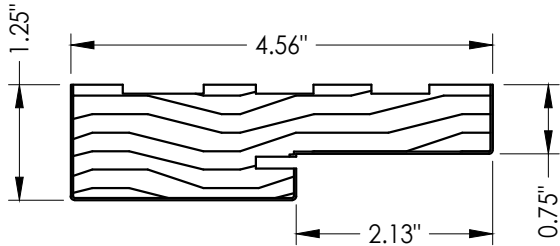


2 WOOD JAMB
FINGER JOINTED PINE

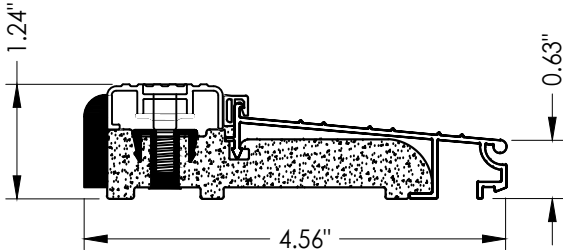


14 INSWING THRESHOLD
AFCO A-276

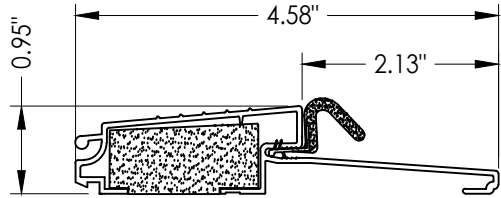


15 OUTSWING THRESHOLD
AFCO A-117

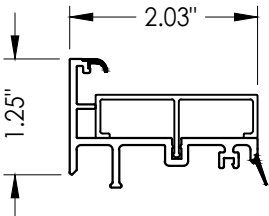

16 INSWING SIDELITE BASE
AFCO

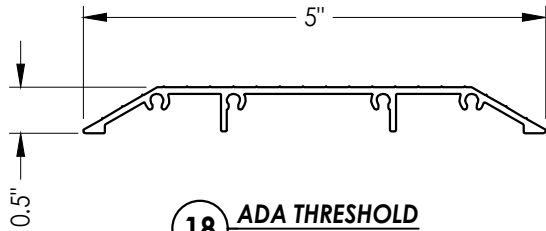

18 ADA THRESHOLD
AFCO A-204

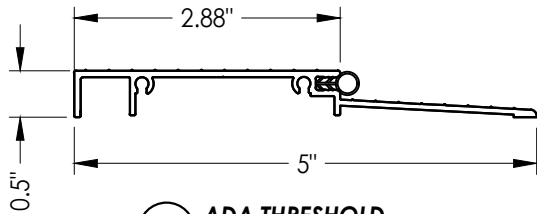

19 ADA THRESHOLD
AFCO A-204T

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: ODL
FIBERGLASS DOOR

PART OR ASSEMBLY:
BILL OF MATERIALS
& COMPONENTS

NO.	DATE	BY	REVISIONS

DATE: 7/25/24

SCALE: N.T.S.

DWG. BY: LFS

CHK. BY: RW

DRAWING NO.:
FL-46118.2

SHEET 12 OF 12