


Z:\2023 FBC Drawings\ODL, Inc\FL-46119\FL-46119.10.dwg





215 EAST ROOSEVELT AVE.
ZEELAND, MI 49464

**OPAQUE FIBERGLASS DOOR
DOUBLE w/ SIDELITES**
INSWING/OUTSWING
"IMPACT"

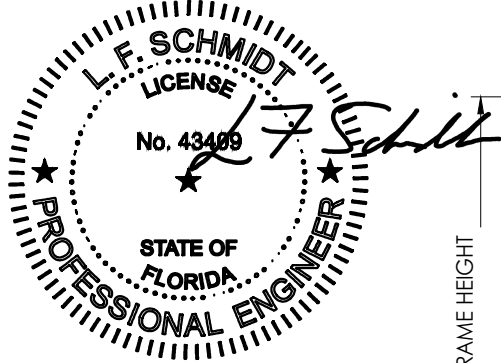

This item has been digitally signed and sealed by
L. F. Schmidt, P.E. on the date adjacent to the seal.
Printed copies of this document are not
considered signed and sealed and the signature
must be verified on any electronic copies.

THIS PRODUCT APPROVAL IS VALID
ONLY FOR THE STATE OF FLORIDA

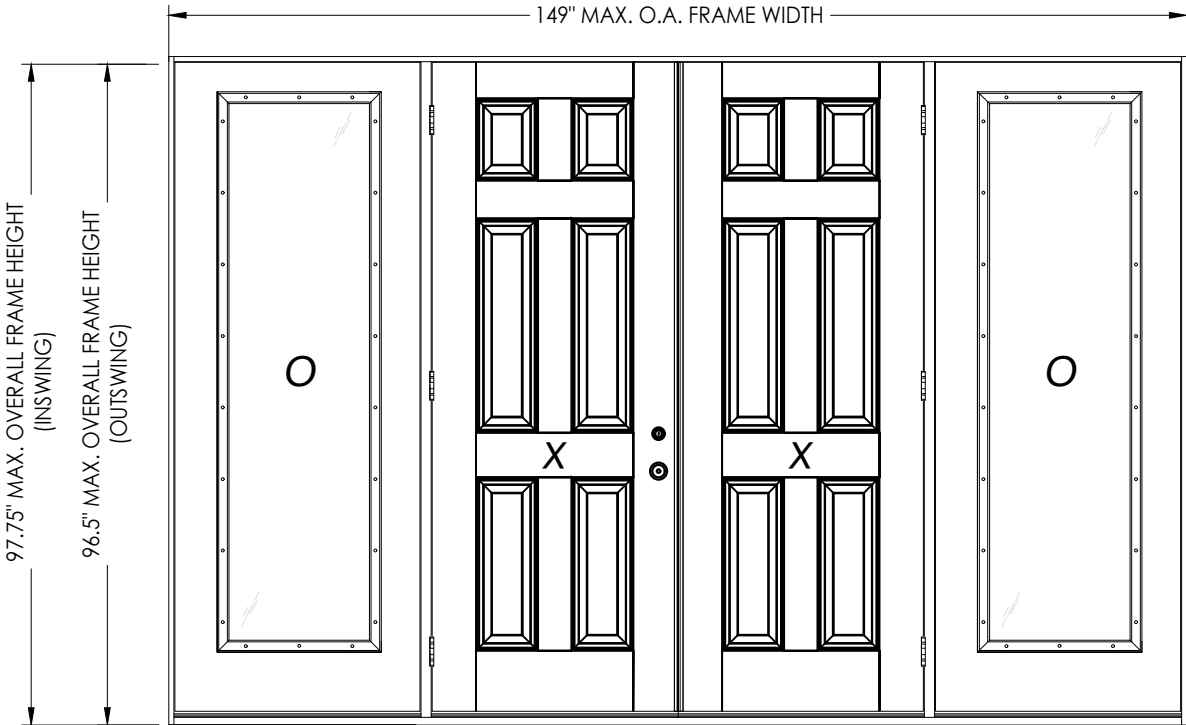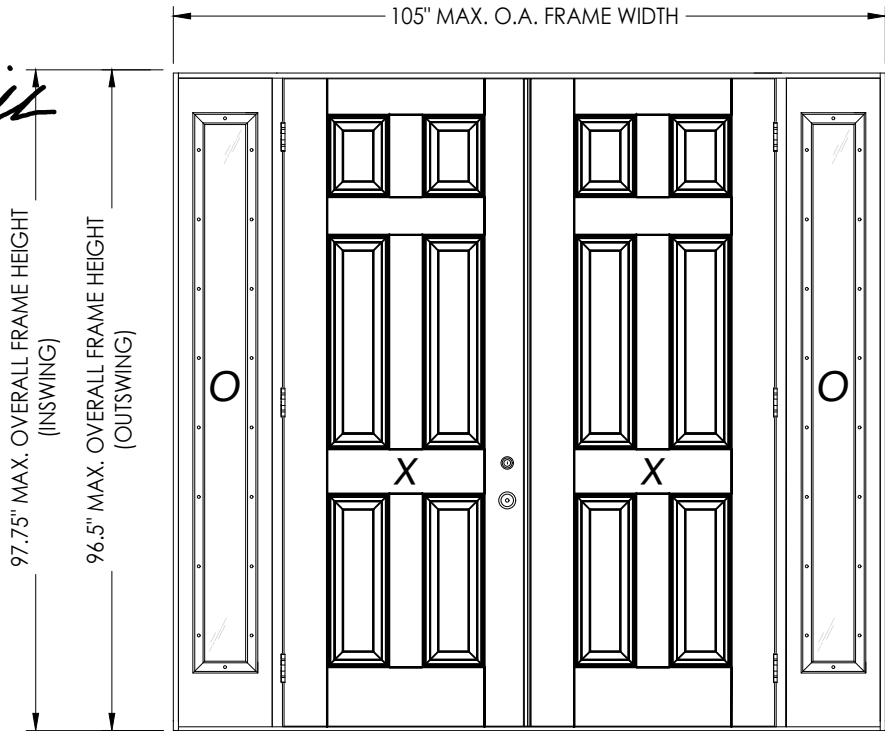

OXXO
CONTINUOUS HEAD & SILL

CONFIGURATION	MAX. FRAME DIMENSION	DESIGN PRESSURE (PSF)		DESIGN PRESSURE (PSF)	
		INSWING		OUTSWING	
		POSITIVE	NEGATIVE	POSITIVE	NEGATIVE
OXXO	105.0" x 97.75"	+40.0	-45.0	+45.0	-45.0
OXXO	149.0" x 97.75"	+40.0	-45.0	+45.0	-45.0

GENERAL NOTES

- This product has been evaluated and is in compliance with the 8th Edition (2023) Florida Building Code (FBC) structural requirements excluding the "High Velocity Hurricane Zone" (HVHZ).
- Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
- When used in areas requiring wind borne debris protection, this product complies with FBC Sections 1609.1.2 & R301.2.1.2 and does not require an impact resistant covering. This product meets missile level "D" and excludes Wind Zone 4 as defined in ASTM E 1996 and FBC Sections 1609.1.2.2 & R301.2.1.2.1.
- For 2x stud framing construction, anchoring of these units shall be the same as that shown for 2x buck masonry construction.
- Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.

TABLE OF CONTENTS

SHEET #	DESCRIPTION	SHEET #	
1	Typical Elevations, Design Pressures & General Notes	8	Horizontal & Vertical Cross Sections (2X Buck)
2	Door Panel Details	9	Horizontal & Vertical Cross Sections (1X Buck)
3	Sidelite Panel Details	10	Horizontal & Vertical Cross Sections (Direct to Masonry)
4	Lite Frame Glazing Details (Alum. Flat Frame)	11	Vertical Cross Sections (Thresholds)
5	Lite Frame Glazing Details (Keystone PVC Frame)	12	Buck Anchoring & Frame Anchoring & Hardware Details
6	Elevations	13	Bill of Materials & Components
7	Horizontal Cross Sections		

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813



PRODUCT:
ODL
FIBERGLASS DOOR

PART OR ASSEMBLY:
TYPICAL ELEVATION, DESIGN
PRESSURES & GENERAL NOTES

NO.	DATE	REVISIONS	
		BY	

DATE: 1/14/25
SCALE: N.T.S.
DWG. BY: LFS
CHK. BY: RW
DRAWING NO.: FL-46119.10
SHEET 1 OF 13

Z:\2023 FBC Drawings\ODL, Inc\FL-46119\FL-46119.10.dwg

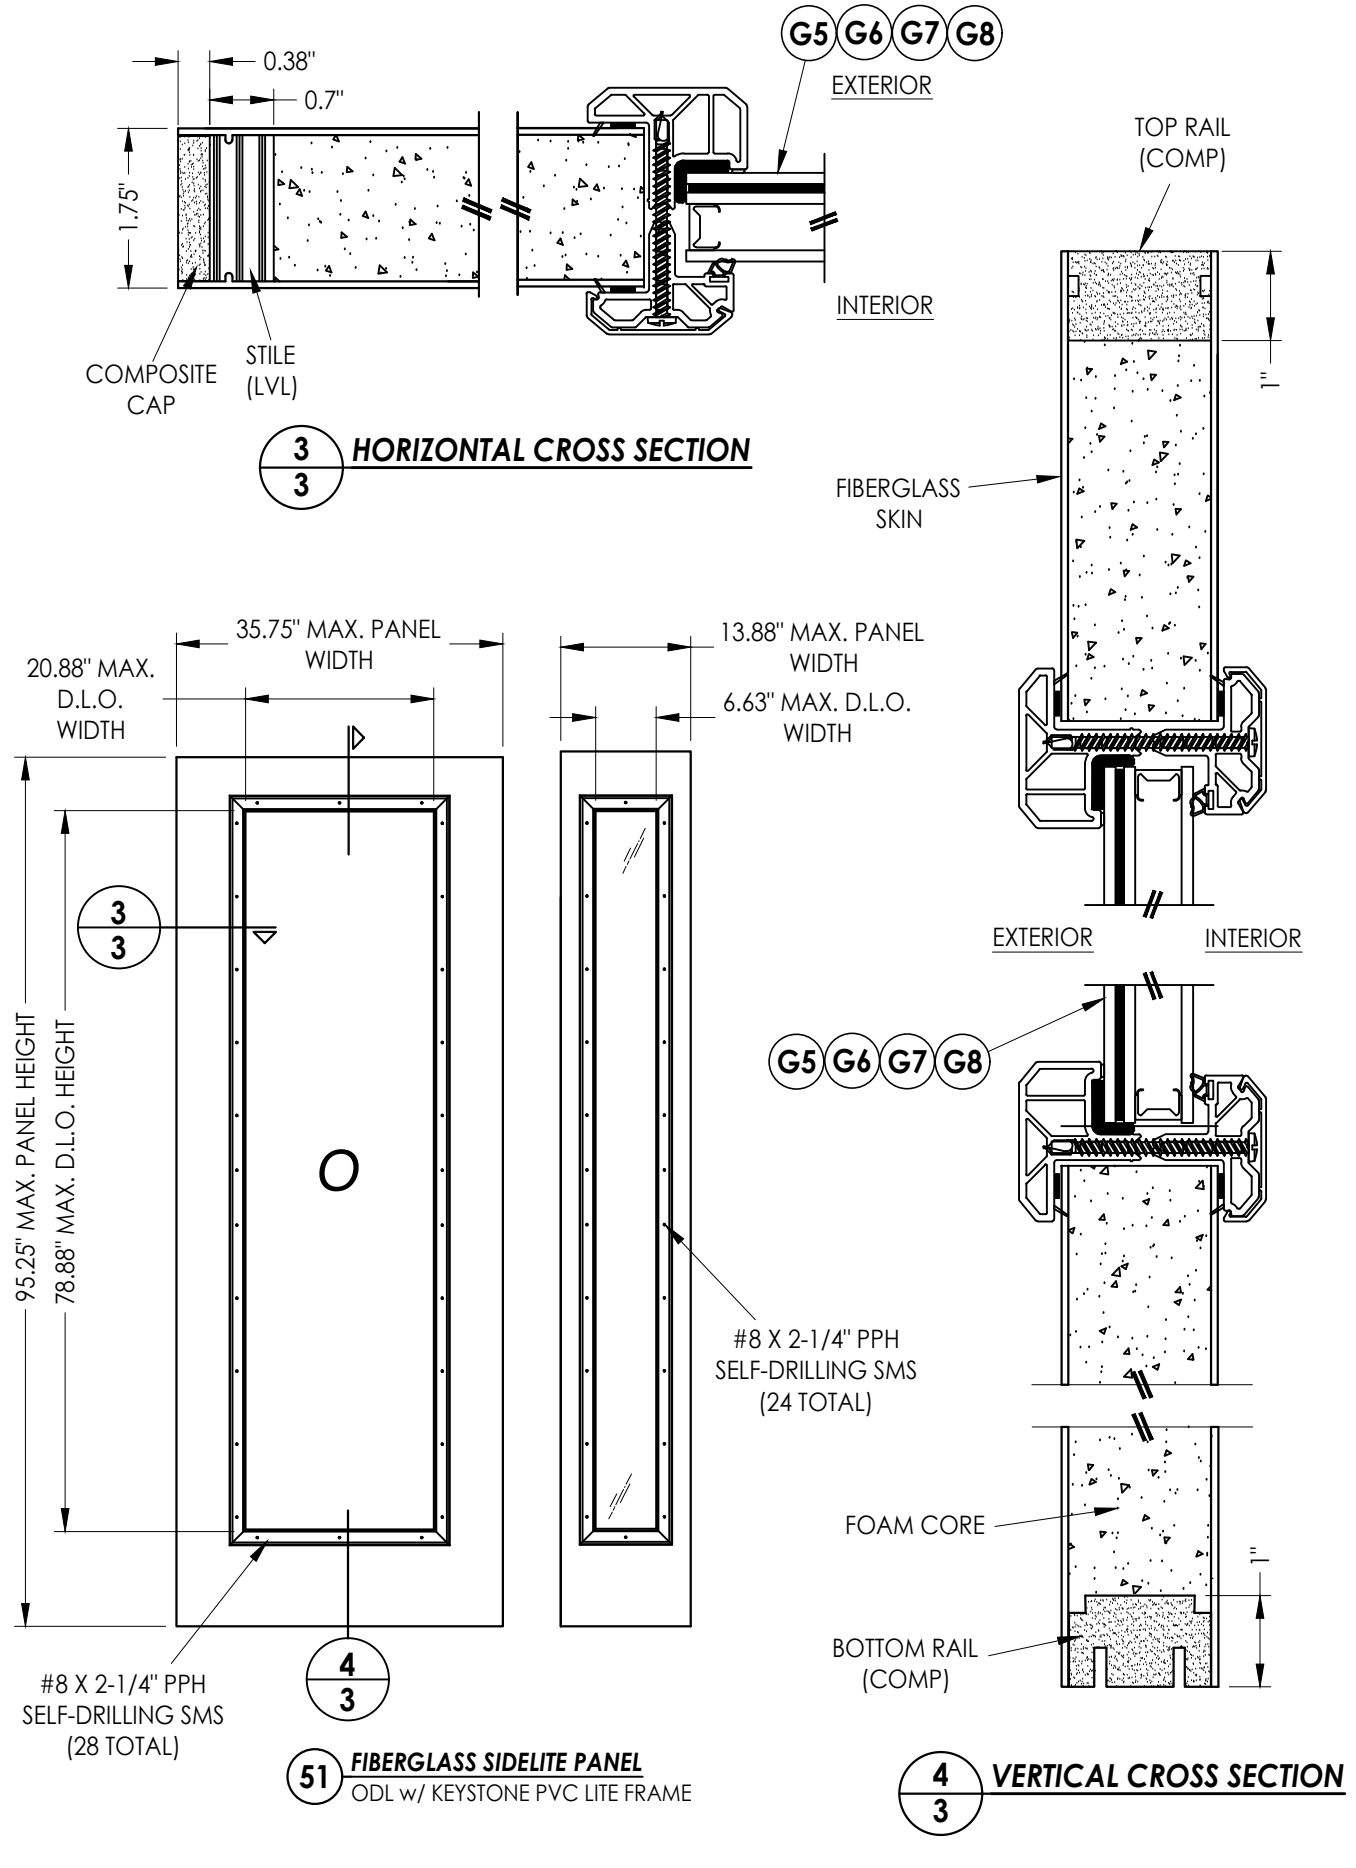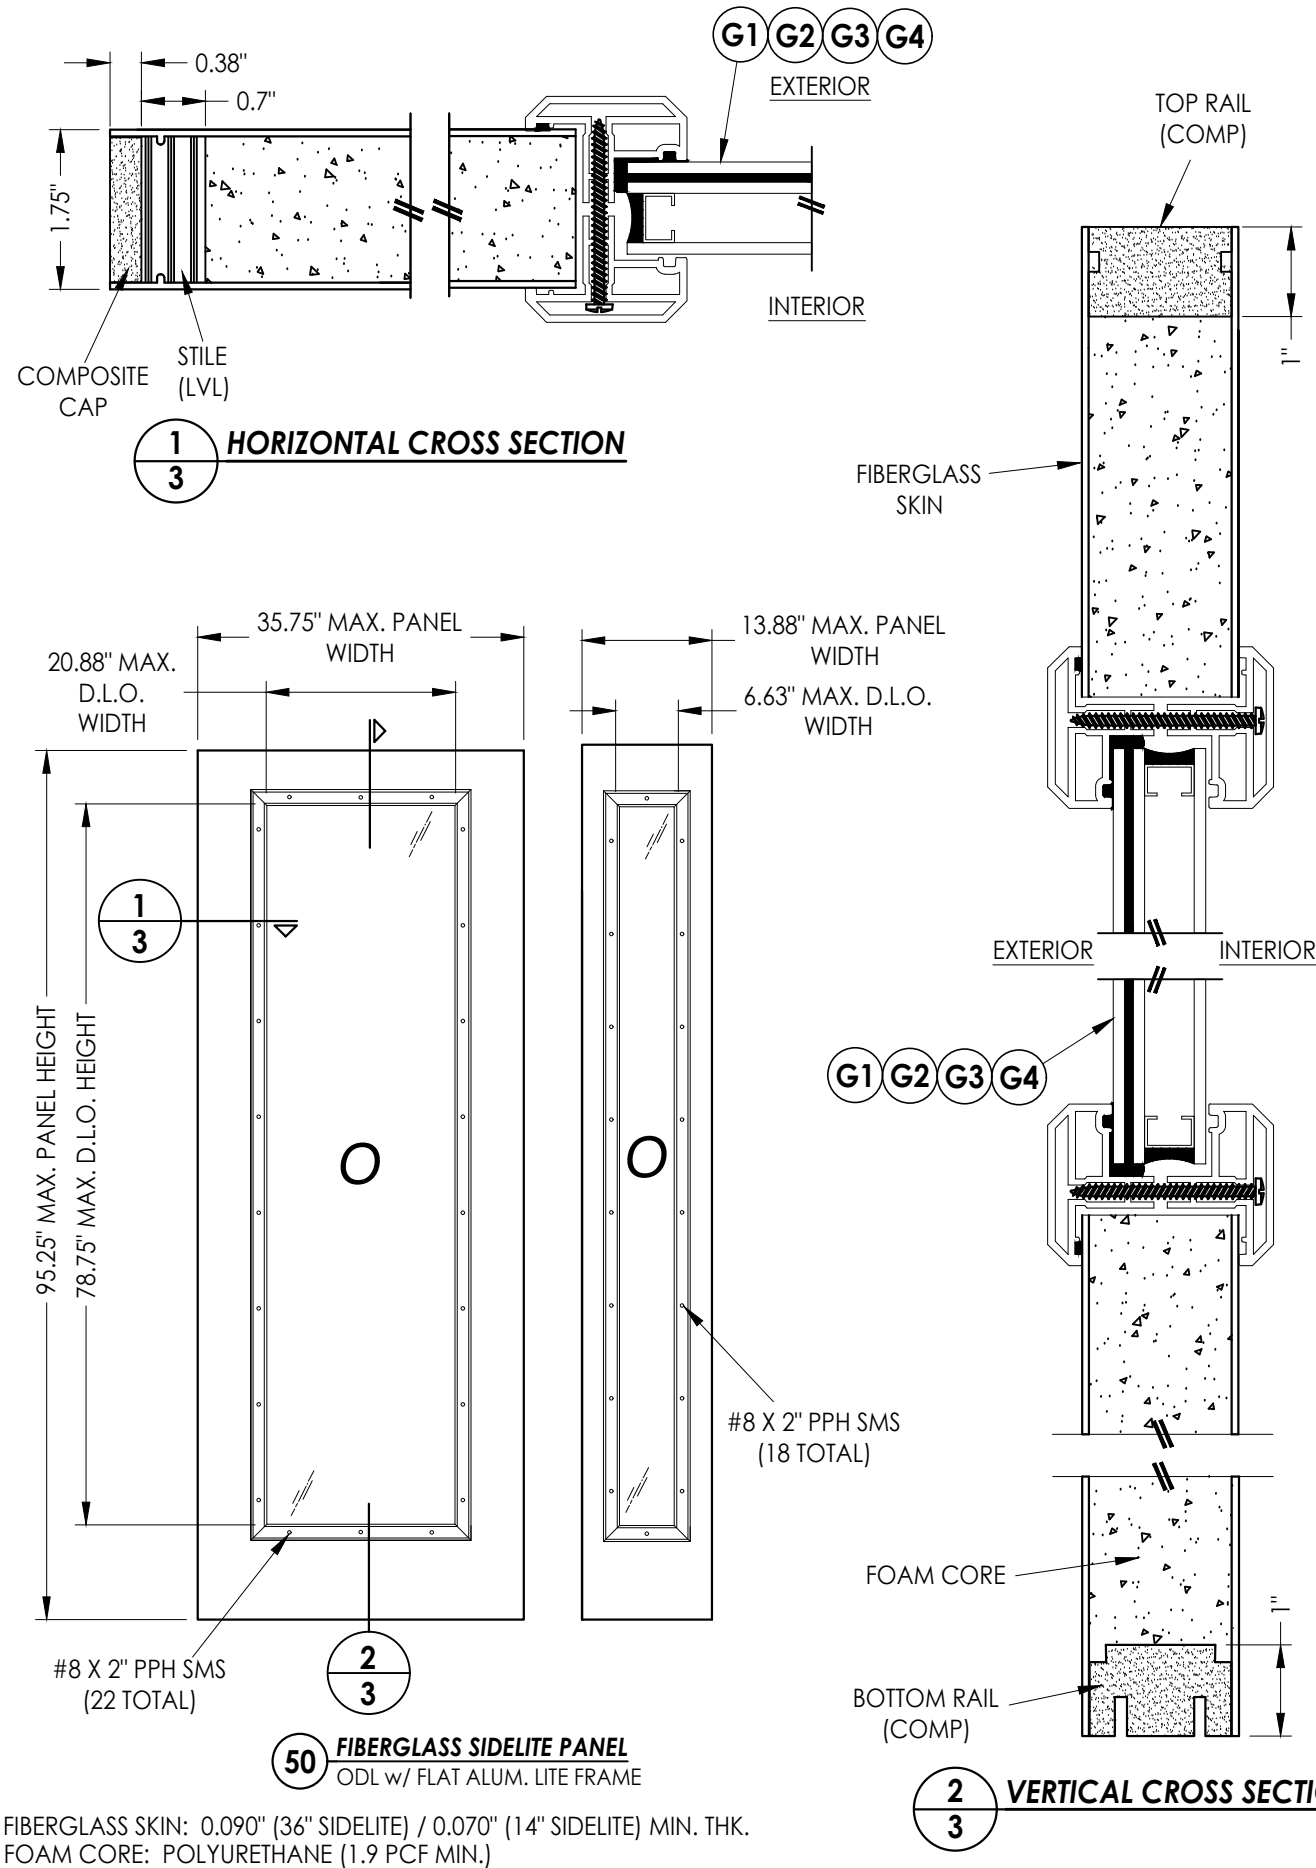

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813






PRODUCT: ODL
FIBERGLASS DOOR

PART OR ASSEMBLY:
SIDELITE PANEL
DETAILS

NO.	DATE	REVISIONS	BY

DATE: 1/14/25
SCALE: N.T.S.
DWG. BY: LFS
CHK. BY: RW
DRAWING NO.: FL-46119.10
SHEET 3 OF 13

Z:\2023 FBC Drawings\ODL, Inc\FL-46119\FL-46119.10.dwg

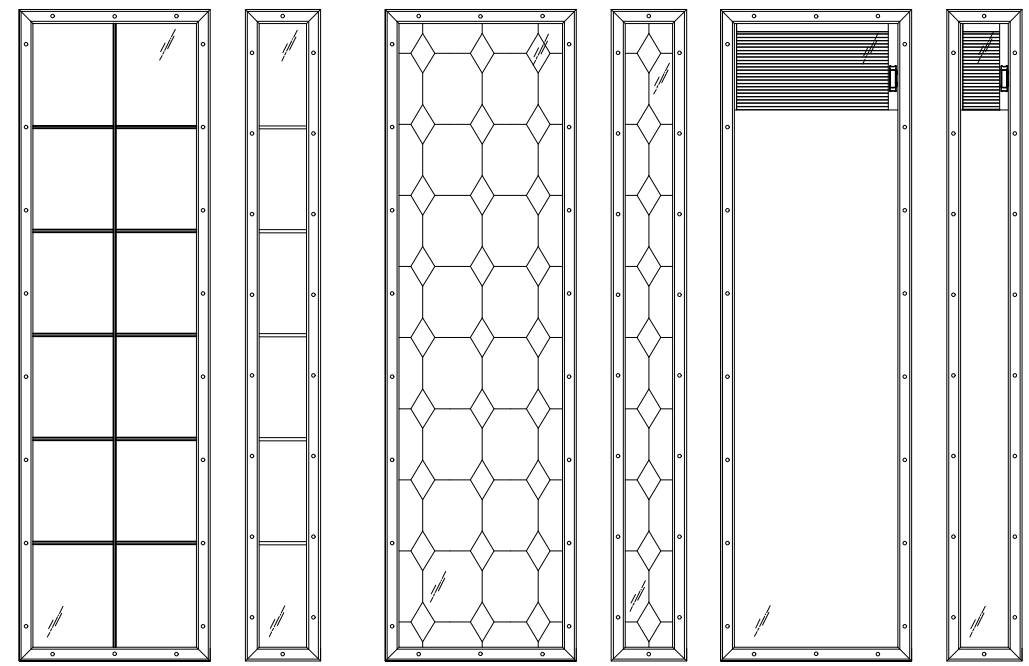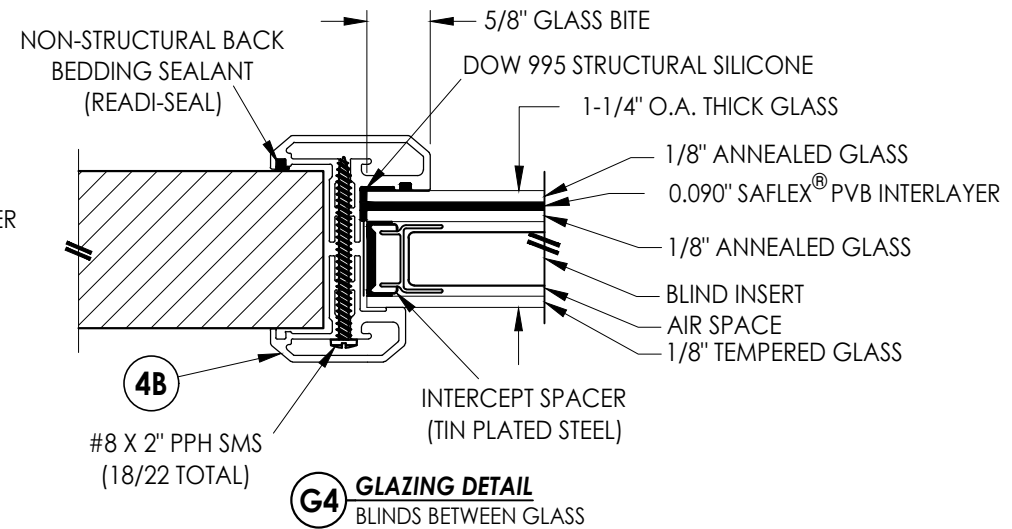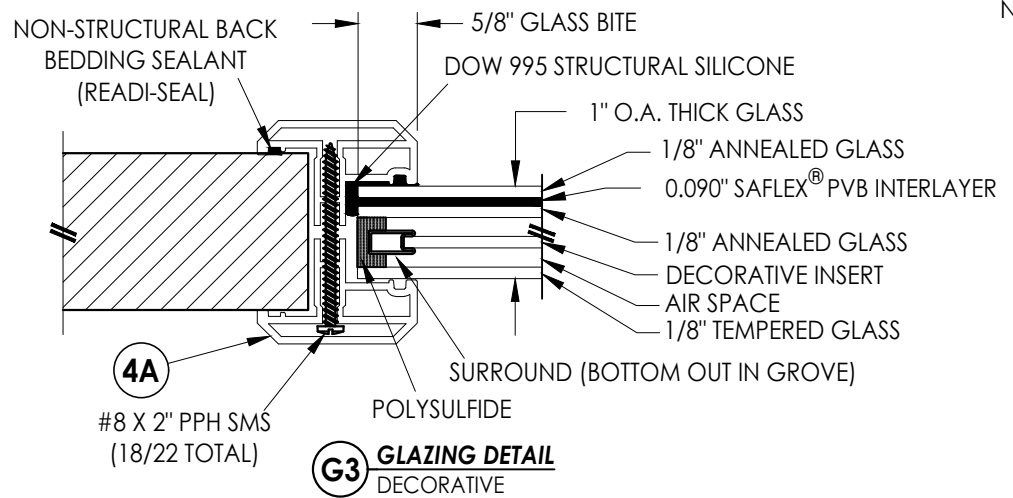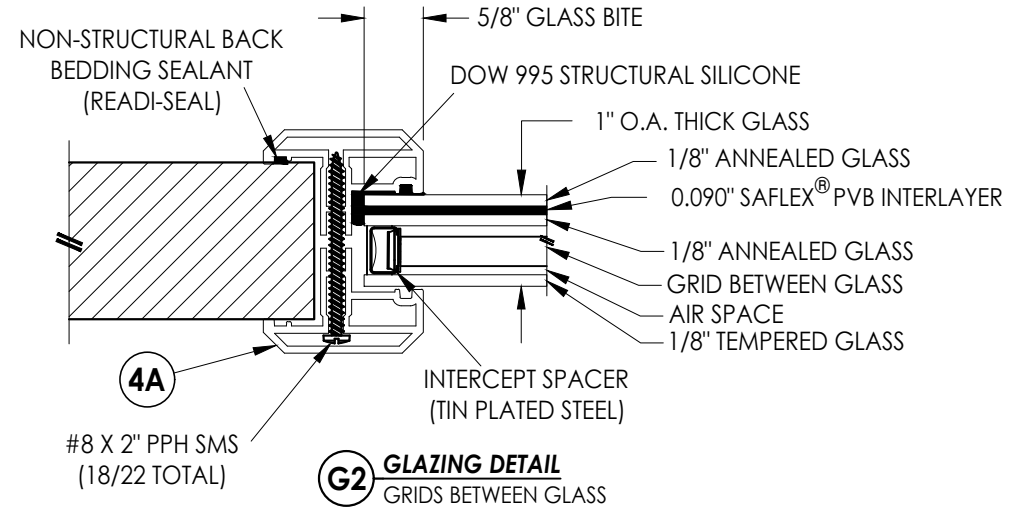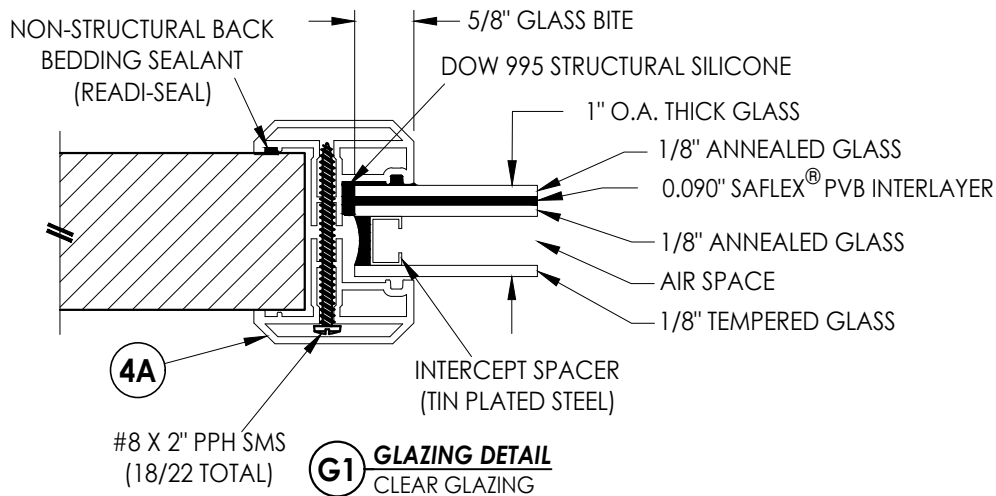


GRIDS BETWEEN GLASS


DECORATIVE

BLINDS BETWEEN GLASS

ALTERNATE GLAZING DETAILS





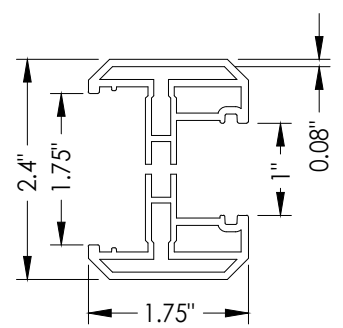


4A ODL FLAT ALUMINUM LITE FRAME
1" GLAZING

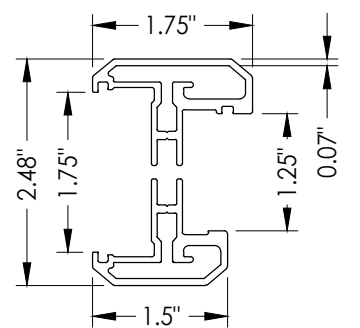


4B ODL FLAT ALUMINUM LITE FRAME
1-1/4" GLAZING


Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409				BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813			
PRODUCT: ODL FIBERGLASS DOOR				PART OR ASSEMBLY: LITE FRAME GLAZING DETAILS (ALUMINUM FLAT FRAME)			
				</			

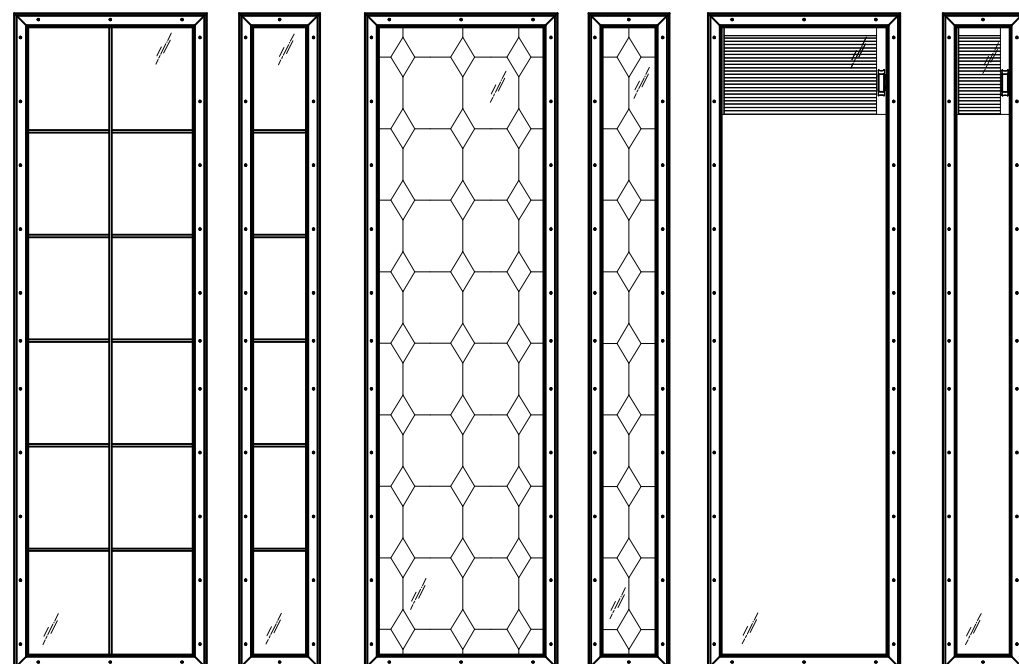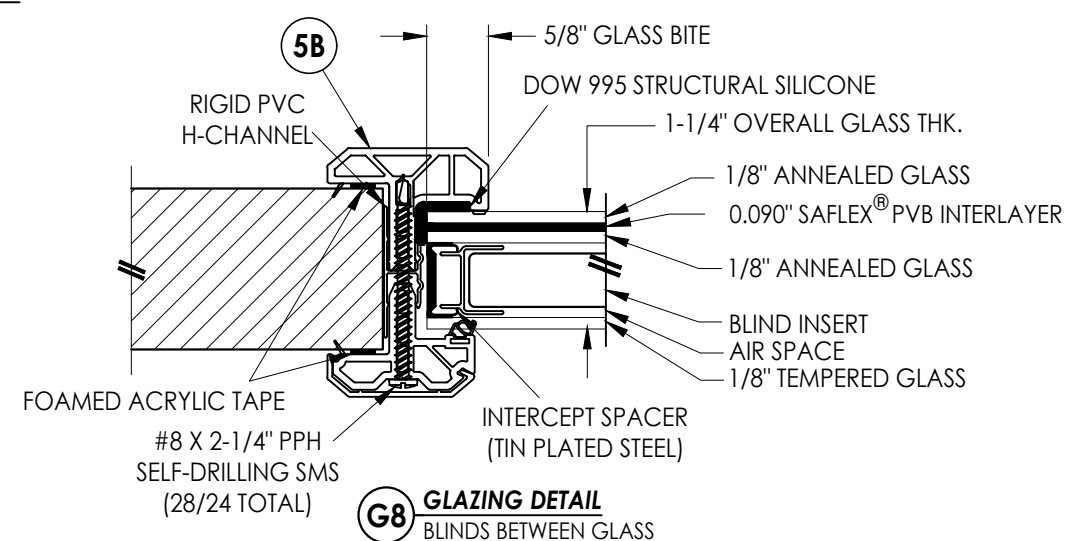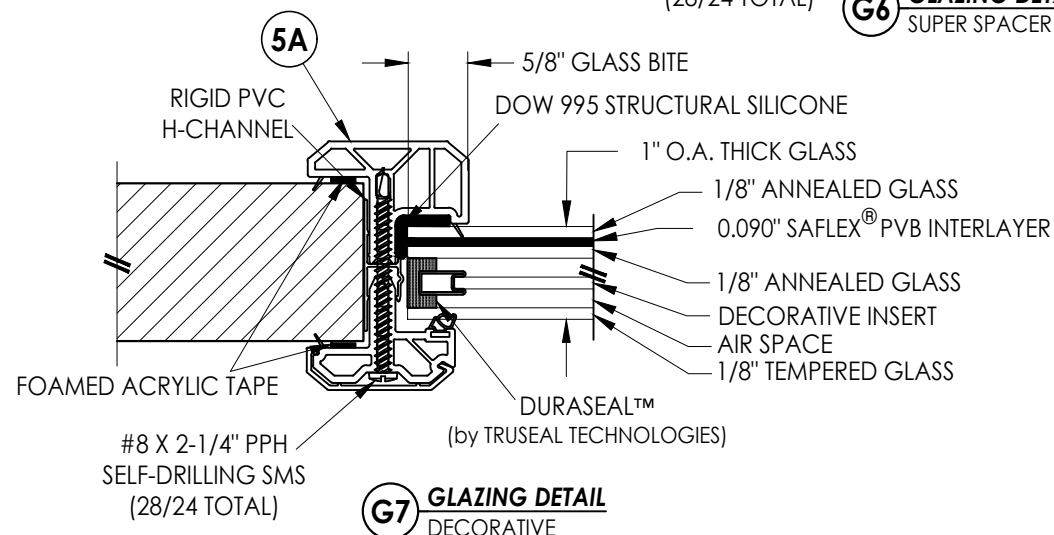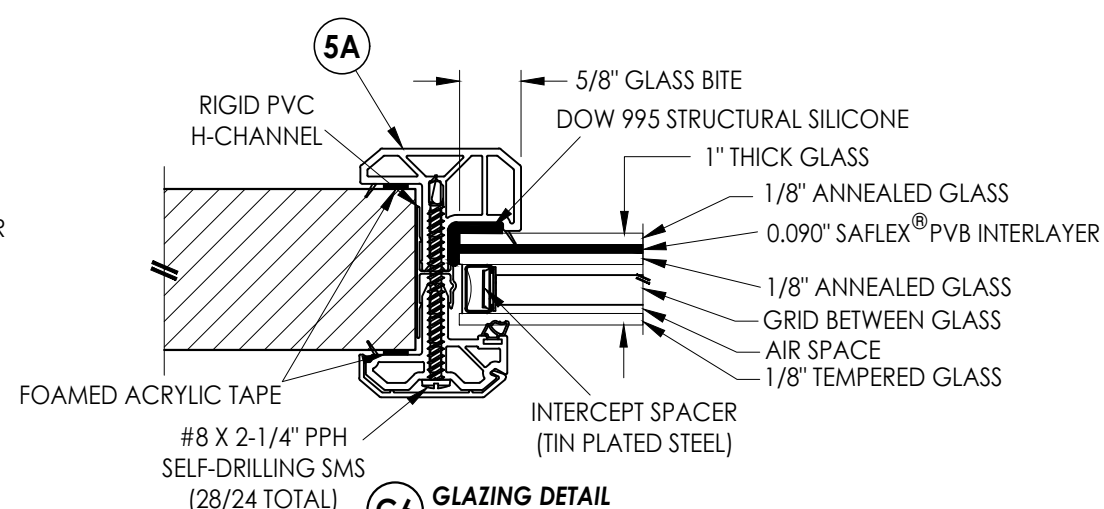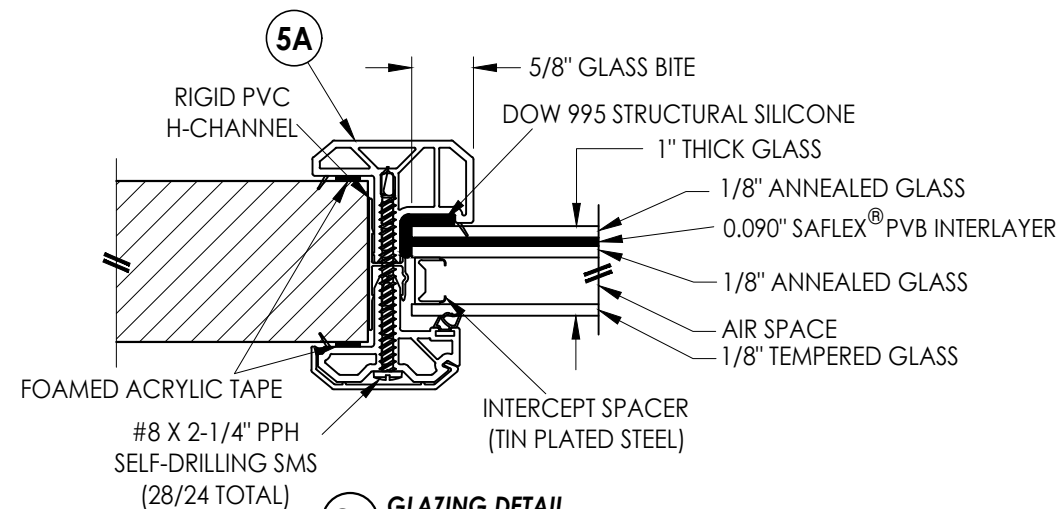

ALTERNATE GLAZING DETAILS

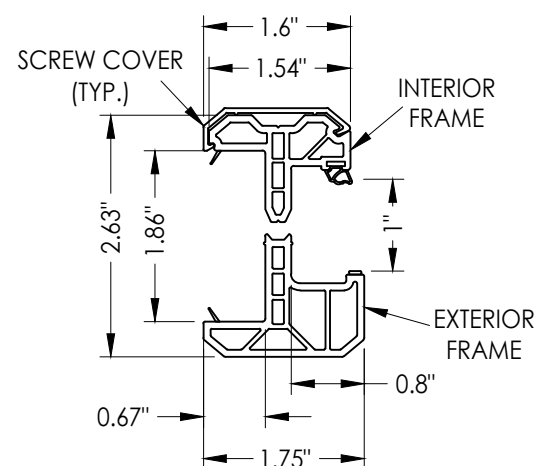

5A **ODL KEYSTONE PVC LITE FRAME**
1" GLAZING

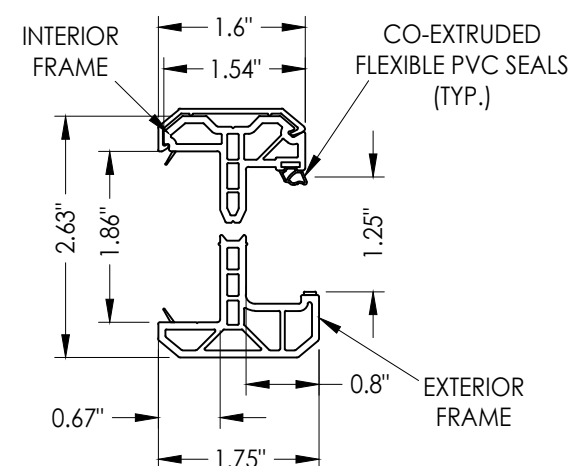

5B **ODL KEYSTONE PVC LITE FRAME**
1-1/4" GLAZING

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409




R²W BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33487
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: ODL
FIBERGLASS DOOR

PART OR ASSEMBLY:
LITE FRAME GLAZING DETAILS
(KEYSTONE PVC FRAME)




[illegible]

Z:\2023 FBC Drawings\ODL, Inc\FL-46119\FL-46119.10.dwg

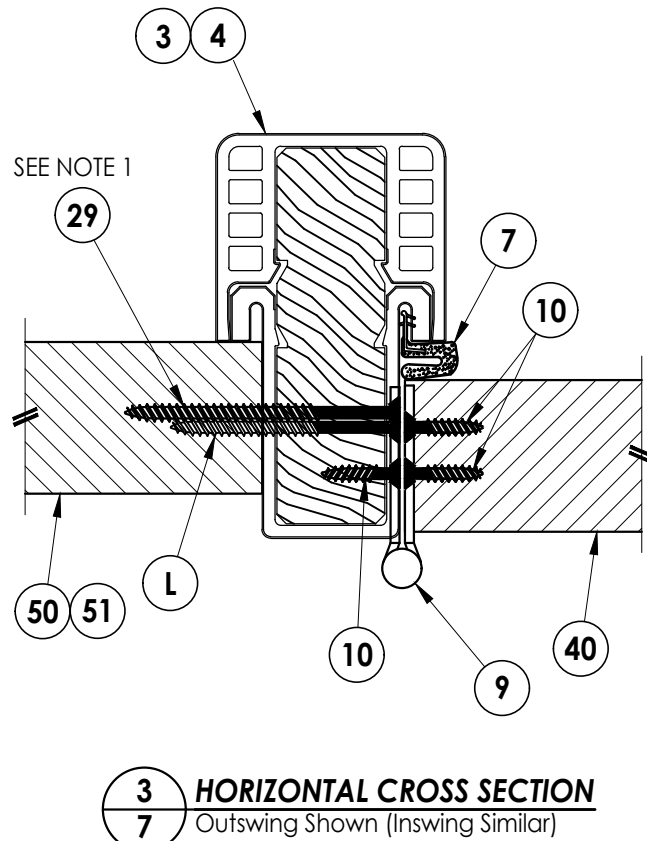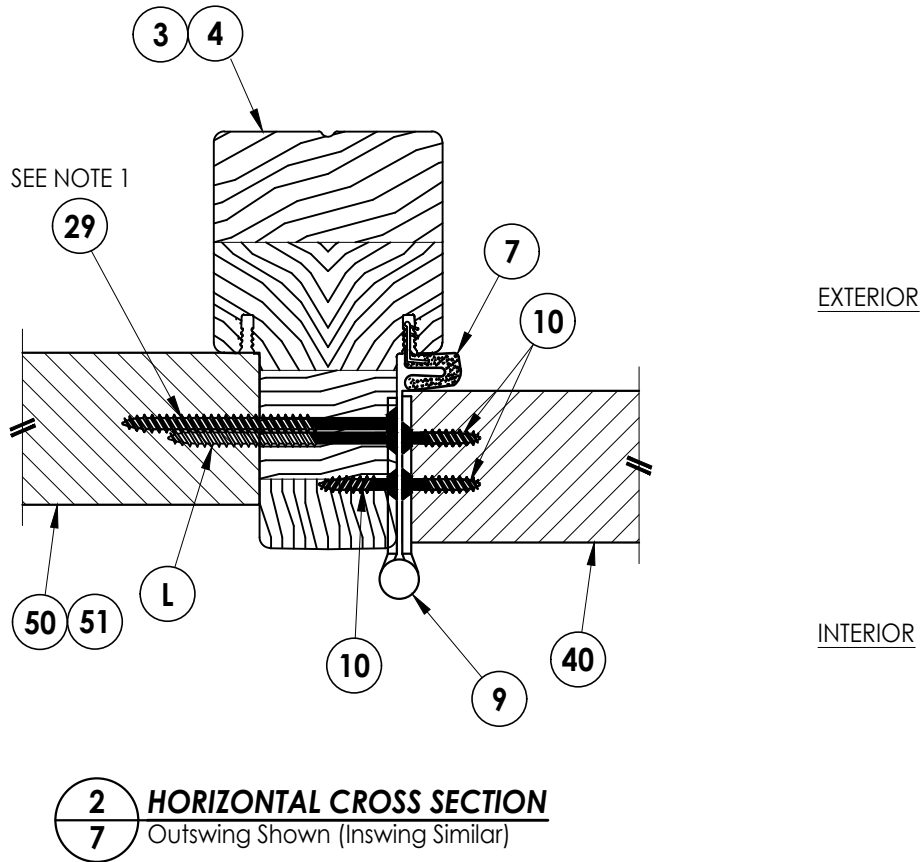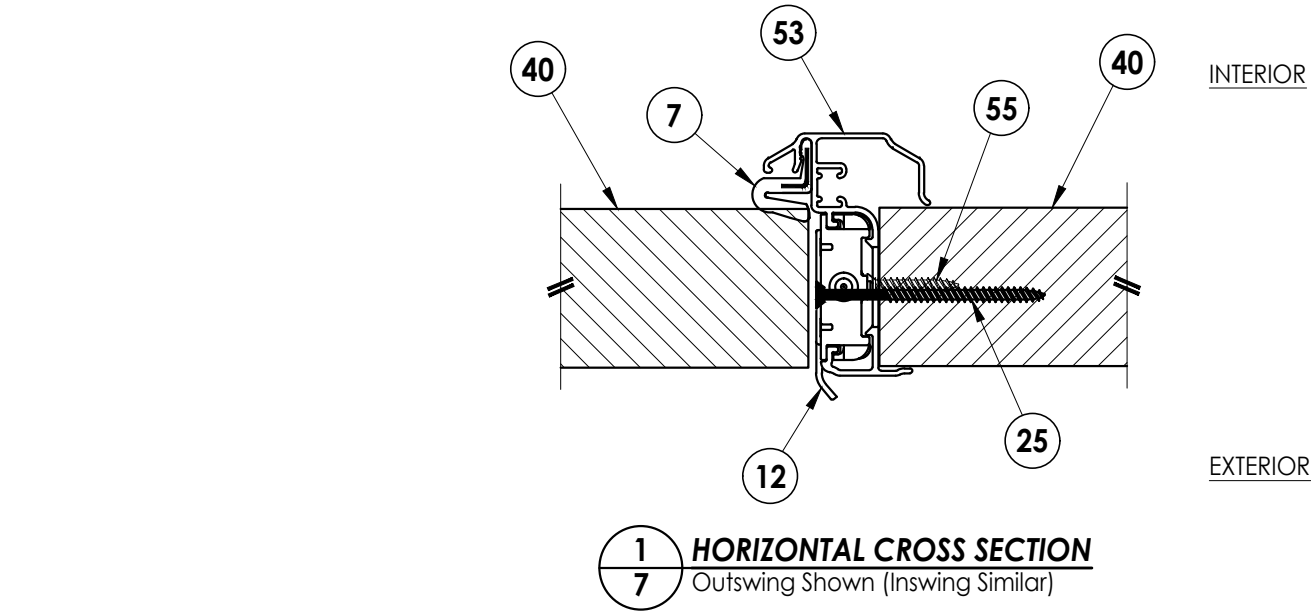

Note:
1. Sidelite assembly screws located 6" from each end plus 5 more screws equally spaced between (7 screws total per side jamb).

Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409		R.W. BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813	
PRODUCT: ODL FIBERGLASS DOOR		PART OR ASSEMBLY: HORIZONTAL CROSS SECTIONS	
		BY	
		REVISIONS	
		NO. DATE	
DATE: 1/14/25			
SCALE: N.T.S.			
DWG. BY: LFS			
CHK. BY: RW			
DRAWING NO.: FL-46119.10			
SHEET 7 OF 13			

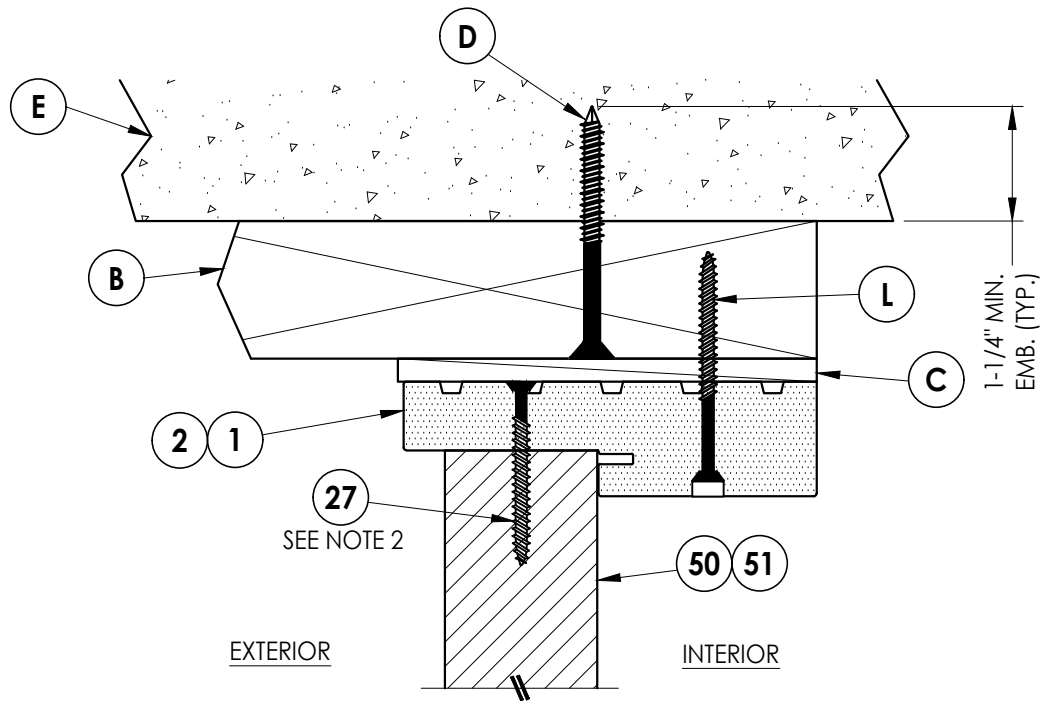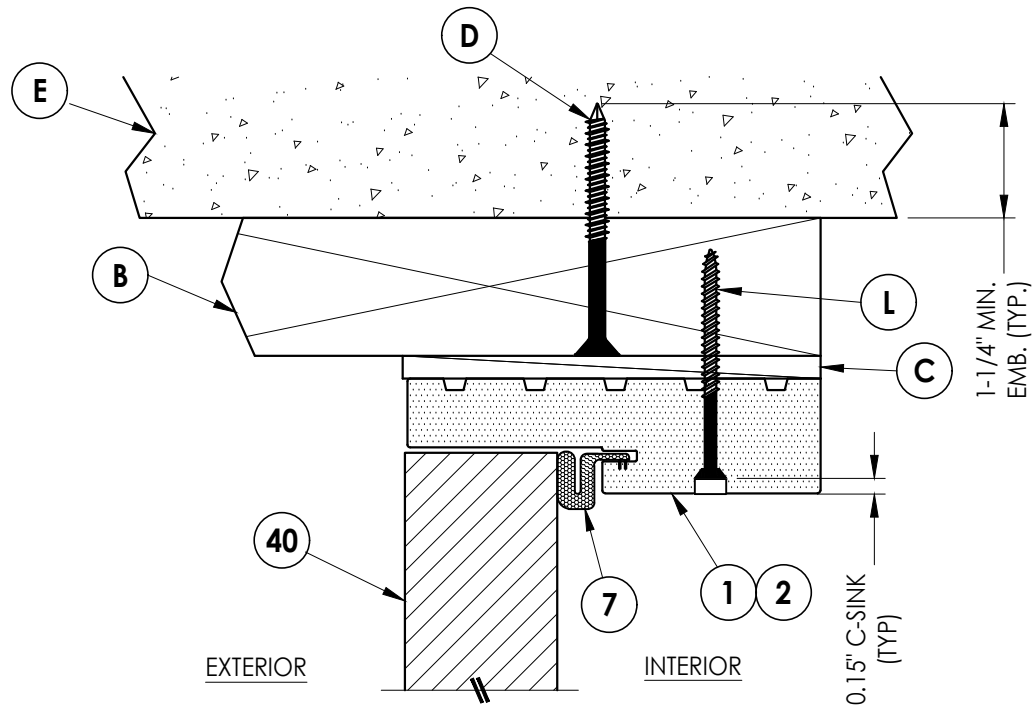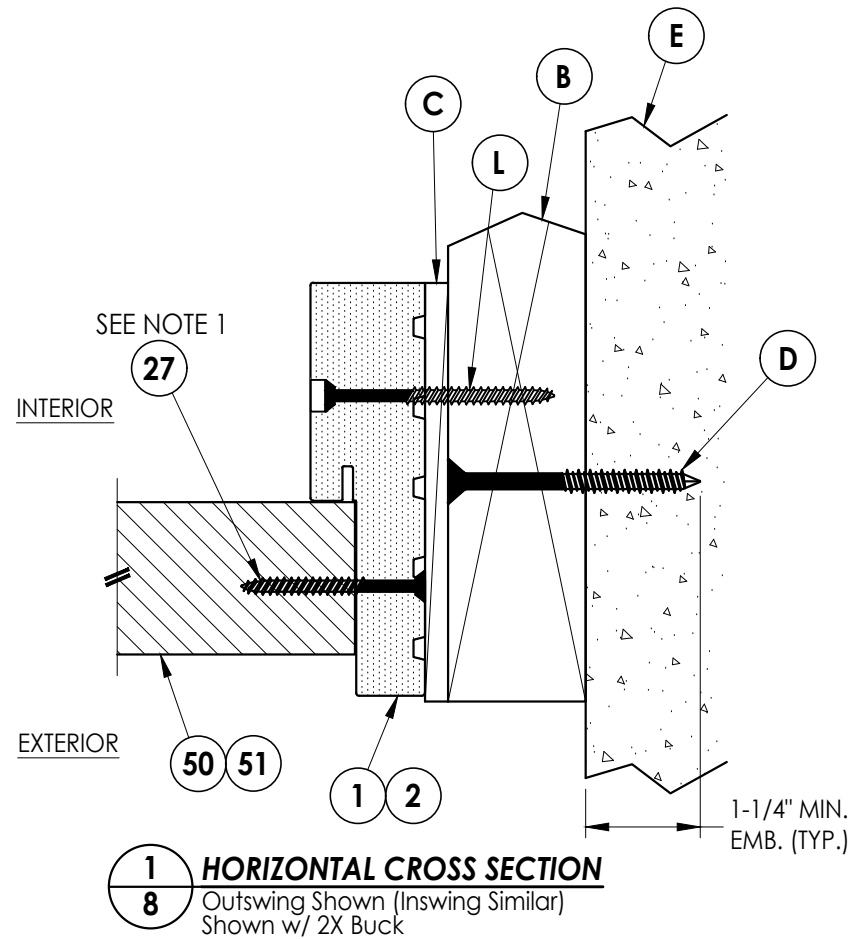

Notes:

- Sidelite assembly screws located 6" from each end plus 5 more screws equally spaced between (7 screws total per side jamb).
- Sidelite assembly screws located 6" from each end (2 total @ head).
(Note: Not required on 14" sidelites)

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: ODL
FIBERGLASS DOOR

PART OR ASSEMBLY:
HORIZONTAL & VERTICAL
CROSS SECTIONS (2X BUCK)

NO.	DATE	BY

DATE: 1/14/25

SCALE: N.T.S.

DWG. BY: LFS

CHK. BY: RW

DRAWING NO.:




FL-46119.10

SHEET 8 OF 13



Z:\2023 FBC Drawings\ODL, Inc\FL-46119\FL-46119.10.dwg

Notes:


1. Sidelite assembly screws located 6" from each end plus 5 more screws equally spaced between (7 screws total per side jamb).
2. Sidelite assembly screws located 6" from each end (2 total @ head). (Note: Not required on 14" sidelites)

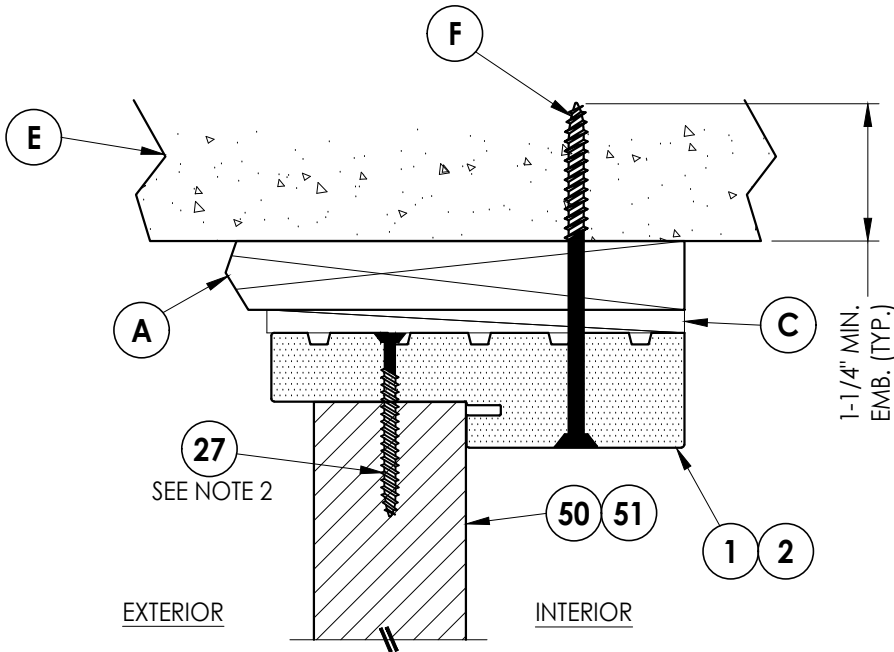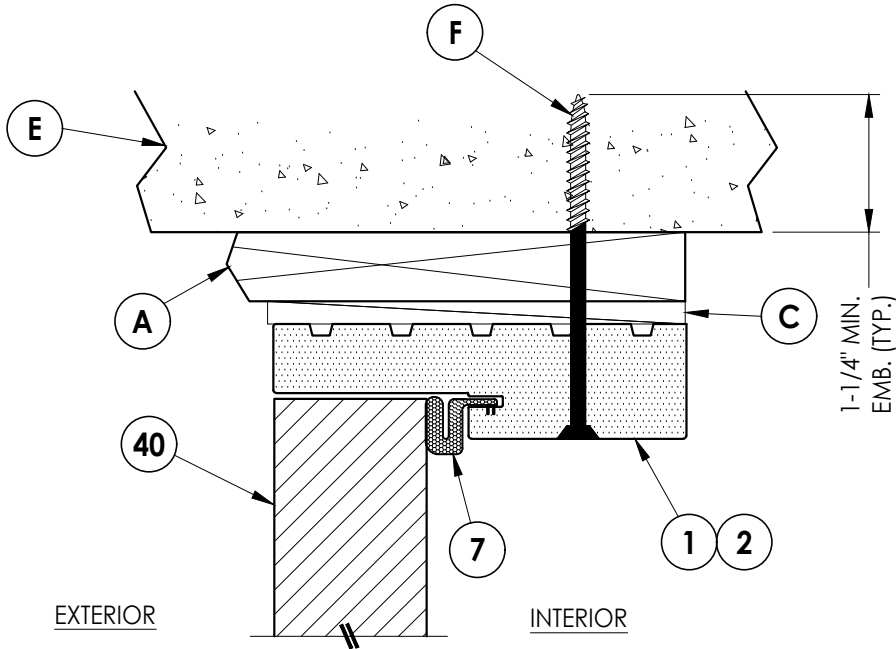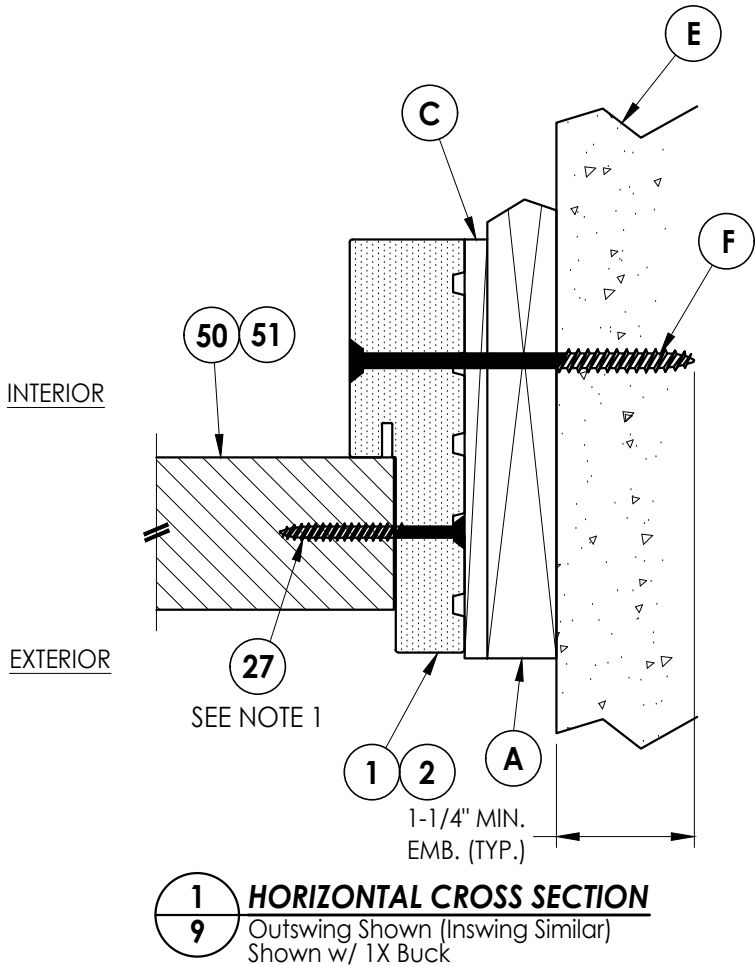

Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409				<i>RW</i> BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813			
PRODUCT: ODL FIBERGLASS DOOR		PART OR ASSEMBLY: HORIZONTAL & VERTICAL CROSS SECTIONS (1X BUCK)					
				REVISIONS			
				NO.	DATE	BY	
DATE: 1/14/25							
SCALE: N.T.S.							
DWG. BY: LFS							
CHK. BY: RW							
DRAWING NO.: FL-46119.10							
SHEET 9 OF 13							

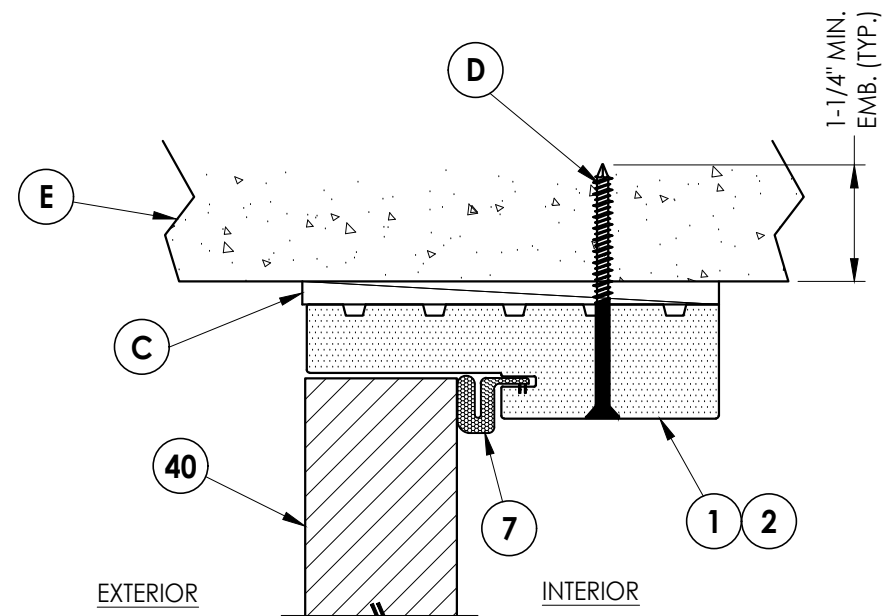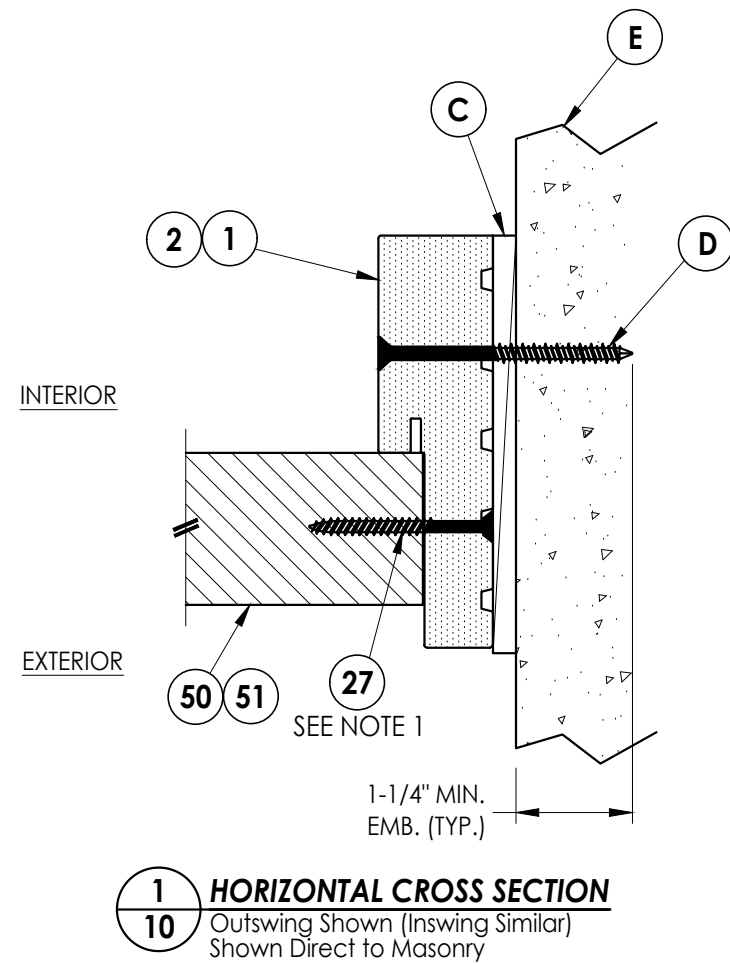

2 **VERTICAL CROSS SECTION**
10 Outswing Shown (Inswing Similar)
 Shown Direct to Masonry

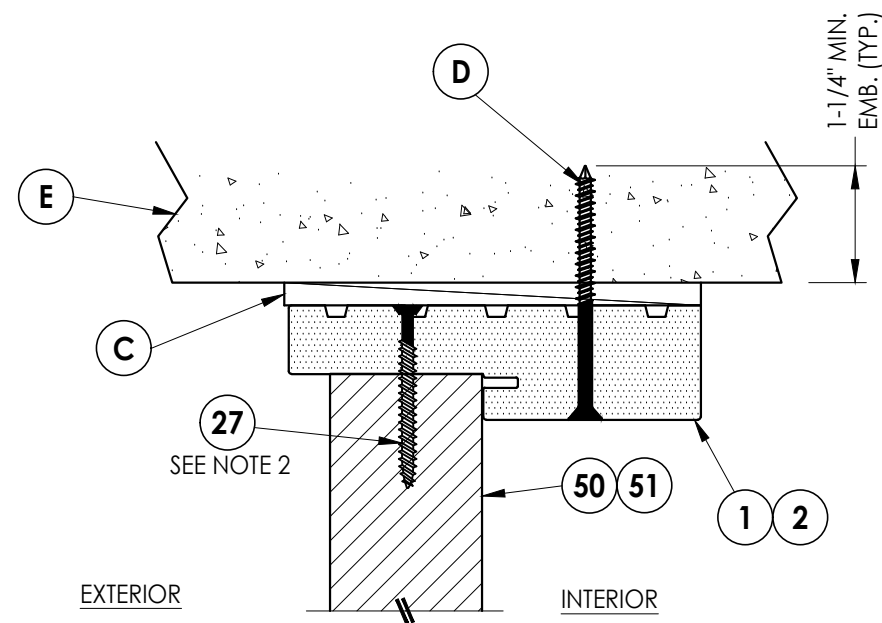


3 **VERTICAL CROSS SECTION**
10 Outswing Shown (Inswing Similar)
Shown Direct to Masonry


Notes:

1. Sidelite assembly screws located 6" from each end plus 5 more screws equally spaced between (7 screws total per side jamb).
2. Sidelite assembly screws located 6" from each end (2 total @ head).
(Note: Not required on 14" sidelites)


[illegible]

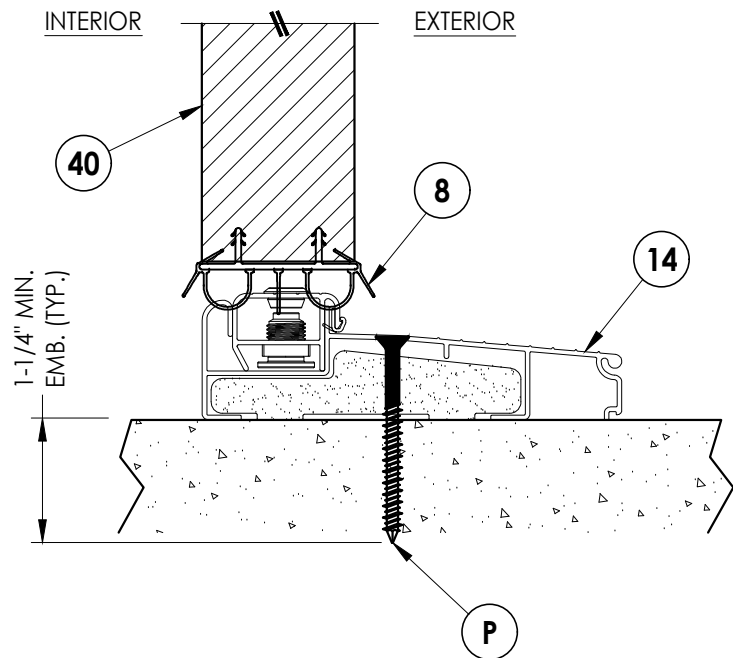


1
11 **VERTICAL CROSS SECTION**
Inswing Sill

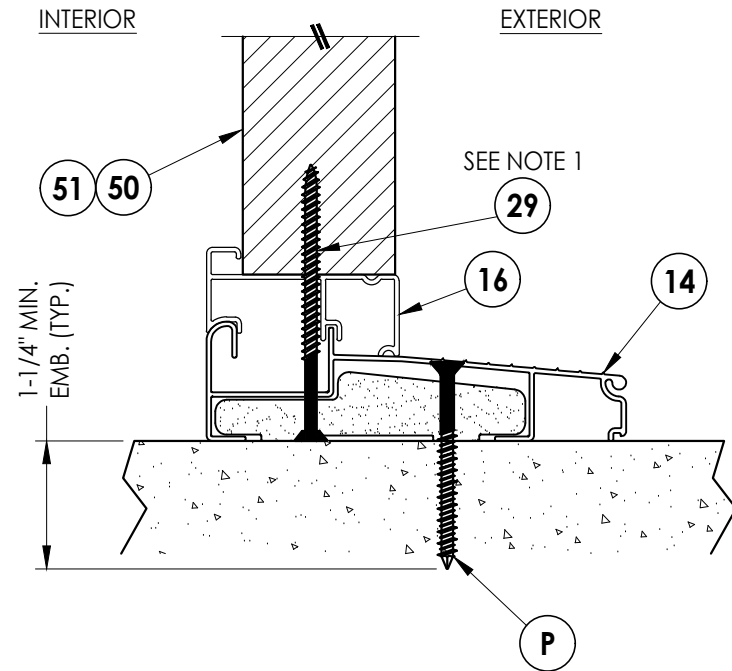

3
11 **VERTICAL CROSS SECTION**
Inswing Sill

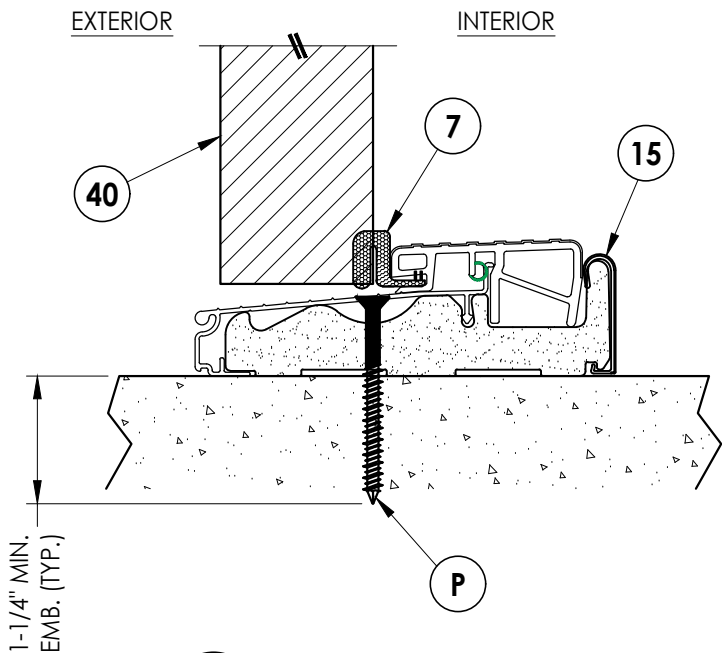










2
11 **VERTICAL CROSS SECTION**
Outswing Sill

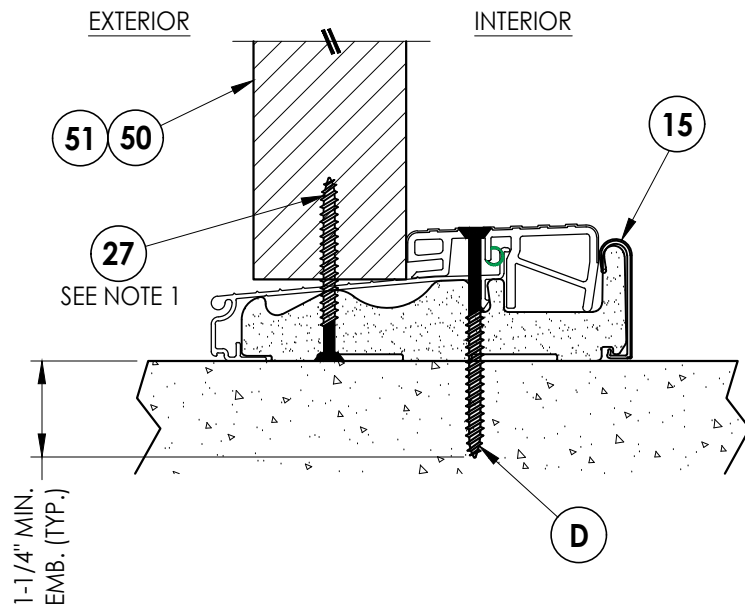

4
11 **VERTICAL CROSS SECTION**
Outswing Sill

Note:
1. Sidelite assembly screws located 6" from each end (2 total @ sill).
(Note: Not required on 14" sidelites)

Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409		BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813	
PRODUCT:	ODL FIBERGLASS DOOR	PART OR ASSEMBLY: VERTICAL CROSS SECTIONS (THRESHOLDS)	
		REVISIONS	
		NO.	DATE
		BY	
DATE: 1/14/25			
SCALE: N.T.S.			
DWG. BY: LFS			
CHK. BY: RW			
DRAWING NO.: FL-46119.10			
SHEET 11 OF 13			

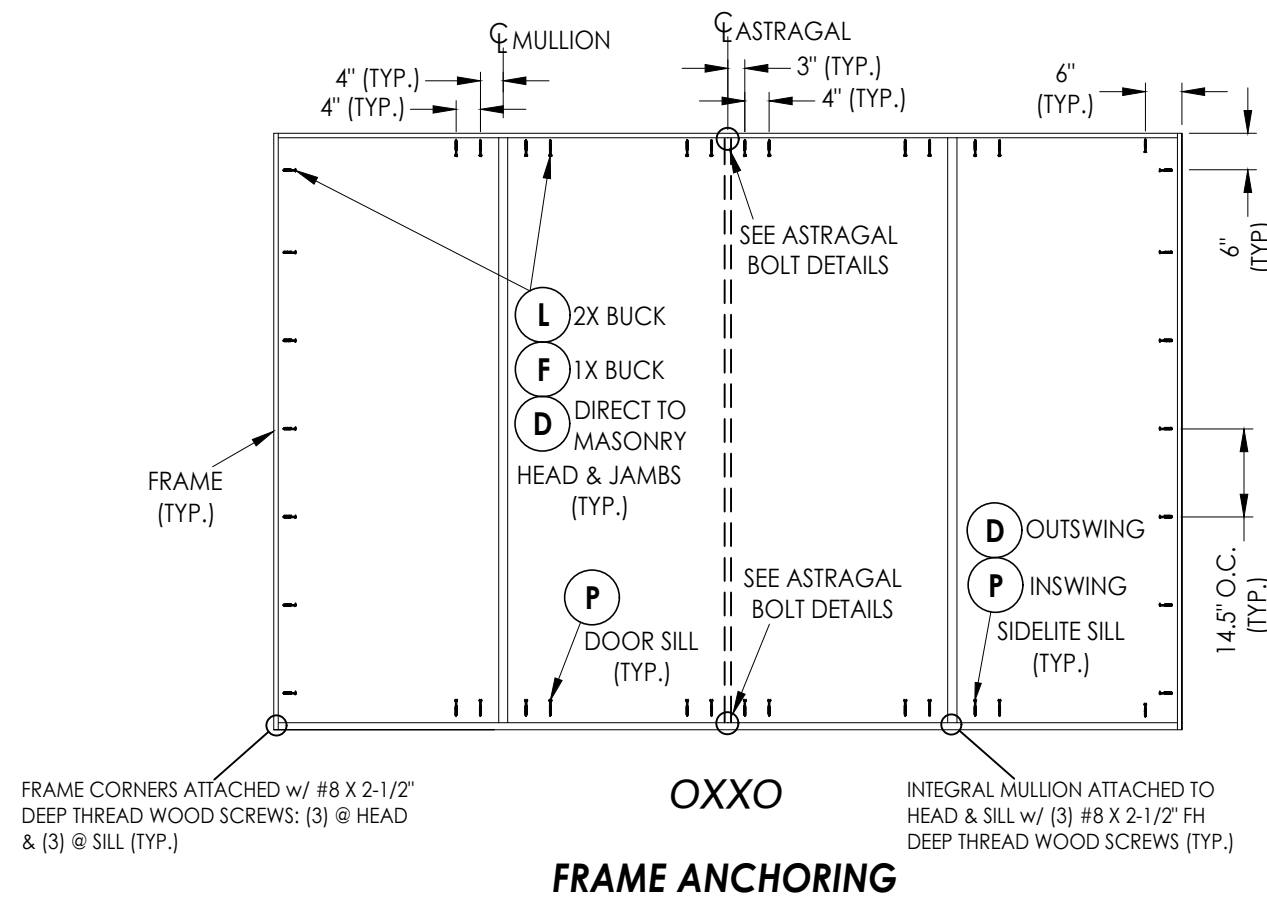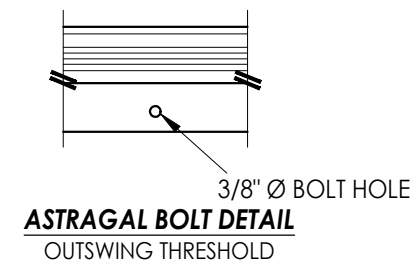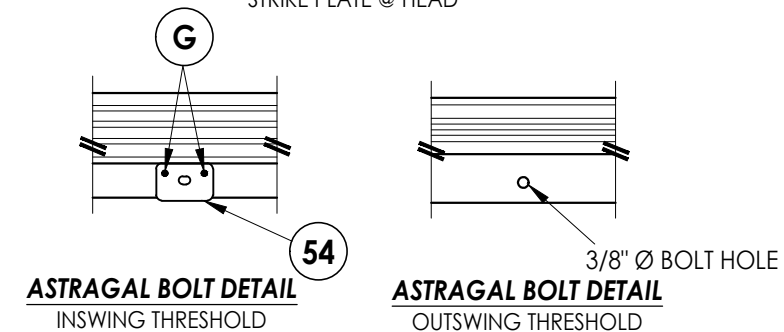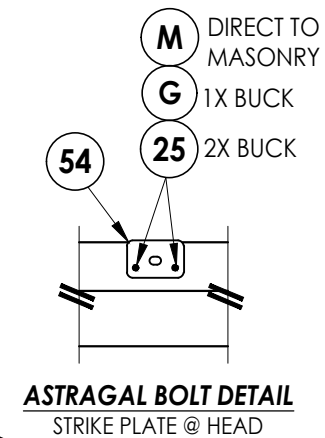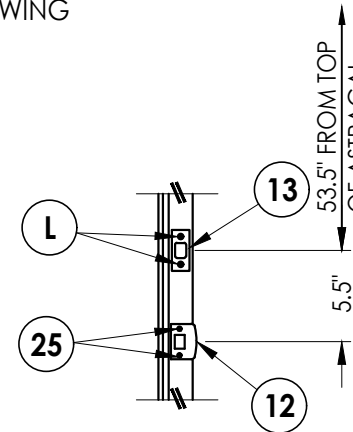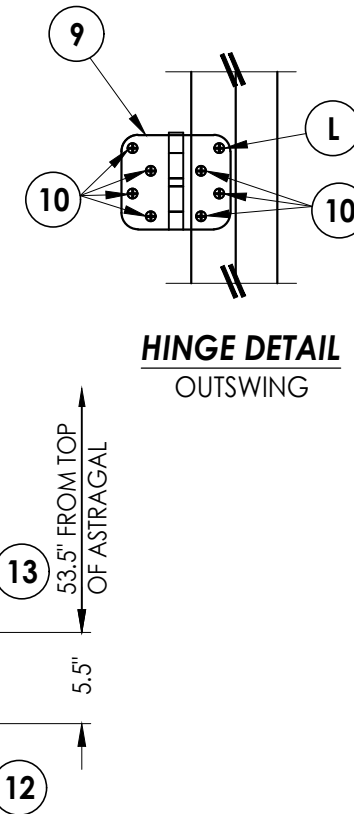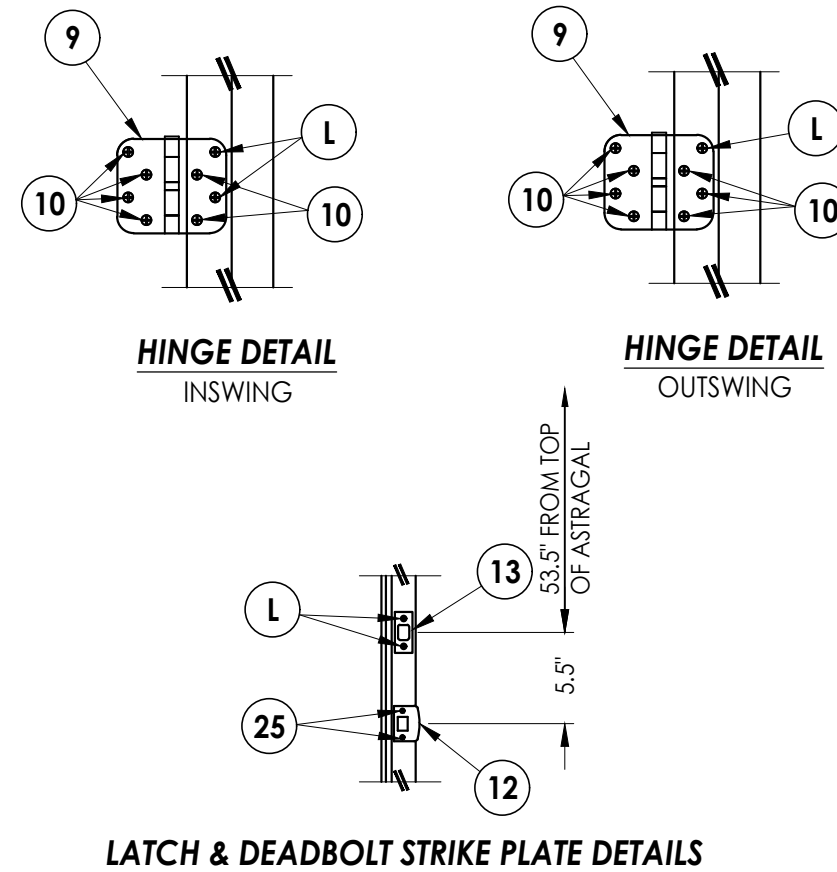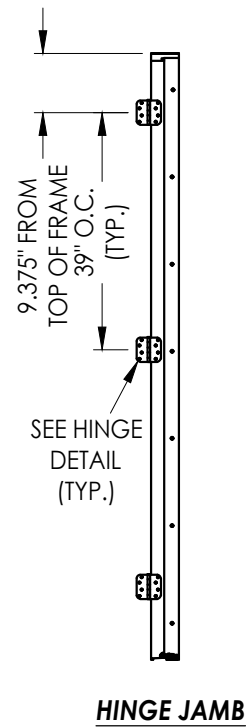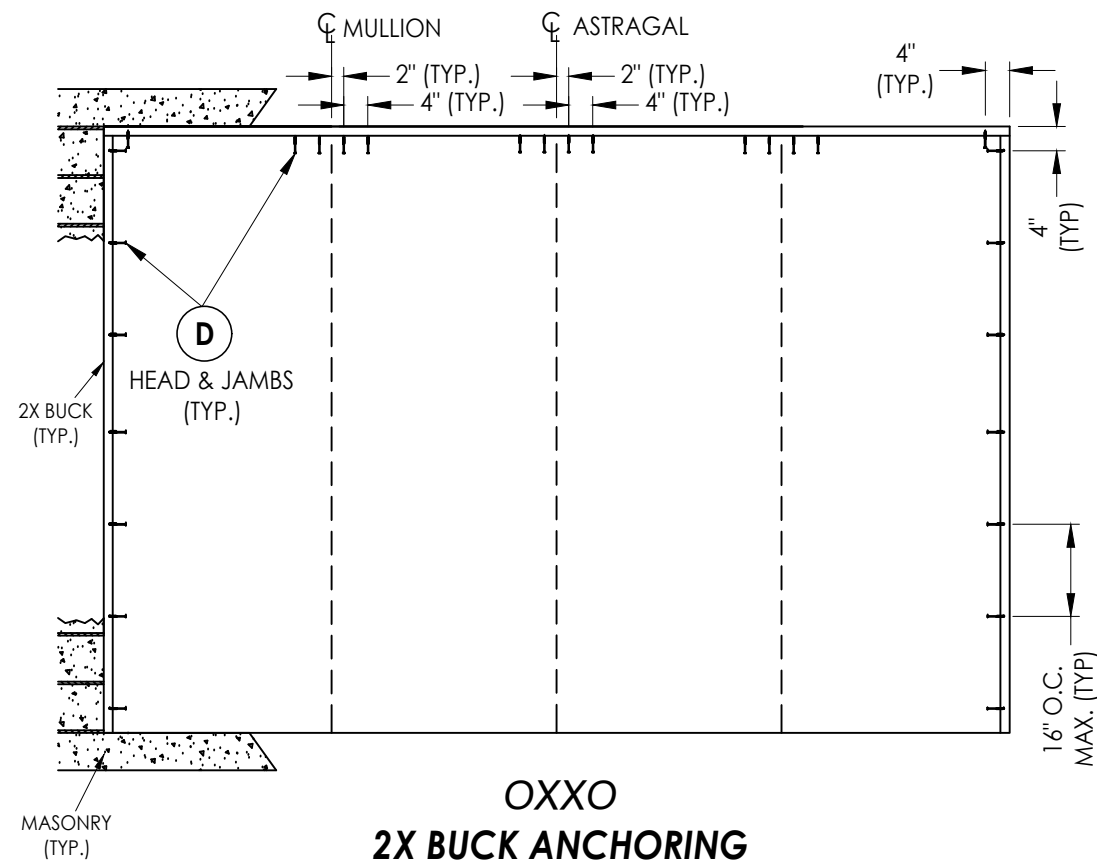

ALL ANCHORS SAME AS OXXO

Shown w/ 14" Sidelite

DATE: 1/14/25 SCALE: N.T.S. DWG. BY: LFS CHK. BY: RW DRAWING NO.: FL-46119.10 SHEET 12 OF 13	NO. DATE BY	REVISIONS	PRODUCT: ODL FIBERGLASS DOOR	PART OR ASSEMBLY: BUCK & FRAME ANCHORING & HARDWARE DETAILS	Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409 RW BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813
---	----------------	-----------	---------------------------------	---	---

Z:\2023 FBC Drawings\ODL, Inc\FL-46119\FL-46119.10.dwg

BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL
A	1X BUCK (G >= 0.42)	WOOD
B	2X BUCK (G >= 0.42)	WOOD
C	1/4" MAX. SHIM SPACE	-
D	1/4" X 2-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301 OR HOLLOW BLOCK CONFORMING TO ASTM C90	CONCRETE
F	1/4" X 3-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
G	3/16" X 3-1/4" PFH ITW CONCRETE SCREW	STEEL
L	#10 X 2-1/2" PFH WOOD SCREW (1.15" MIN. EMB.)	STEEL
M	3/16" X 2-1/4" PFH ITW CONCRETE SCREW	STEEL
P	1/4" X 2-1/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
1	COMPOSITE JAMB (WORLDWIDE OR PLASTPRO)	COMP
2	WOOD JAMB (FJ PINE OR PLASTPRO)	WOOD
3	COMPOSITE MULLION (ENDURA OR PLASTPRO)	PVC/WOOD
4	WOOD MULLION (PINE OR ENDURA)	WOOD
7	WEATHERSTRIP	FOAM
8	DOOR SWEEP	VINYL
9	4" X 4" HINGE	STEEL
10	#9 X 3/4" PFH WOOD SCREW	STEEL
12	LATCH STRIKE PLATE	STEEL
13	DEADBOLT STRIKE PLATE	STEEL
14	INSWING THRESHOLD	ALUM/COMP
15	OUTSWING THRESHOLD	ALUM/COMP
16	INSWING SIDELITE BASE	ALUM
25	#8 X 2-1/2" PFH WOOD SCREW	STEEL
27	#10 X 2" PFH SMS	STEEL
29	#10 X 3" FH COMPOSITE DECK SCREW	STEEL
40	DOOR PANEL	-
50	SIDELITE PANEL	-
51	SIDELITE PANEL	-
53	ALUMINUM ASTRAGAL	ALUM
54	ASTRAGAL STRIKE PLATE (1.75" X 2.5")	STEEL
55	8 X 1" PFH WS	STEEL


CONCRETE ANCHOR NOTES:

- Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
- Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
- Concrete anchor table:


ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW BUILDEX TAPCON®	3/16"	1-1/4"	3"	1-1/2"
	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON®	1/4"	1-1/4"	1"	4"

WOOD SCREW INSTALLATION NOTES:


- Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

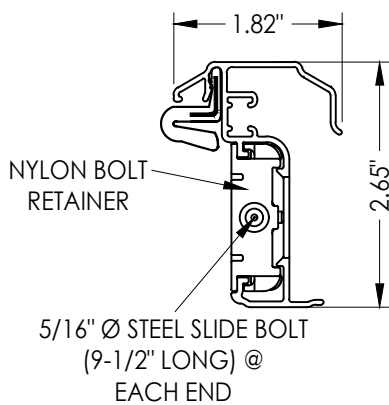


53 **ENDURA ULTIMATE ALUMINUM ASTRAGAL**
ULTIMATE PUSH BUTTON ASTRAGAL
ULTIMATE HURRICANE ASTRAGAL

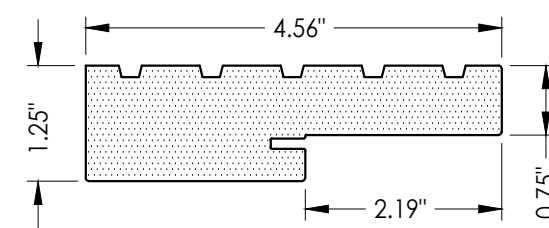


1 **COMPOSITE JAMB**
WORLDWIDE 4EVER COMPOSITE FRAME

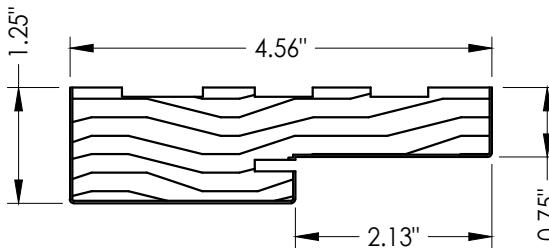


2 **WOOD JAMB**
FINGER JOINTED PINE

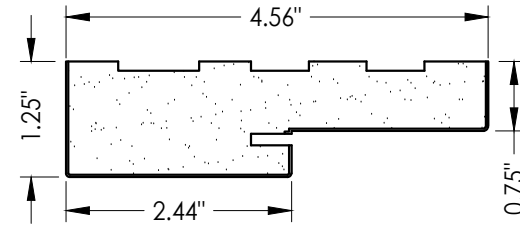


1 **COMPOSITE JAMB**
PLASTPRO POLY FIBER JAMB

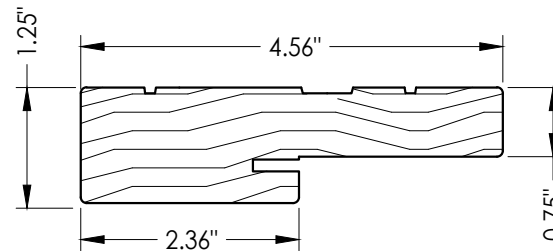


2 **WOOD JAMB**
ENDURA FrameSaver

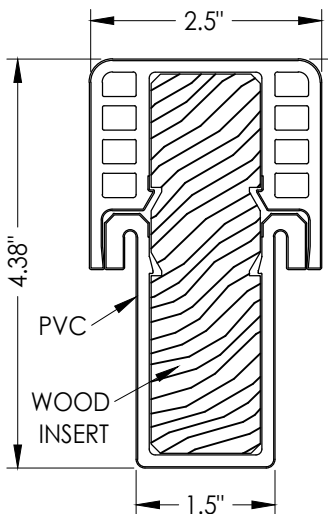


3 **COMPOSITE MULLION**
ENDURA FUSION
w/ PVC Boot

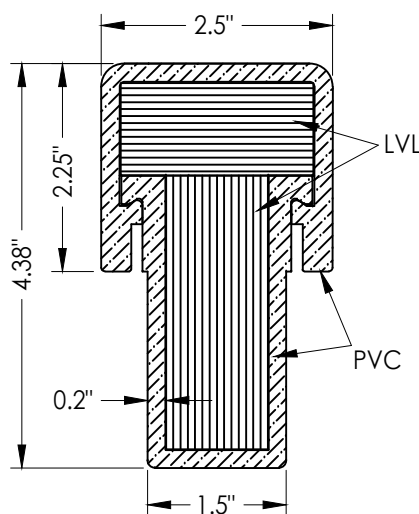


3 **COMPOSITE MULLION**
PLASTPRO (3-Piece)
w/ PVC Boot

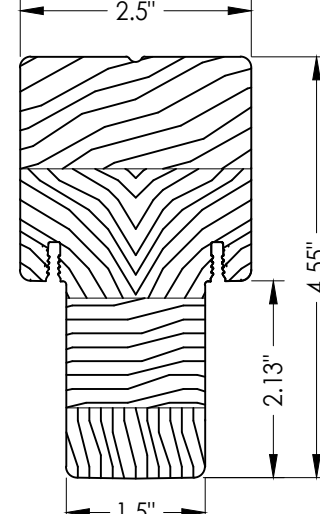


4 **WOOD MULLION**
PINE

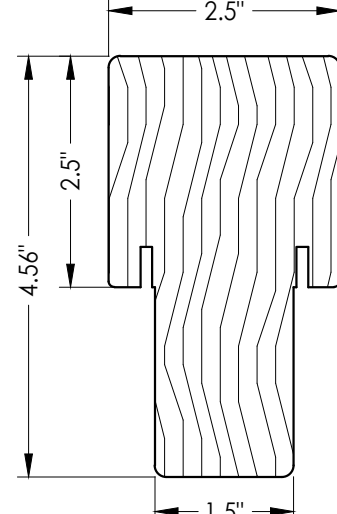


4 **WOOD MULLION**
ENDURA FrameSaver

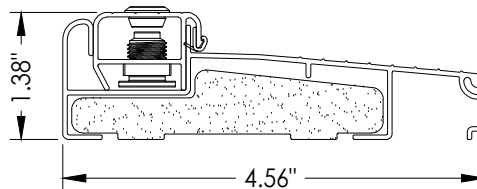

14 **INSWING ADJUSTABLE THRESHOLD**
ZAILAA4565

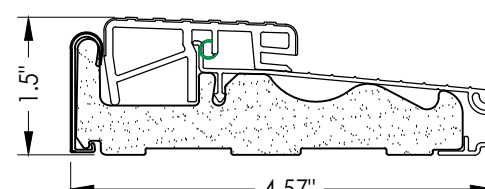

15 **OUTSWING THRESHOLD**
ENDURA Z SERIES

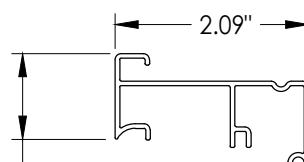

16 **INSWING SIDELITE BASE**
ENDURA

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.

P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: ODL
FIBERGLASS DOOR

PART OR ASSEMBLY:
BILL OF MATERIALS
& COMPONENTS

NO.	DATE	BY	REVISIONS

DATE: 1/14/25

SCALE: N.T.S.

DWG. BY: LFS

CHK. BY: RW

DRAWING NO.: FL-46119.10

SHEET 13 OF 13