

- NOTES:
- 1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
 - 2. WOOD FRAMING AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
 - 3. 1X BUCK OVER MASONRY/CONCRETE IS OPTIONAL.
 - 4. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1-1/2" WINDOW UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
 - 5. WHERE WOOD BUCK THICKNESS IS 1-1/2" OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. WINDOW UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS.
 - 6. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
 - 7. BUCKS SHALL EXTEND BEYOND WINDOW INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
 - 8. FOR FIN INSTALLATION SHIM AS NEEDED. FOR FRAME INSTALLATION SHIM AS REQUIRED AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4".
 - 9. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
 - 10. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
 - 11. FRAME MATERIAL: EXTRUDED RIGID PVC.
 - 12. UNITS MUST BE GLAZED PER ASTM E1300, SEE SHEET 3 FOR GLASS DETAILS.
 - 13. APPROVED IMPACT PROTECTIVE SYSTEM IS NOT REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.
 - 14. FOR ANCHORING THROUGH FIN INTO WOOD FRAMING OR 2X BUCK USE #6 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.

- 15. FOR ANCHORING THROUGH FRAME INTO WOOD FRAMING OR 2X BUCK USE #10 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
- 16. FOR ANCHORING THROUGH FRAME INTO MASONRY/CONCRETE USE 3/16" TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2 1/2" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
- 17. FOR ANCHORING THROUGH FRAME INTO METAL STRUCTURE USE #10 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
- 18. ALL FASTENERS TO BE CORROSION RESISTANT.
- 19. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:
 - A. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42
 - B. CONCRETE: MINIMUM COMPRESSIVE STRENGTH OF 2,000 PSI.
 - C. MASONRY: HOLLOW/FILLED BLOCK PER ASTM C90 WITH f'm=2,000PSI MINIMUM.
 - D. METAL STRUCTURE: STEEL 18GA (.048") FY=33KSI/FU=52KSI OR ALUMINUM 6063-T5 FU=30KSI 1/8" THICK MINIMUM

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2	ELEVATIONS
3 - 6	INSTALLATION DETAILS

REV

DESCRIPTION

DATE

08/28/26

A

VIVINCO, INC.

MORGANTOWN BUSINESS PARK, P.O. BOX 499

MORGANTOWN, PA 19543

OCEANVIEW FIXED CASEMENT OVER CASEMENT

COMBINATION ASSEMBLY - IMPACT

NOTES

L. ROBERTO LOMAS P.E.

208 7th Ave, INDIALANTIC, FL 32903

434-688-0609 rilomas@rlomaspe.com

DWG NO.

08-02809A

SHEET

1 OF 6

SCALE

NTS

REV

-

FPA

-


DRAWN

N.G.


DATE:

09/10/15


SIGNED: 08/28/2026

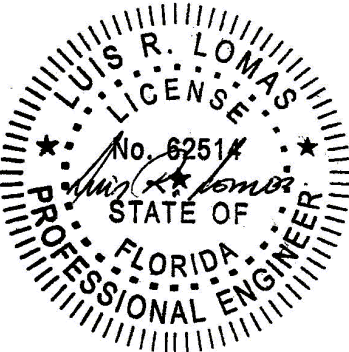


Luis R. Lomas P.E.
FL No.: 62514

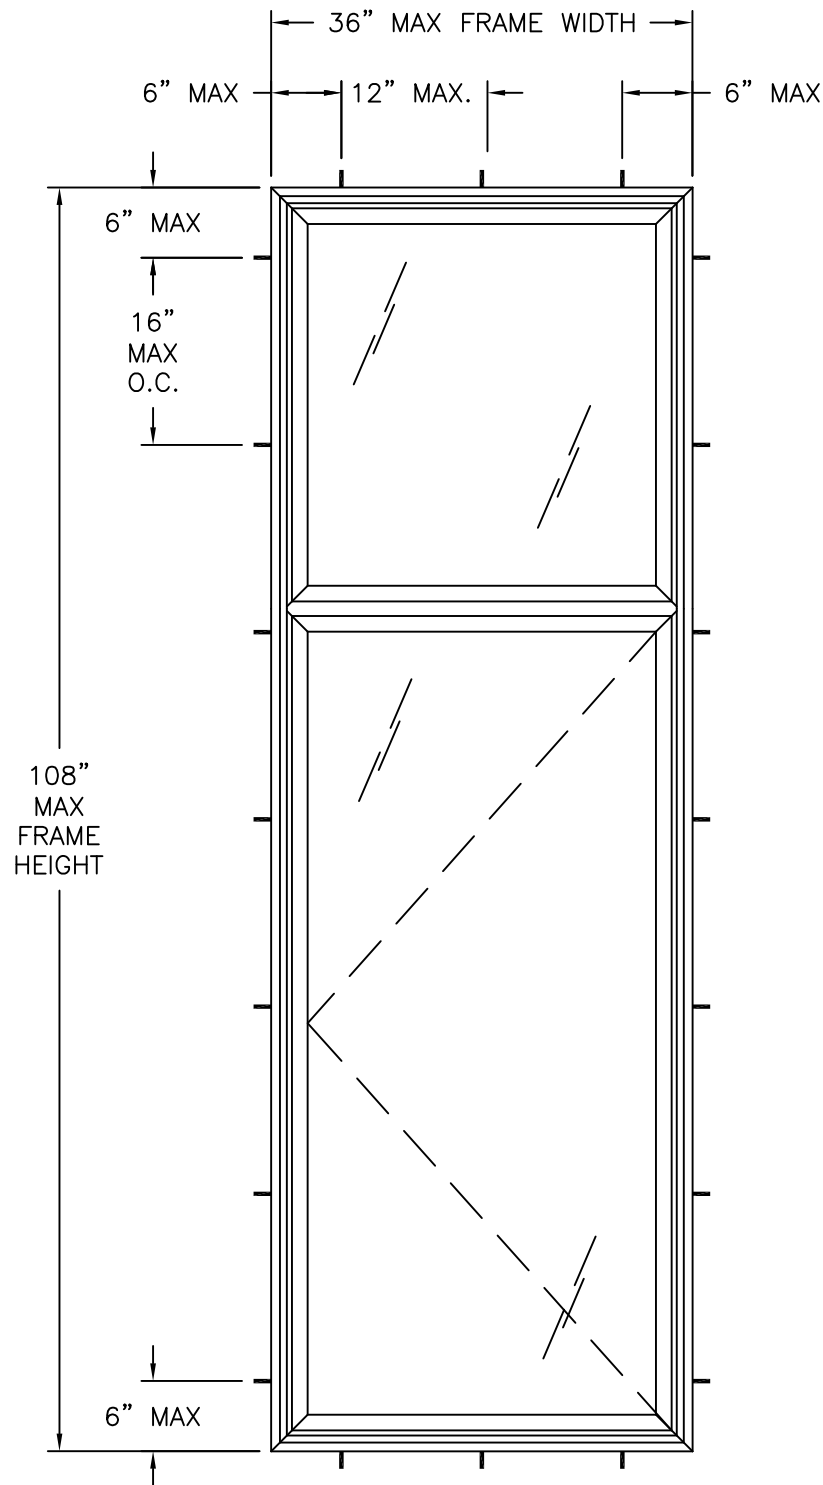

OCEANVIEW FIXED CASEMENT OVER CASEMENT
EXTERIOR VIEW
FRAME INSTALLATION

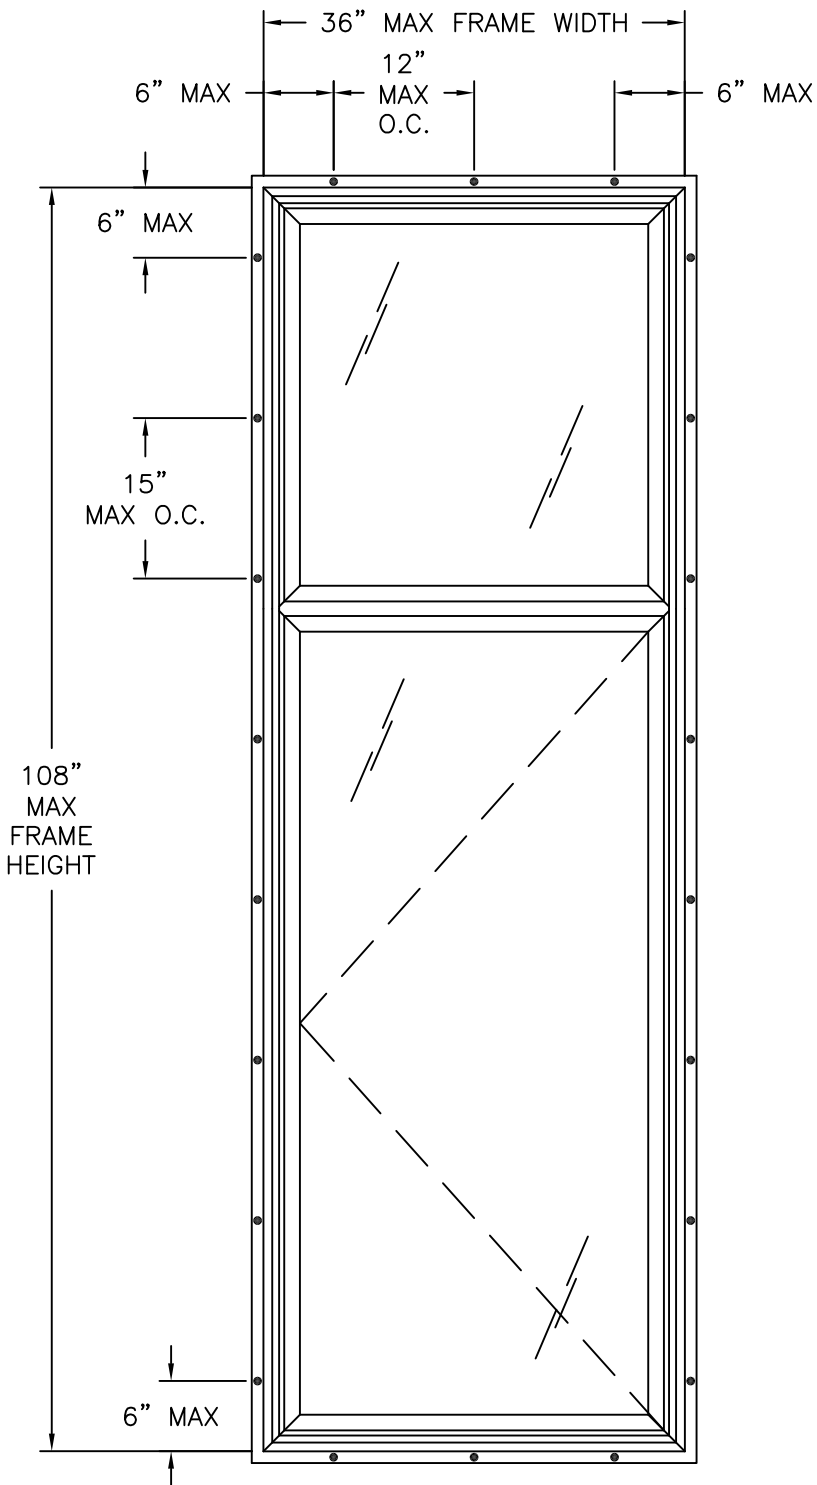

OCEANVIEW FIXED CASEMENT OVER CASEMENT
EXTERIOR VIEW
FIN INSTALLATION

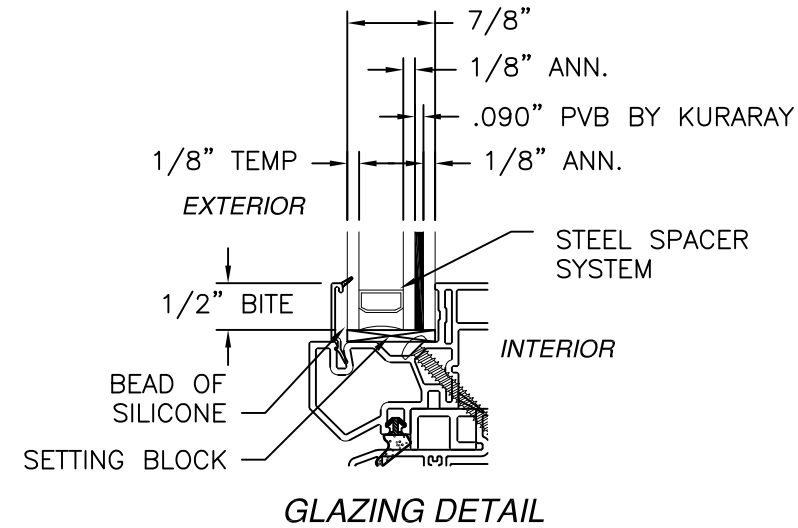

DESIGN PRESSURE RATING	IMPACT RATING
±50.0PSF	LARGE AND SMALL MISSILE IMPACT

MISSILE LEVEL D, WIND ZONE 3

- NOTES:
1. MAXIMUM SASH SIZE: 33" X 70 1/4"
 2. MAXIMUM D.L.O.: 29 5/8" X 66 3/4"
 3. (2) 1/4" WEEP HOLE AT 3 1/4" FROM EACH END VENT BOTTOM RAIL

HARDWARE SCHEDULE	
A.	(1) ROTARY CRANK 10" FROM HINGE JAMB AT SILL
B.	(2) SNUBBER 2 1/4" FROM EACH END HINGE JAMB
C.	(2) 3-BAR HINGE AT EACH END HINGE STILE
D.	(1) MULTI-POINT LOCK AT 9 1/2" FROM SILL
E.	EXTRUDED ALUMINUM REINFORCEMENT (10202004) AT HEAD, SILL AND JAMBS
F.	EXTRUDED ALUMINUM REINFORCEMENT (12737) AT HEAD, SILL AND JAMBS
G.	EXTRUDED ALUMINUM REINFORCEMENT (1030028-A) AT INTERMEDIATE FRAME RAIL
H.	EXTRUDED ALUMINUM REINFORCEMENT (4220-1) AT CASEMENT VENT RAILS AND STILES
I.	EXTRUDED ALUMINUM REINFORCEMENT (10300091) AT CASEMENT VENT HINGE SITLE

REVISIONS		DATE
REV	DESCRIPTION	
A	REVISED GLAZING DETAIL	08/28/26


VIVINCO, INC.
MORGANTOWN BUSINESS PARK, P.O. BOX 499
MORGANTOWN, PA 19543

OCEANVIEW FIXED CASEMENT OVER CASEMENT
COMBINATION ASSEMBLY – IMPACT
NOTES



L. ROBERTO LOMAS P.E.
208 7th Ave, INDIANLANTIC, FL 32903
434-688-0609 rllomas@rlomaspe.com

DWG NO. 08-02809A	SHEET 2 OF 6
SCALE NTS	REV – FPA –
DRAWN N.G.	DATE: 09/10/15

SIGNED: 08/28/2026

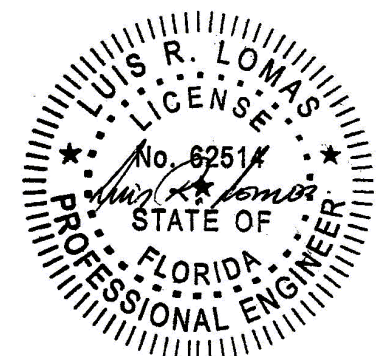


Luis R. Lomas P.E.
FL No.: 62514

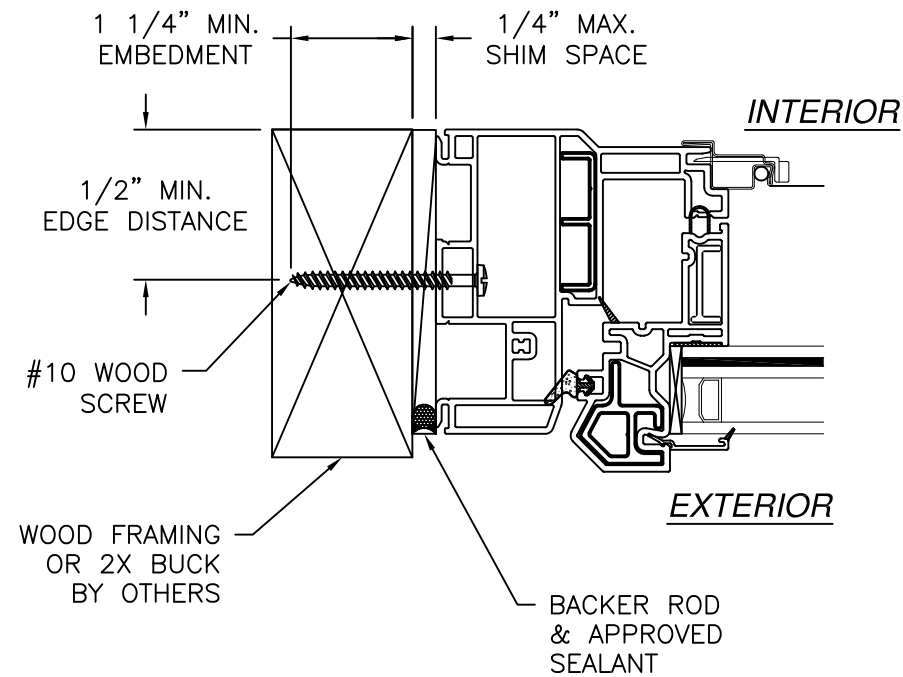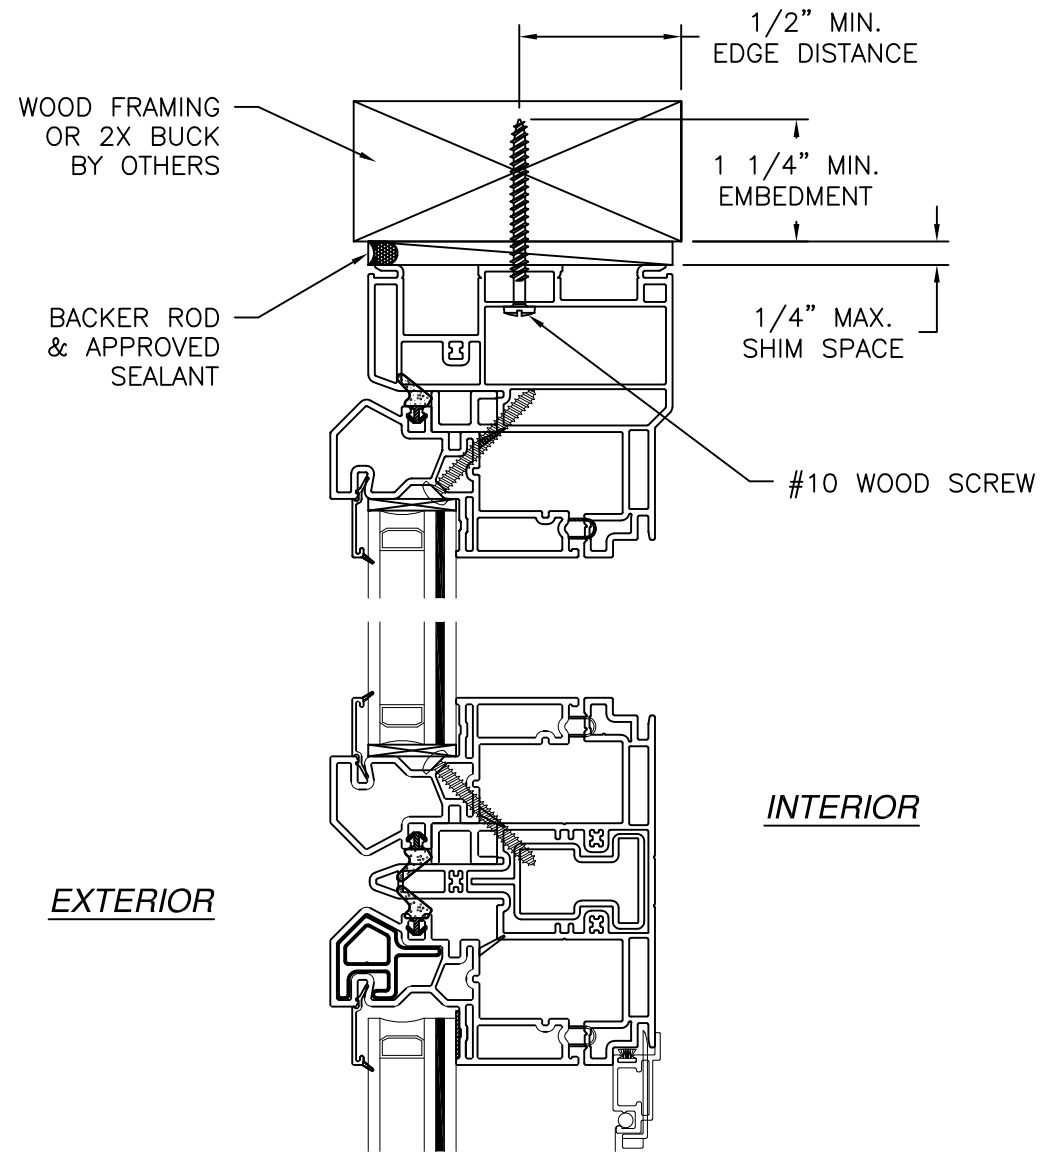

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

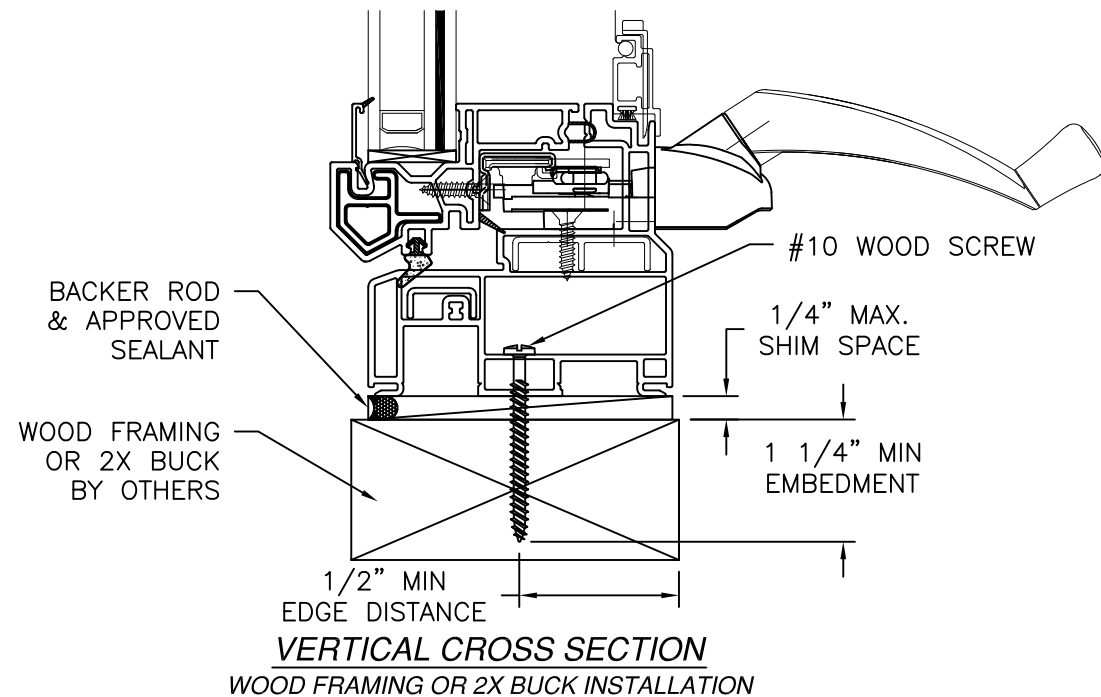


REVISIONS			DATE
REV	DESCRIPTION	REVISED	GLAZING DETAIL
A			08/28/26



VIVINCO, INC. MORGANTOWN BUSINESS PARK, P.O. BOX 499 MORGANTOWN, PA 19543		OCEANVIEW FIXED CASEMENT OVER CASEMENT COMBINATION ASSEMBLY – IMPACT INSTALLATION DETAILS		L. ROBERTO LOMAS P.E. 208 7th Ave, INDIANLANTIC, FL 32903 434-688-0609 rllomas@rlomaspe.com	
--	--	---	--	---	--

DWG NO.	SHEET	
08-02809A	3 OF 6	
SCALE NTS	REV –	FPA –
DRAWN N.G.	DATE: 09/10/15	

SIGNED: 08/28/2026

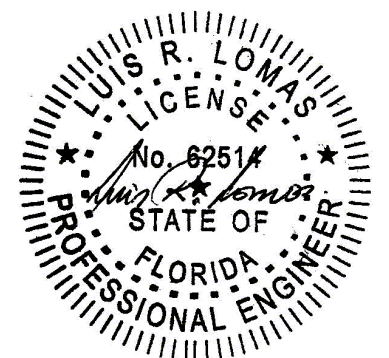

Luis R. Lomas P.E.
FL No.: 62514

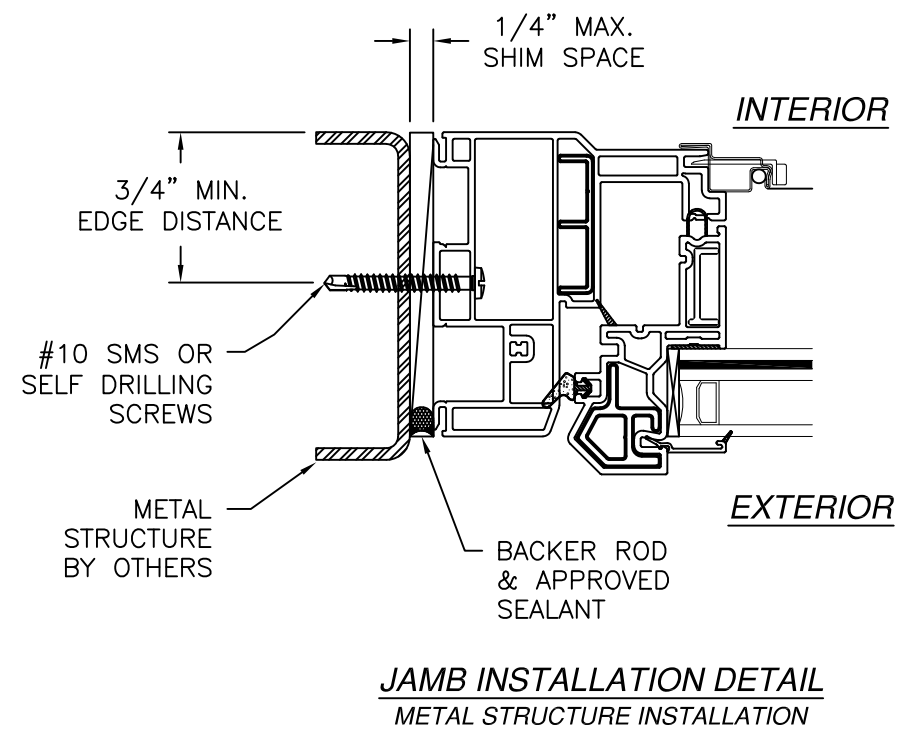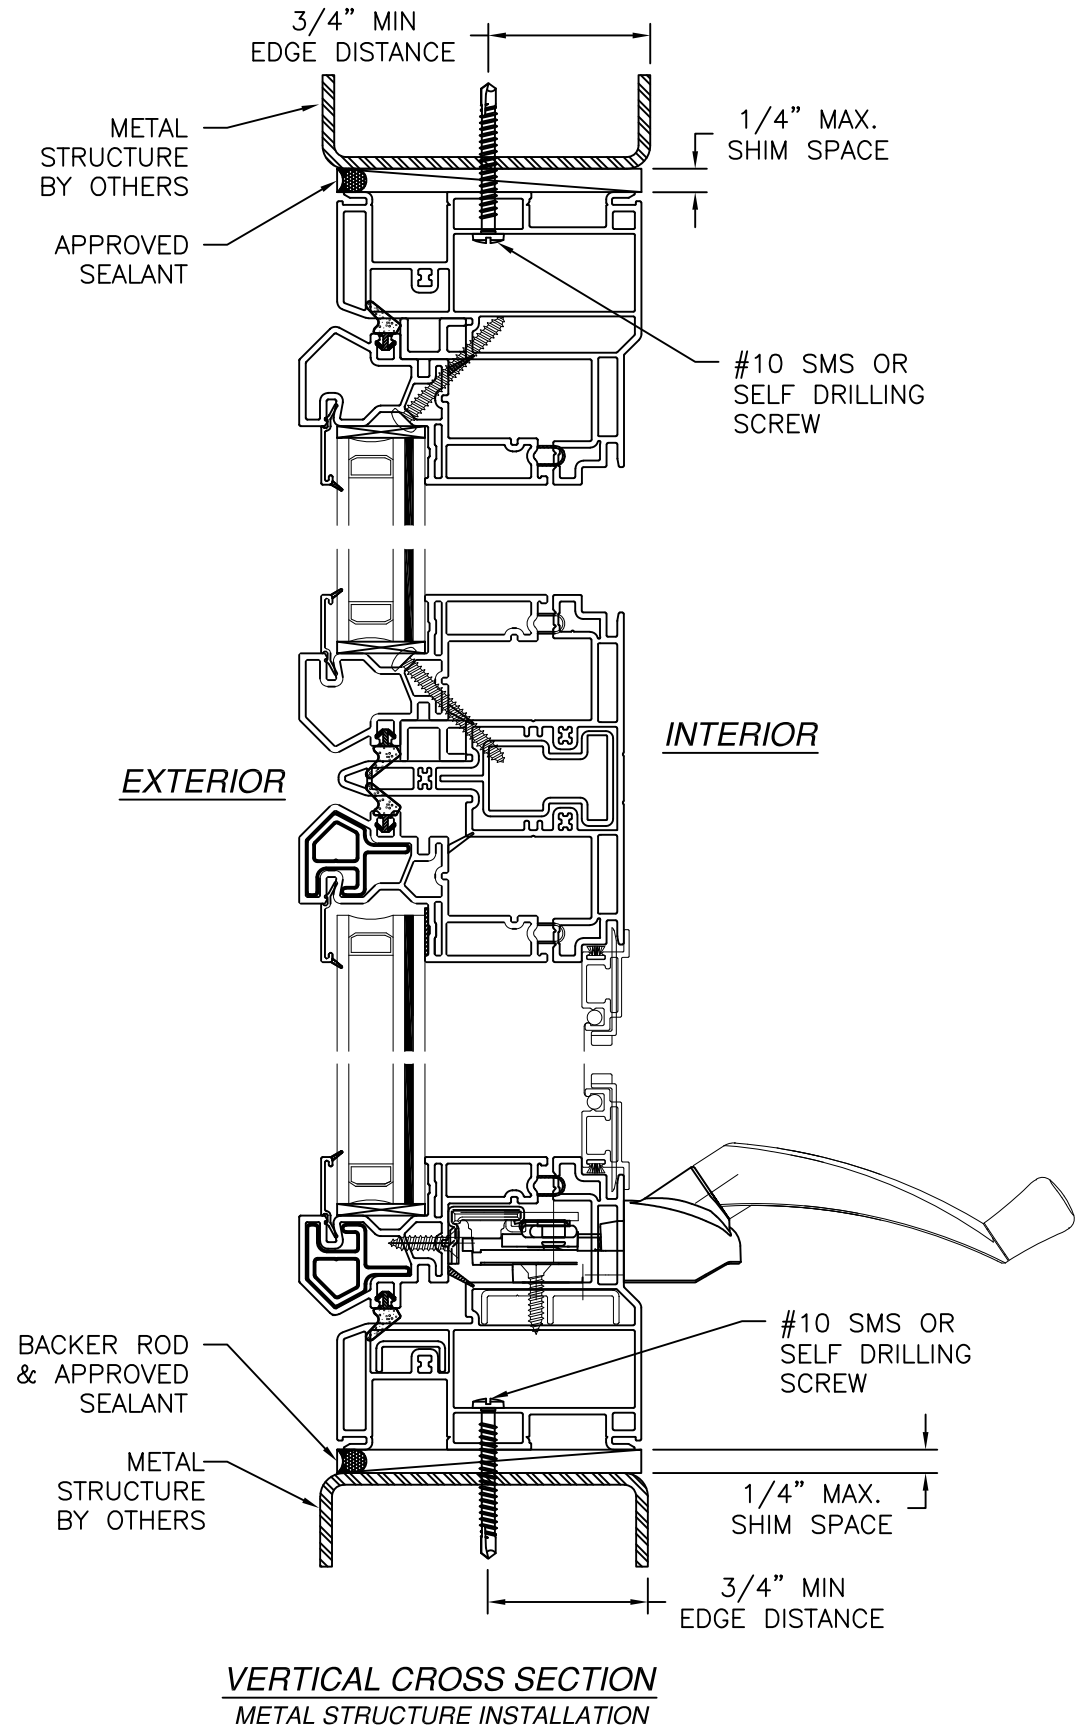

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

REVISIONS			DATE
REV	DESCRIPTION		
A	REVISED GLAZING DETAIL		08/28/26

VIWINCO, INC.
MORGANTOWN BUSINESS PARK, P.O. BOX 499
MORGANTOWN, PA 19543




OCEANVIEW FIXED CASEMENT OVER CASEMENT
COMBINATION ASSEMBLY - IMPACT
INSTALLATION DETAILS

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIANLANTIC, FL 32903
434-688-0609 rllomas@rlomaspe.com

DWG NO. 08-02809A	SHEET 4 OF 6
SCALE NTS	REV - FPA -
DRAWN N.G.	DATE: 09/10/15

SIGNED: 08/28/2026

Luis R. Lomas P.E.
FL No.: 62514

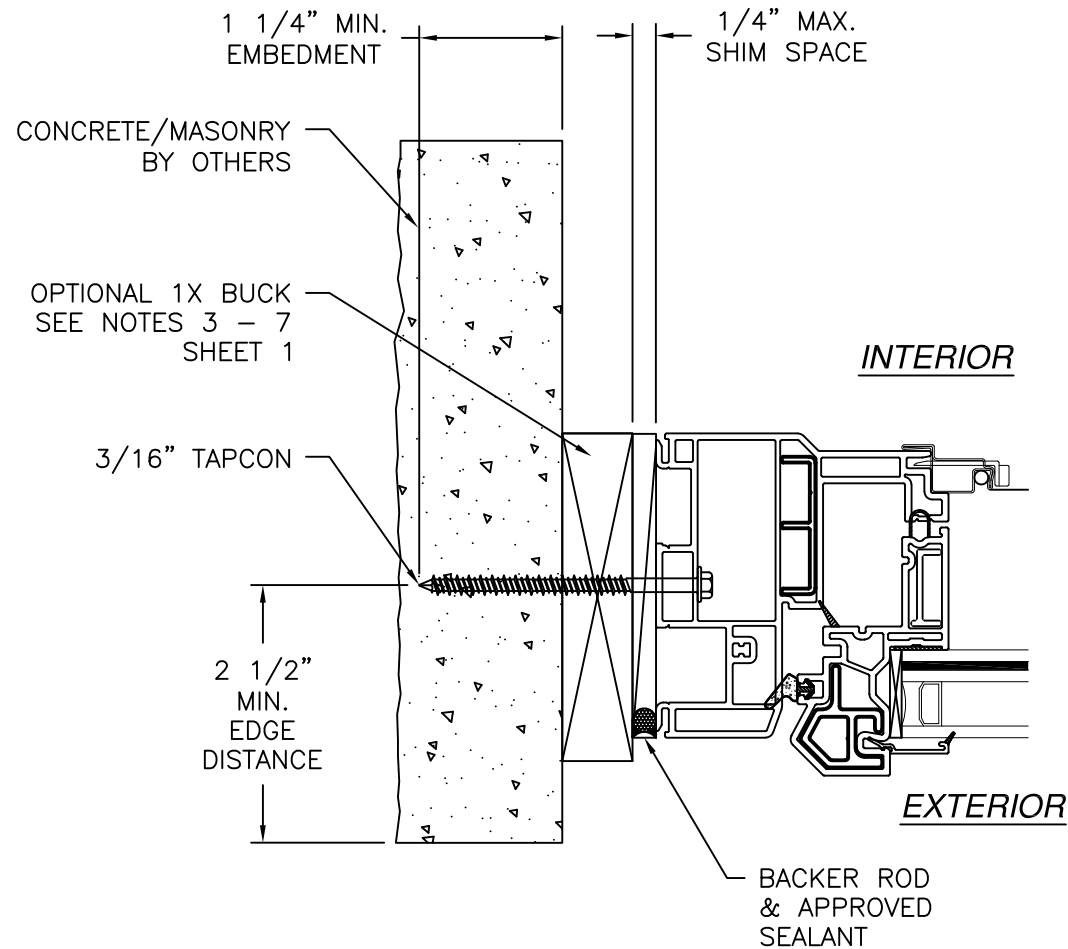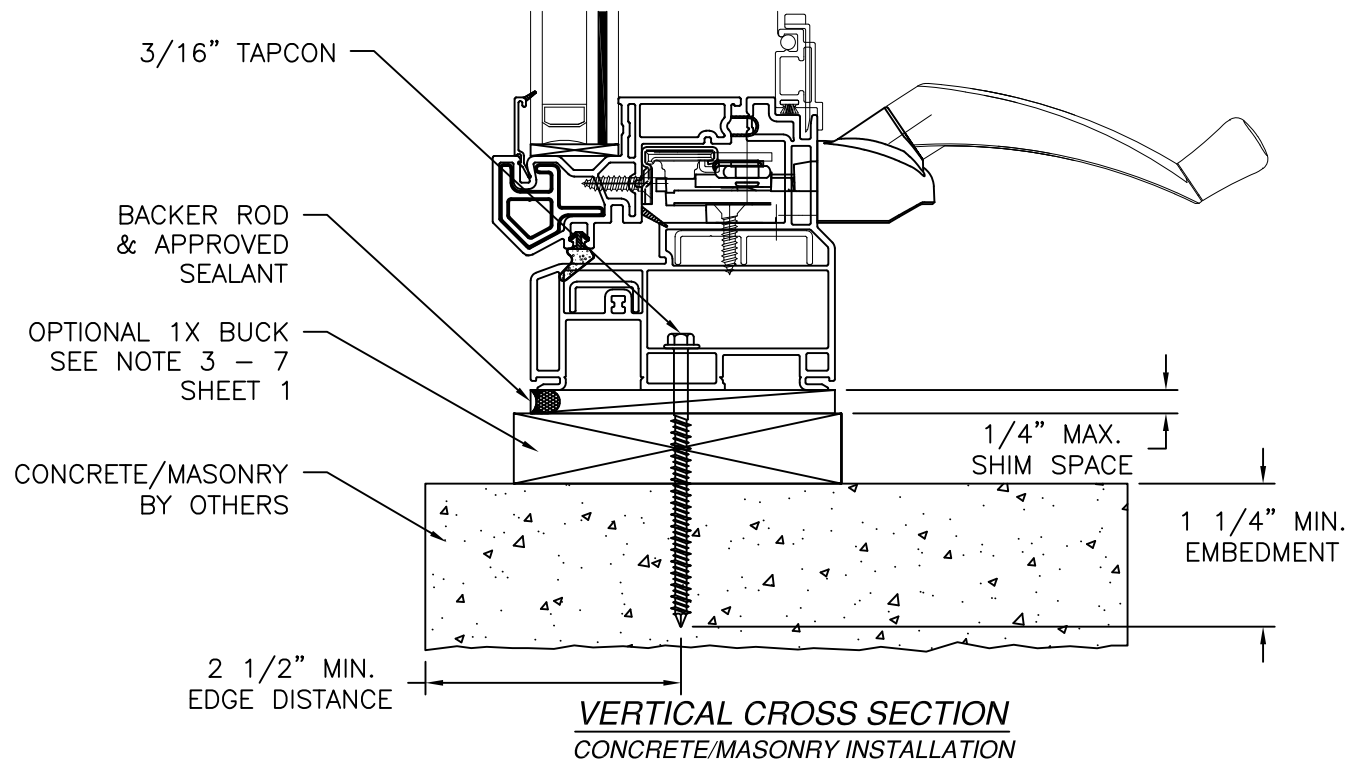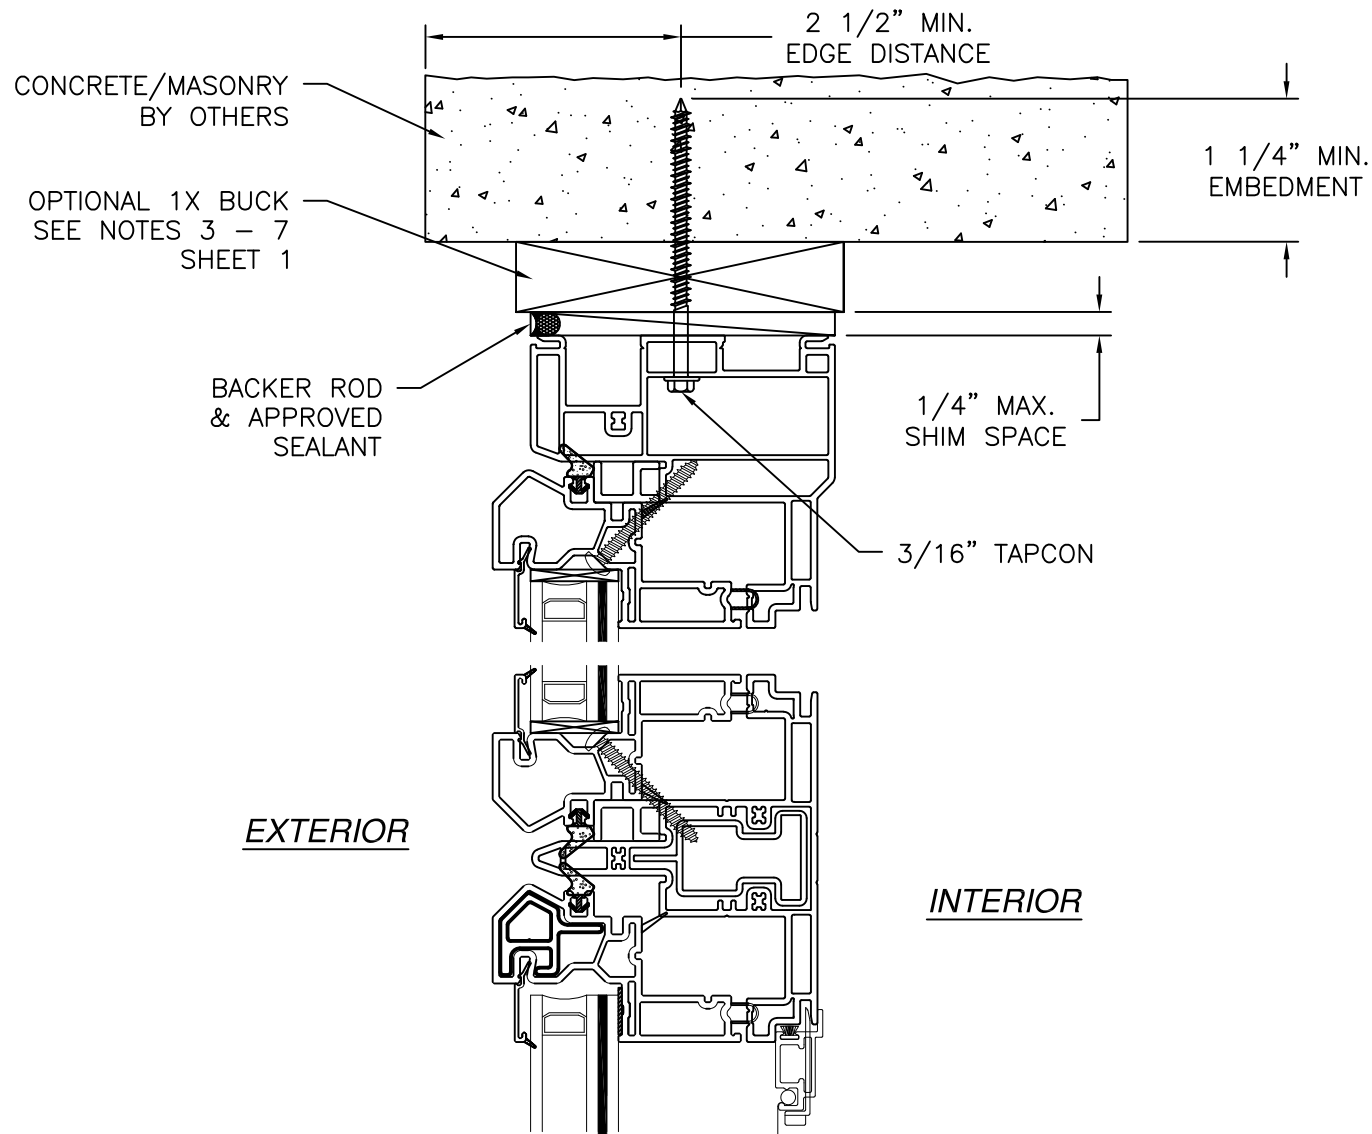

JAMB INSTALLATION DETAIL
CONCRETE/MASONRY INSTALLATION

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

REVISIONS		DATE
REV	DESCRIPTION	
A	REVISED GLAZING DETAIL	08/28/26


VIVINCO, INC.
MORGANTOWN BUSINESS PARK, P.O. BOX 499
MORGANTOWN, PA 19543

OCEANVIEW FIXED CASEMENT OVER CASEMENT
COMBINATION ASSEMBLY - IMPACT
INSTALLATION DETAILS




L. ROBERTO LOMAS P.E.
208 7th Ave, INDIANLANTIC, FL 32903
434-688-0609 rllomas@rlomaspe.com

DWG NO. 08-02809A	SHEET 5 OF 6
SCALE NTS	REV - FPA -
DRAWN N.G.	DATE: 09/10/15

SIGNED: 08/28/2026

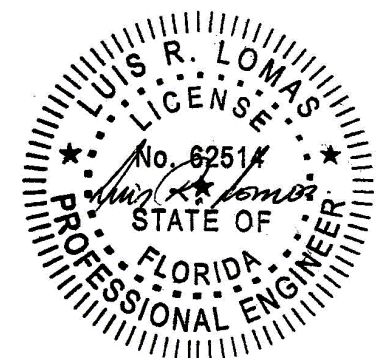

Luis R. Lomas P.E.
FL No.: 62514

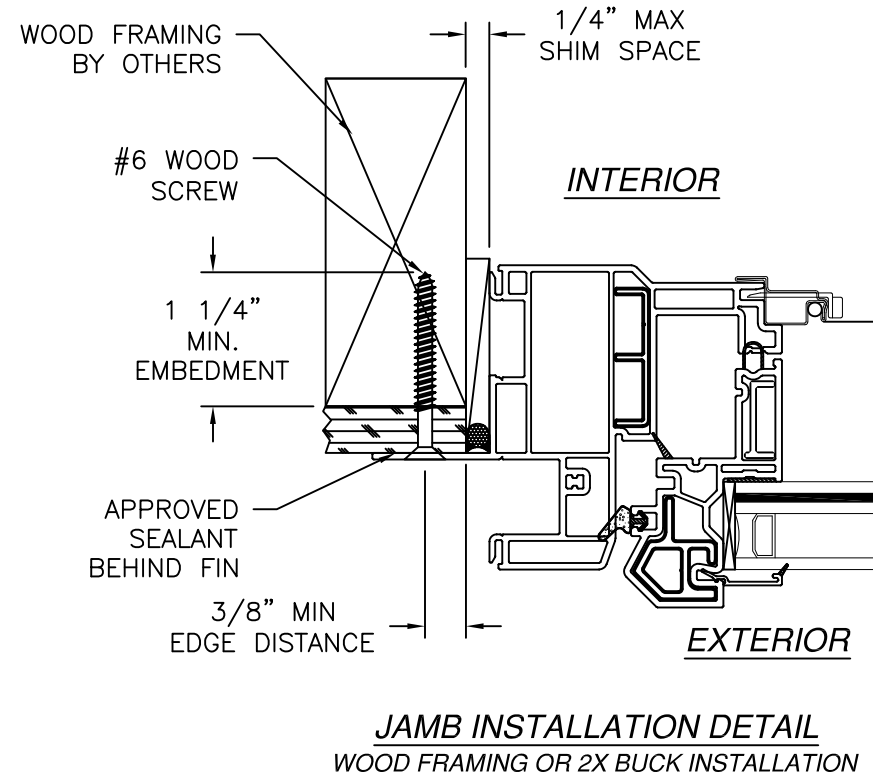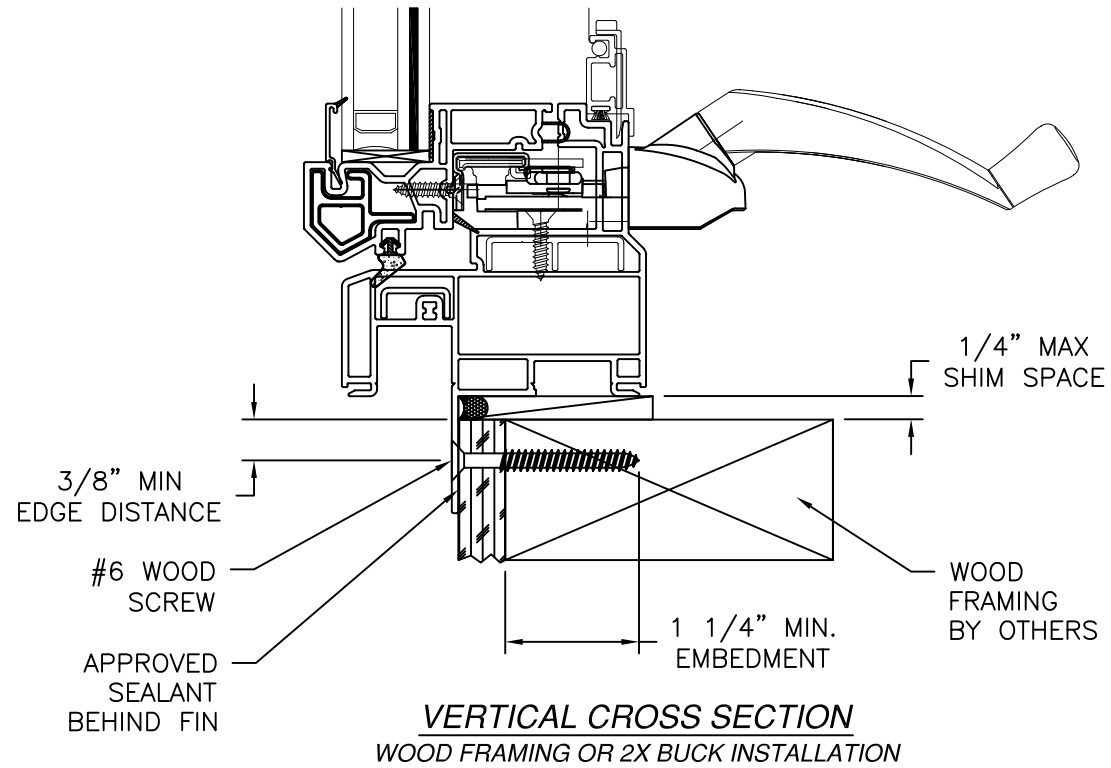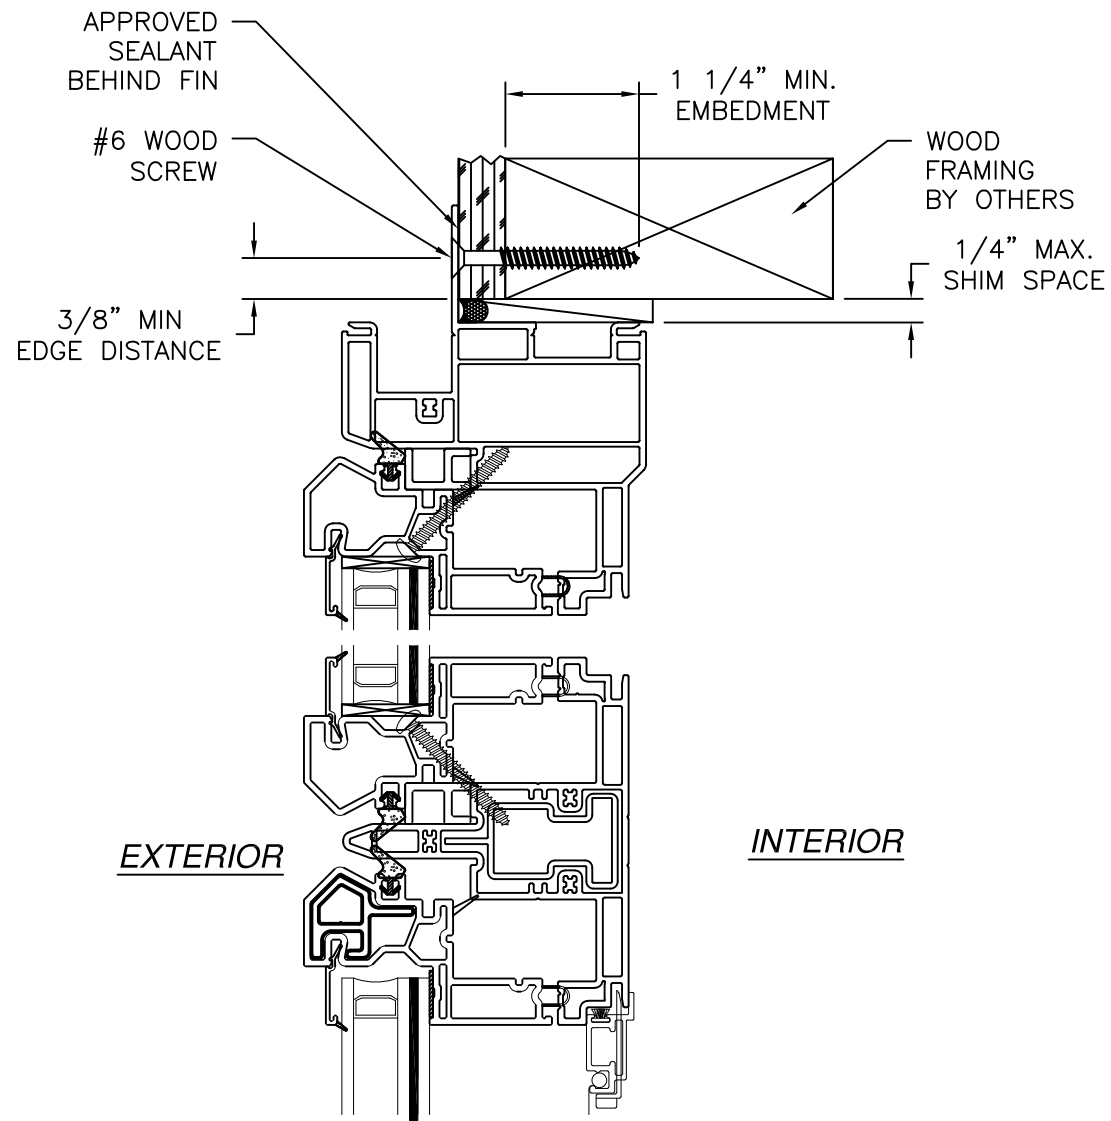


- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

REVISIONS			DATE
REV	DESCRIPTION	REVISED	GLAZING DETAIL
A			08/28/26

VIVINCO, INC. MORGANTOWN BUSINESS PARK, P.O. BOX 499 MORGANTOWN, PA 19543		OCEANVIEW FIXED CASEMENT OVER CASEMENT COMBINATION ASSEMBLY - IMPACT INSTALLATION DETAILS		L. ROBERTO LOMAS P.E. 208 7th Ave, INDIANLANTIC, FL 32903 434-688-0609 rllomas@rlomaspe.com	
--	--	---	--	---	--

DWG NO.	SHEET	
08-02809A	6 OF 6	
SCALE NTS	REV -	FPA -
DRAWN N.G.	DATE: 09/10/15	

SIGNED: 08/28/2026

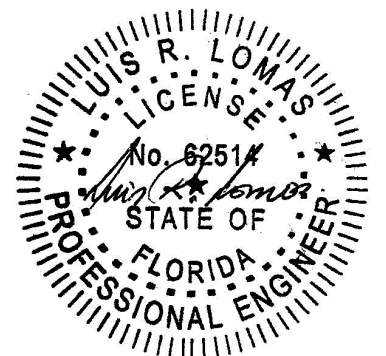

Luis R. Lomas P.E.
FL No.: 62514