

PanoramAH! AMERICA, LLC

ah!38 INSWING DOOR

(HVHZ)(IMPACT)

GENERAL NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH THE CURRENT EDITION OF THE FLORIDA BUILDING CODE (FBC), **INCLUDING** HVHZ AND HAS BEEN EVALUATED ACCORDING TO THE FOLLOWING:
 - TAS 201-94
 - TAS 202-94
 - TAS 203-94
2. ADEQUACY OF THE EXISTING STRUCTURAL CONCRETE/MASONRY, 2X FRAMING, AND METAL FRAMING AS A MAIN WIND FORCE RESISTING SYSTEM CAPABLE OF WITHSTANDING AND TRANSFERRING APPLIED PRODUCT LOADS TO THE FOUNDATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
3. 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO THE STRUCTURE. BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
4. THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.
5. APPROVED IMPACT PROTECTIVE SYSTEM **IS NOT REQUIRED** ON THIS PRODUCT IN AREAS REQUIRING IMPACT RESISTANCE.
6. WINDOW FRAME MATERIAL: ALUMINUM 6063-T5
7. GLASS MEETS THE REQUIREMENTS OF ASTM E1300 GLASS CHARTS. SEE SHEET 4 FOR GLAZING DETAIL.

INSTALLATION NOTES:

1. TWO (2) INSTALLATION ANCHORS ARE REQUIRED AT EACH ANCHOR LOCATION SHOWN, UNLESS OTHERWISE STATED ON SHEET 3.
2. INSTALL INDIVIDUAL INSTALLATION ANCHORS WITHIN A TOLERANCE OF ±1/4 INCH THE DEPICTED LOCATION & SPACING IN THE ANCHOR LAYOUT DETAILS (I.E., WITHOUT CONSIDERATION OF TOLERANCES). TOLERANCES ARE NOT CUMULATIVE FROM ONE INSTALLATION ANCHOR TO THE NEXT.
3. SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR WITH LOAD BEARING SHIM(S). MAXIMUM ALLOWABLE SHIM STACK TO BE 3/8 INCH. SHIM WHERE SPACE OF 1/16 INCH OR GREATER OCCURS. SHIM(S) SHALL BE CONSTRUCTED OF HIGH DENSITY PLASTIC OR BETTER.
4. MINIMUM EMBEDMENT AND EDGE DISTANCE EXCLUDE WALL FINISHES, INCLUDING BUT NOT LIMITED TO STUCCO, FOAM, BRICK VENEER, AND SIDING.
5. INSTALLATION ANCHORS AND ASSOCIATED HARDWARE MUST BE MADE OF CORROSION RESISTANT MATERIAL OR HAVE A CORROSION RESISTANT COATING.

5.1. FASTENERS USED WITHIN 3000 FEET OF A SALTWATER COASTLINE AND INSTALLED IN ENCLOSED SPACES SHALL BE GALVANIZED IN ACCORDANCE WITH SECTION 1711.1.1 (E.G., ASTM A153 CLASS D, ASTM A641 CLASS 3S, OR EQUIVALENT CORROSION RESISTANCE).

5.2. CONNECTORS AND METAL PLATES USED WITHIN 3000 FEET OF A SALTWATER COASTLINE SHALL BE STANDARD GALVANIZED IN ACCORDANCE WITH SECTION 1711.1.2 (E.G., ASTM A653 G90, ASTM A123, OR PROTECTIVE COATING PER TPI 1).
6. FOR MASONRY OR CONCRETE OPENINGS, A 1X WOOD BUCK MAY BE USED (OPTIONAL) AS LONG AS THE MINIMUM EMBEDMENT AND EDGE DISTANCE REQUIREMENTS ARE STILL MET WITHIN THE CORRESPONDING HOST SUBSTRATE. SEE GENERAL NOTE #3 ON SHEET 1 FOR MORE INFORMATION.
7. FOR HOLLOW BLOCK AND GROUT FILLED BLOCK, DO NOT INSTALL INSTALLATION ANCHORS INTO MORTAR JOINTS. EDGE DISTANCE IS MEASURED FROM FREE EDGE OF BLOCK OR EDGE OF MORTAR JOINT INTO FACE SHELL OF BLOCK.
8. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS, AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BY THE ANCHOR MANUFACTURER.

TABLE OF CONTENTS	
SHEET	SHEET DESCRIPTION
1	GENERAL NOTES AND INSTALLATION NOTES
2	ELEVATION & DESIGN PRESSURE TABLE
3	ANCHOR LAYOUT
4	VERTICAL SECTIONS & GLAZING DETAIL
5	HORIZONTAL SECTIONS
6	ANCHOR DETAILS & ANCHOR SCHEDULE

DESIGN PRESSURE RATING (PSF)				
CONFIGURATION	WIDTH (IN.)	HEIGHT (IN.)	DESIGN PRESSURE	MISSILE IMPACT RATING
X	SEE TABLE ON SHEET 2			LARGE & SMALL MISSILE IMPACT



1000 WOODBURY ROAD, STE. 206
WOODBURY, NY 11797
PH: (631)683-8580

TITLE: ah!38 INSWING DOOR (HVHZ)(IMPACT)
GENERAL NOTES & INSTALLATION NOTES


PREPARED BY: BUILDING DROPS, INC.
1900 NE MIAMI COURT, STE. 2-15
MIAMI, FL 33132
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE
2026 FBC UPDATE	DB	08/26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

Digitally signed by Hermes F. Norero, P.E.
Reason: I am approving this document
Date: 2026.10.02 19:12:44 -07'00'

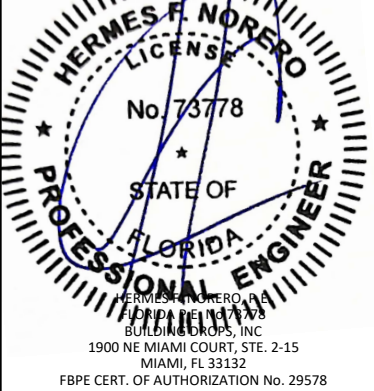

FL #:
FL46513

DATE: **04.16.2024**

DWG. BY: **SH**CHK. BY: **HFN**


SCALE: **NTS**

DWG. #: **PAN016**

SECTION: **1**REV. **A**

OF 6

c:\users\daniel\trabajo\building drops, inc\building drops landing - common\projects\2026 code change projects\panoramahi america\cc-26-0601.1 - 2026 code change\dwgs\fl46513\pan016 - a.dwg 8/6/2026 5:33 PM

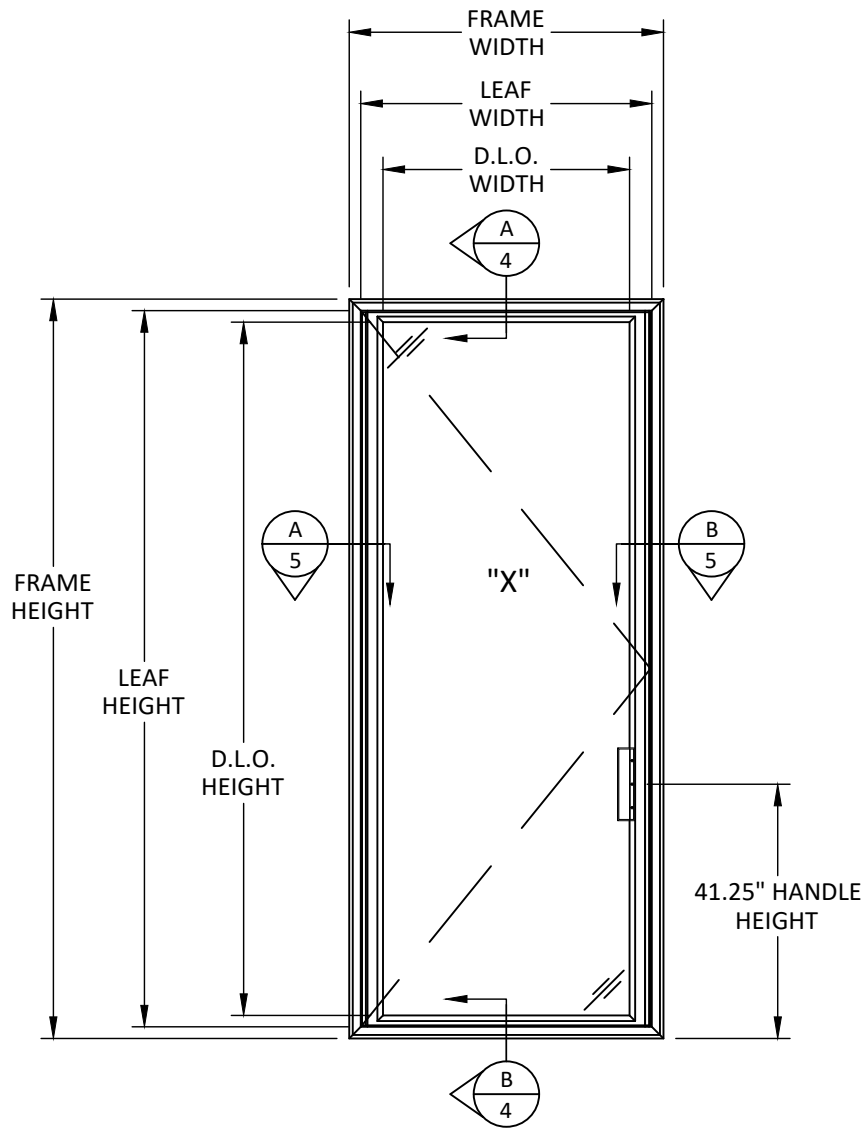

ELEVATION
TYP.

D.L.O. HEIGHT = FRAME HEIGHT - 7.50"
D.L.O. WIDTH = FRAME WIDTH - 11.00"
LEAF HEIGHT = FRAME HEIGHT - 4.25"
LEAF WIDTH = FRAME WIDTH - 4.14"

INSWING DOOR ALLOWABLE DESIGN PRESSURE TABLE (PSF)												
FRAME HEIGHT (IN.)	FRAME WIDTH (IN.)											
		30	36	42	48	51	54	60	66	72	78	84
	66	75.0	75.0	75.0	65.6	65.0	61.4	55.3	50.2	50.2	50.2	50.2
	72	75.0	75.0	75.0	65.6	65.0	61.4	55.3	50.2	46.0	46.0	46.0
	78	75.0	75.0	75.0	65.6	65.0	61.4	55.3	50.2	46.0	42.5	-
	84	75.0	75.0	75.0	65.6	65.0	61.4	55.3	50.2	46.0	-	-
	90	75.0	75.0	75.0	65.6	65.0	61.4	55.3	50.2	-	-	-
	96	75.0	75.0	75.0	65.0	65.0	61.4	55.3	-	-	-	-
	102	75.0	75.0	75.0	65.0	65.0	61.4	55.3	-	-	-	-
	108	75.0	75.0	75.0	65.0	65.0	61.4	-	-	-	-	-
	114	75.0	75.0	65.0	65.0	65.0	-	-	-	-	-	-
	120	75.0	75.0	65.0	65.0	65.0	-	-	-	-	-	-
	126	75.0	75.0	65.0	65.0	-	-	-	-	-	-	-
	132	75.0	65.0	65.0	-	-	-	-	-	-	-	-
	138	75.0	65.0	65.0	-	-	-	-	-	-	-	-
	144	75.0	65.0	65.0	-	-	-	-	-	-	-	-
	150	75.0	65.0	-	-	-	-	-	-	-	-	-
	156	65.0	65.0	-	-	-	-	-	-	-	-	-


TITLE: **ah!38 INSWING DOOR
(HVHZ)/(IMPACT)**
ELEVATION & DESIGN
PRESSURE TABLE

PREPARED BY:
BUILDING DROPS, INC.
1900 NE MIAMI COURT, STE. 2-15
MIAMI, FL 33132
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE
2026 FBC UPDATE	DB	08/26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE
GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR
A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION
TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A
LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE
SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

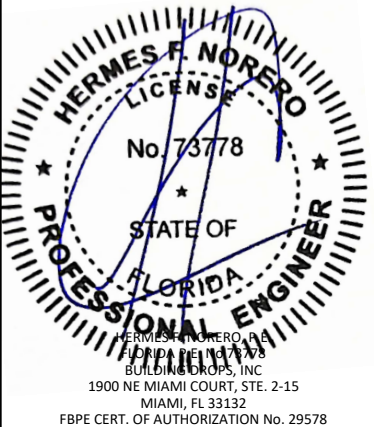

FL #:

FL46513

DATE: 04.16.2024

DWG. BY:
SH

CHK. BY:
HFN

SCALE: NTS


DWG. #: PAN016

SECTION:

2

REV.

A

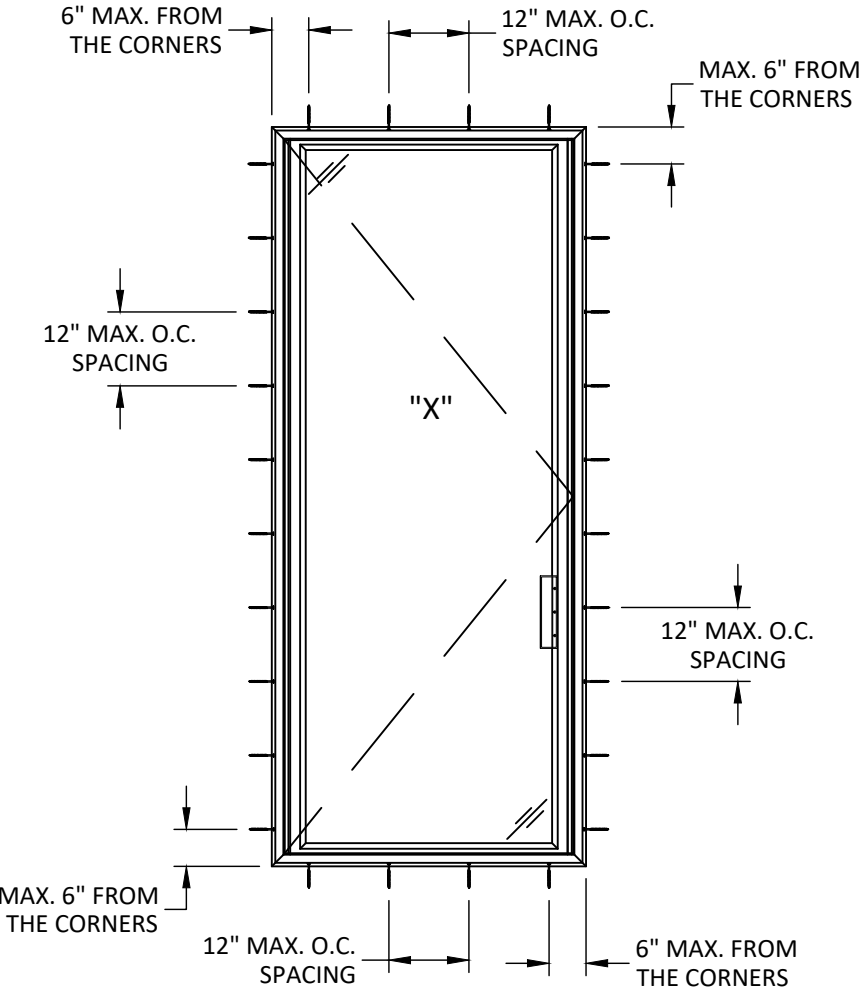

ANCHOR LAYOUT
THROUGH FRAME INSTALLATION

NOTE: TWO (2) ANCHORS PER LOCATION.



1000 WOODBURY ROAD, STE. 206
WOODBURY, NY 11797
PH: (631)683-8580


TITLE: ah!38 INSWING DOOR
(HVHZ)/(IMPACT)
ANCHOR LAYOUT

PREPARED BY:
BUILDING DROPS, INC.
1900 NE MIAMI COURT, STE. 2-15
MIAMI, FL 33132
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com




REMARKS	BY	DATE
2026 FBC UPDATE	DB	08/26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

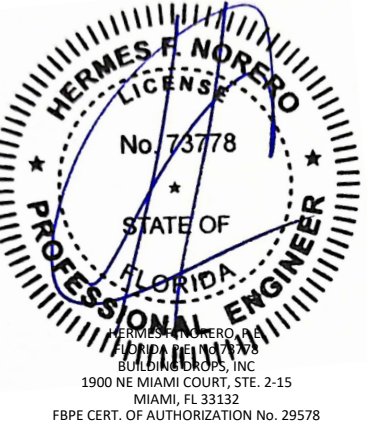


FL #:	FL46513
DATE:	04.16.2024
DWG. BY:	SH
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	PAN016
SECTION:	3
REV.	A


c:\users\daniel(buitrago)\building drops, inc\building drops landing - common\projects\panoramahi america\cc-26-0601.1 - 2026 code change\dwgs\166513\pan016 - a.dwg 8/6/2026 5:33 PM

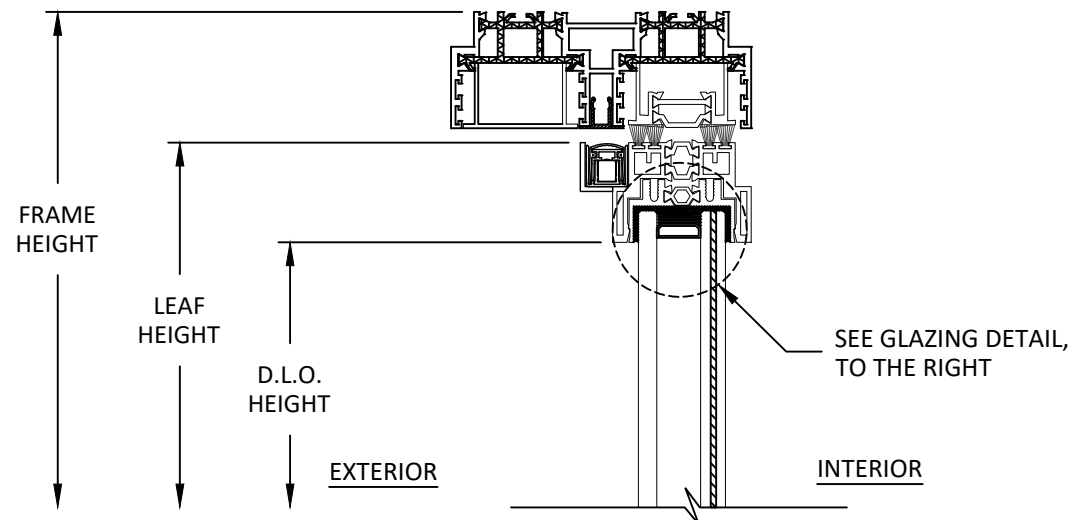

A
4 VERTICAL SECTION
HEAD

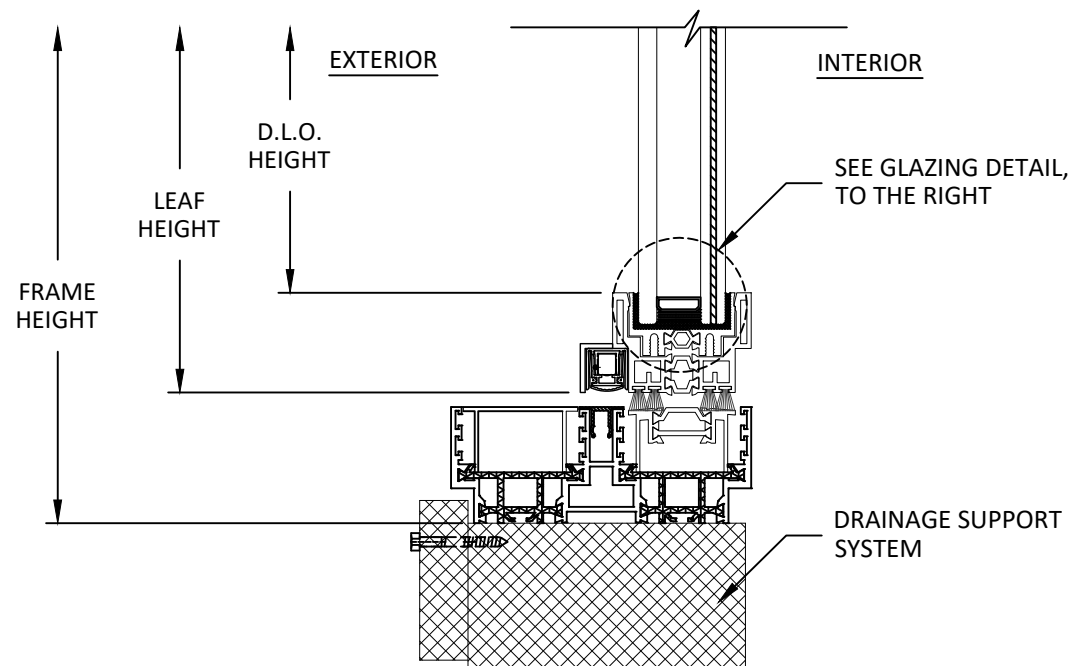

B
4 VERTICAL SECTION
SILL

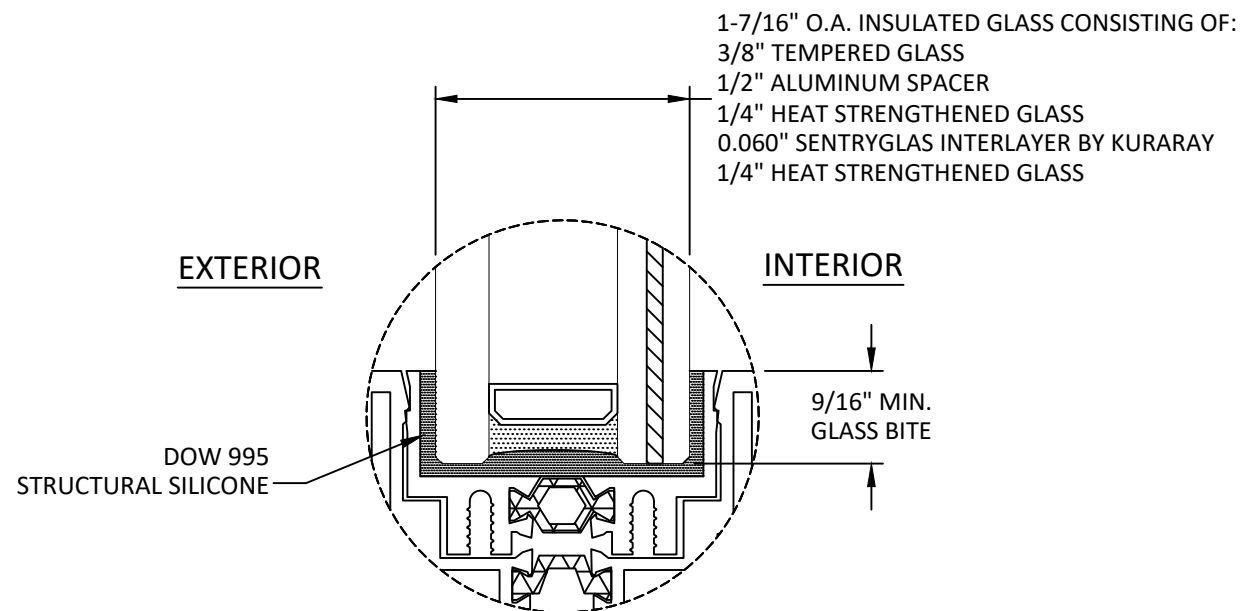

GLAZING DETAIL 1

GLAZING NOTES:

1. GLASS TYPE COMPLIES WITH ASTM E1300 AND THE FBC SAFETY GLAZING REQUIREMENTS. PER THE FBC TEMPER AND SAFETY GLAZING REQUIREMENTS SHALL BE REVIEWED ON A SITE SPECIFIC BASIS.
2. SETTING BLOCK DUROMETER HARDNESS OF 70-90 (SHORE A) AS REFERENCED IN FBC CHAPTER 24.
3. SETTING BLOCKS TO BE LOCATED AT 1/4 SPAN LENGTH FOR GLASS WIDER THAN 36" AS PER FBC CHAPTER 24.
4. D.L.O. AND DESIGN PRESSURES MAY NOT EXCEED MAX VALUES SHOWN HEREIN.

PANORAMAH!
unlimited perspective

1000 WOODBURY ROAD, STE. 206
WOODBURY, NY 11797
PH: (631)683-8580


TITLE: **ah!38 INSWING DOOR**
(HVHZ)/(IMPACT)
VERTICAL SECTIONS &
GLAZING DETAIL

PREPARED BY:
BUILDING DROPS, INC.
1900 NE MIAMI COURT, STE. 2-15
MIAMI, FL 33132
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com




REMARKS	BY	DATE
2026 FBC UPDATE	DB	08/26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

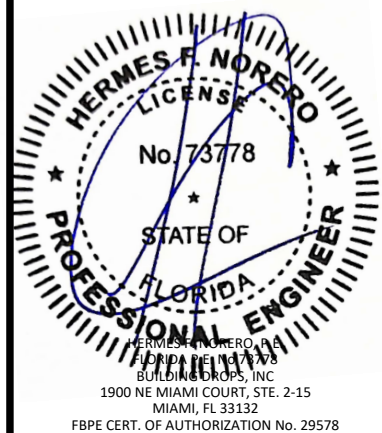


FL #:	FL46513
DATE:	04.16.2024
DWG. BY:	SH
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	PAN016
SECTION:	4
REV.	A

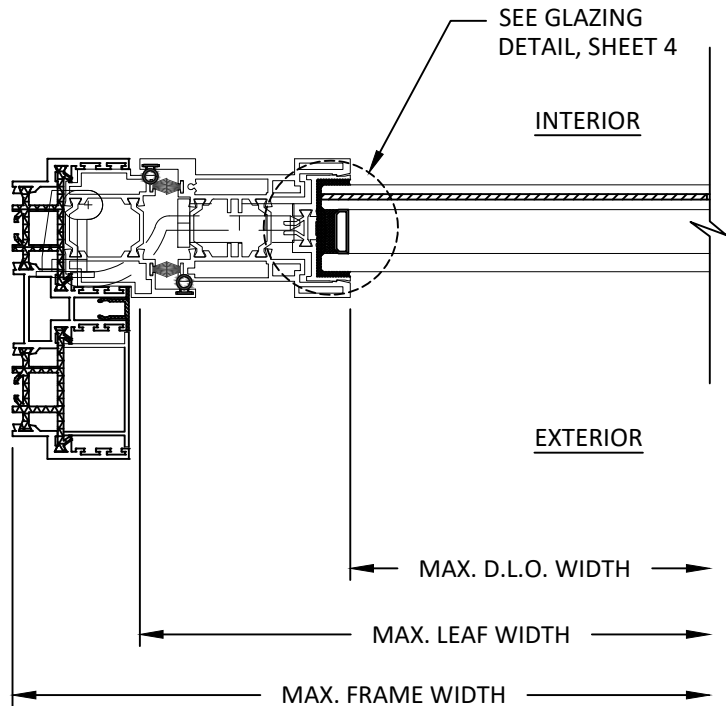

A
5

HORIZONTAL SECTION
HINGE JAMB

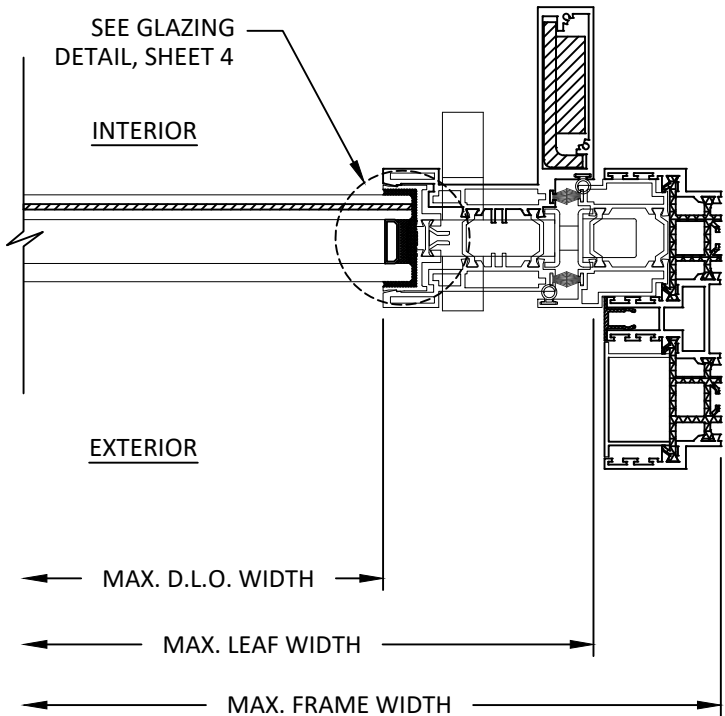

B
5

HORIZONTAL SECTION
LOCK JAMB

TITLE: ah!38 INSWING DOOR
(HVHZ)/(IMPACT)

HORIZONTAL SECTIONS


PREPARED BY:

BUILDING DROPS, INC.
1900 NE MIAMI COURT, STE. 2-15
MIAMI, FL 33132
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE
2026 FBC UPDATE	DB	08/26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

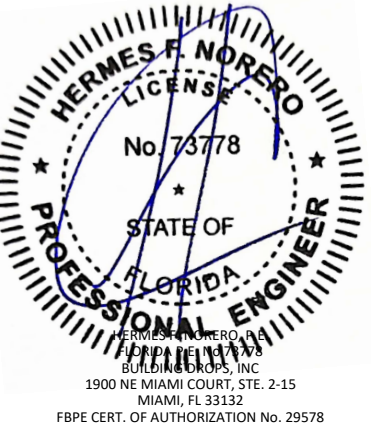

FL #:	FL46513
DATE:	04.16.2024
DWG. BY: SH	CHK. BY: HFN
SCALE:	NTS
DWG. #:	PAN016
SECTION:	REV. A



ANCHOR SCHEDULE					
METHOD	SUBSTRATE	ANCHOR SCHEDULE	MIN. EMBEDMENT	MIN. EDGE DISTANCE	SPACING
THROUGH FRAME	WOOD: MIN. SG = 0.55	#14 WOOD SCREW	1.50"	0.75"	SEE SHEET 3
	METAL: 18 GAUGE STEEL, MIN. Fy = 33KSI ALUMINUM: 1/8" MIN., 6063-T5	1/4" SELF-DRILLING SCREW	3 THREADS MIN PENETRATION BEYOND STRUCTURE	0.50"	
	CONCRETE: f'c = 3000 PSI	1/4" ITW TAPCON	1.50"	2.50"	
	MASONRY: CMU per ASTM C90 MIN. 2000 PSI	1/4" ITW TAPCON	1.00"	2.50"	