

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
2. WOOD FRAMING, METAL STRUCTURE AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1–1/2” UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER’S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
4. WHERE WOOD BUCK THICKNESS IS 1–1/2” OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER’S PUBLISHED INSTALLATION INSTRUCTIONS.
5. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
6. BUCKS SHALL EXTEND BEYOND UNIT FRAME INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
7. SHIM AS NEEDED AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16” OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4”.
8. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
9. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
10. FRAME MATERIAL: EXTRUDED RIGID PVC.
11. UNITS MUST BE GLAZED PER ASTM E1300, SEE SHEET 2 FOR GLASS DETAILS.
12. APPROVED IMPACT PROTECTIVE SYSTEM IS NOT REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.

13. FOR ANCHORING THROUGH FIN INTO WOOD FRAMING OR 2X BUCK USE #8 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 3/4” MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
14. FOR ANCHORING THROUGH FIN INTO METAL STRUCTURE USE #8 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
15. FOR ANCHORING THROUGH FRAME INTO WOOD FRAMING OR 2X BUCK USE #10 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4” MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
16. FOR ANCHORING THROUGH FRAME INTO MASONRY/CONCRETE USE 3/16” TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4” MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2” MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
17. FOR ANCHORING THROUGH FRAME INTO METAL STRUCTURE USE #10 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
18. ALL FASTENERS TO BE CORROSION RESISTANT.
19. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER’S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:

19.1. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42

19.2. CONCRETE: MINIMUM COMPRESSIVE STRENGTH OF 2,000 PSI.

19.3. MASONRY: HOLLOW/FILLED BLOCK PER ASTM C90 WITH Fm=2,000PSI MINIMUM.

19.4. METAL STRUCTURE: STEEL 18GA (.048”) FY=33KSI/FU=52KSI OR ALUMINUM 6063–T5 FU=30KSI 1/8” THICK MINIMUM

SIGNED: 02/05/2024

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2	ELEVATIONS AND GLAZING DETAILS
3	DESIGN PRESSURE CHARTS
4 – 11	INSTALLATION DETAILS
12	COMPONENTS

SLOCOMB WINDOWS AND DOORS, INC.

767 SANS SOUCI PARKWAY
WILKES–BARRE, PA 18706

650 DH DOUBLE HUNG WINDOW
IMPACT
NOTES

DRAWN:
A.R.

DWG NO.
08–03994


REV
–

SCALE NTS


DATE 01/17/2024

SHEET 1 OF 12


L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

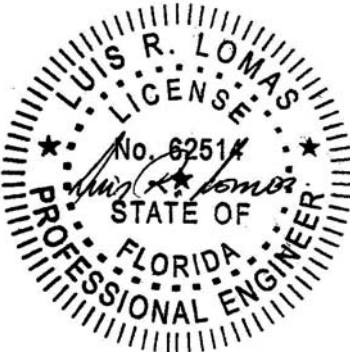

Luis R. Lomas P.E.
FL No.: 62514

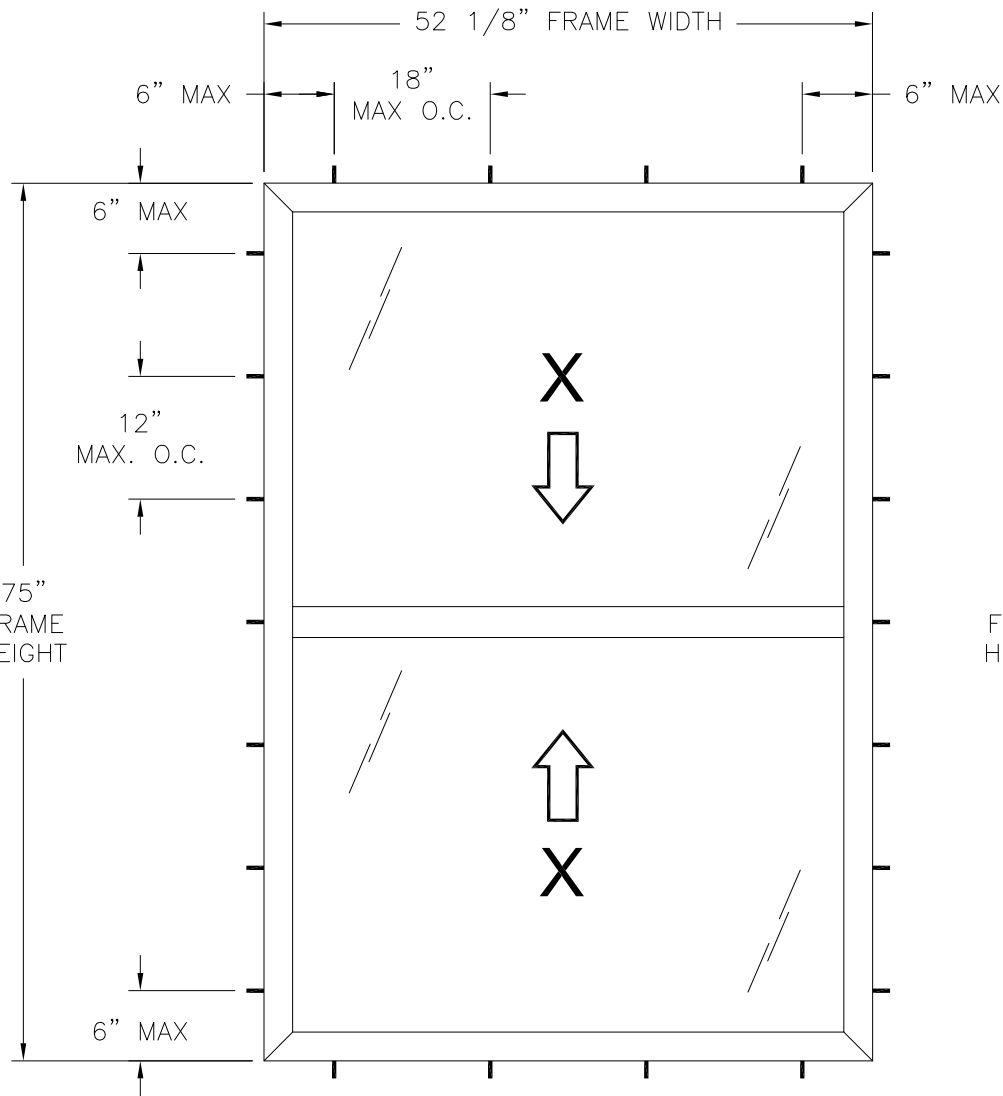

650 DH DOUBLE HUNG WINDOW
EXTERIOR VIEW
FINLESS AND FLANGE INSTALLATION

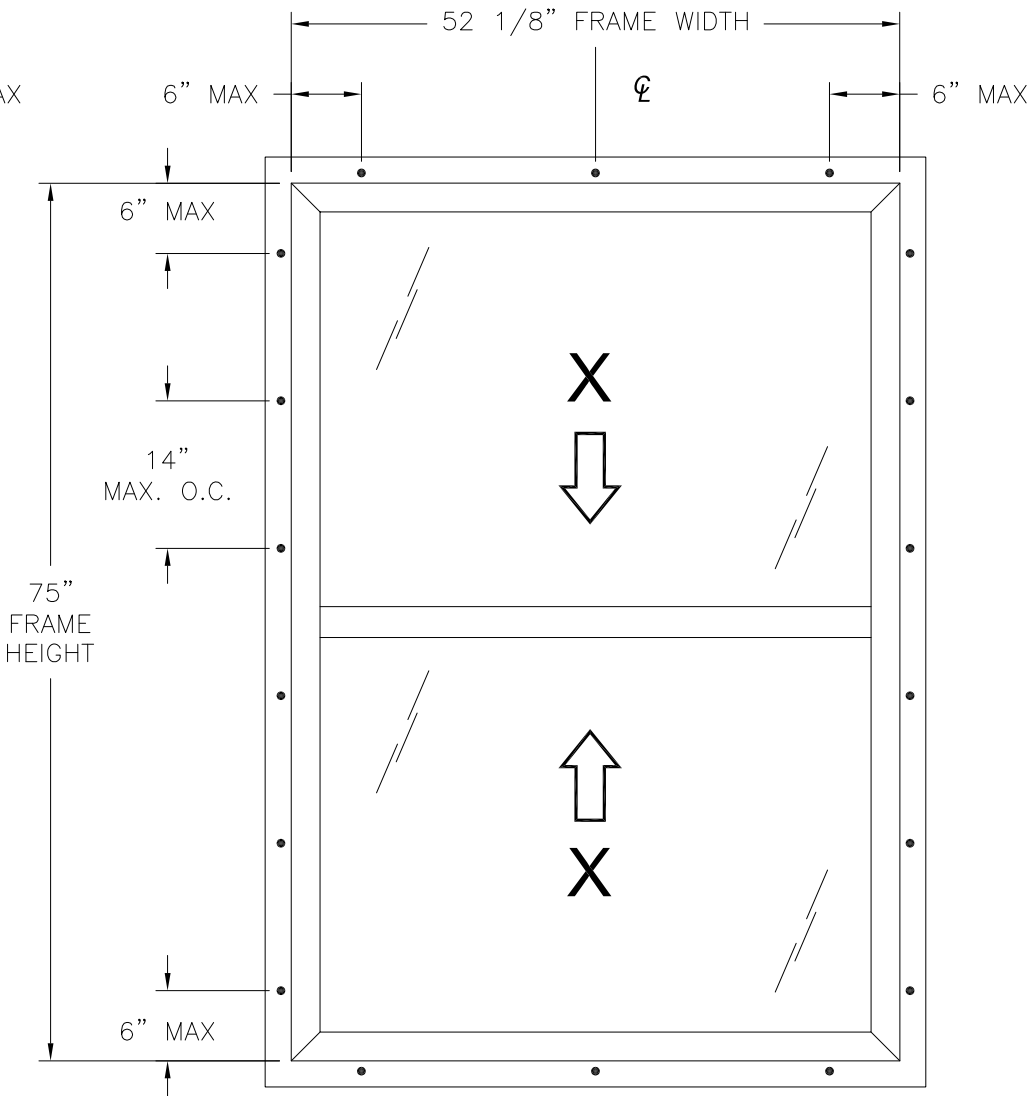

650 DH DOUBLE HUNG WINDOW
EXTERIOR VIEW
FIN INSTALLATION

WITH SILL EXTENSION 10005131

DESIGN PRESSURE RATING	IMPACT RATING
+50.0/-60.0PSF	LARGE & SMALL MISSILE IMPACT

MISSILE LEVEL D, WIND ZONE 4
FOR ADDITIONAL SIZES SEE CHART #1, SHEET 3

WITH SILL EXTENSION 10005139

DESIGN PRESSURE RATING	IMPACT RATING
±60.0PSF	LARGE & SMALL MISSILE IMPACT


MISSILE LEVEL D, WIND ZONE 4
FOR ADDITIONAL SIZES SEE CHART #2, SHEET 3

HARDWARE SCHEDULE


A.	(4) BALANCE ASSEMBLY & SHOE, 2 PER JAMB
B.	(2) METAL KEEPERS, 7" FROM EACH END OF RAIL
C.	(2) METAL CAM LOCKS, 8" FROM EACH END OF RAIL
D.	(2) PLASTIC ROUTED IN TILT LATCHES AT TOP SASH TOP RAIL
E.	(2) RECESSED TILT LATCHES AT BOTTOM SASH LOCK RAIL
F.	(4) STAINLESS STEEL STAMPED PIVOT BARS, 2 PER JAMB
G.	(2) VENT STOP AT TOP SASH STILES
H.	(2) RECESSED TILT SASH THUMB BUTTON AT BOTTOM SASH LOCK RAIL
I.	ALUMINUM REINFORCEMENT 6005-T5 (10300266) AT LOCK RAIL
J.	ALUMINUM REINFORCEMENT 6005-T5 (10300159) AT TOP LIFT RAIL AND KEEPER/ BOTTOM LIFT RAIL
K.	ALUMINUM REINFORCEMENT 6005-T5 (10300166) AT STILES

- NOTES:
- TOP SASH SIZE: 47 9/16" X 27 1/2"
 - BOTTOM SASH SIZE: 48 9/16" X 36 7/8"
 - TOP D.L.O.: 44 5/8" X 32 7/8"
 - BOTTOM D.L.O.: 45 5/8" X 33 7/8"

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

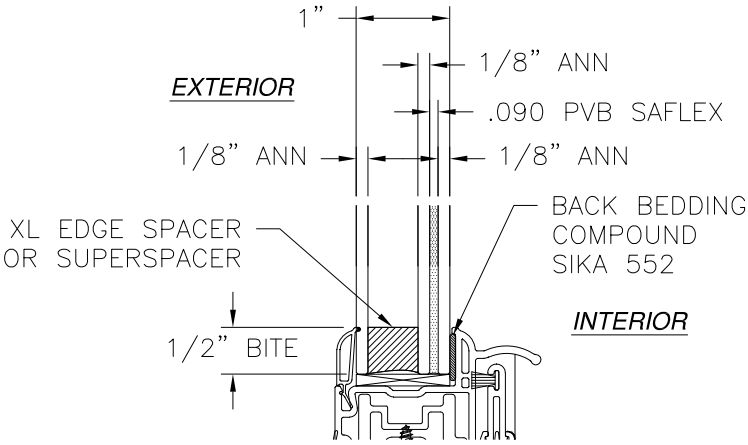

GLAZING DETAIL A

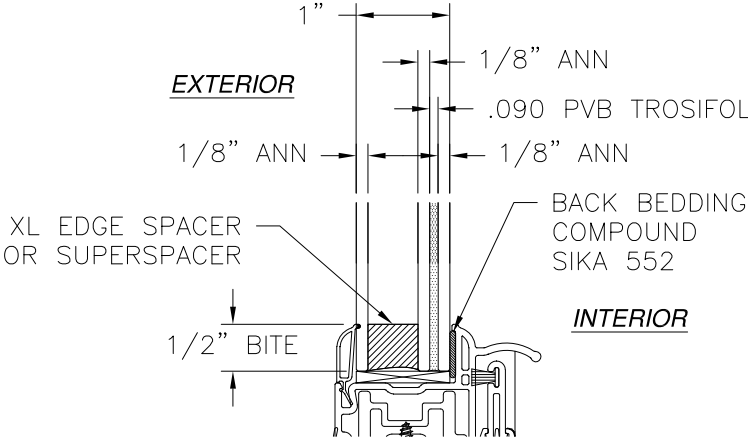

GLAZING DETAIL B

SIGNED: 02/05/2024


SLOCOMB WINDOWS AND DOORS, INC.

767 SANS SOUCI PARKWAY
WILKES-BARRE, PA 18706

650 DH DOUBLE HUNG WINDOW
IMPACT
ELEVATIONS AND GLAZING DETAILS

DRAWN: A.R.	DWG NO. 08-03994	REV -
SCALE NTS	DATE 01/17/2024	SHEET 2 OF 12

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

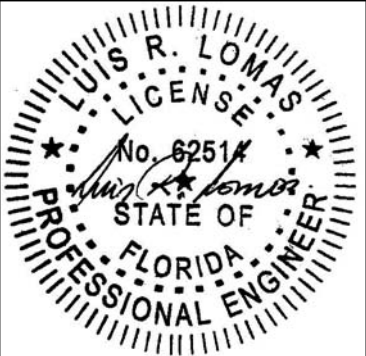

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

Chart #1
Rating for units with sill extension 10005131 (psf)

Frame Height (in)	Frame width (in)													
	24.00		30.00		36.00		42.00		48.00		52.13		60.00	
	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg
24.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0
30.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0
36.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0
42.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	59.3
48.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	52.7
54.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	47.7	47.7
60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	43.8	43.8
66.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	-	-
72.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	-	-
75.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	-	-
78.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	-	-	-	-
84.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	-	-	-	-	-	-
90.0	50.0	60.0	50.0	60.0	50.0	60.0	50.0	60.0	-	-	-	-	-	-
96.0	50.0	60.0	50.0	60.0	50.0	60.0	-	-	-	-	-	-	-	-
102.0	50.0	60.0	50.0	60.0	50.0	60.0	-	-	-	-	-	-	-	-
108.0	50.0	60.0	50.0	60.0	50.0	60.0	-	-	-	-	-	-	-	-
114.0	50.0	60.0	50.0	60.0	-	-	-	-	-	-	-	-	-	-
120.0	50.0	60.0	50.0	60.0	-	-	-	-	-	-	-	-	-	-

Large Missile Impact, Level D, Wind Zone 4

Chart #2
Rating for units with sill extension 10005139 (psf)

Frame Height (in)	Frame width (in)													
	24.00		30.00		36.00		42.00		48.00		52.13		60.00	
	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg
24.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0
30.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0
36.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0
42.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	59.3	59.3
48.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	52.7	52.7
54.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	47.7	47.7
60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	43.8	43.8
66.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	-	-
72.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	-	-
75.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	-	-
78.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	-	-	-	-
84.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	-	-	-	-	-	-
90.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	-	-	-	-	-	-
96.0	60.0	60.0	60.0	60.0	60.0	60.0	-	-	-	-	-	-	-	-
102.0	60.0	60.0	60.0	60.0	60.0	60.0	-	-	-	-	-	-	-	-
108.0	60.0	60.0	60.0	60.0	60.0	60.0	-	-	-	-	-	-	-	-
114.0	60.0	60.0	60.0	60.0	-	-	-	-	-	-	-	-	-	-
120.0	60.0	60.0	60.0	60.0	-	-	-	-	-	-	-	-	-	-

Large Missile Impact, Level D, Wind Zone 4

SIGNED: 02/05/2024

SLOCOMB WINDOWS AND DOORS, INC.
767 SANS SOUCI PARKWAY
WILKES-BARRE, PA 18706

650 DH DOUBLE HUNG WINDOW
IMPACT
DESIGN PRESSURE CHARTS

DRAWN:
A.R.

DWG NO.
08-03994


REV
-

SCALE
NTS


DATE
01/17/2024

SHEET
3 OF 12


L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

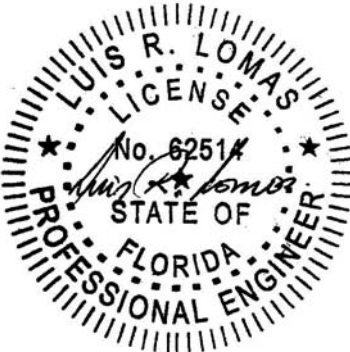

Luis R. Lomas P.E.
FL No.: 62514

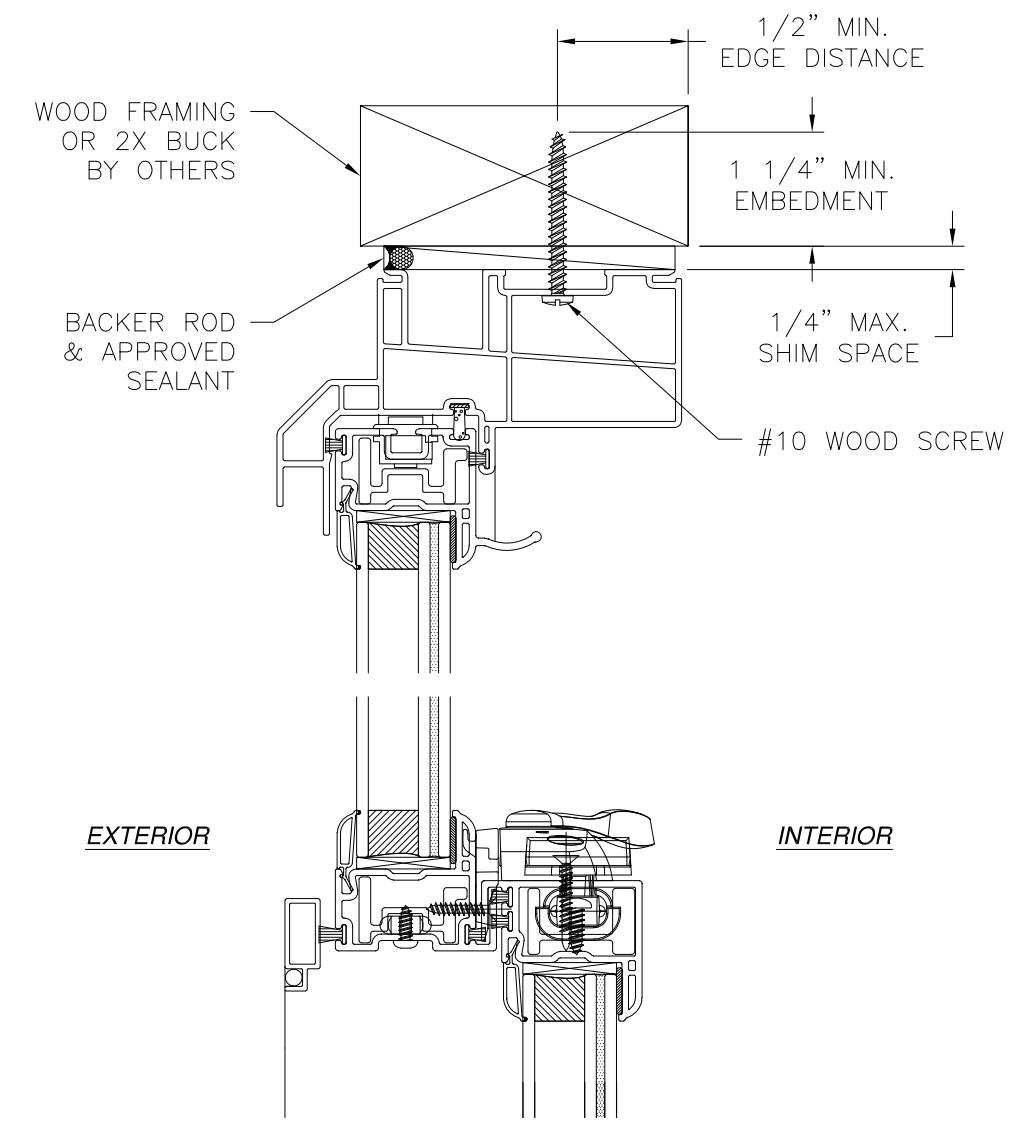

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

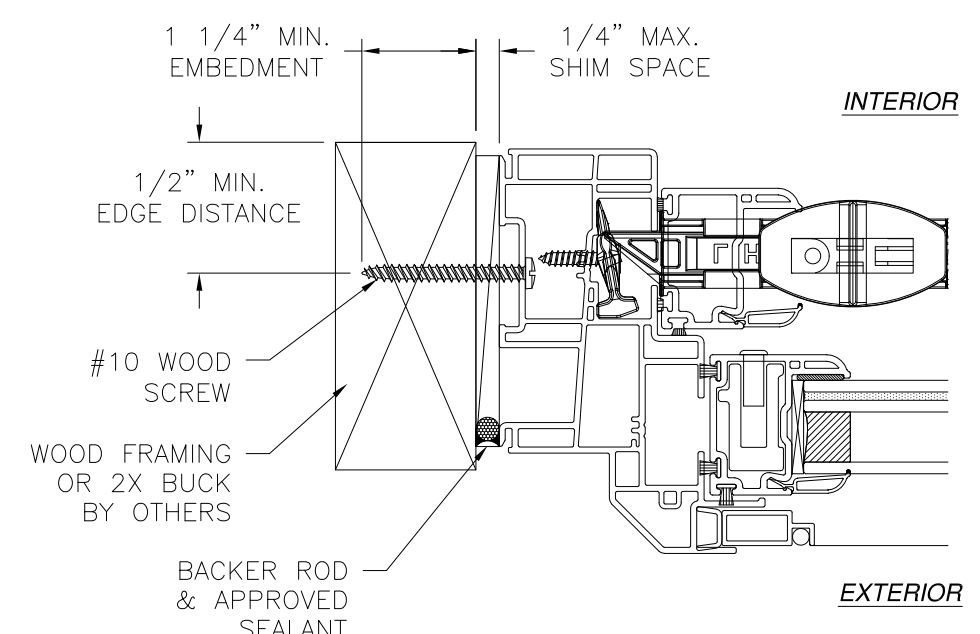

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

- NOTES:**
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED


SLOCOMB WINDOWS AND DOORS, INC.
767 SANS SOUCI PARKWAY
WILKES-BARRE, PA 18706

650 DH DOUBLE HUNG WINDOW
IMPACT
FINLESS INSTALLATION DETAILS

DRAWN: A.R.	DWG NO. 08-03994	REV -
SCALE NTS	DATE 01/17/2024	SHEET 4 OF 12



L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 02/05/2024

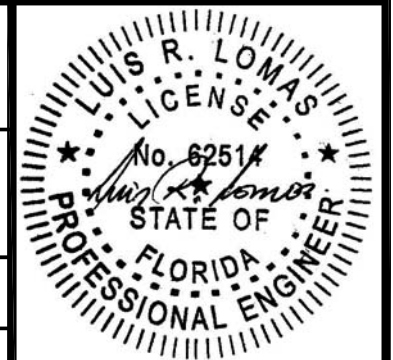


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

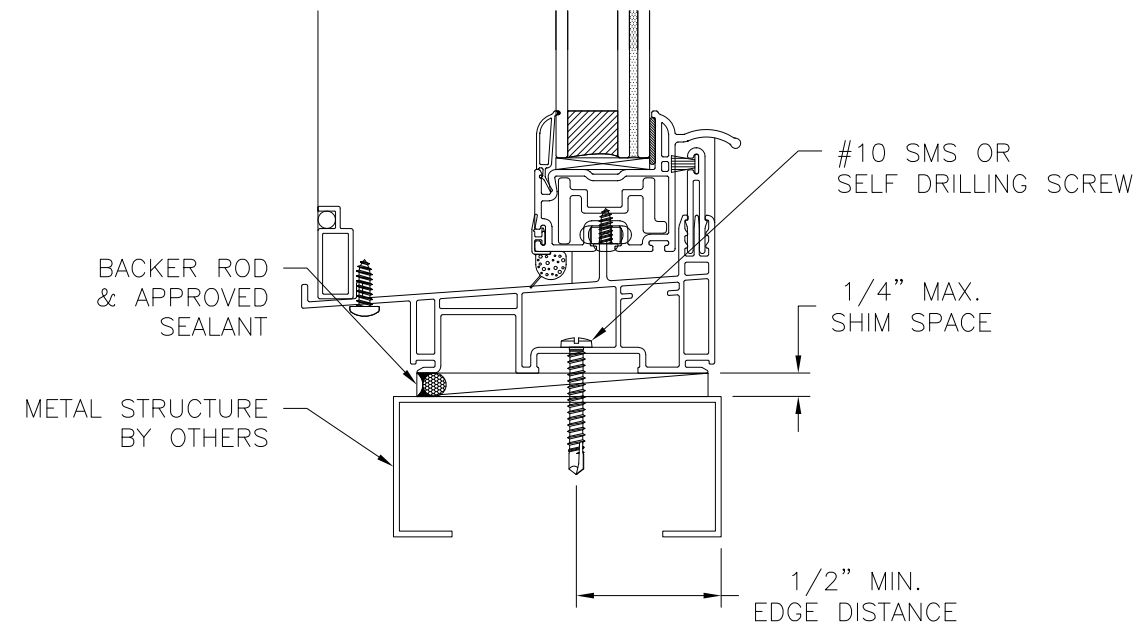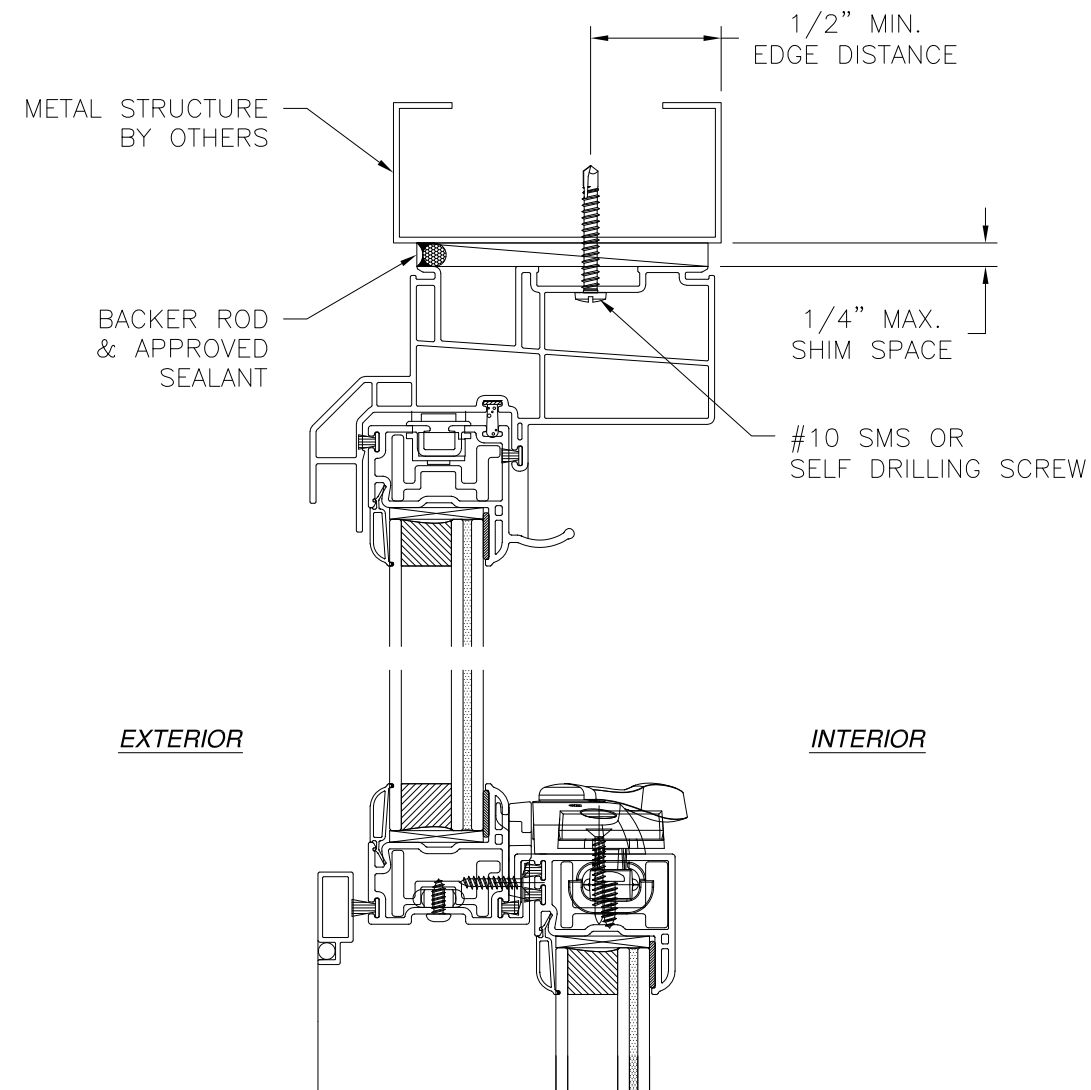

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

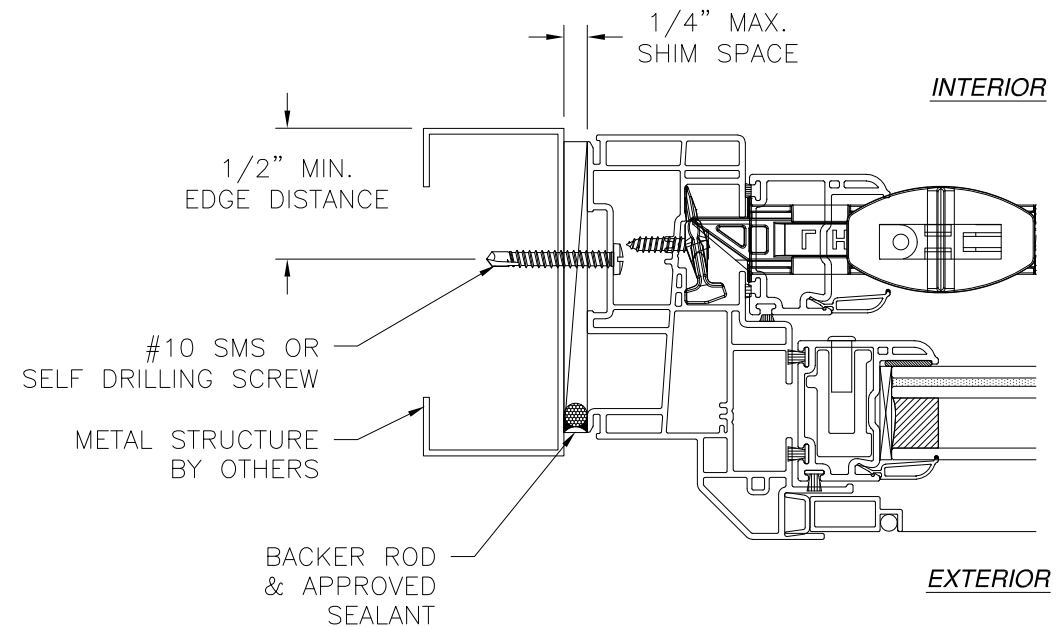


JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION



- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 02/05/2024

SLOCOMB WINDOWS AND DOORS, INC.		
767 SANS SOUCI PARKWAY WILKES-BARRE, PA 18706		
650 DH DOUBLE HUNG WINDOW IMPACT FINLESS INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03994	REV -
SCALE NTS	DATE 01/17/2024	SHEET 5 OF 12
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

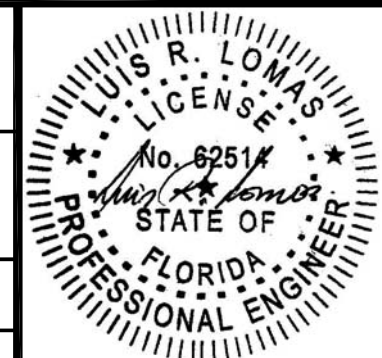


Luis R. Lomas P.E.
FL No.: 62514

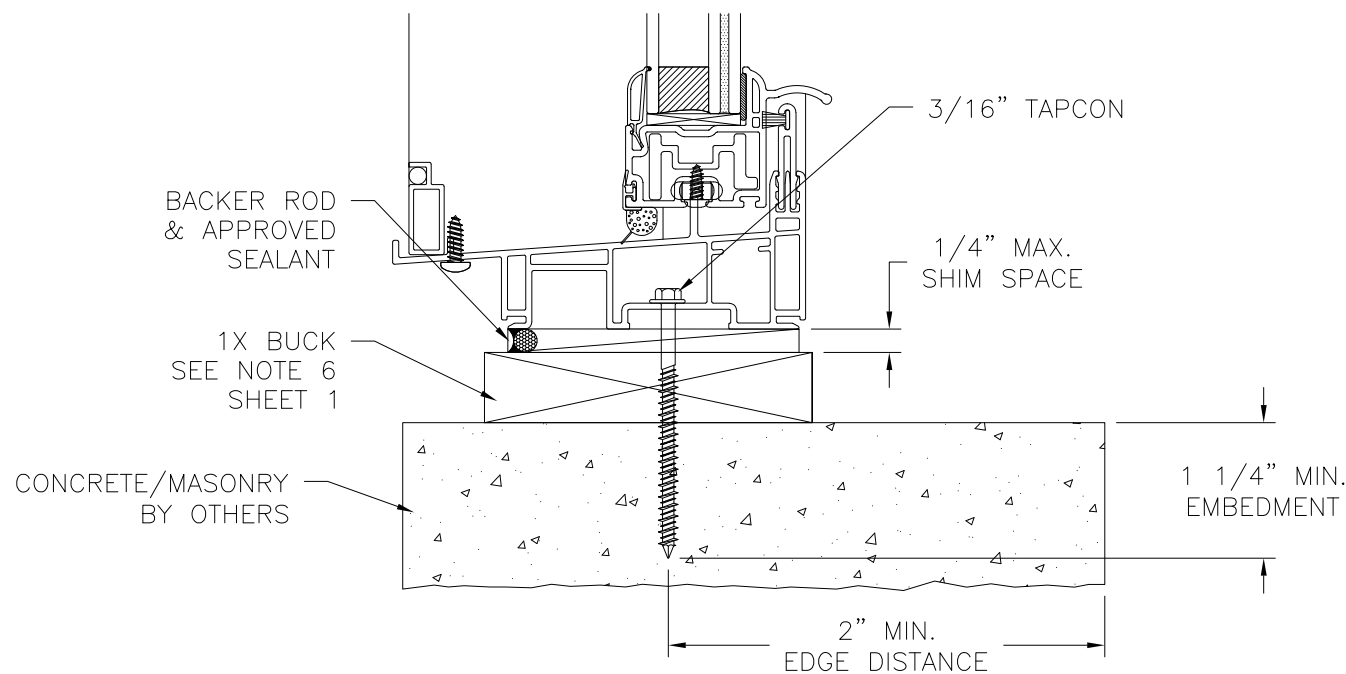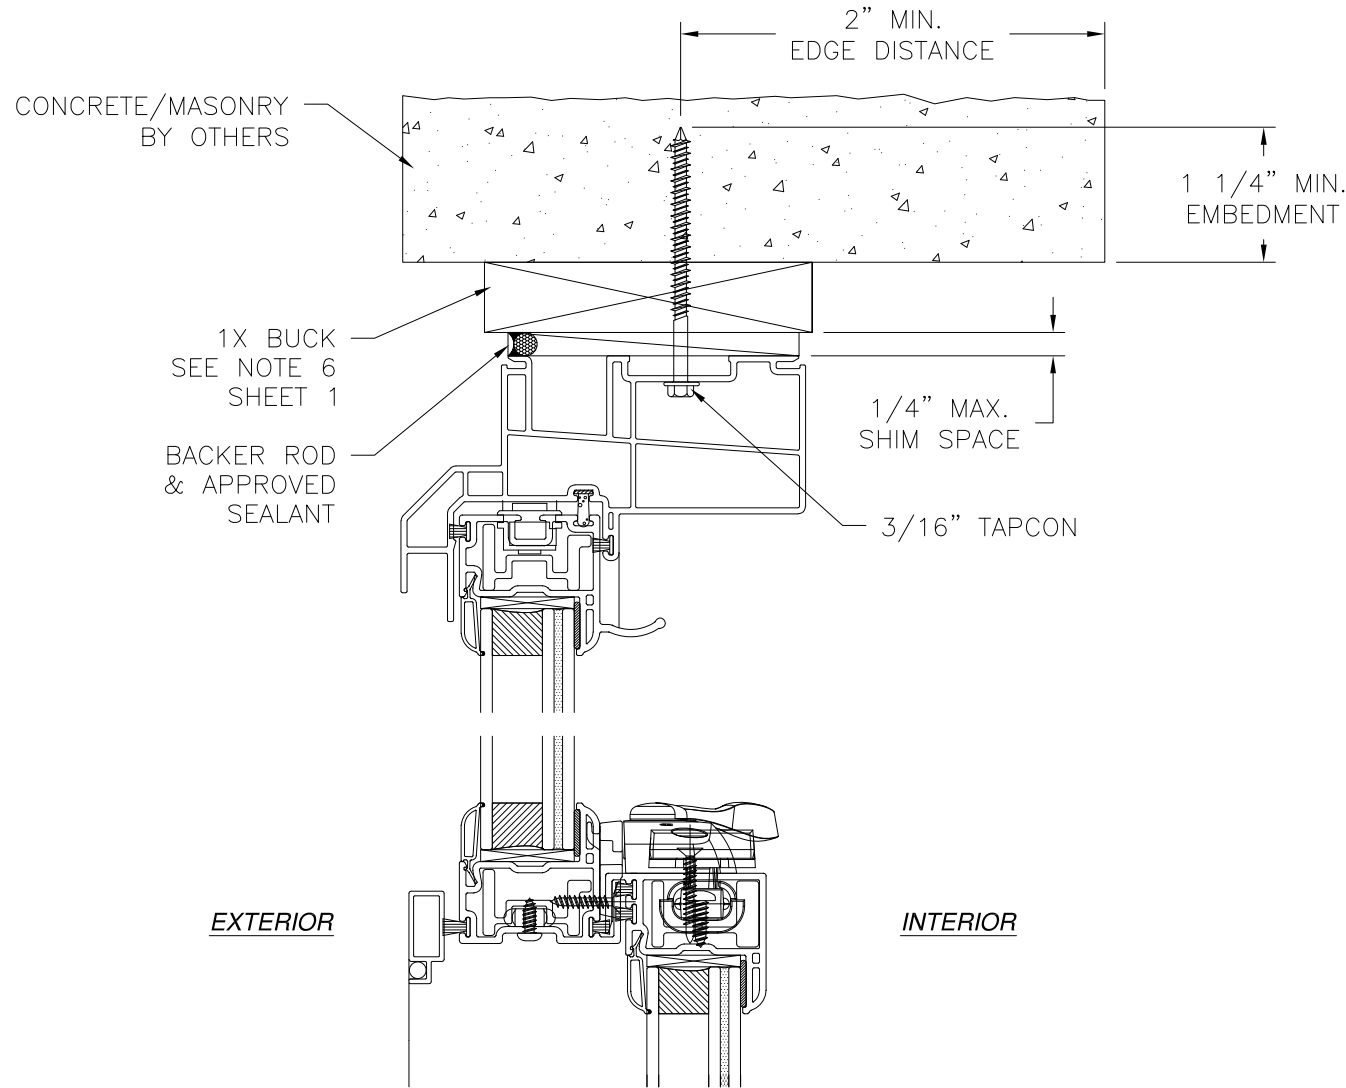

VERTICAL CROSS SECTION
 CONCRETE/MASONRY WITH 1X BUCK INSTALLATION
 FOR CONCRETE/MASONRY WITHOUT 1X BUCK REFER TO
 JAMB INSTALLATION DETAIL

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

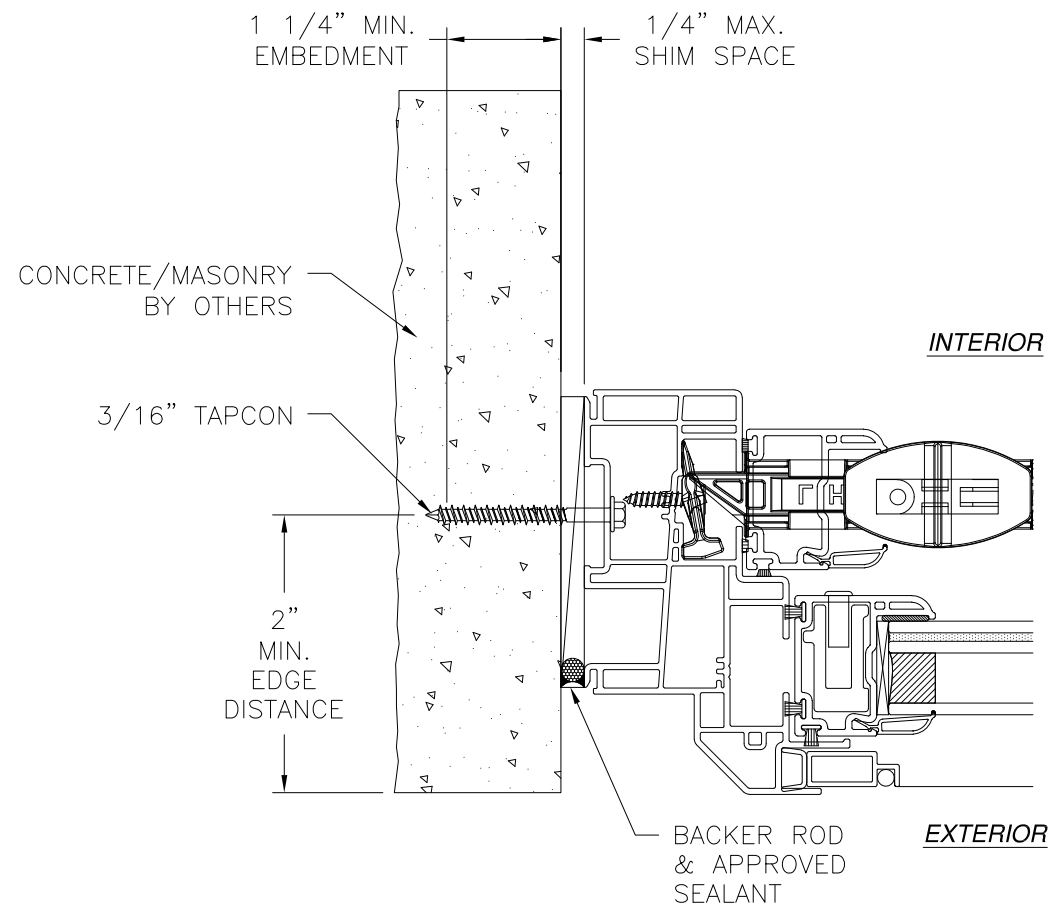

JAMB INSTALLATION DETAIL
 CONCRETE/MASONRY WITHOUT 1X BUCK INSTALLATION
 FOR CONCRETE/MASONRY WITH 1X BUCK REFER TO
 HEAD AND SILL INSTALLATION DETAILS

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 02/05/2024


SLOCOMB WINDOWS AND DOORS, INC.

767 SANS SOUCI PARKWAY
 WILKES-BARRE, PA 18706

650 DH DOUBLE HUNG WINDOW
 IMPACT
 FINLESS INSTALLATION DETAILS




DRAWN: A.R.	DWG NO. 08-03994	REV -
SCALE NTS	DATE 01/17/2024	SHEET 6 OF 12

L. ROBERTO LOMAS P.E.
 208 7th Ave, INDIALANTIC, FL 32903
 434-688-0609 rllomas@lrlomaspe.com

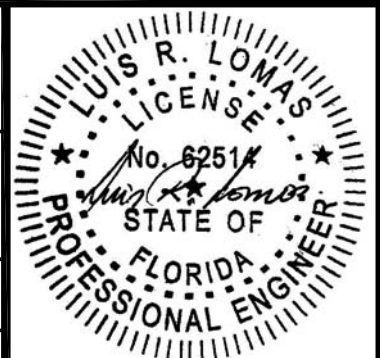

Luis R. Lomas P.E.
 FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

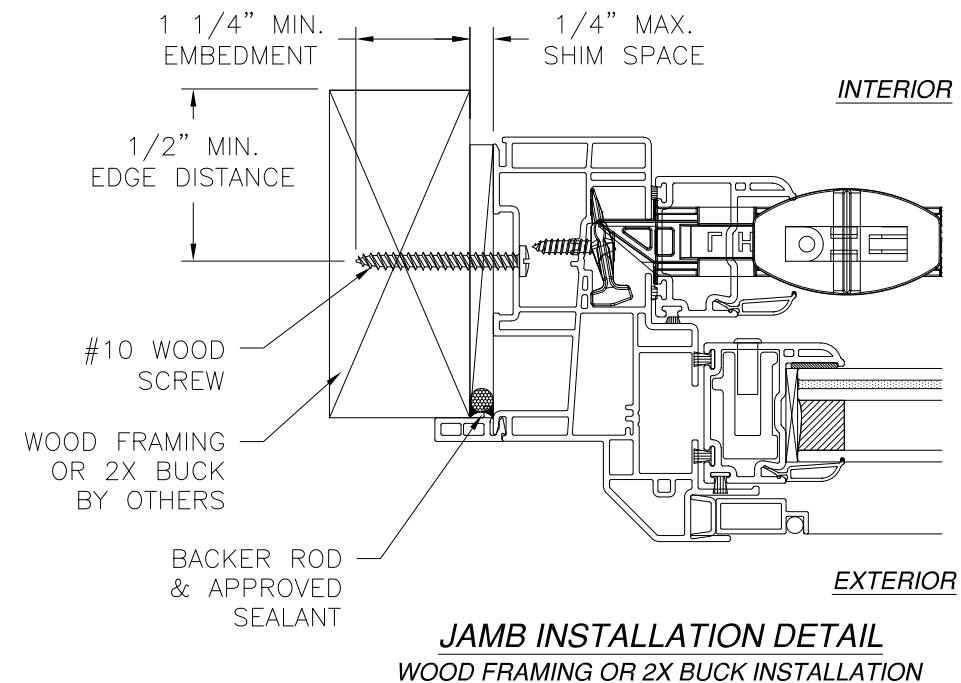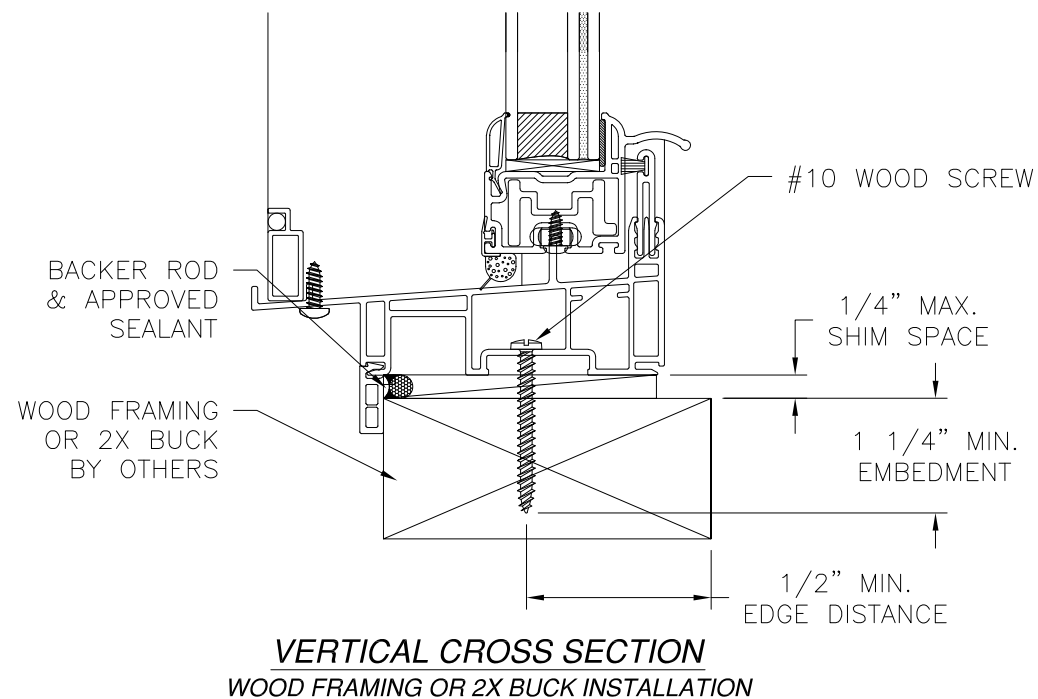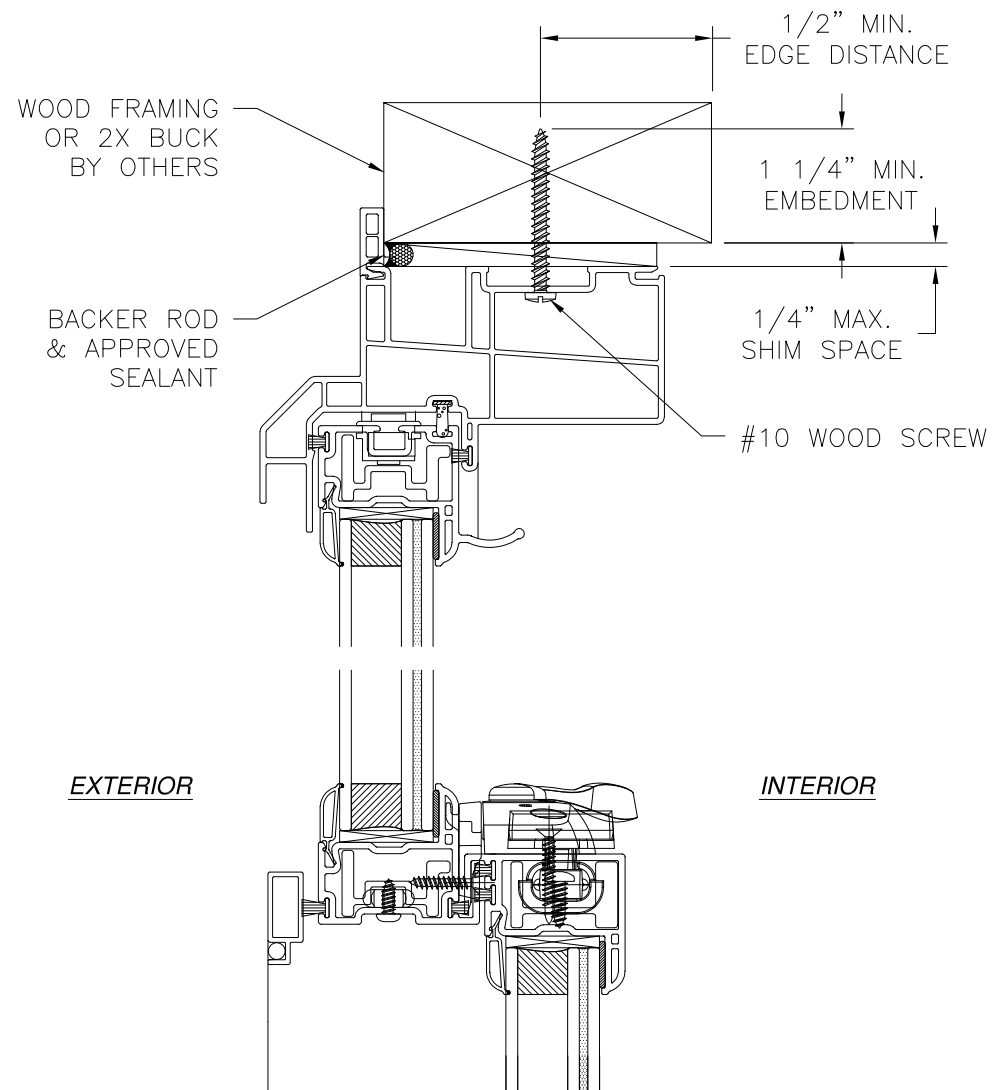

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112




SIGNED: 02/05/2024

SLOCOMB WINDOWS AND DOORS, INC.		
767 SANS SOUCI PARKWAY WILKES-BARRE, PA 18706		
650 DH DOUBLE HUNG WINDOW IMPACT FLANGE INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03994	REV -
SCALE NTS	DATE 01/17/2024	SHEET 7 OF 12
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

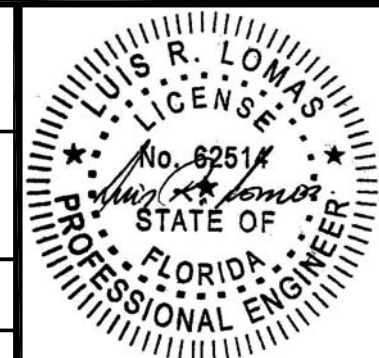

Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

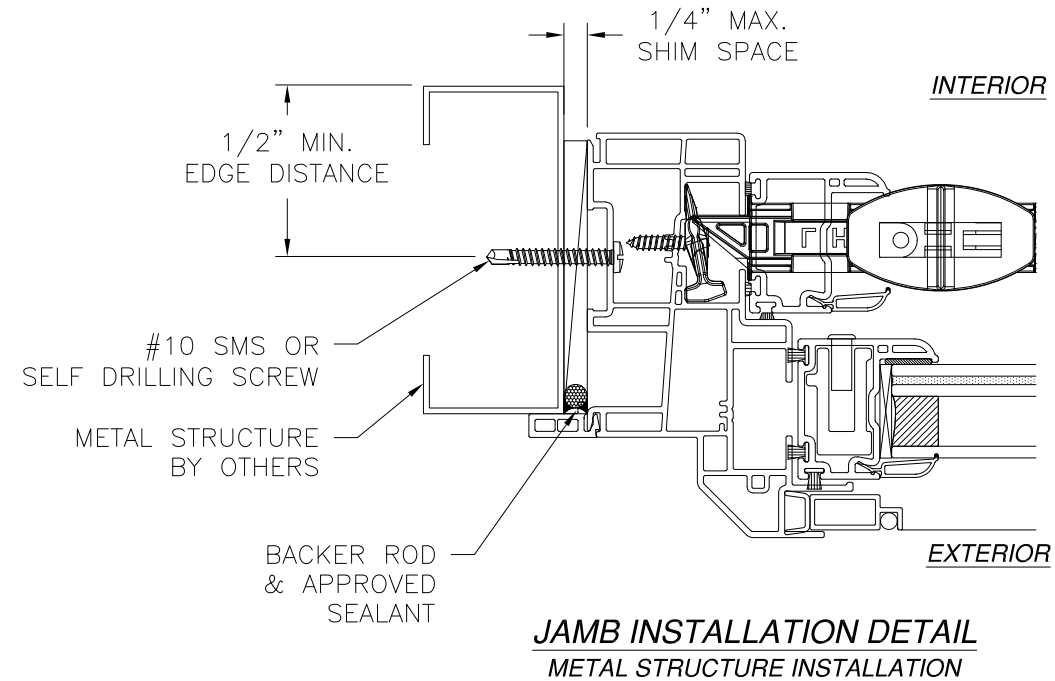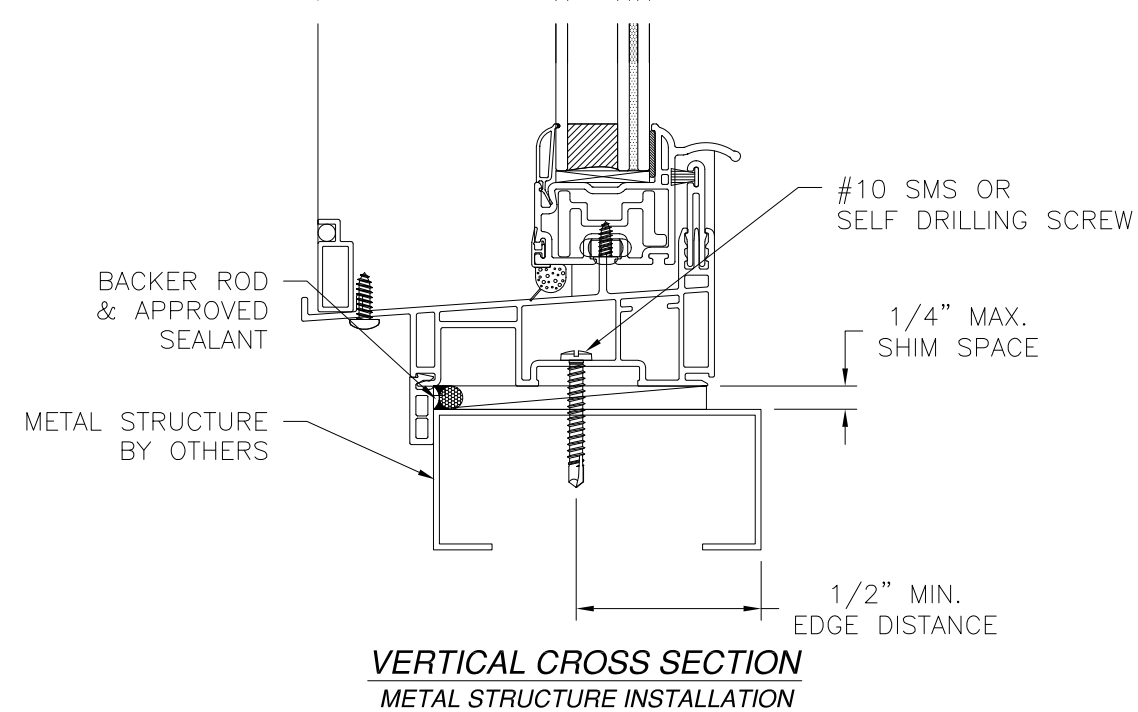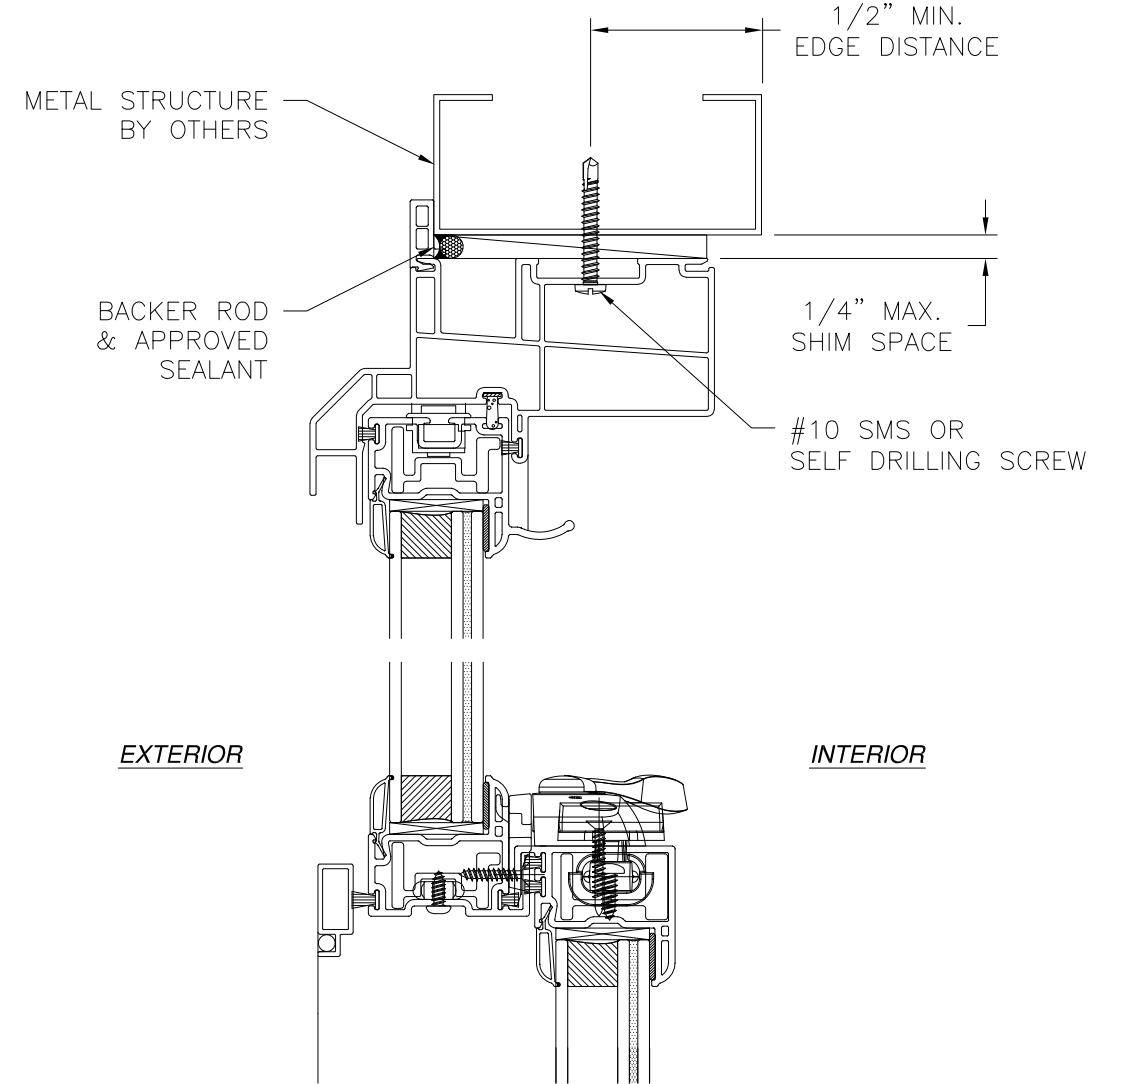


- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


SIGNED: 02/05/2024

SLOCOMB WINDOWS AND DOORS, INC.		
767 SANS SOUCI PARKWAY WILKES-BARRE, PA 18706		
650 DH DOUBLE HUNG WINDOW IMPACT FLANGE INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03994	REV -
SCALE NTS	DATE 01/17/2024	SHEET 8 OF 12
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

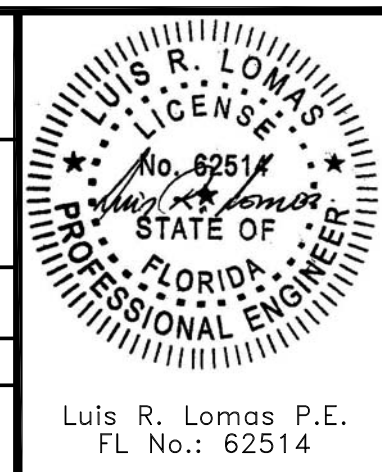

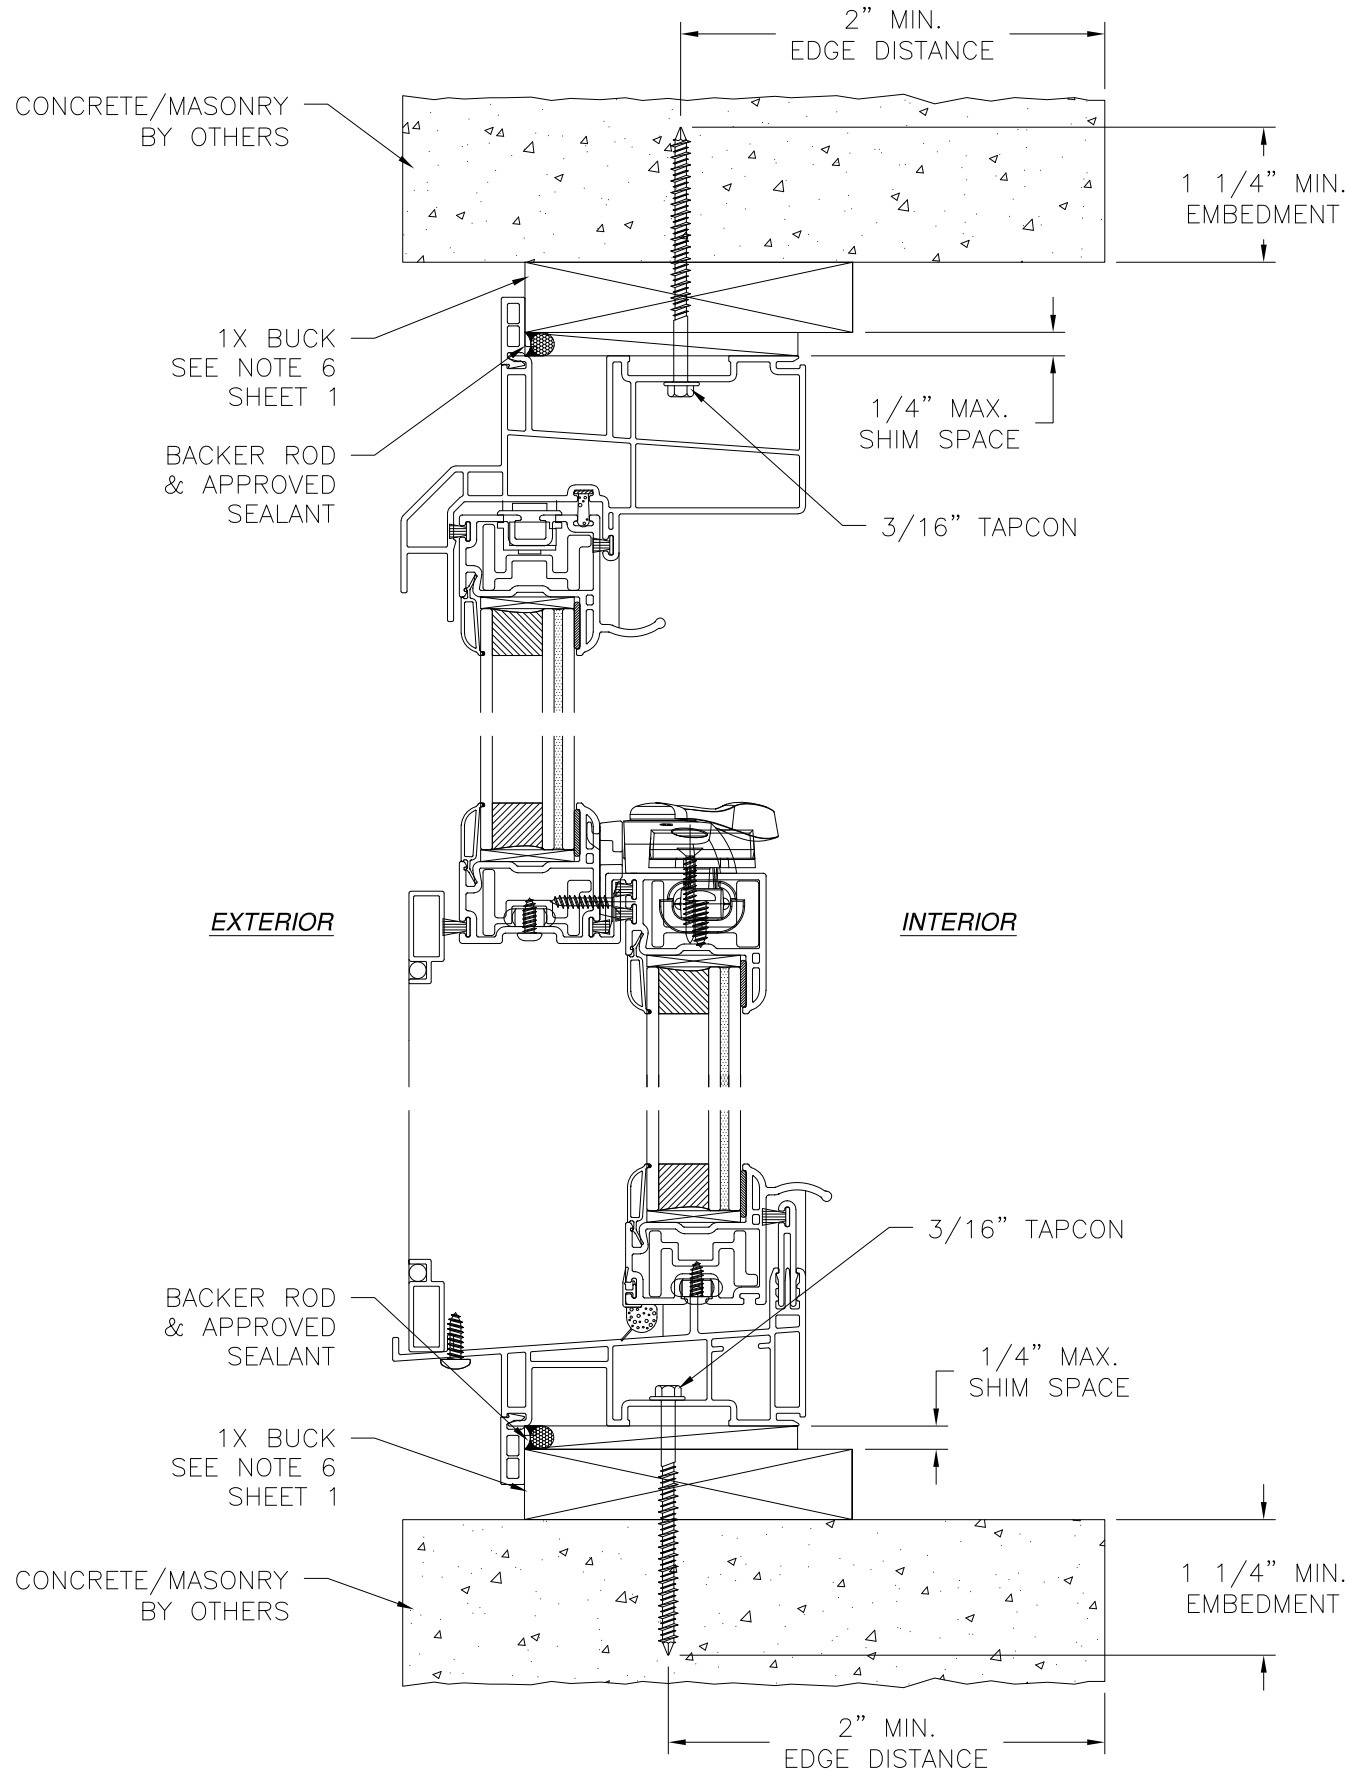

VERTICAL CROSS SECTION
 CONCRETE/MASONRY WITH 1X BUCK INSTALLATION
 FOR CONCRETE/MASONRY WITHOUT 1X BUCK REFER TO
 JAMB INSTALLATION DETAIL

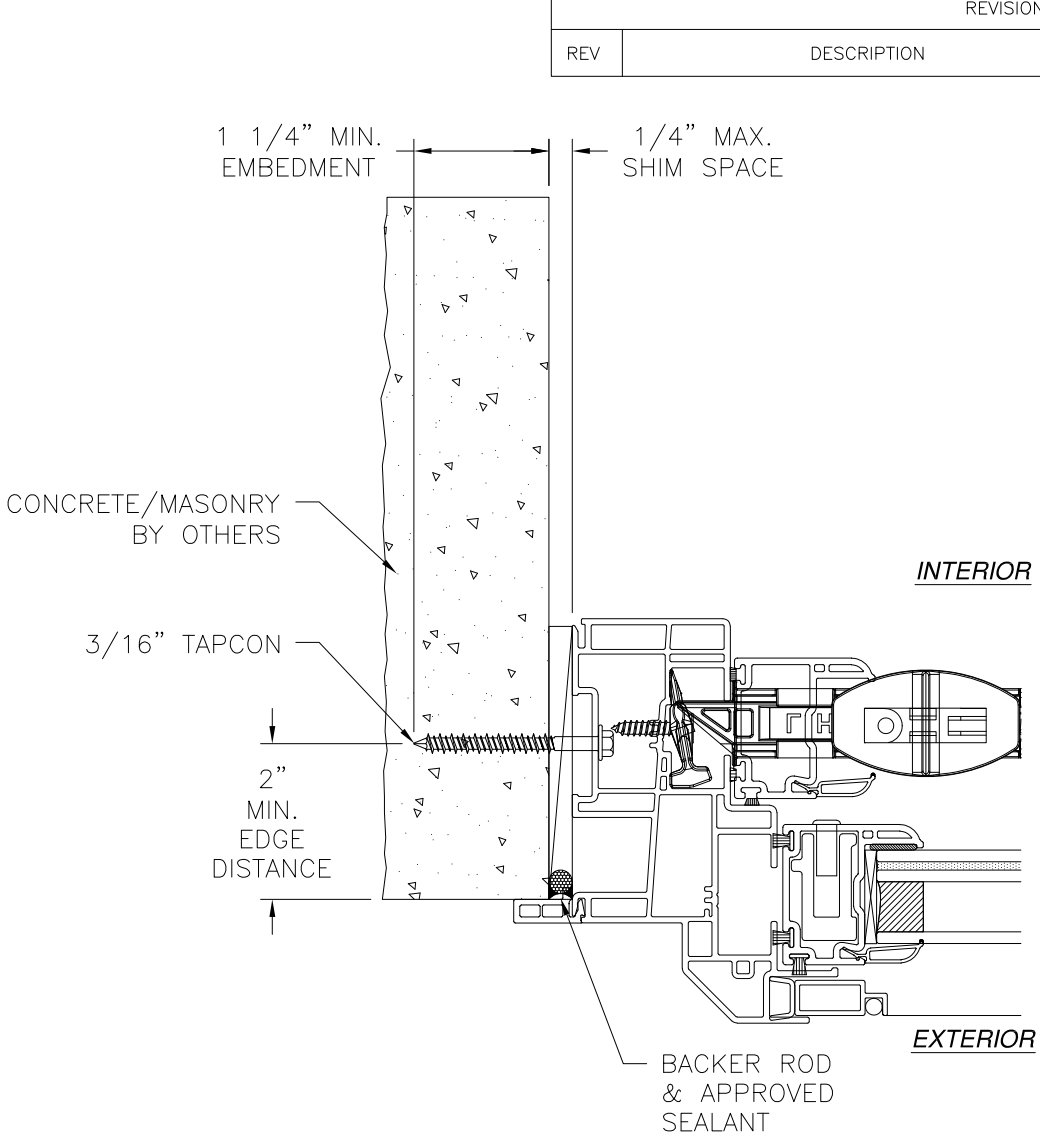


JAMB INSTALLATION DETAIL
 CONCRETE/MASONRY WITHOUT 1X BUCK INSTALLATION
 FOR CONCRETE/MASONRY INSTALLATION WITH 1X BUCK REFER TO
 HEAD AND SILL INSTALLATION DETAILS

- NOTES:**
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SLOCOMB WINDOWS AND DOORS, INC. 767 SANS SOUCI PARKWAY WILKES-BARRE, PA 18706		
650 DH DOUBLE HUNG WINDOW IMPACT FLANGE INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03994	REV -
SCALE NTS	DATE 01/17/2024	SHEET 9 OF 12
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

SIGNED: 02/05/2024

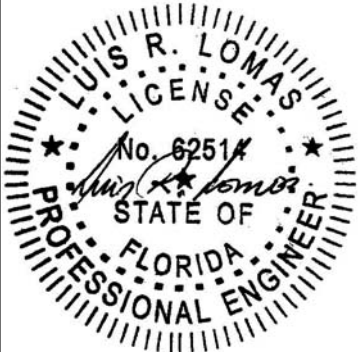

Luis R. Lomas P.E.
 FL No.: 62514

APPROVED SEALANT BEHIND FIN

#8 WOOD SCREW

7/16" MIN EDGE DISTANCE

1 1/4" MIN. EMBEDMENT

WOOD FRAMING BY OTHERS

1/4" MAX. SHIM SPACE

EXTERIOR

INTERIOR

7/16" MIN EDGE DISTANCE

#8 WOOD SCREW

APPROVED SEALANT BEHIND FIN

1 1/4" MIN. EMBEDMENT

WOOD FRAMING BY OTHERS

1/4" MAX SHIM SPACE

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

WOOD FRAMING BY OTHERS

#8 WOOD SCREW

1 1/4" MIN. EMBEDMENT

APPROVED SEALANT BEHIND FIN

7/16" MIN EDGE DISTANCE

1/4" MAX SHIM SPACE

INTERIOR

EXTERIOR

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 02/05/2024

SLOCOMB WINDOWS AND DOORS, INC.

767 SANS SOUCI PARKWAY
WILKES-BARRE, PA 18706

650 DH DOUBLE HUNG WINDOW
IMPACT
FIN INSTALLATION DETAILS

DRAWN:
A.R.

DWG NO.

08-03994

REV
-


SCALE NTS

DATE

01/17/2024



SHEET 10 OF 12

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

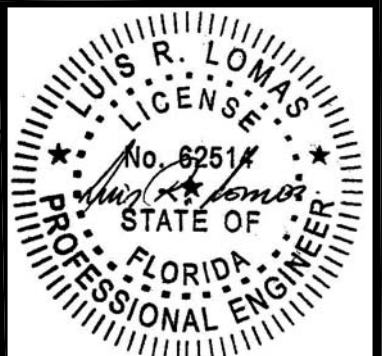


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

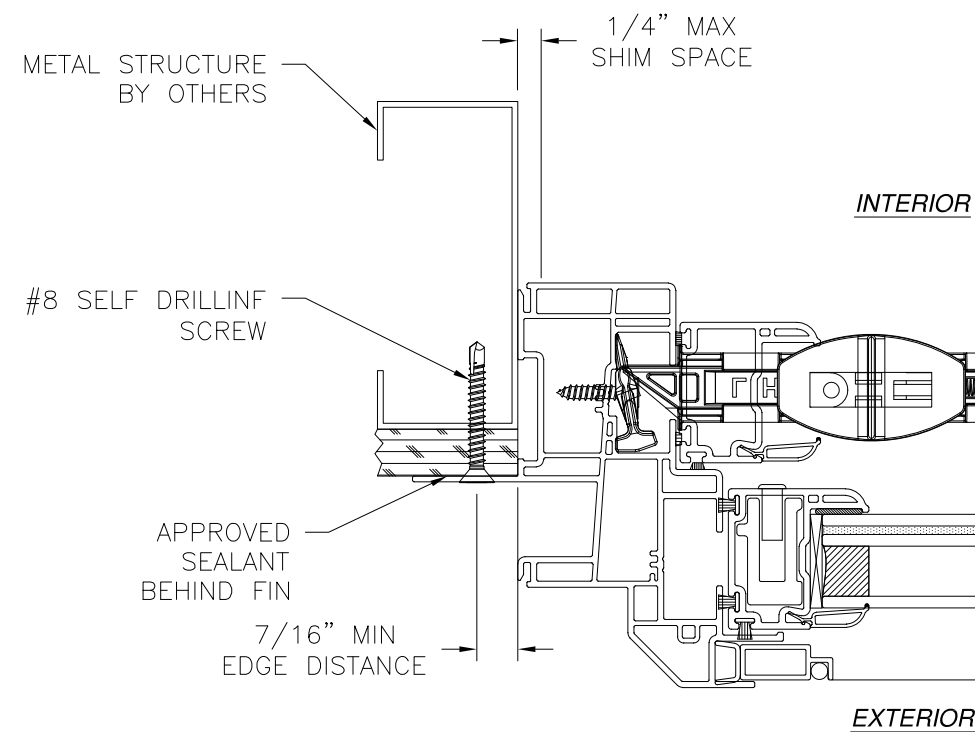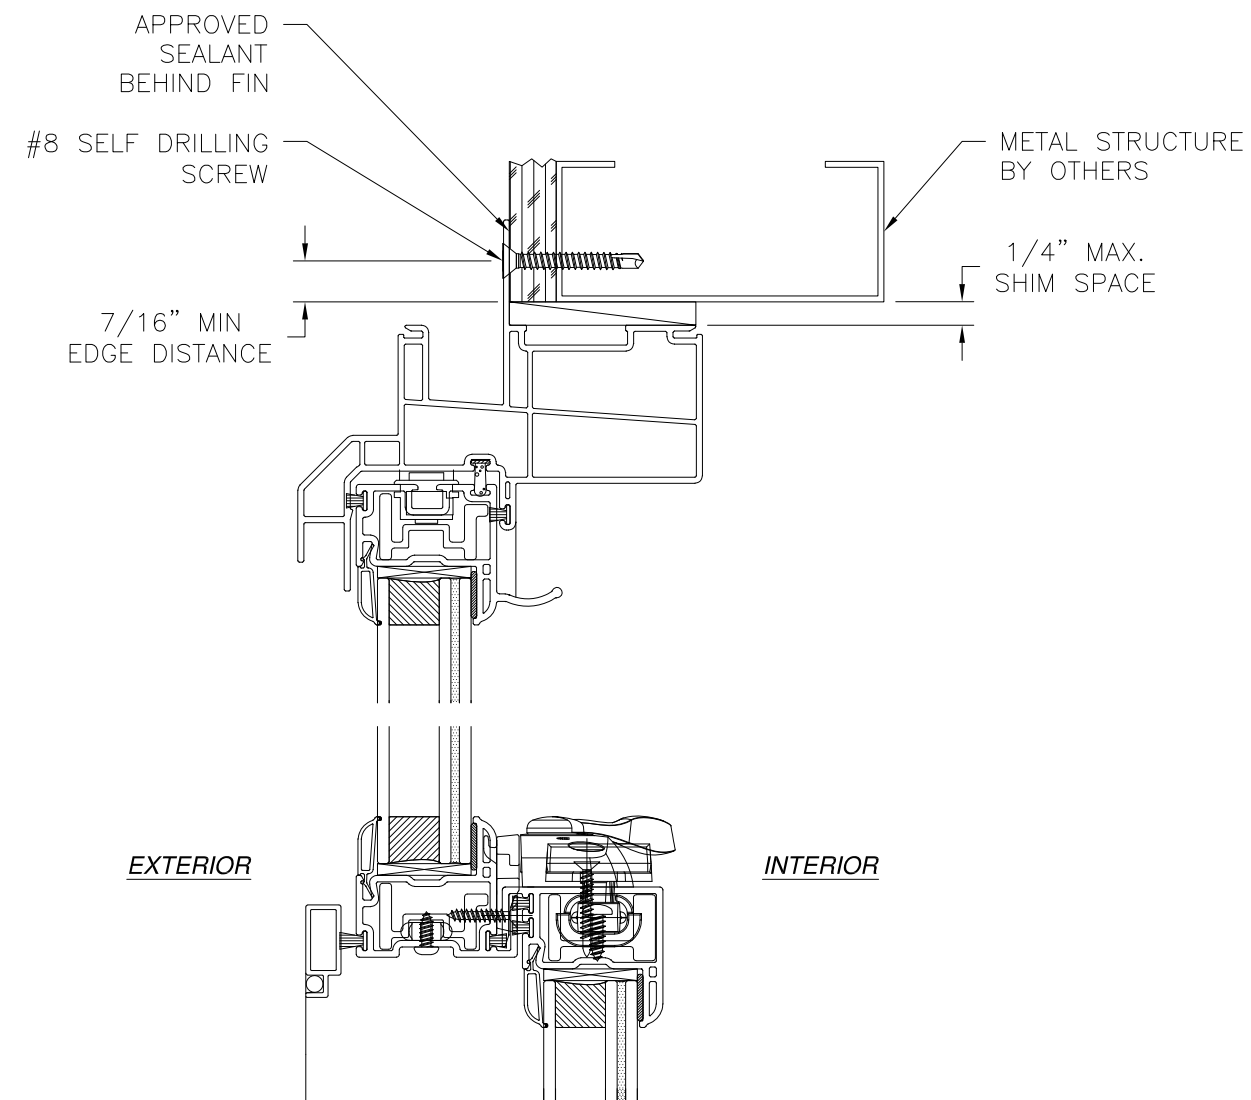

JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

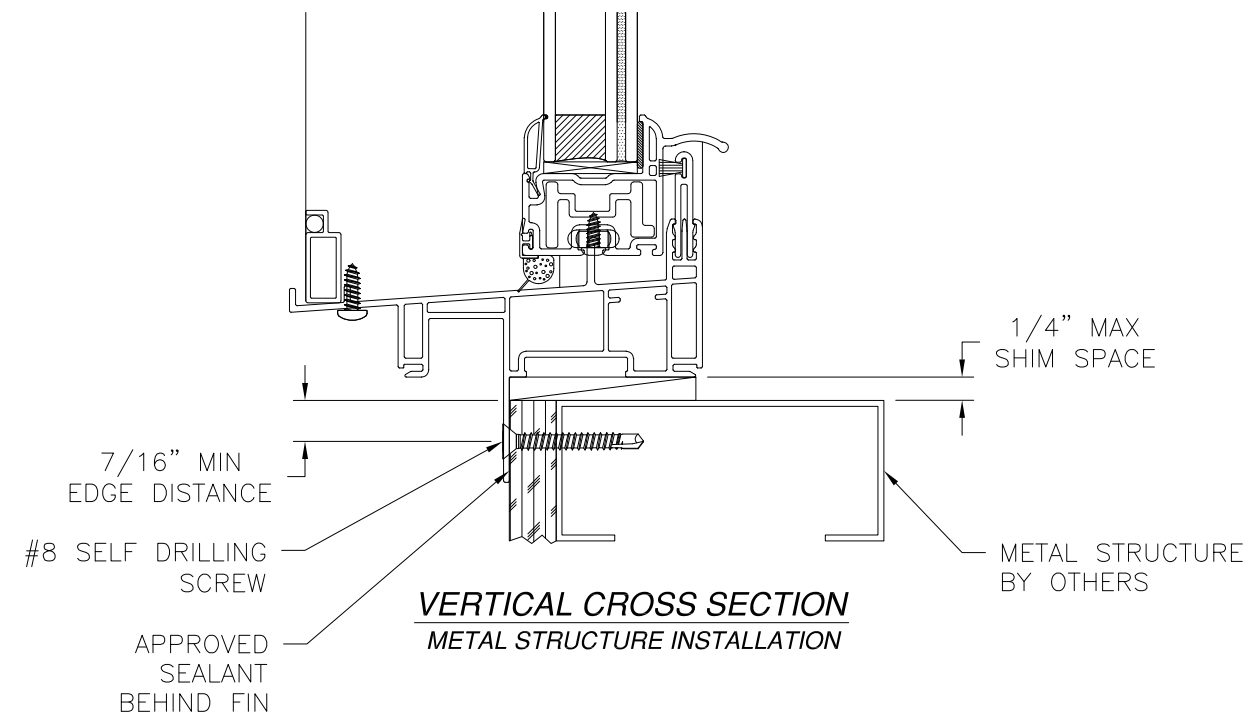

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

SLOCOMB WINDOWS AND DOORS, INC.


767 SANS SOUCI PARKWAY
WILKES-BARRE, PA 18706

650 DH DOUBLE HUNG WINDOW
IMPACT
FIN INSTALLATION DETAILS

DRAWN: A.R.	DWG NO. 08-03994	REV -
SCALE NTS	DATE 01/17/2024	SHEET 11 OF 12


L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 02/05/2024

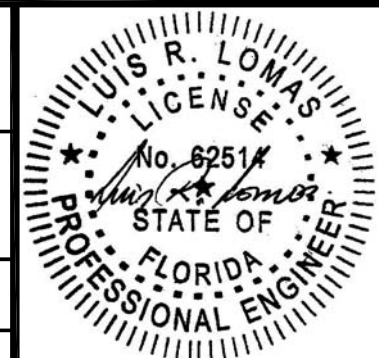


Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

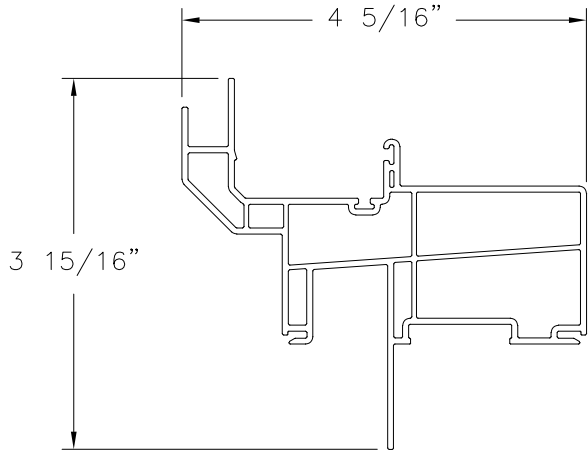


HEAD FRAME
FIN INSTALLATION (10005150)
EXTRUDED PVC

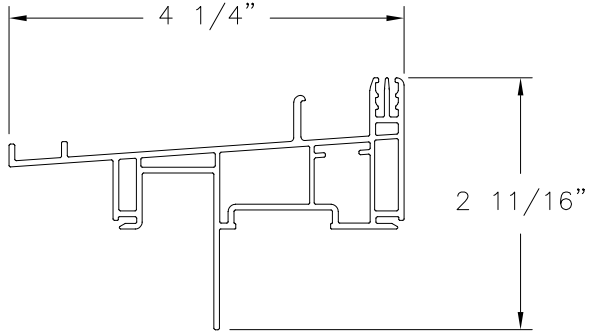


SILL FRAME
FIN INSTALLATION (10005193)
EXTRUDED PVC

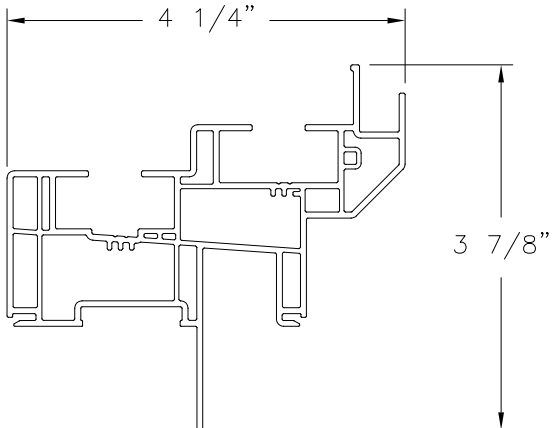


JAMB FRAME
FIN INSTALLATION (10005152)
EXTRUDED PVC

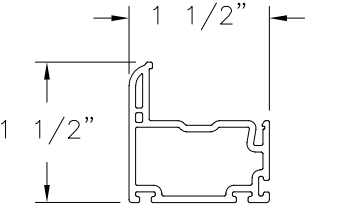


MAIN SASH (10005540)
EXTRUDED PVC

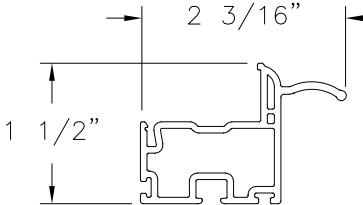


PULL/ LIFT SASH (10005541)
EXTRUDED PVC

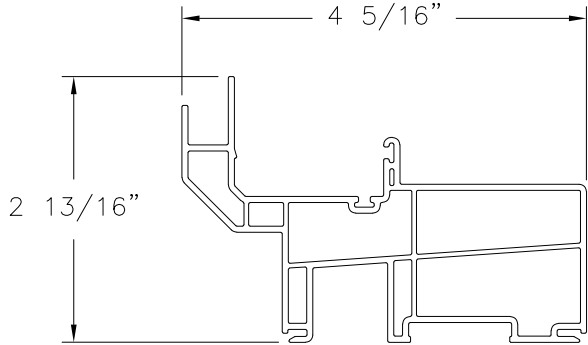


HEAD FRAME
FINLESS INSTALLATION (10005150)
EXTRUDED PVC

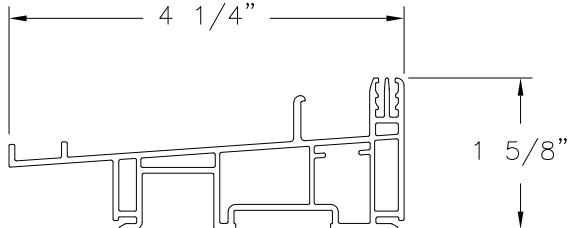


SILL FRAME
FINLESS INSTALLATION (10005193)
EXTRUDED PVC

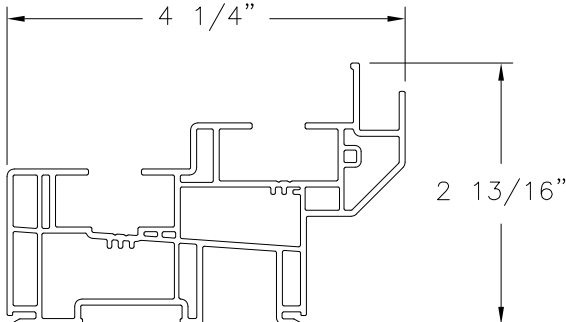


JAMB FRAME
FINLESS INSTALLATION (10005152)
EXTRUDED PVC

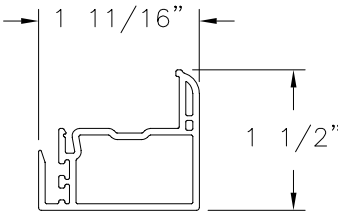


LOCK RAIL (10005542)
EXTRUDED PVC

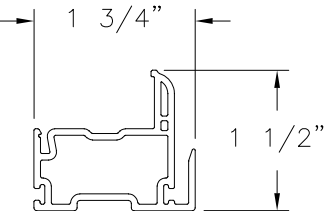


KEEPER RAIL (10005543)
EXTRUDED PVC

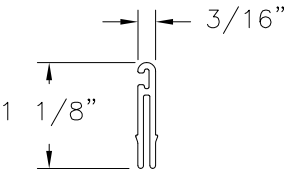


SILL EXTENSION
STANDARD (10005131)
EXTRUDED PVC

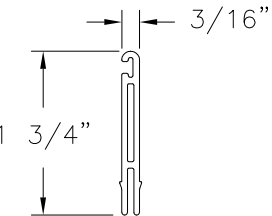


SILL EXTENSION
(10005139)
EXTRUDED PVC

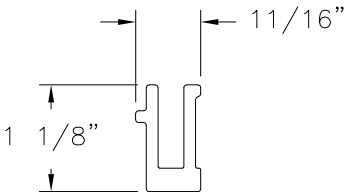


STILE
REINFORCEMENT (10300166)
6005-T5 ALUMINUM

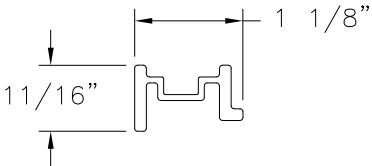


KEEPER RAIL
REINFORCEMENT (10300159)
6005-T5 ALUMINUM

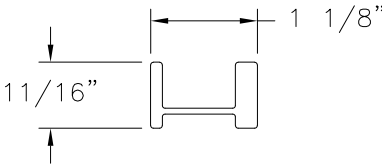

LOCK RAIL
REINFORCEMENT (10300266)
6005-T5 ALUMINUM

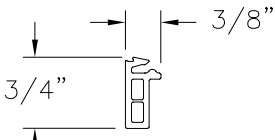

FLANGE (10004714)
EXTRUDED PVC

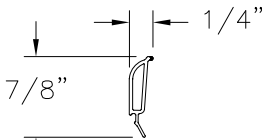

GLAZING BEAD (10005464)
EXTRUDED PVC

SLOCOMB WINDOWS AND DOORS, INC.
767 SANS SOUCI PARKWAY
WILKES-BARRE, PA 18706

650 DH DOUBLE HUNG WINDOW
IMPACT
COMPONENTS

DRAWN: A.R.	DWG NO. 08-03994	REV -
SCALE NTS	DATE 01/17/2024	SHEET 12 OF 12

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 02/05/2024



Luis R. Lomas P.E.
FL No.: 62514