

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
2. WOOD FRAMING, METAL STRUCTURE AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1–1/2” UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER’S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
4. WHERE WOOD BUCK THICKNESS IS 1–1/2” OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER’S PUBLISHED INSTALLATION INSTRUCTIONS.
5. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
6. BUCKS SHALL EXTEND BEYOND UNIT FRAME INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
7. SHIM AS NEEDED AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16” OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4”.
8. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
9. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
10. FRAME MATERIAL: EXTRUDED RIGID PVC.
11. UNITS MUST BE GLAZED PER ASTM E1300.
12. APPROVED IMPACT PROTECTIVE SYSTEM IS REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.

13. FOR ANCHORING THROUGH FIN INTO WOOD FRAMING OR 2X BUCK USE #8 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 3/4” MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
14. FOR ANCHORING THROUGH FIN INTO METAL STRUCTURE USE #8 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
15. FOR ANCHORING THROUGH FRAME INTO WOOD FRAMING OR 2X BUCK USE #10 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4” MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
16. FOR ANCHORING THROUGH FRAME INTO MASONRY/CONCRETE USE 3/16” TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4” MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2” MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
17. FOR ANCHORING THROUGH FRAME INTO METAL STRUCTURE USE #10 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
18. ALL FASTENERS TO BE CORROSION RESISTANT.
19. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER’S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:

19.1. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42

19.2. CONCRETE: MINIMUM COMPRESSIVE STRENGTH OF 2,000 PSI.

19.3. MASONRY: HOLLOW/FILLED BLOCK PER ASTM C90 WITH Fm=2,000PSI MINIMUM.

19.4. METAL STRUCTURE: STEEL 18GA (.048”) FY=33KSI/FU=52KSI OR ALUMINUM 6063–T5 FU=30KSI 1/8” THICK MINIMUM

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2 – 3	ELEVATIONS
4	DESIGN PRESSURE CHARTS
5 – 12	INSTALLATION DETAILS
13	COMPONENTS

SLOCOMB WINDOWS AND DOORS, INC.
767 SANS SOUCI PARKWAY
WILKES–BARRE, PA 18706

600 DH DOUBLE HUNG WINDOW
REINFORCED NON–IMPACT
NOTES

DRAWN:
A.R.

DWG NO.
08–03995

REV
–


SCALE NTS

DATE 01/18/2024

SHEET 1 OF 13


L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 01/25/2024

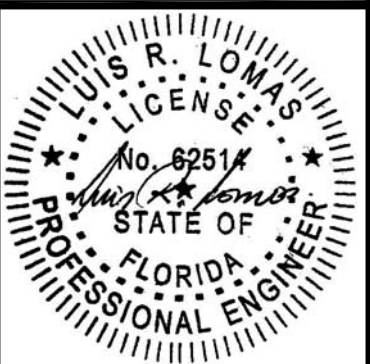


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

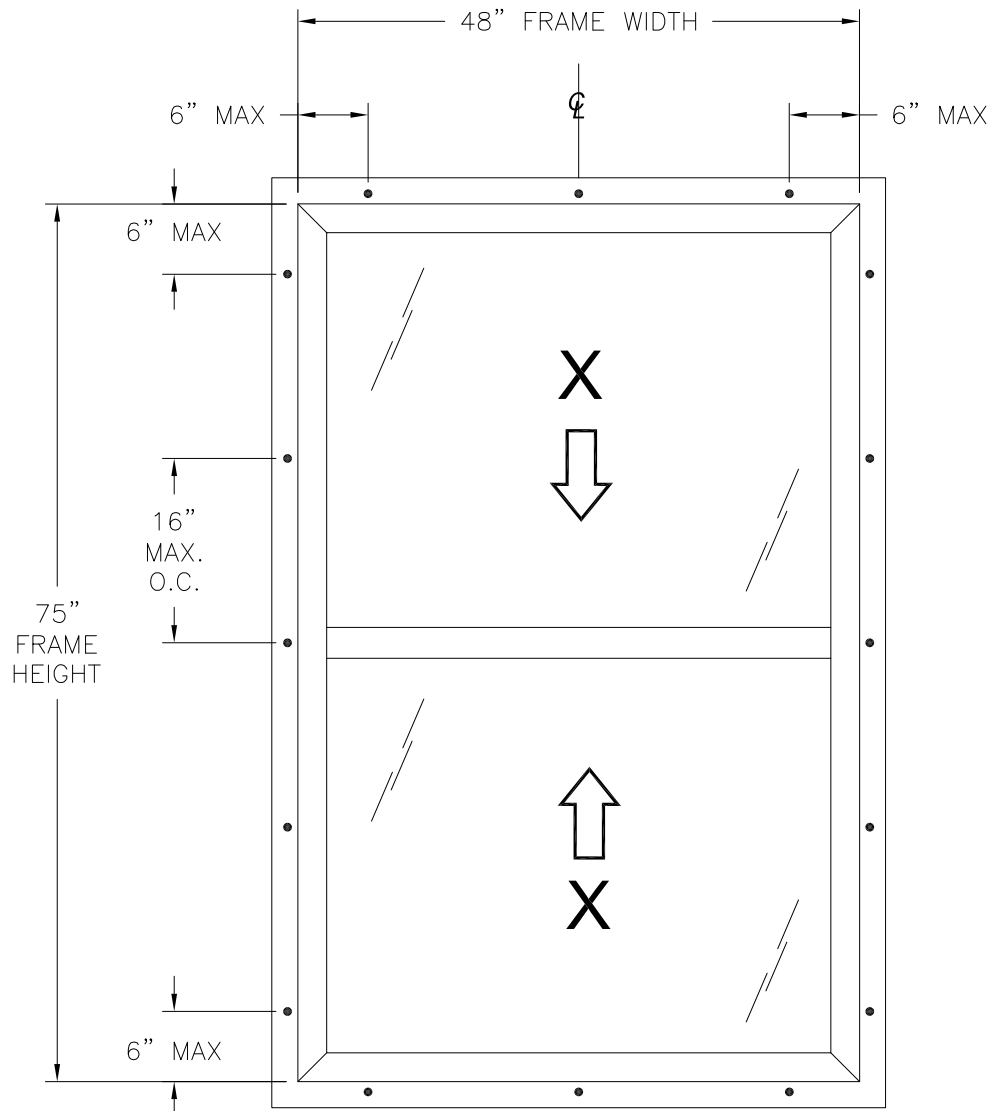

600 DH DOUBLE HUNG WINDOW
EXTERIOR VIEW
FIN INSTALLATION

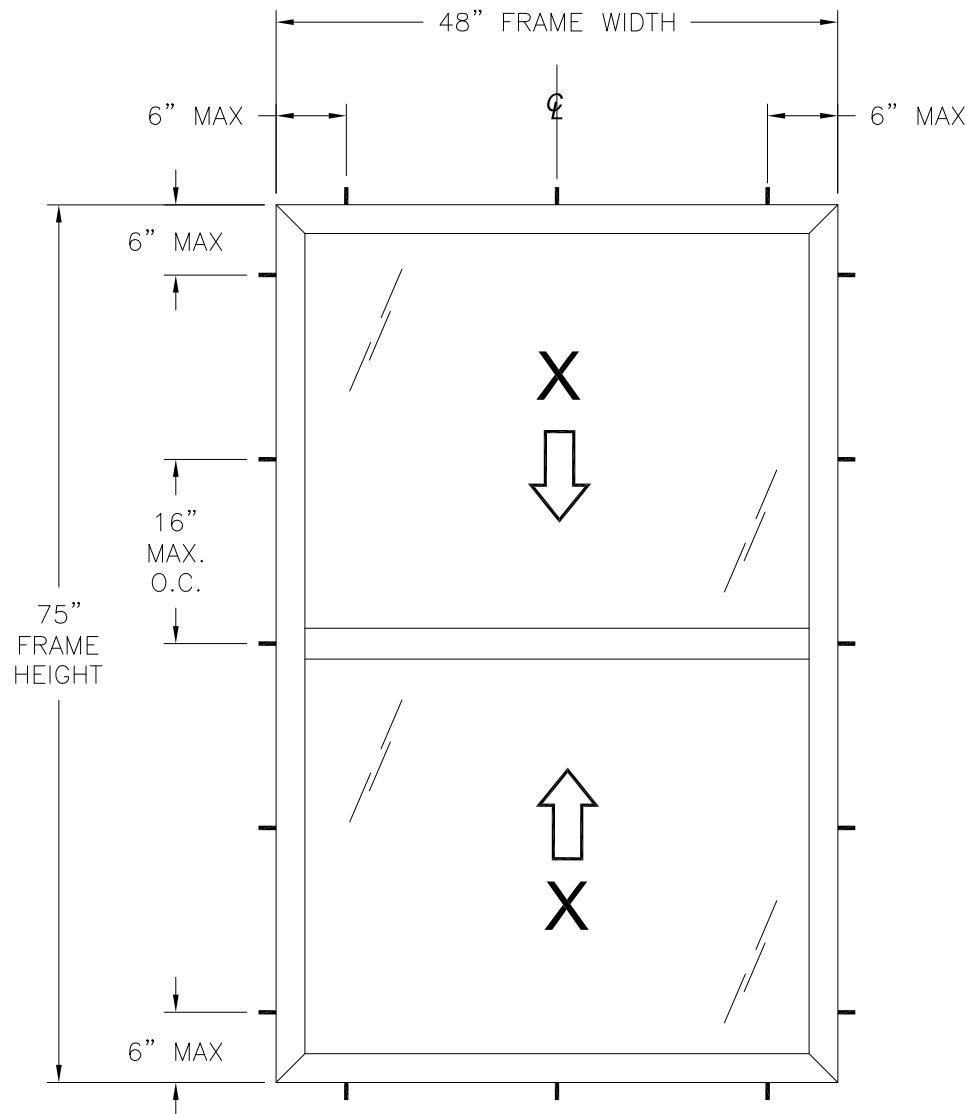

600 DH DOUBLE HUNG WINDOW
EXTERIOR VIEW
FINLESS & FLANGE INSTALLATION

- NOTES:
- TOP SASH SIZE: 43 1/2" X 35 15/16"
 - BOTTOM SASH SIZE: 44 1/2" X 36 15/16"
 - TOP D.L.O.: 40 1/2" X 32 15/16"
 - BOTTOM D.L.O.: 41 1/2" X 33 15/16"

DESIGN PRESSURE RATING	IMPACT RATING
±35.0PSF	NONE

WHERE WATER INFILTRATION RESISTANCE IS REQUIRED
FOR ADDITIONAL SIZES SEE CHART #1, SHEET 4

DESIGN PRESSURE RATING	IMPACT RATING
±35.0PSF	NONE

WHERE WATER INFILTRATION RESISTANCE IS NOT REQUIRED
FOR ADDITIONAL SIZES SEE CHART #2, SHEET 4

HARDWARE SCHEDULE

A.	(2) METAL CAM LOCK WITH KEEPER AT LOCK RAIL W/MATING KEEPER ON EXTERIOR MEETIN RAIL, 7" IN FROM EACH END
B.	(4) CONSTANT FORCE BALANCE WITH TILT LOCKING SHOE, TWO PER JAMB
C.	(4) METAL PIVOT BAR AT BOTTOM RAIL AND KEEPER RAIL, ONE AT EACH END
D.	(4) PLASTIC ROUTED TILT LATCH AT TOP RAIL AND LOCK RAIL, ONE AT EACH END
E.	(2) PLASTIC NIGHT LATCH AT TOP SASH STILES, ONE PER STILE
F.	ALUMINUM REINFORCEMENT 10006608 IN ALL MEETING RAILS AND SASH STILES
G.	POLYURETHANE FIBERGLASS REINFORCEMENT (10000665) AT LOCK RAIL AND KEEPER RAIL

SLOCOMB WINDOWS AND DOORS, INC.

767 SANS SOUCI PARKWAY
WILKES-BARRE, PA 18706

600 DH DOUBLE HUNG WINDOW
REINFORCED NON-IMPACT
ELEVATIONS

DRAWN: A.R.	DWG NO. 08-03995	REV -
SCALE NTS	DATE 01/18/2024	SHEET 2 OF 13

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 01/25/2024



Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

Chart #1
Rating where water penetration resistance is required (psf)

Frame Height (in)	Frame width (in)															
	24.0		30.0		36.0		40.0		42.0		48.0		54.0		60.0	
24.0	50.0	90.0	50.0	86.1	50.0	75.9	50.0	69.1	50.0	65.7	50.0	55.5	45.2	45.2	35.0	35.0
30.0	50.0	90.0	50.0	84.9	50.0	72.1	50.0	63.6	50.0	59.3	46.5	46.5	33.7	33.7	20.9	20.9
36.0	50.0	90.0	50.0	84.9	50.0	70.8	50.0	60.6	50.0	55.5	40.1	40.1	24.8	24.8	-	-
42.0	50.0	90.0	50.0	84.9	50.0	70.8	50.0	60.0	50.0	54.2	36.3	36.3	18.4	18.4	-	-
48.0	50.0	90.0	50.0	84.9	50.0	70.8	50.0	60.0	50.0	54.2	35.0	35.0	-	-	-	-
54.0	50.0	90.0	50.0	84.9	50.0	70.8	50.0	60.0	50.0	54.2	35.0	35.0	-	-	-	-
60.0	50.0	90.0	50.0	84.0	50.0	70.0	50.0	60.0	50.0	54.2	35.0	35.0	-	-	-	-
63.0	50.0	90.0	50.0	80.0	50.0	66.7	50.0	60.0	50.0	54.2	35.0	35.0	-	-	-	-
66.0	50.0	90.0	50.0	76.4	50.0	63.6	50.0	57.3	50.0	54.2	35.0	35.0	-	-	-	-
72.0	50.0	87.5	50.0	70.0	50.0	58.3	50.0	52.5	50.0	50.0	35.0	35.0	-	-	-	-
75.0	50.0	84.0	50.0	67.2	50.0	56.0	50.0	50.4	48.0	48.0	35.0	35.0	-	-	-	-
78.0	50.0	80.8	50.0	64.6	50.0	53.8	48.5	48.5	46.2	46.2	-	-	-	-	-	-
84.0	50.0	75.0	50.0	60.0	50.0	50.0	45.0	45.0	42.9	42.9	-	-	-	-	-	-
90.0	50.0	70.0	50.0	56.0	46.7	46.7	42.0	42.0	-	-	-	-	-	-	-	-
96.0	50.0	65.6	50.0	52.5	43.8	43.8	-	-	-	-	-	-	-	-	-	-
102.0	50.0	61.8	49.4	49.4	-	-	-	-	-	-	-	-	-	-	-	-
108.0	50.0	58.3	46.7	46.7	-	-	-	-	-	-	-	-	-	-	-	-
114.0	50.0	55.3	44.2	44.2	-	-	-	-	-	-	-	-	-	-	-	-
120.0	50.0	52.5	42.0	42.0	-	-	-	-	-	-	-	-	-	-	-	-

Chart #2
Rating where water penetration resistance is not required (psf)

Frame Height (in)	Frame width (in)															
	24.0		30.0		36.0		40.0		42.0		48.0		54.0		60.0	
24.0	90.0	90.0	86.1	86.1	75.9	75.9	69.1	69.1	65.7	65.7	55.5	55.5	45.2	45.2	35.0	35.0
30.0	90.0	90.0	84.9	84.9	72.1	72.1	63.6	63.6	59.3	59.3	46.5	46.5	33.7	33.7	20.9	20.9
36.0	90.0	90.0	84.9	84.9	70.8	70.8	60.6	60.6	55.5	55.5	40.1	40.1	24.8	24.8	-	-
42.0	90.0	90.0	84.9	84.9	70.8	70.8	60.0	60.0	54.2	54.2	36.3	36.3	18.4	18.4	-	-
48.0	90.0	90.0	84.9	84.9	70.8	70.8	60.0	60.0	54.2	54.2	35.0	35.0	-	-	-	-
54.0	90.0	90.0	84.9	84.9	70.8	70.8	60.0	60.0	54.2	54.2	35.0	35.0	-	-	-	-
60.0	90.0	90.0	84.0	84.0	70.0	70.0	60.0	60.0	54.2	54.2	35.0	35.0	-	-	-	-
63.0	90.0	90.0	80.0	80.0	66.7	66.7	60.0	60.0	54.2	54.2	35.0	35.0	-	-	-	-
66.0	90.0	90.0	76.4	76.4	63.6	63.6	57.3	57.3	54.2	54.2	35.0	35.0	-	-	-	-
72.0	87.5	87.5	70.0	70.0	58.3	58.3	52.5	52.5	50.0	50.0	35.0	35.0	-	-	-	-
75.0	84.0	84.0	67.2	67.2	56.0	56.0	50.4	50.4	48.0	48.0	35.0	35.0	-	-	-	-
78.0	80.8	80.8	64.6	64.6	53.8	53.8	48.5	48.5	46.2	46.2	-	-	-	-	-	-
84.0	75.0	75.0	60.0	60.0	50.0	50.0	45.0	45.0	42.9	42.9	-	-	-	-	-	-
90.0	70.0	70.0	56.0	56.0	46.7	46.7	42.0	42.0	-	-	-	-	-	-	-	-
96.0	65.6	65.6	52.5	52.5	43.8	43.8	-	-	-	-	-	-	-	-	-	-
102.0	61.8	61.8	49.4	49.4	-	-	-	-	-	-	-	-	-	-	-	-
108.0	58.3	58.3	46.7	46.7	-	-	-	-	-	-	-	-	-	-	-	-
114.0	55.3	55.3	44.2	44.2	-	-	-	-	-	-	-	-	-	-	-	-
120.0	52.5	52.5	42.0	42.0	-	-	-	-	-	-	-	-	-	-	-	-

SIGNED: 01/25/2024

SLOCOMB WINDOWS AND DOORS, INC.
767 SANS SOUCI PARKWAY
WILKES-BARRE, PA 18706

600 DH DOUBLE HUNG WINDOW
REINFORCED NON-IMPACT
DESIGN PRESSURE CHARTS

DRAWN:
A.R.

DWG NO.
08-03995


REV
-

SCALE
NTS




DATE
01/18/2024

SHEET
4 OF 13

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

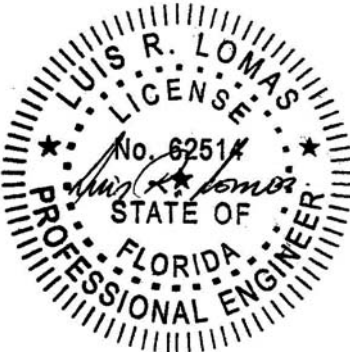

Luis R. Lomas P.E.
FL No.: 62514

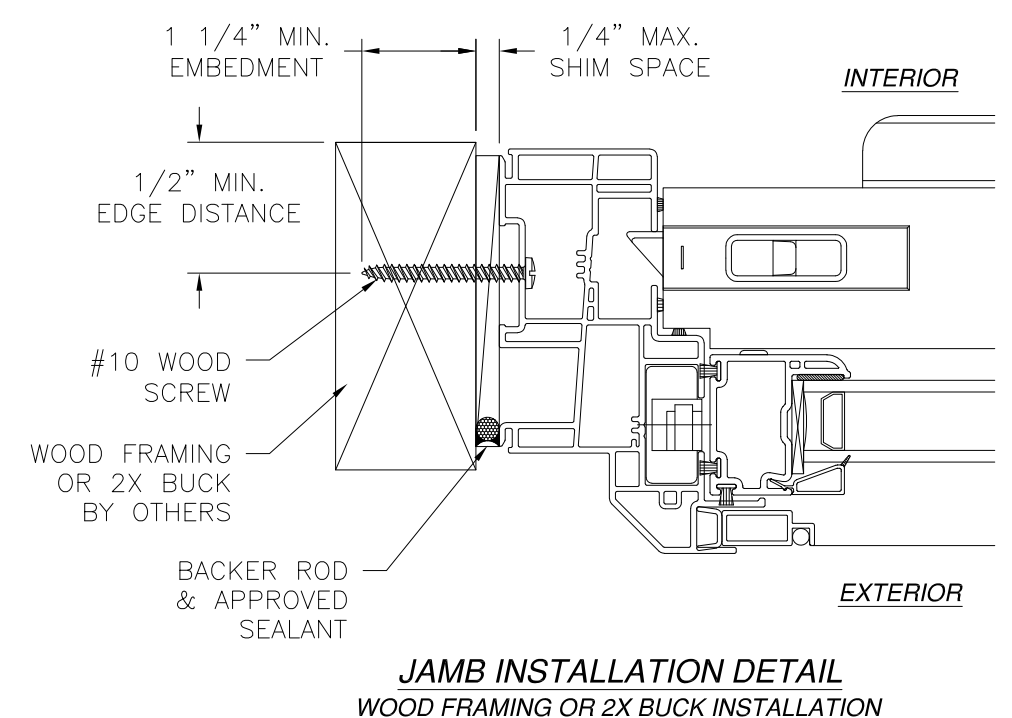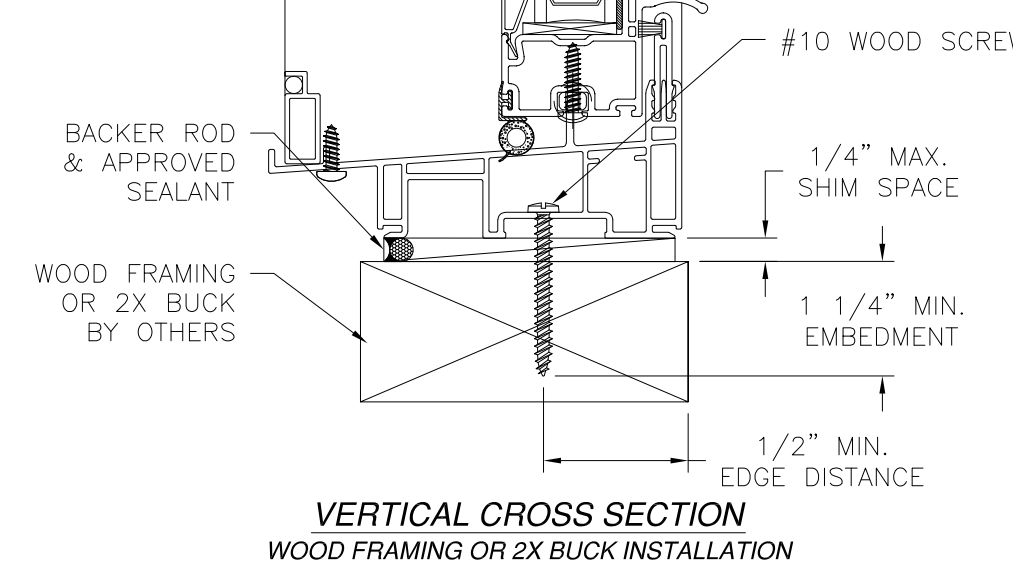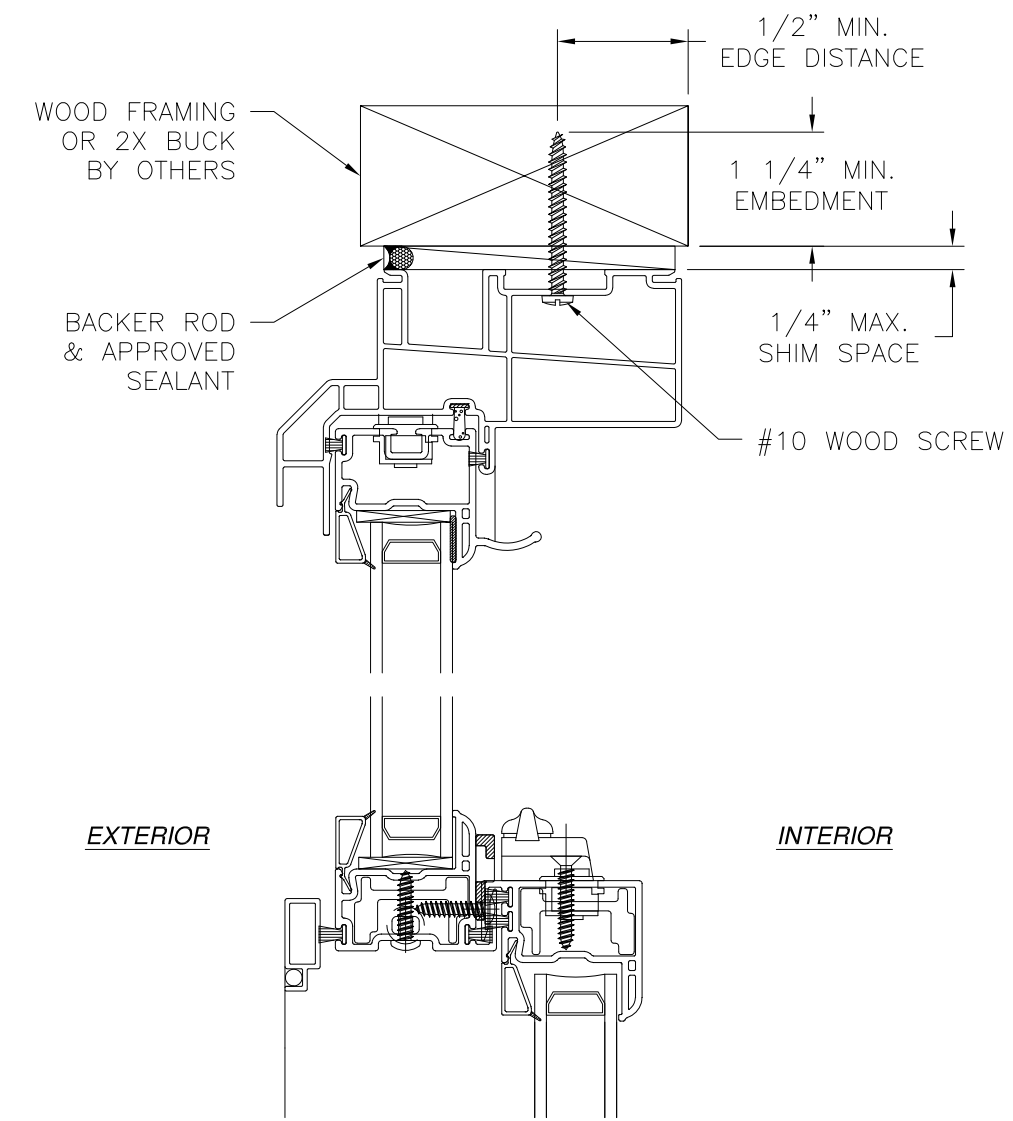

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SLOCOMB WINDOWS AND DOORS, INC.

767 SANS SOUCI PARKWAY
WILKES-BARRE, PA 18706

600 DH DOUBLE HUNG WINDOW
REINFORCED NON-IMPACT
FINLESS INSTALLATION DETAILS

DRAWN:
A.R.

DWG NO.

08-03995

REV
-

SCALE NTS


DATE

01/18/2024

SHEET 5 OF 13


L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 01/25/2024

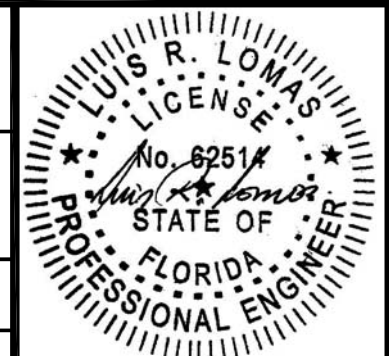


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

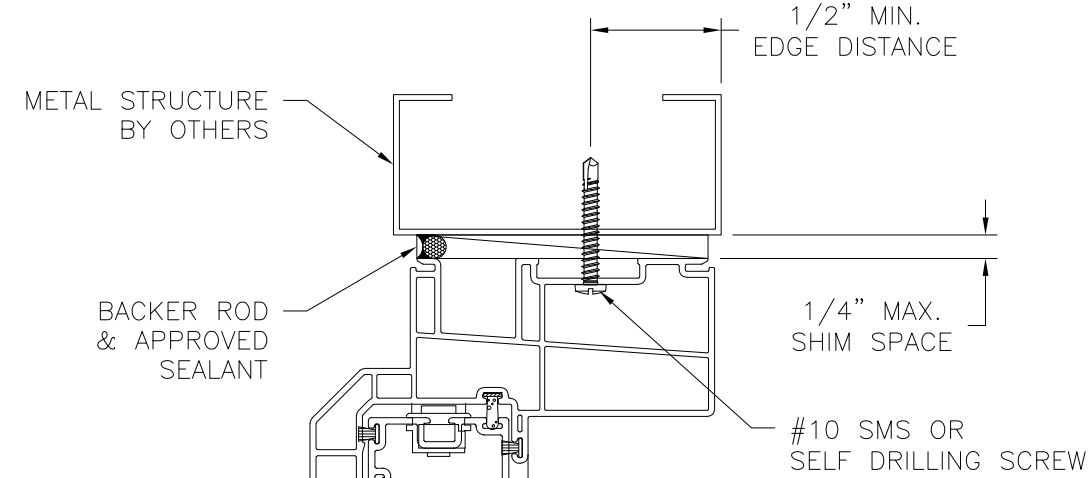


EXTERIOR

INTERIOR

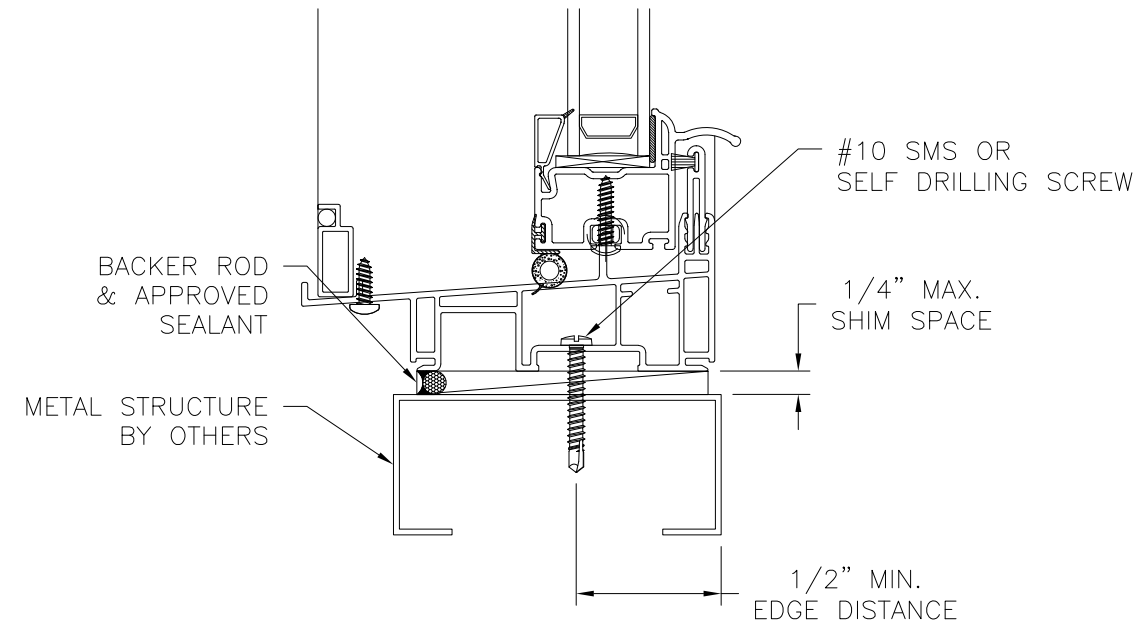

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

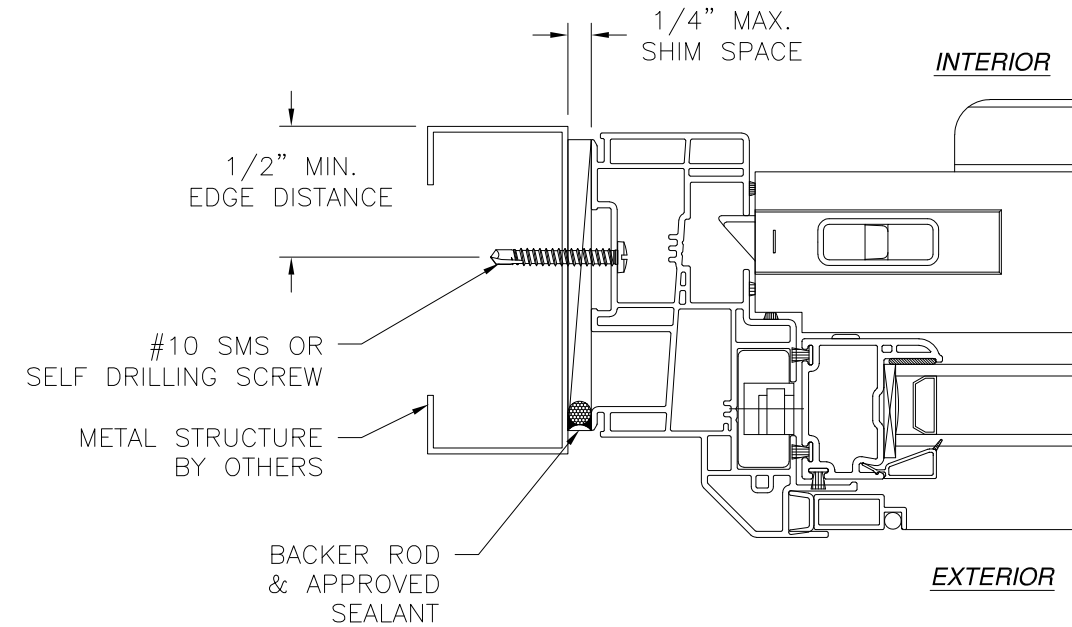


JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION



- NOTES:
- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 01/25/2024


SLOCOMB WINDOWS AND DOORS, INC.		
767 SANS SOUCI PARKWAY WILKES-BARRE, PA 18706		
600 DH DOUBLE HUNG WINDOW REINFORCED NON-IMPACT FINLESS INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03995	REV -
SCALE NTS	DATE 01/18/2024	SHEET 6 OF 13
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

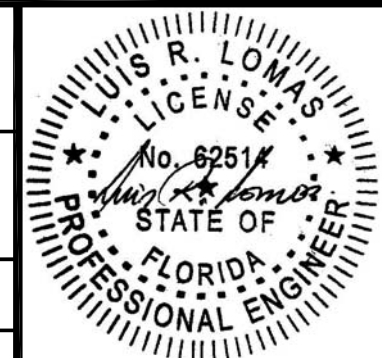

Luis R. Lomas P.E.
FL No.: 62514

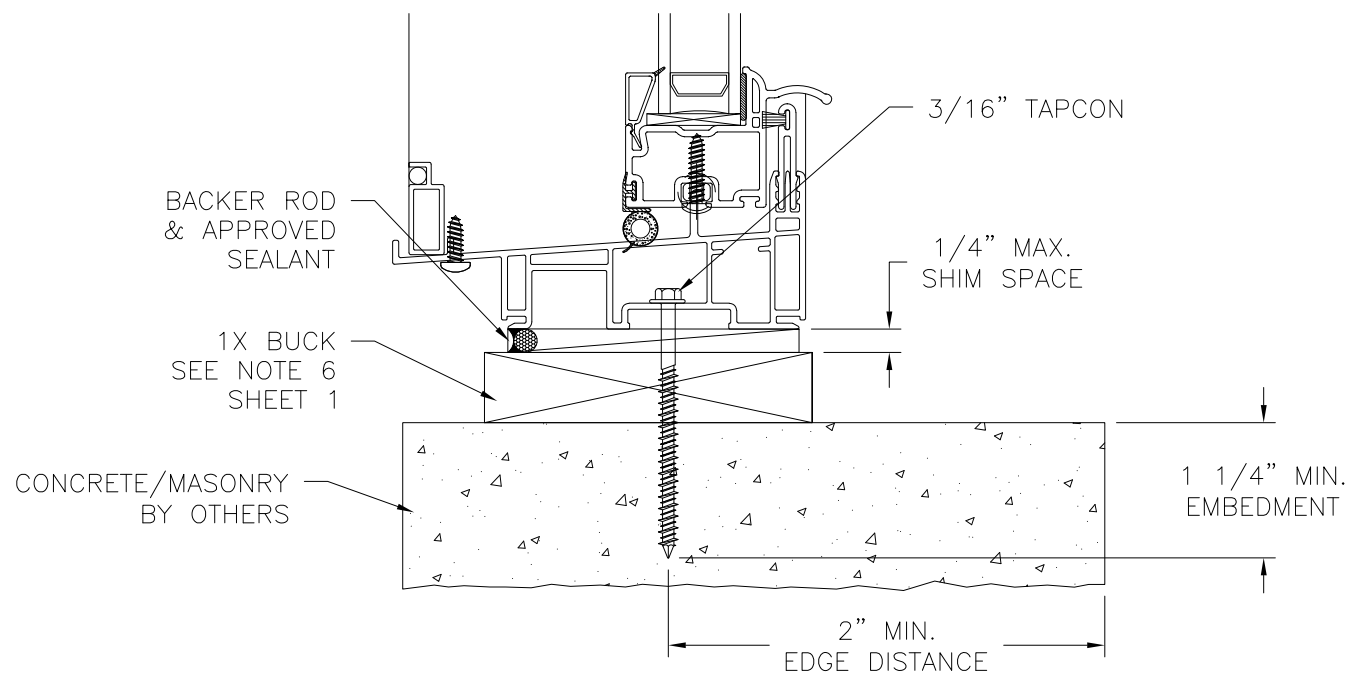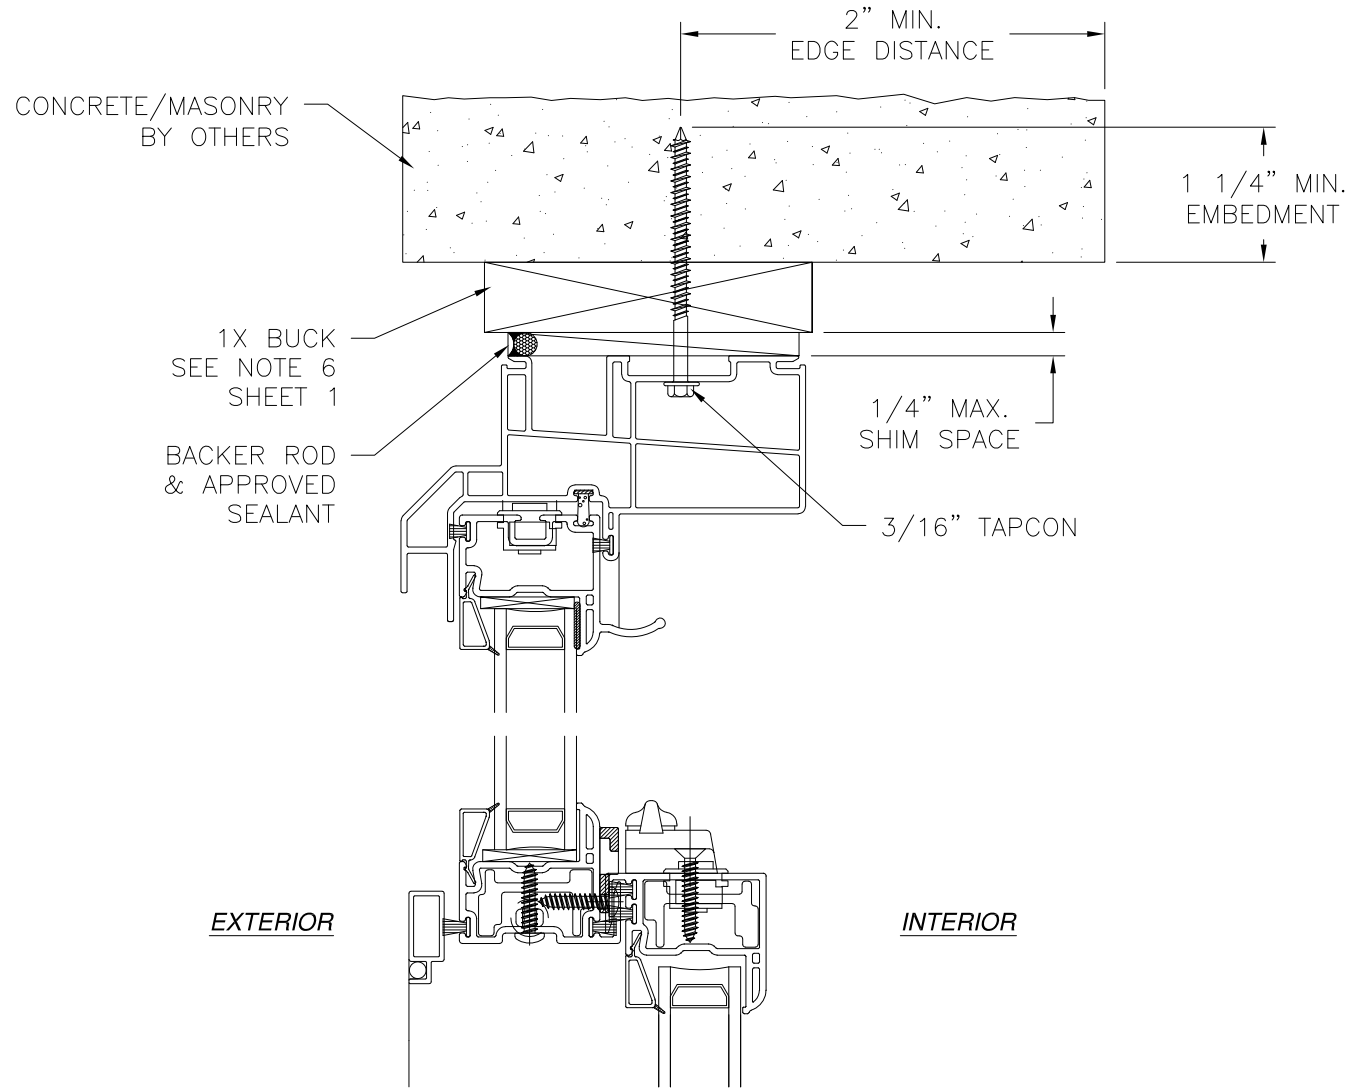

VERTICAL CROSS SECTION
CONCRETE/MASONRY WITH 1X BUCK INSTALLATION
FOR CONCRETE/MASONRY WITHOUT 1X BUCK REFER TO
JAMB INSTALLATION DETAIL

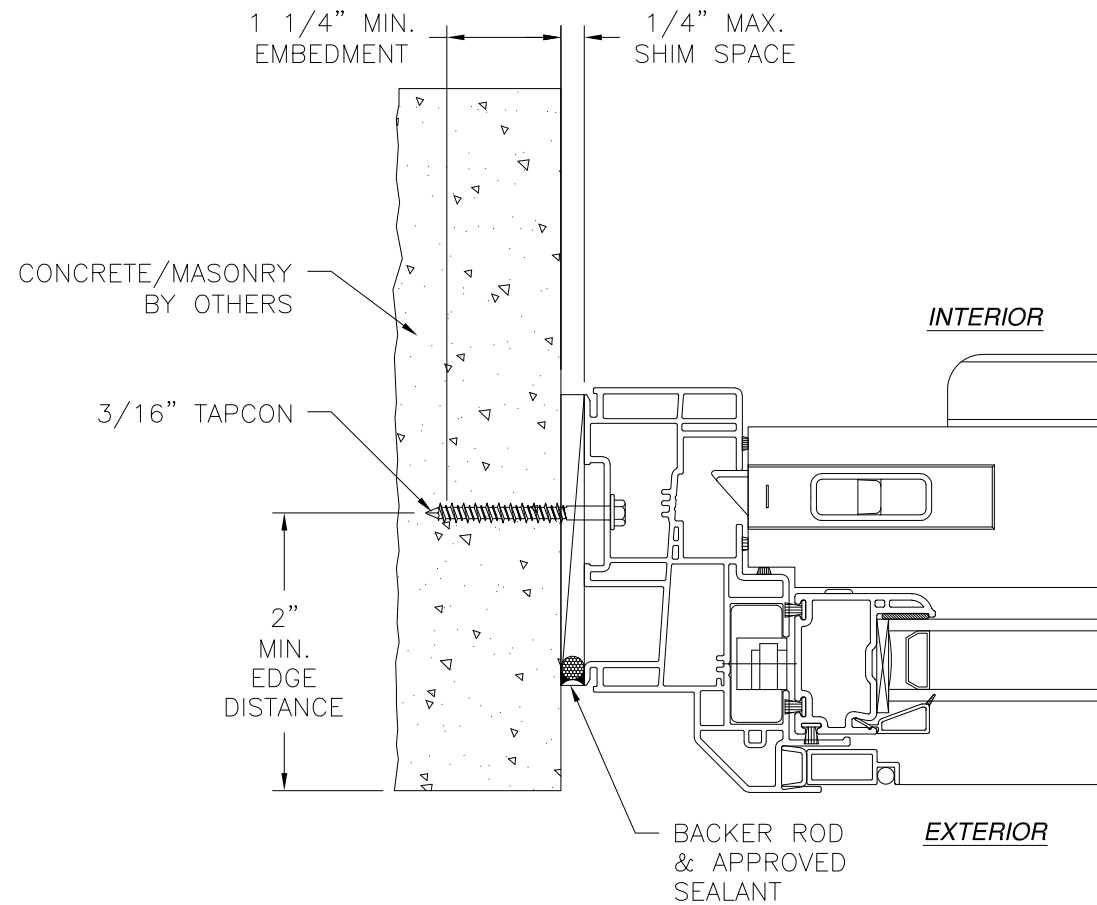

JAMB INSTALLATION DETAIL
CONCRETE/MASONRY WITHOUT 1X BUCK INSTALLATION
FOR CONCRETE/MASONRY WITH 1X BUCK REFER TO
HEAD AND SILL INSTALLATION DETAILS

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SLOCOMB WINDOWS AND DOORS, INC.

767 SANS SOUCI PARKWAY
WILKES-BARRE, PA 18706

600 DH DOUBLE HUNG WINDOW
REINFORCED NON-IMPACT
FINLESS INSTALLATION DETAILS

DRAWN:
A.R.

DWG NO.
08-03995

REV
-


SCALE NTS

DATE 01/18/2024

SHEET 7 OF 13




L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 01/25/2024

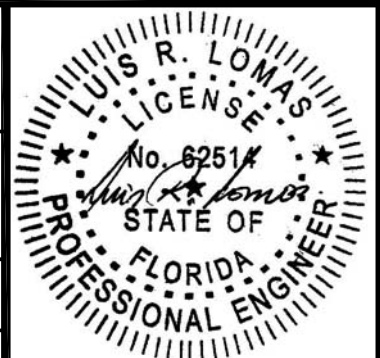

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

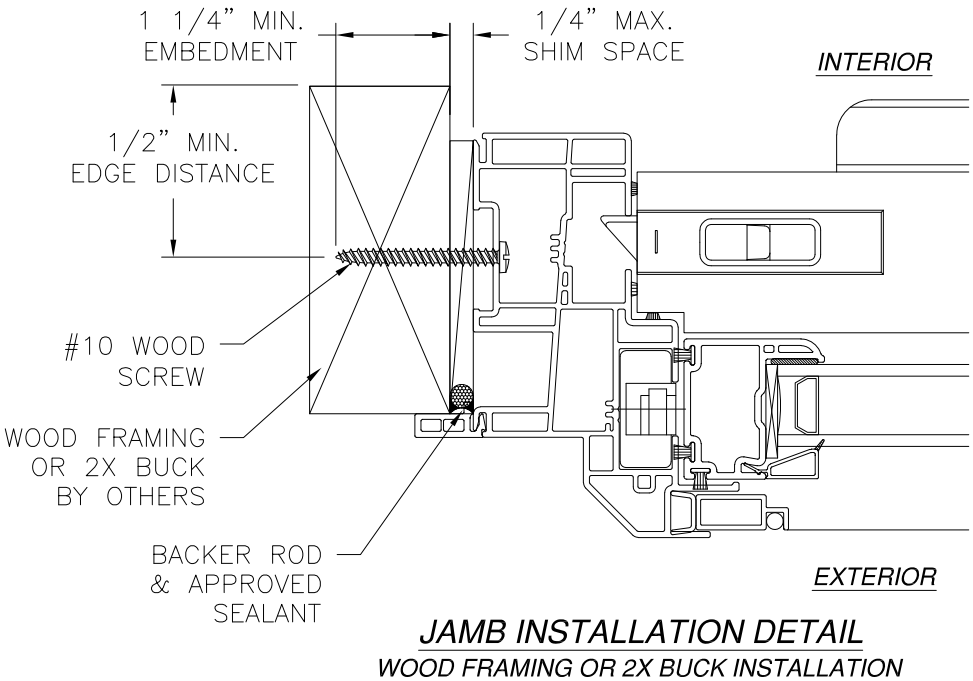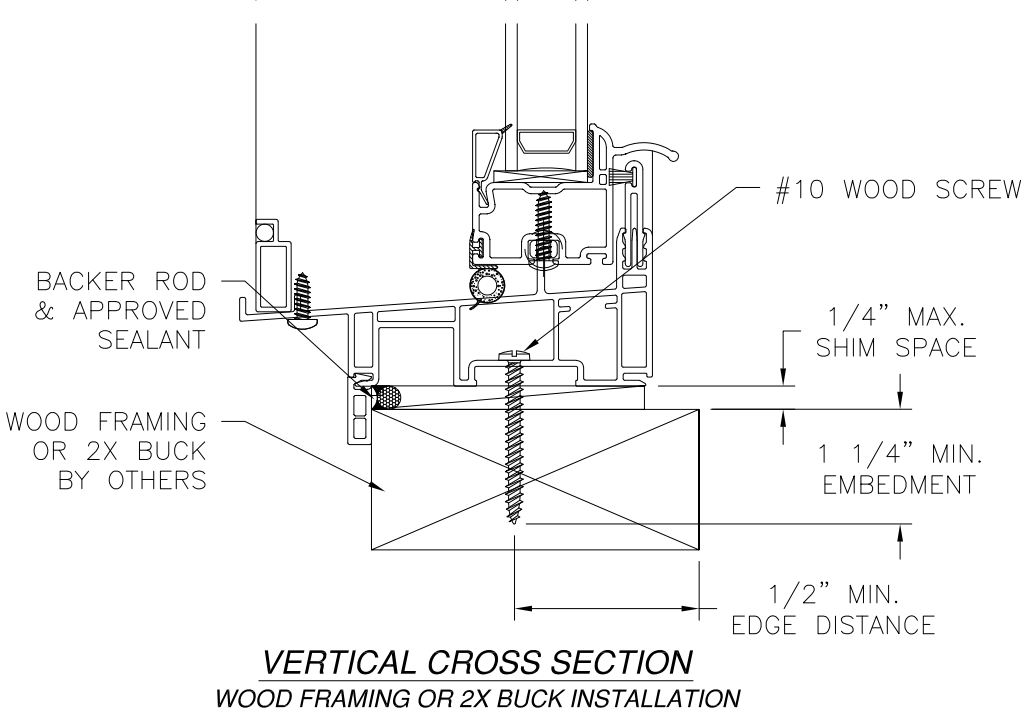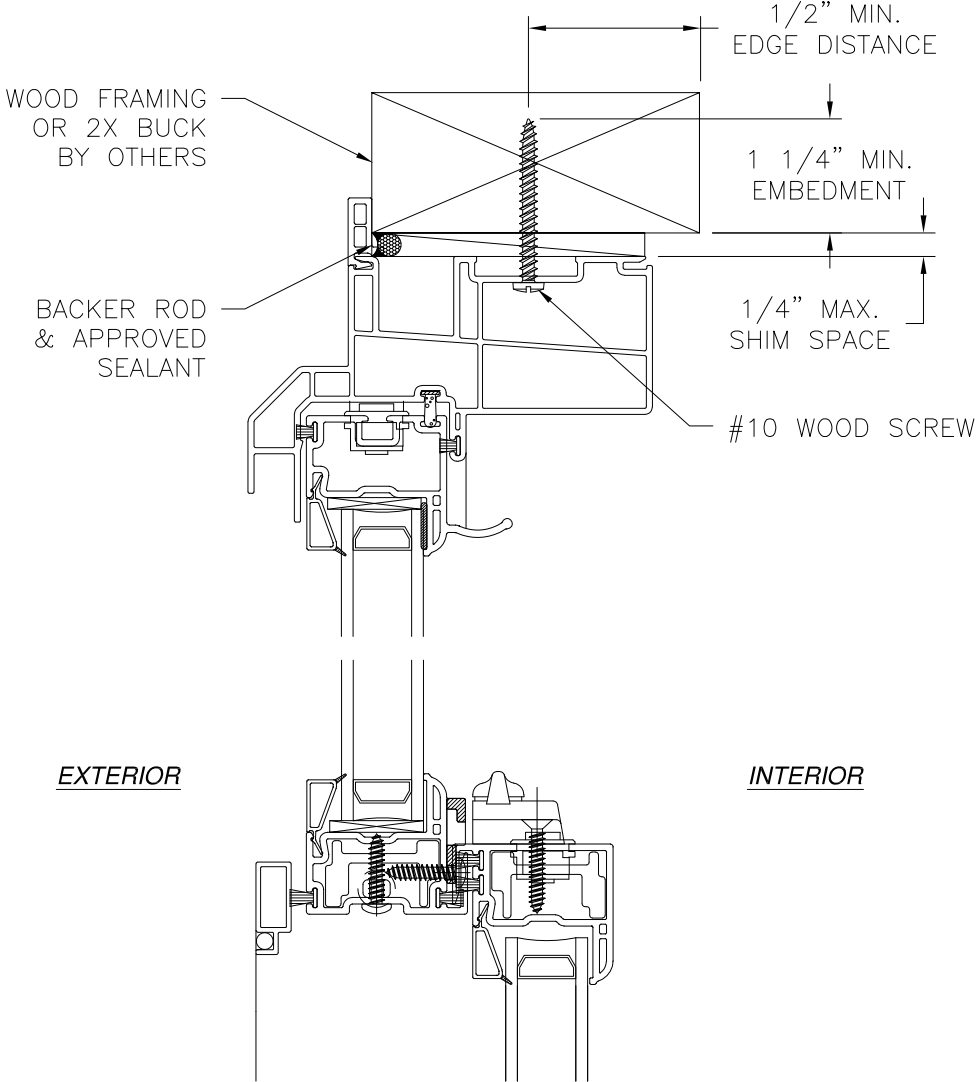

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SLOCOMB WINDOWS AND DOORS, INC.

767 SANS SOUCI PARKWAY
WILKES-BARRE, PA 18706

600 DH DOUBLE HUNG WINDOW
REINFORCED NON-IMPACT
FLANGE INSTALLATION DETAILS

DRAWN: A.R.	DWG NO. 08-03995	REV -
SCALE NTS	DATE 01/18/2024	SHEET 8 OF 13

L. ROBERTO LOMAS P.E.


208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 01/25/2024





Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

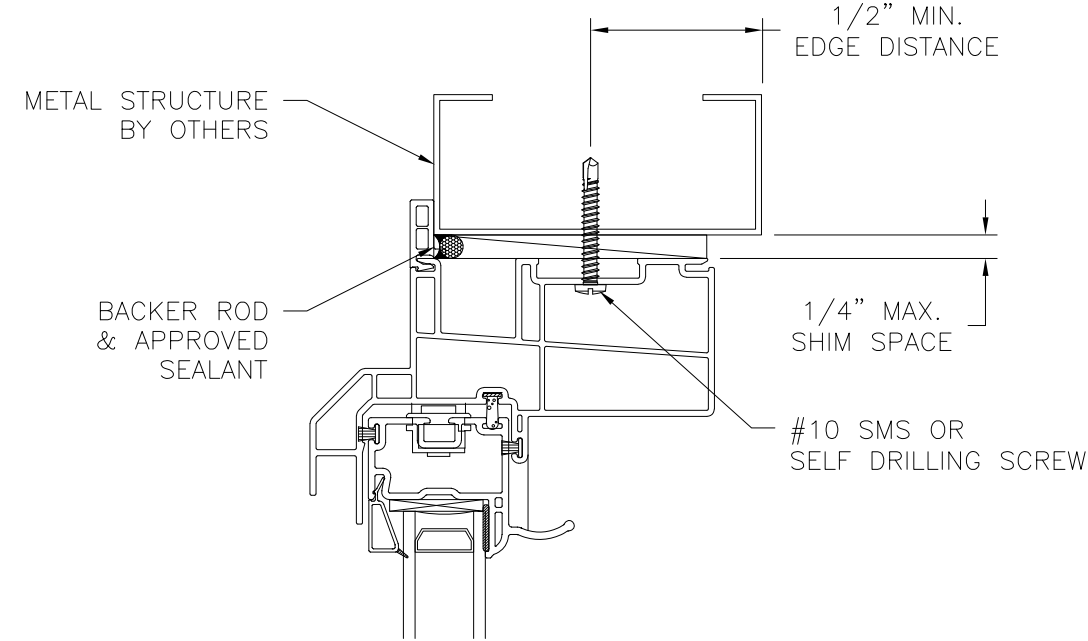


EXTERIOR

INTERIOR

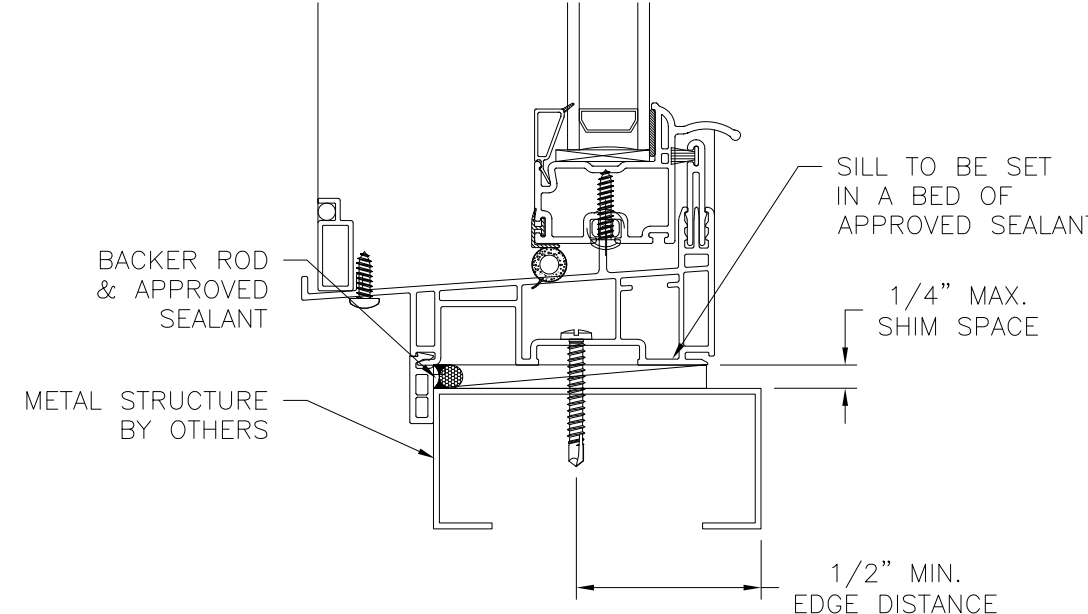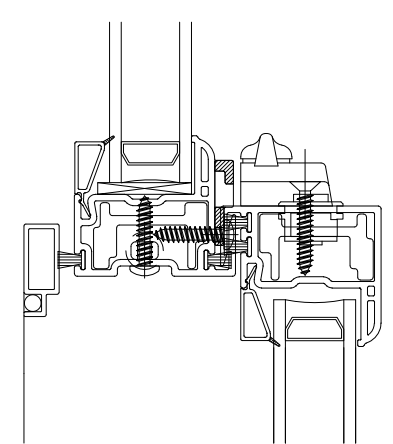

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

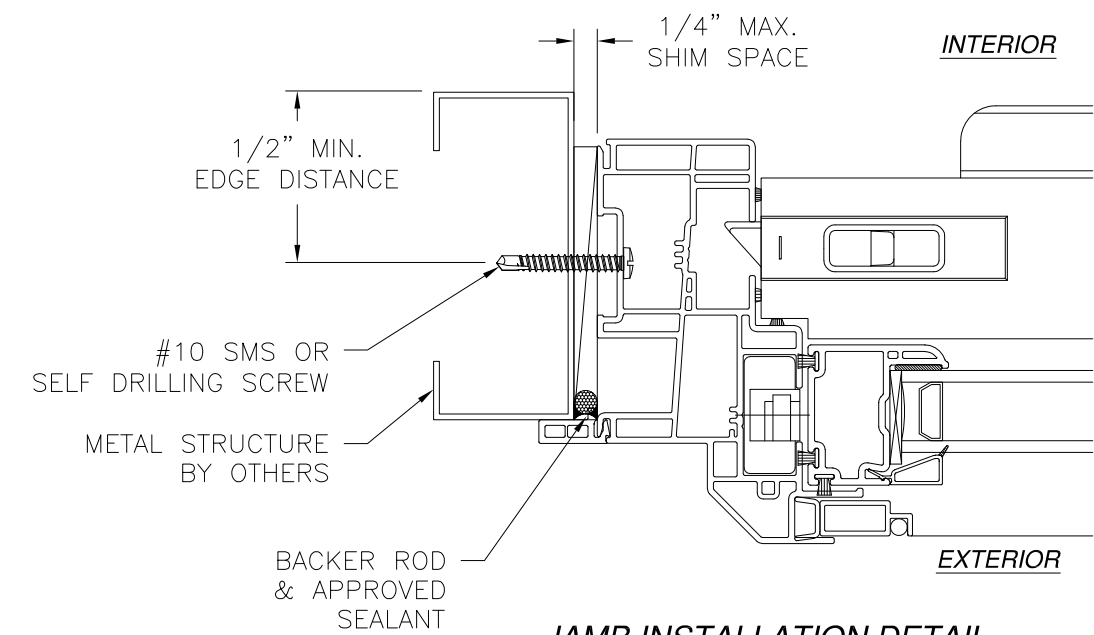

JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 01/25/2024

SLOCOMB WINDOWS AND DOORS, INC.
767 SANS SOUCI PARKWAY
WILKES-BARRE, PA 18706



600 DH DOUBLE HUNG WINDOW
REINFORCED NON-IMPACT
FLANGE INSTALLATION DETAILS

DRAWN: A.R.	DWG NO. 08-03995	REV -
SCALE NTS	DATE 01/18/2024	SHEET 9 OF 13


L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

LUISS R. LOMAS
LICENSE
No. 62514
STATE OF
FLORIDA
PROFESSIONAL ENGINEER

Luis R. Lomas P.E.
FL No.: 62514

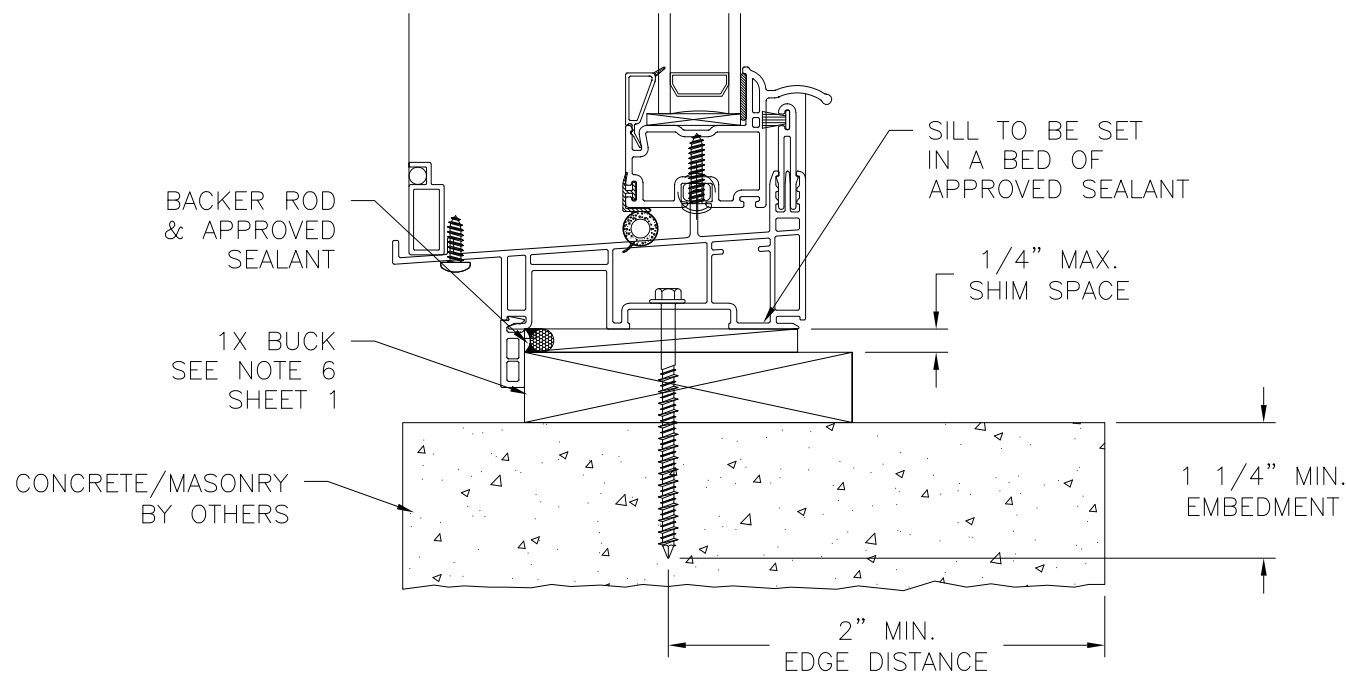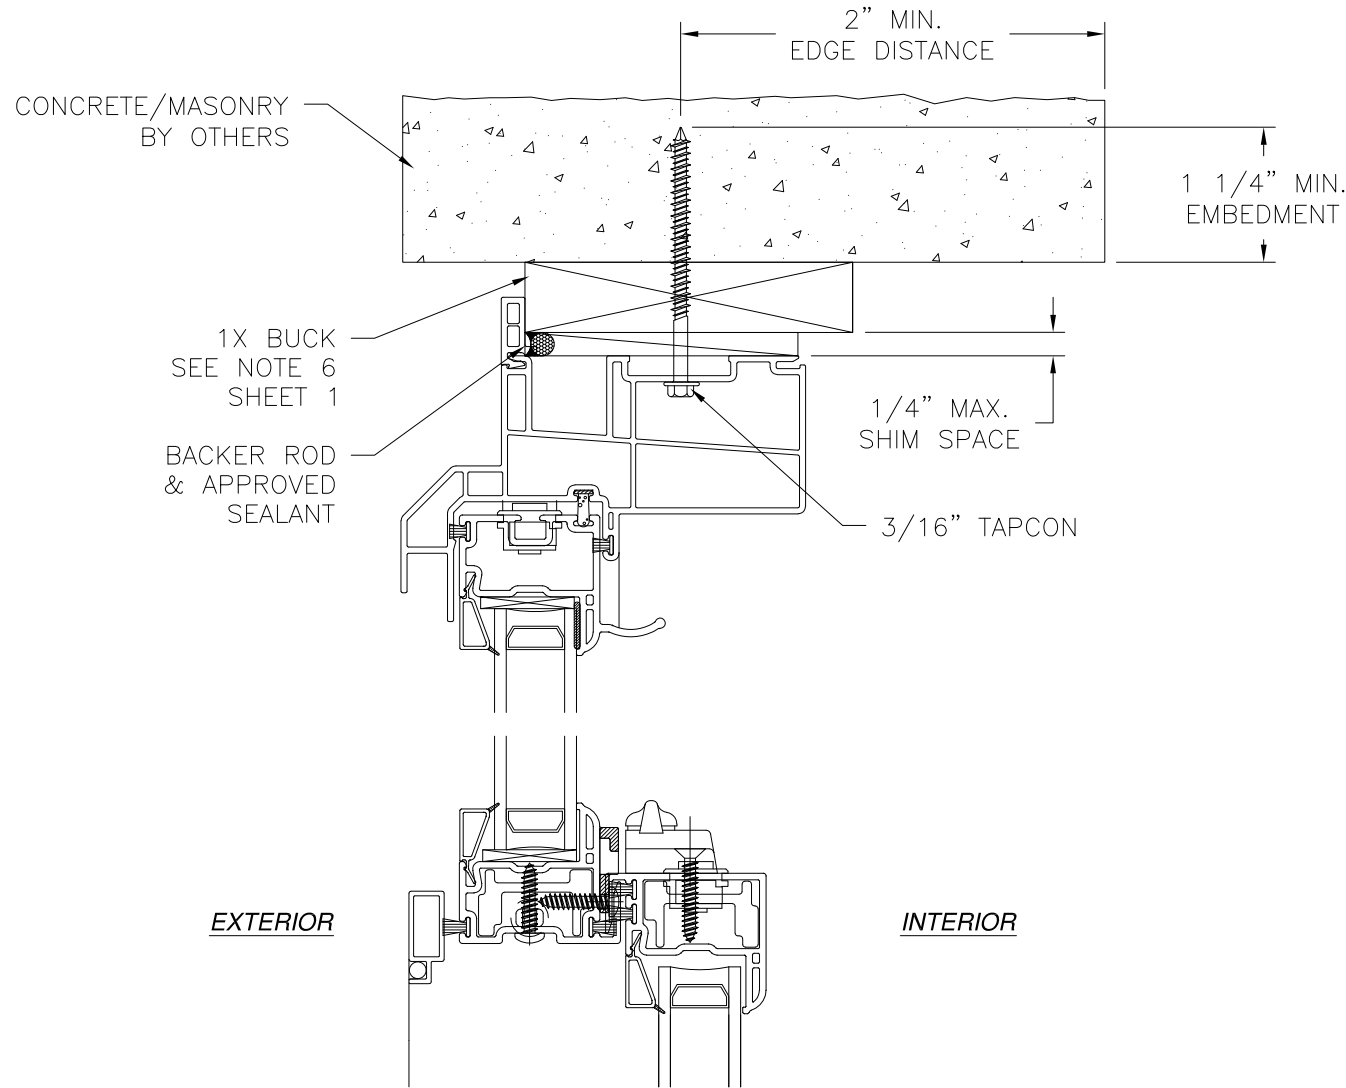

VERTICAL CROSS SECTION
CONCRETE/MASONRY WITH 1X BUCK INSTALLATION
FOR CONCRETE/MASONRY WITHOUT 1X BUCK REFER TO
JAMB INSTALLATION DETAIL

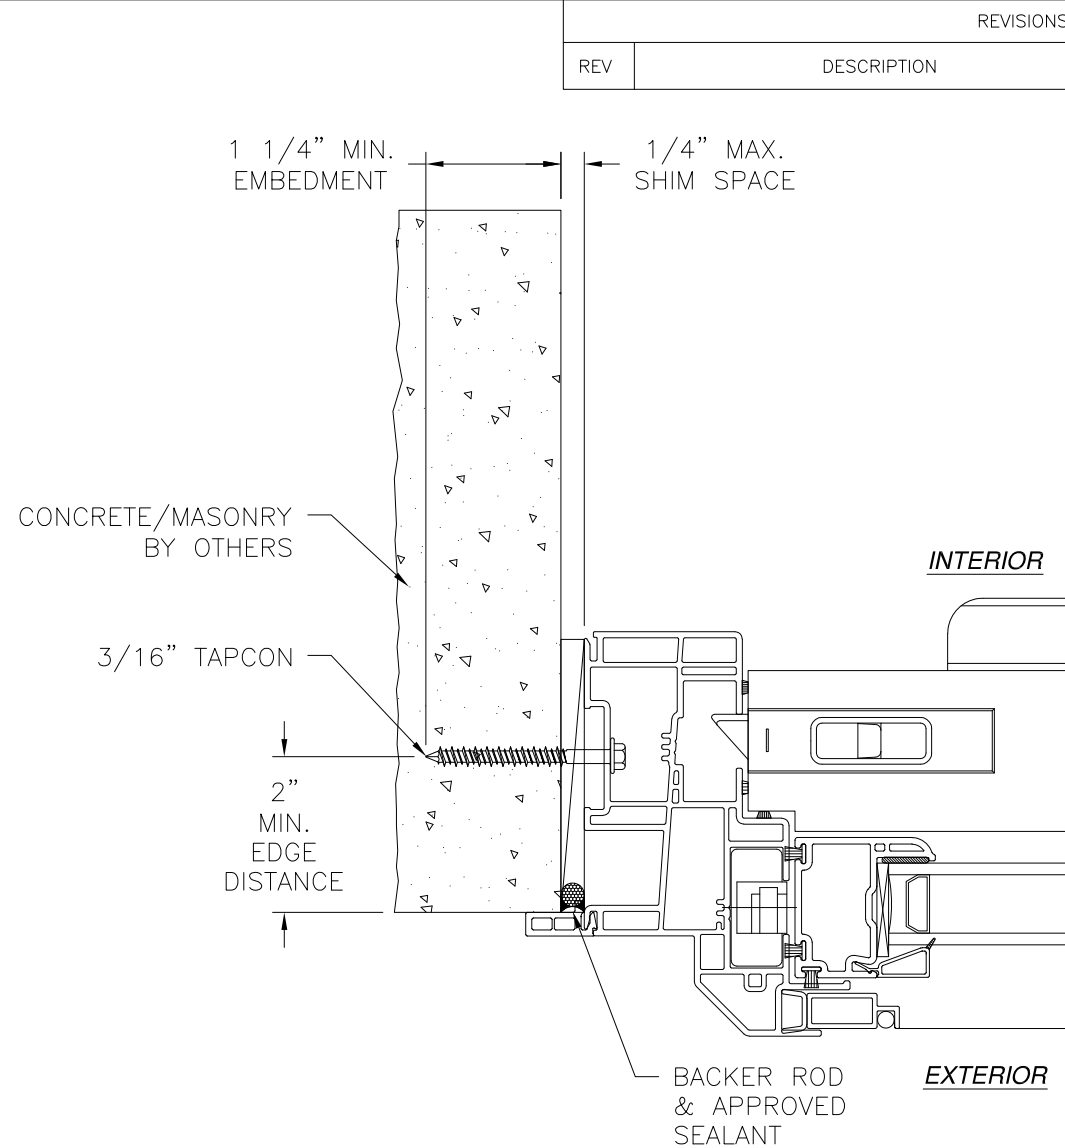

JAMB INSTALLATION DETAIL
CONCRETE/MASONRY WITHOUT 1X BUCK INSTALLATION
FOR CONCRETE/MASONRY WITH 1X BUCK REFER TO
HEAD AND SILL INSTALLATION DETAILS

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 01/25/2024


SLOCOMB WINDOWS AND DOORS, INC.

767 SANS SOUCI PARKWAY
WILKES-BARRE, PA 18706

600 DH DOUBLE HUNG WINDOW
REINFORCED NON-IMPACT
FLANGE INSTALLATION DETAILS

DRAWN: A.R.	DWG NO. 08-03995	REV -
SCALE NTS	DATE 01/18/2024	SHEET 10 OF 13

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

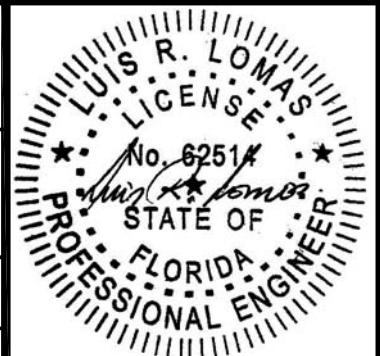

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

APPROVED SEALANT BEHIND FIN
#8 WOOD SCREW
7/16" MIN EDGE DISTANCE
1 1/4" MIN. EMBEDMENT
WOOD FRAMING BY OTHERS
1/4" MAX. SHIM SPACE

EXTERIOR

INTERIOR

7/16" MIN EDGE DISTANCE
#8 WOOD SCREW
APPROVED SEALANT BEHIND FIN
1 1/4" MIN. EMBEDMENT
WOOD FRAMING BY OTHERS
1/4" MAX SHIM SPACE

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

WOOD FRAMING BY OTHERS
#8 WOOD SCREW
1 1/4" MIN. EMBEDMENT
APPROVED SEALANT BEHIND FIN
7/16" MIN EDGE DISTANCE
1/4" MAX SHIM SPACE
INTERIOR
EXTERIOR

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 01/25/2024


SLOCOMB WINDOWS AND DOORS, INC.

767 SANS SOUCI PARKWAY
WILKES-BARRE, PA 18706

600 DH DOUBLE HUNG WINDOW
REINFORCED NON-IMPACT
FIN INSTALLATION DETAILS



DRAWN: A.R.	DWG NO. 08-03995	REV -
SCALE NTS	DATE 01/18/2024	SHEET 11 OF 13

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

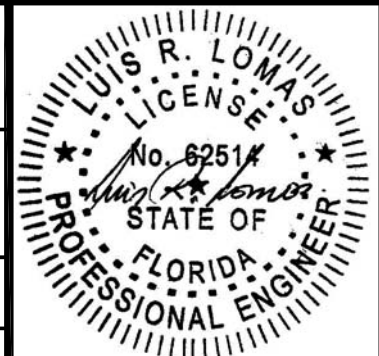


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

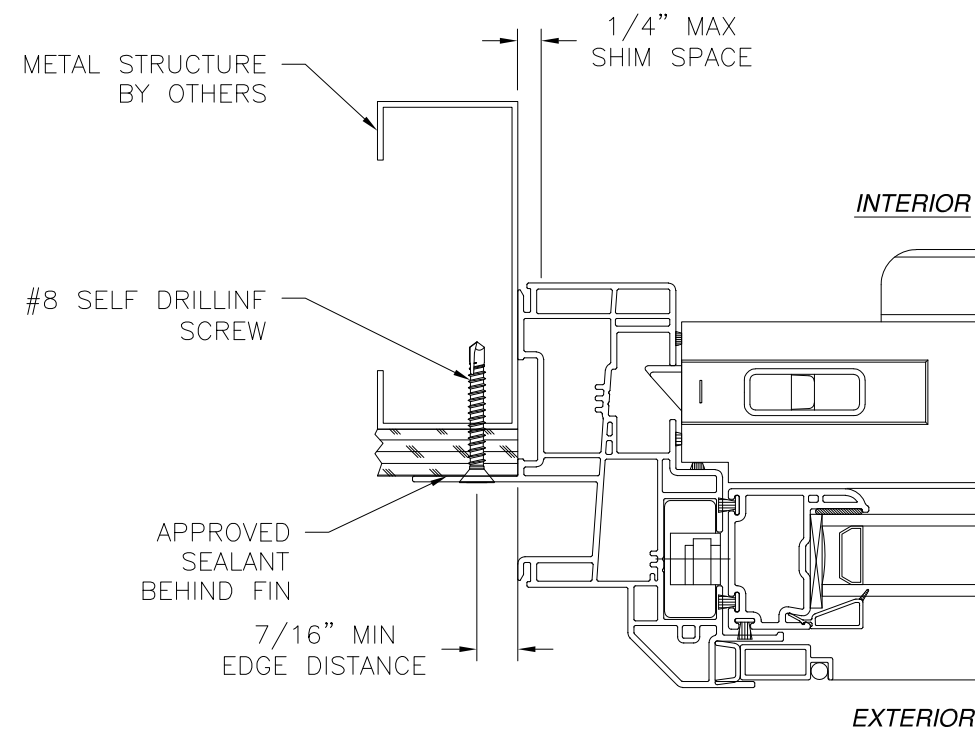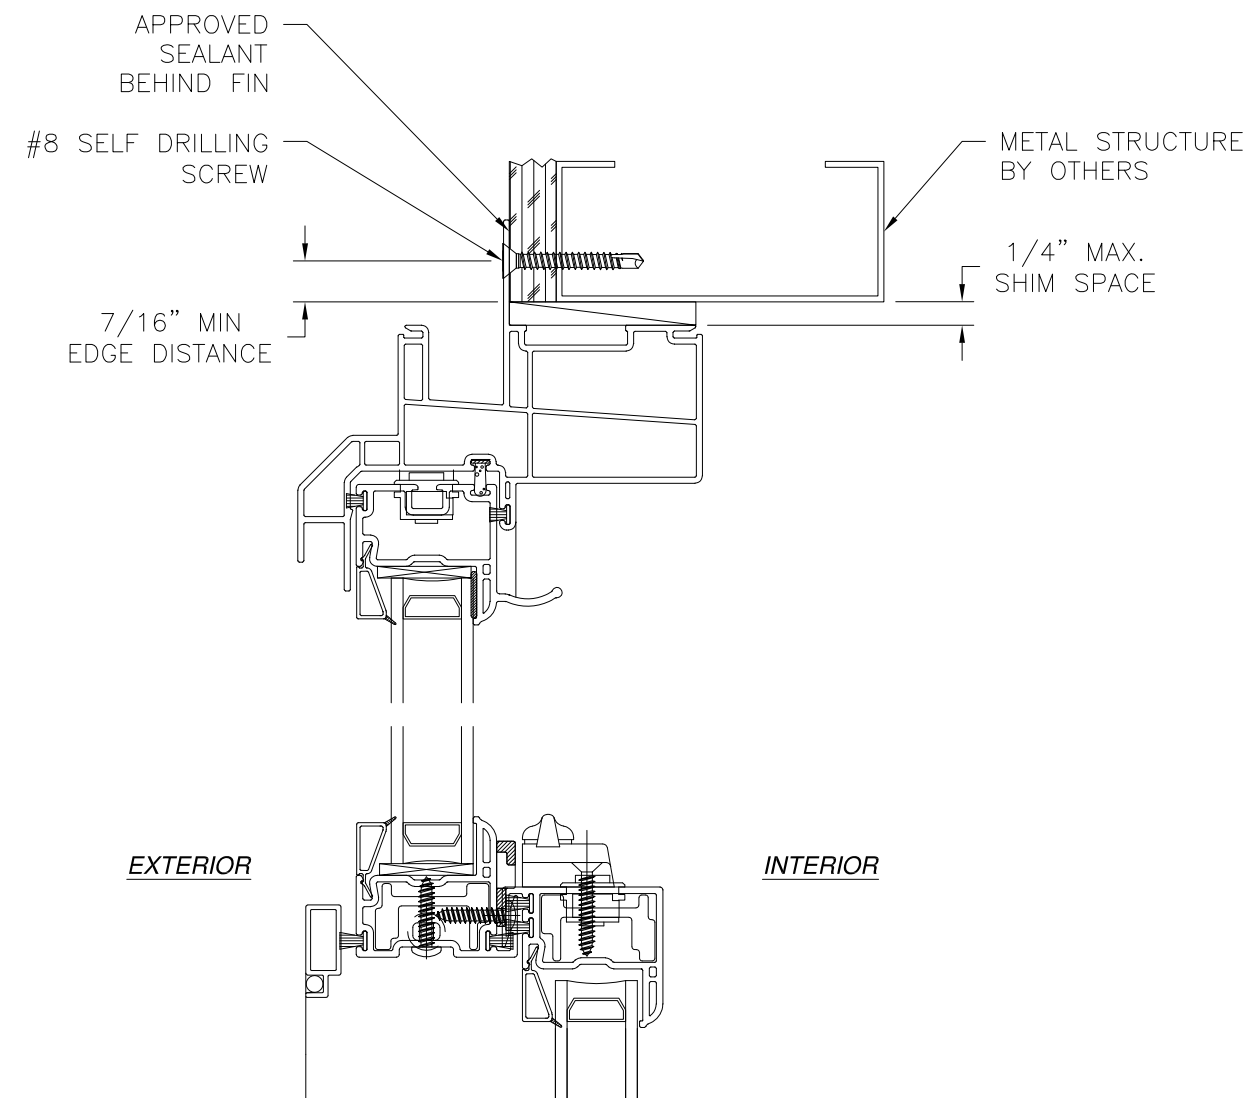

JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

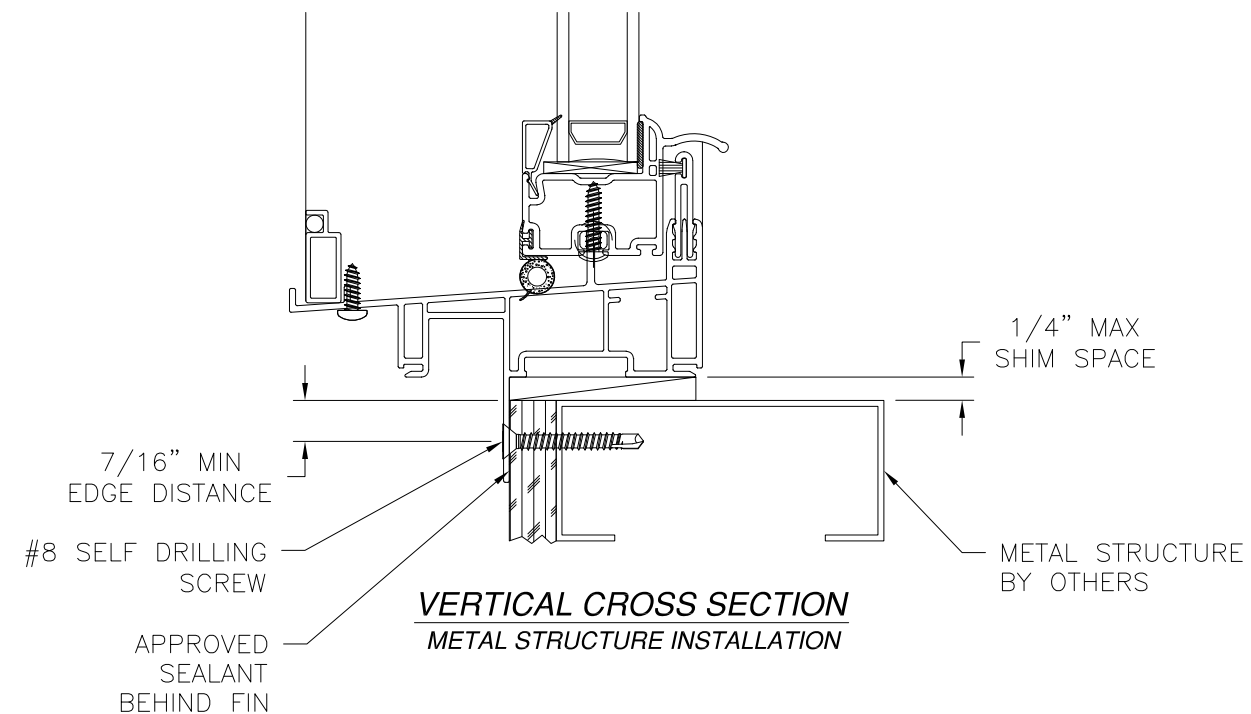

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

SLOCOMB WINDOWS AND DOORS, INC.


767 SANS SOUCI PARKWAY
WILKES-BARRE, PA 18706

600 DH DOUBLE HUNG WINDOW
REINFORCED NON-IMPACT
FIN INSTALLATION DETAILS


DRAWN: A.R.	DWG NO. 08-03995	REV -
SCALE NTS	DATE 01/18/2024	SHEET 12 OF 13

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com


SIGNED: 01/25/2024

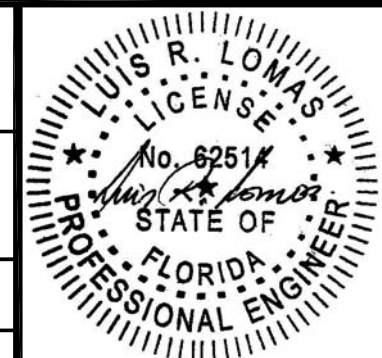


Luis R. Lomas P.E.
FL No.: 62514

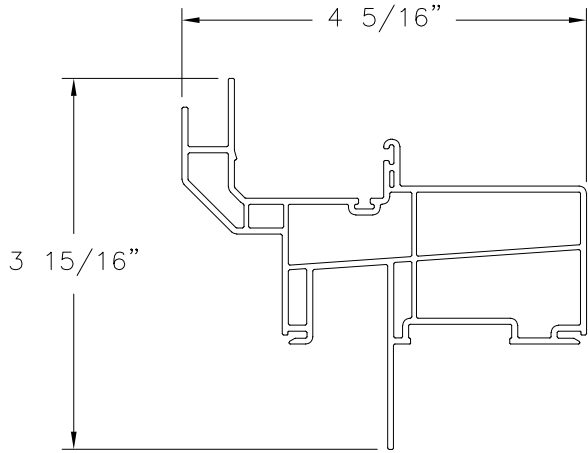


HEAD FRAME
FIN INSTALLATION (10005150)
EXTRUDED PVC

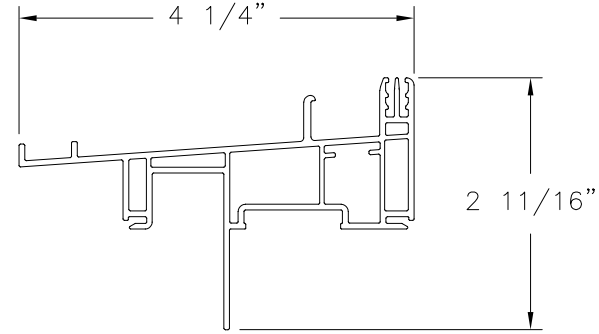


SILL FRAME
FIN INSTALLATION (10005151)
EXTRUDED PVC

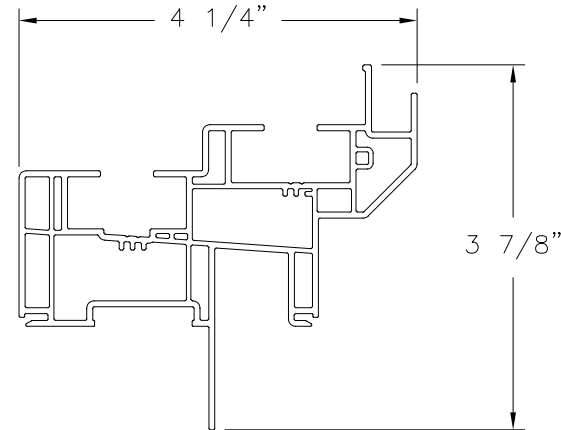


JAMB FRAME
FIN INSTALLATION (10005152)
EXTRUDED PVC

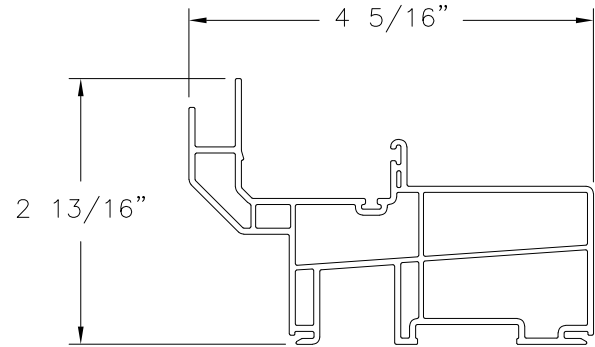


HEAD FRAME
FINLESS INSTALLATION (10005150)
EXTRUDED PVC

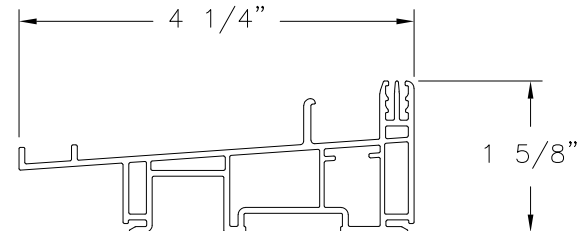


SILL FRAME
FINLESS INSTALLATION (10005151)
EXTRUDED PVC

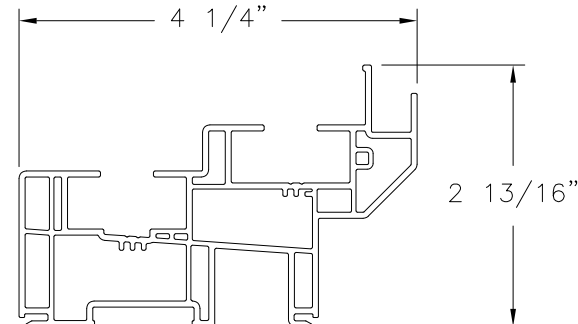


JAMB FRAME
FINLESS INSTALLATION (10005152)
EXTRUDED PVC

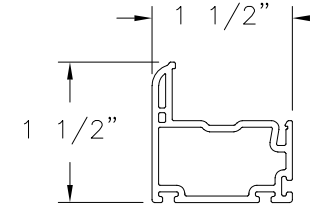


MAIN SASH (10005540)
EXTRUDED PVC

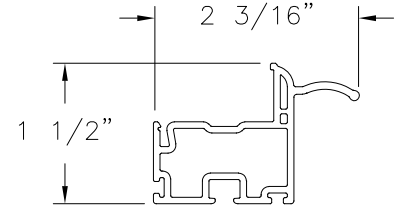


PULL/ LIFT SASH (10005541)
EXTRUDED PVC

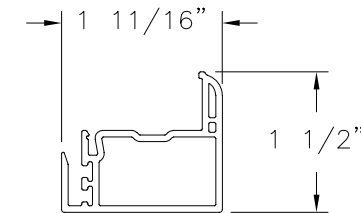


LOCK RAIL (10005542)
EXTRUDED PVC

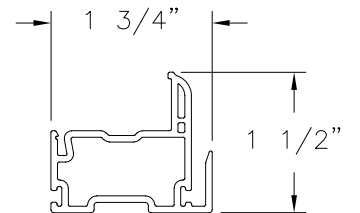


KEEPER RAIL (10005543)
EXTRUDED PVC

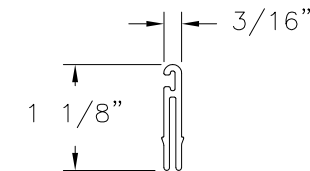


SILL EXTENSION
STANDARD (10005131)
EXTRUDED PVC

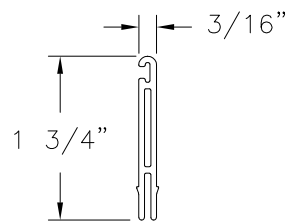


SILL EXTENSION
(10005139)
EXTRUDED PVC

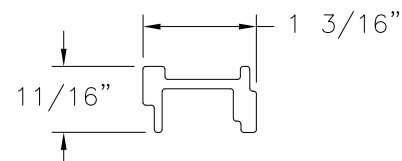

REINFORCEMENT (1000665)
POLYURETHANE REINFORCED FIBERGLASS

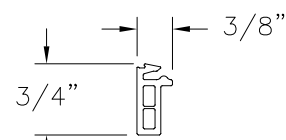

FLANGE (10004714)
EXTRUDED PVC

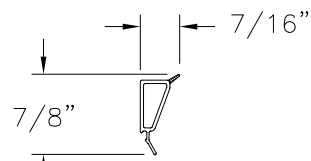

GLAZING BEAD
EXTRUDED PVC

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

SLOCOMB WINDOWS AND DOORS, INC.

767 SANS SOUCI PARKWAY
WILKES-BARRE, PA 18706

600 DH DOUBLE HUNG WINDOW
REINFORCED NON-IMPACT
COMPONENTS

DRAWN:
A.R.

DWG NO.

08-03995

REV
-

SCALE NTS

DATE


01/18/2024

SHEET 13 OF 13

L. ROBERTO LOMAS P.E.

208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 01/25/2024

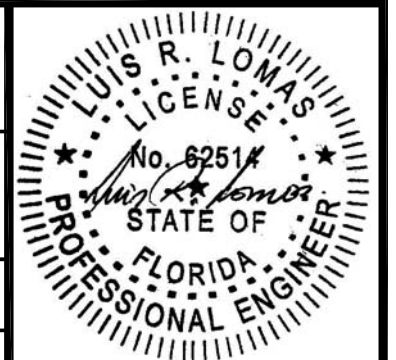

Luis R. Lomas P.E.
FL No.: 62514