


7 Installing Deadbolt Latch & Latchbolt



7-16 / 8-32 x 1" UNCWS



x4

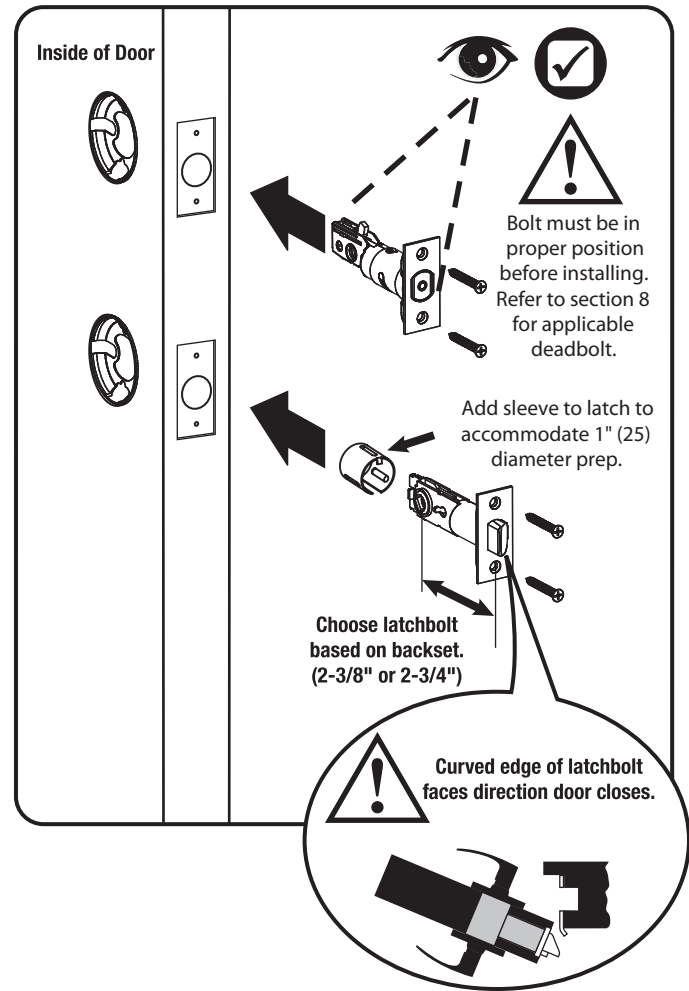

8^{opt} Installing Standard Exterior Deadbolt


For YR852 & YR872 Functions with KW, Schlage C or Yale Para Keyways



M6x55 PPHMS



x2

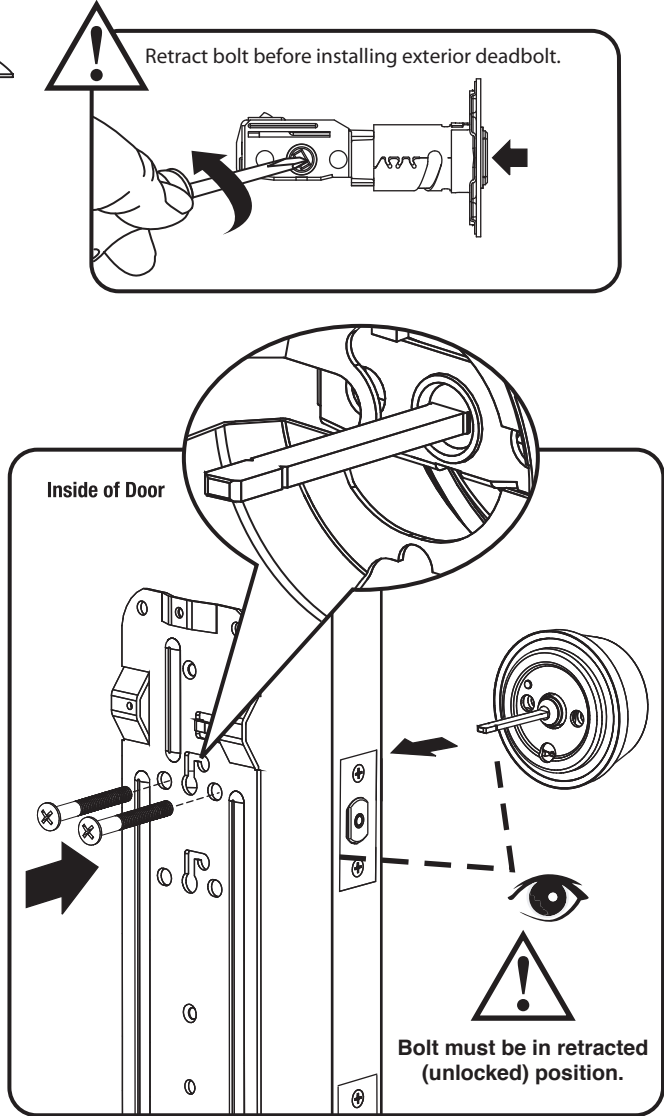

8^{opt} Installing Optional Exterior Deadbolt


For YR852 & YR872 Functions with Yale Commercial & Arrow Keyways or SFIC



1/4-20 x 2-3/8" PPHMS




x2

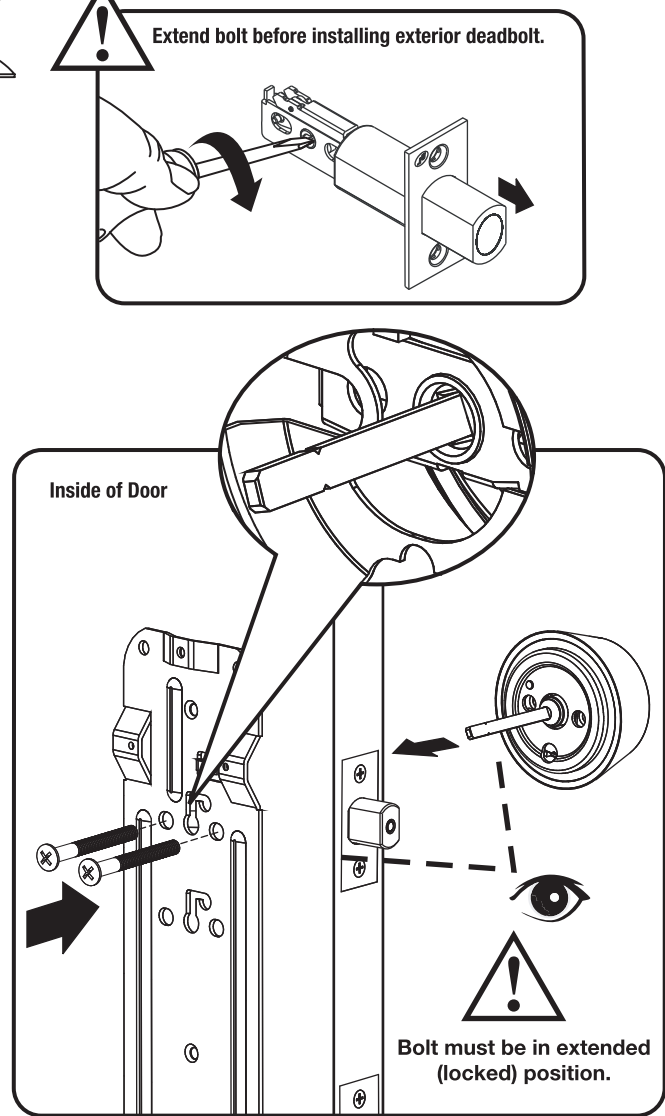


8^{opt} Installing Occupancy Exterior Deadbolt


For YR853 Function



1/4-20 x 1-3/4" LHSCS




x2

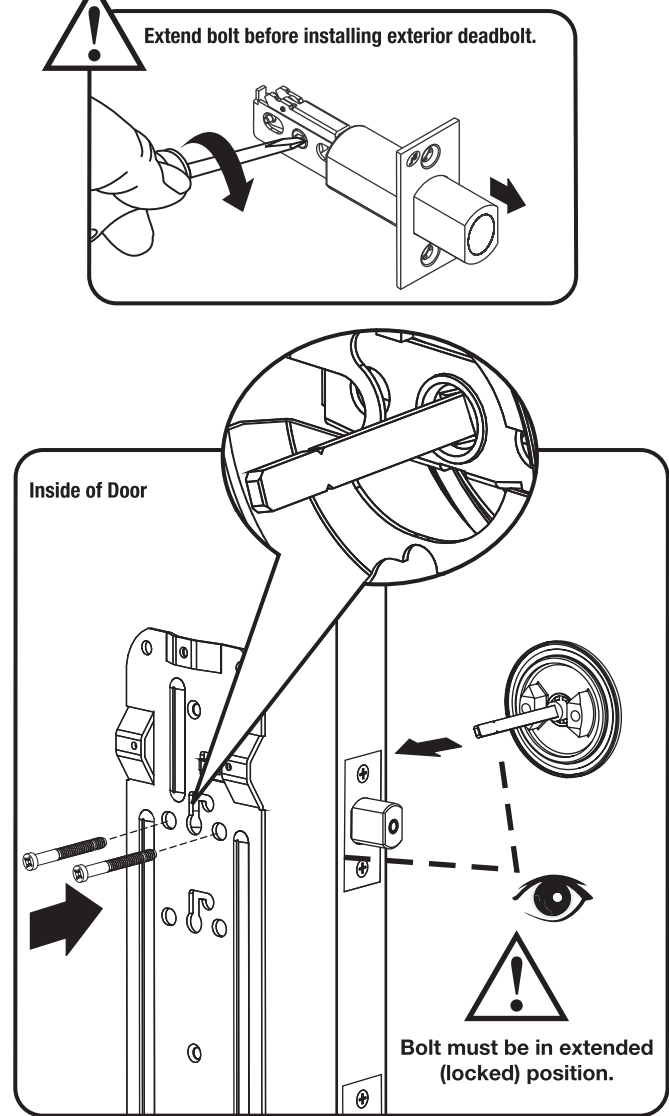


9 Installing Lock Chassis



10-32 x 1-1/2" PPHMS



x2

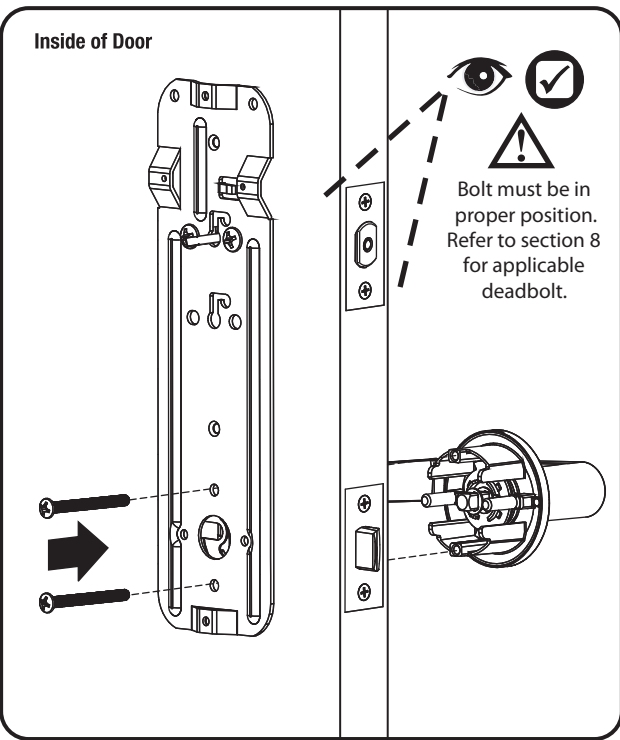


10 Securing Back Plate to Door




#8 Wood, 8-32 x 3/4" Machine



2x

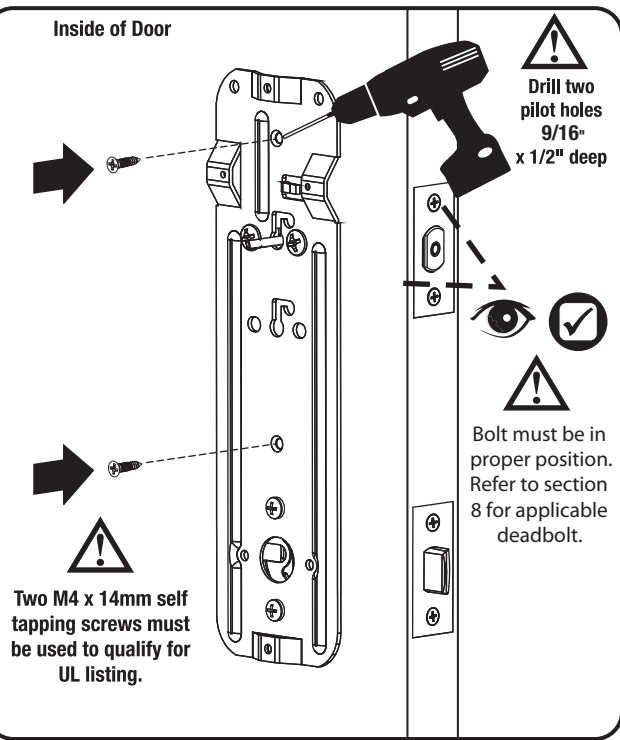

Testing Deadbolt & Latchbolt Operation

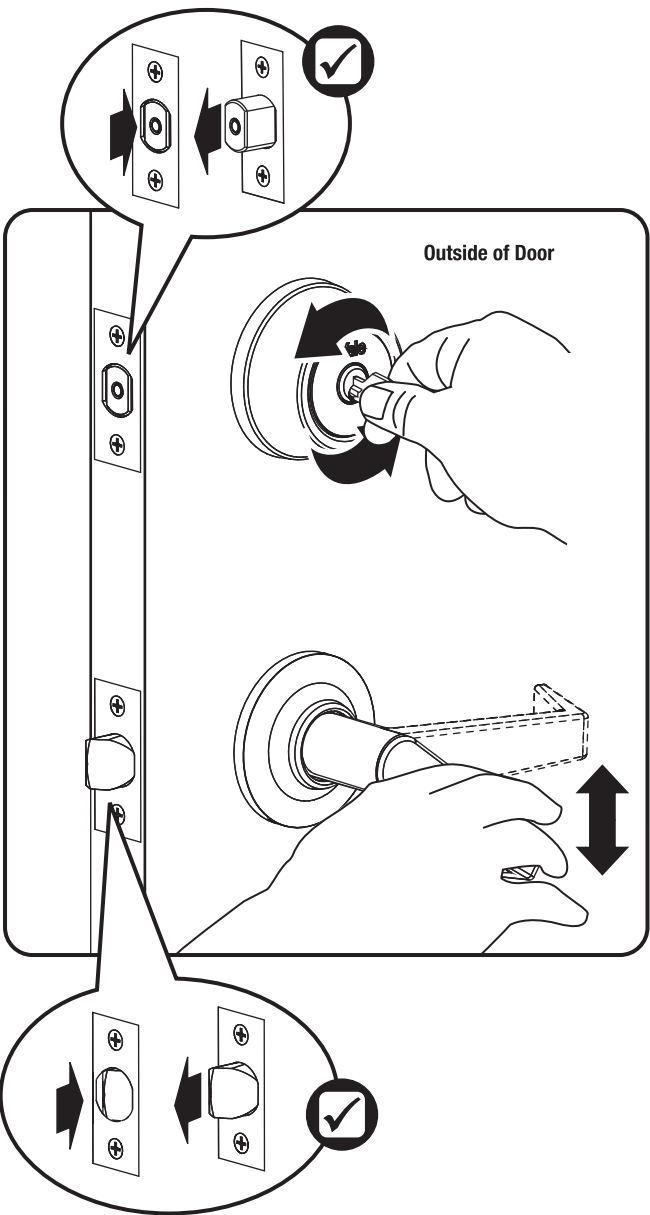


11 Installing Interior Escutcheon




10-32 x 5/8" POHMS




x2

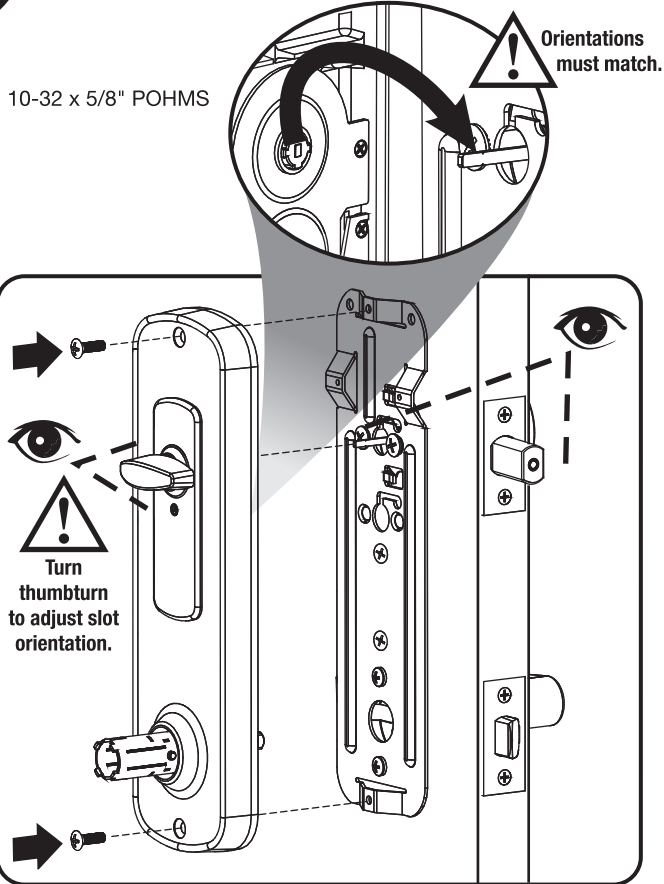


12 Installing Interior Lever

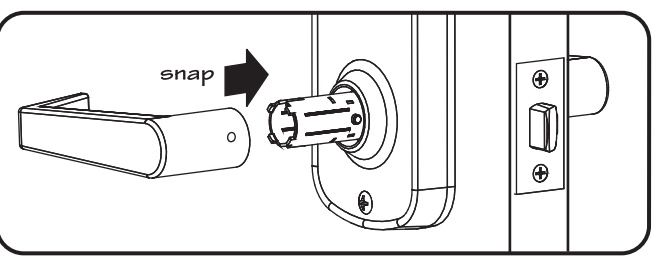

Testing Final Latchbolt Operation

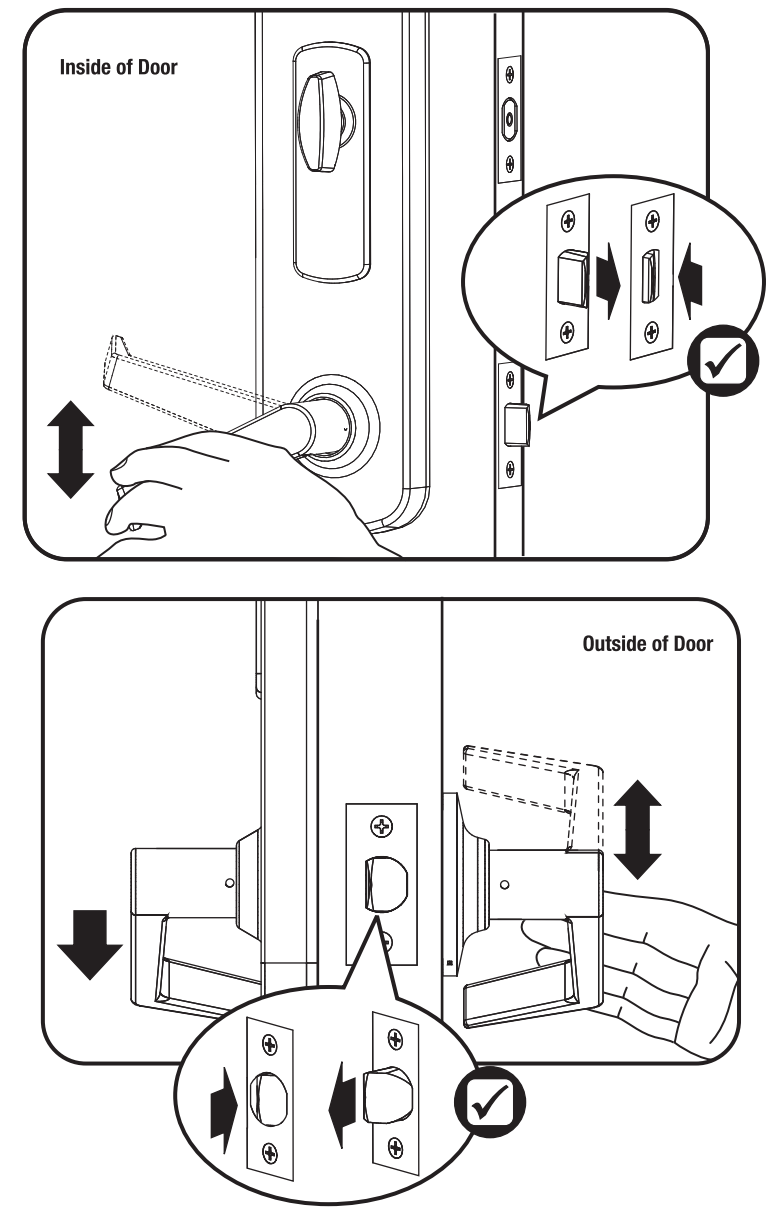


Testing Final Deadbolt Operation

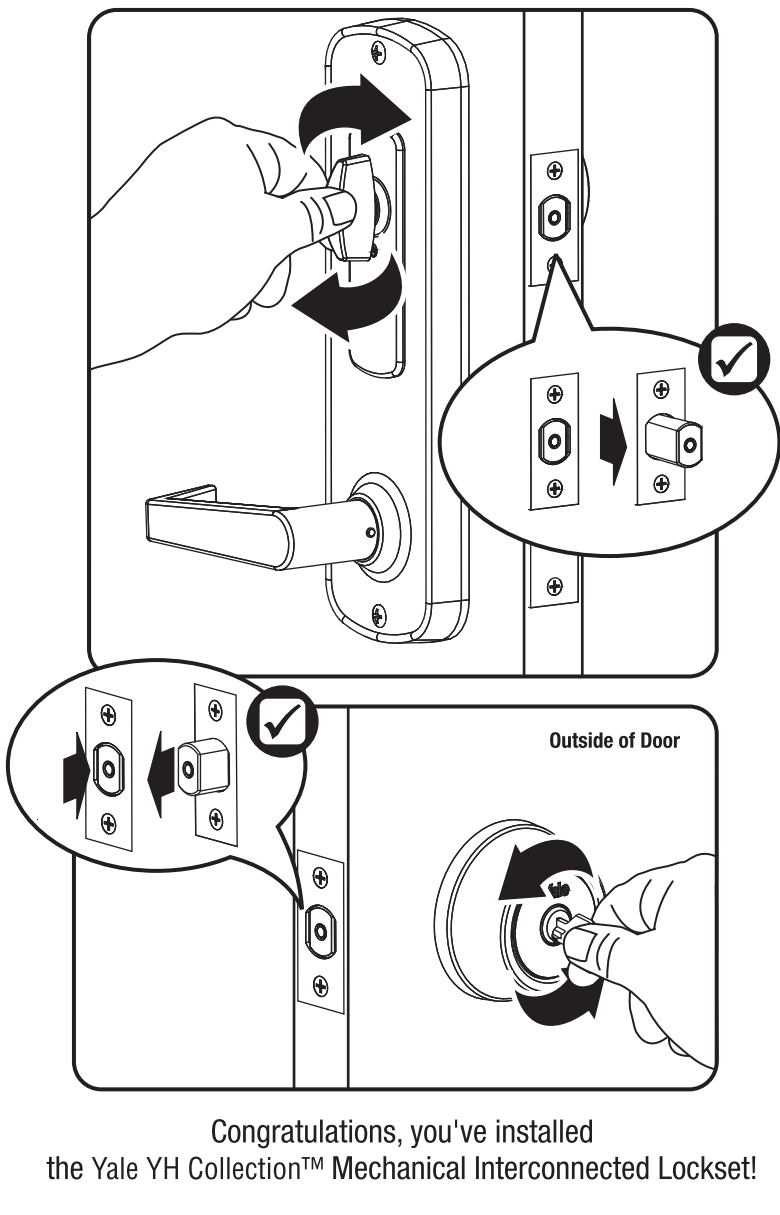

Removal of Cylinder (Kwikset, Schlage, Para)

For Retrofit Only / For Face Removable Deadbolt Only


1. Remove the loose plate from the back of the cylinder.
2. Two (2) screws hold the metal strap in place. Under the "C" cutout in this strap is a semicircular indentation in a spring loaded tab. Using the cylinder removing tool (wire with loop) or a screwdriver, place the tip of the tool against the tab in the indentation and push toward the center and turn clockwise.
3. The purpose is to move the cylinder and strap to the left. When all the way left, push the cylinder out of the housing.
4. Remove the plug assembly from the cylinder housing for re-keying.

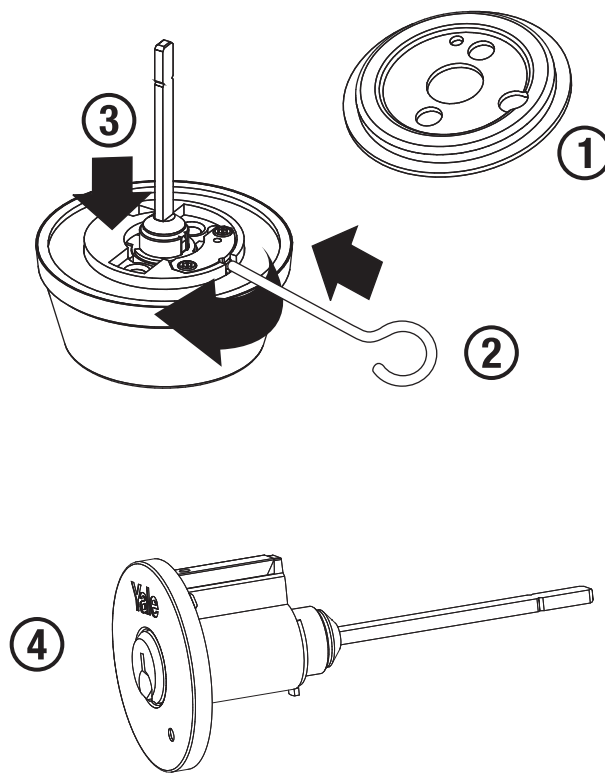

Removal of Cylinder (Kwikset, Schlage, Para)

For Retrofit Only / For Face Removable Deadbolt Only

1. Insert the key into the lock.
2. Press the cylinder removing tool into the small hole on cylinder face and turn the key counter-clockwise. This will cause the face of the cylinder to rotate to the left slightly.
3. Once turned off center, pull on the key to remove the cylinder.
4. Remove the plug assembly from the cylinder housing for re-keying.

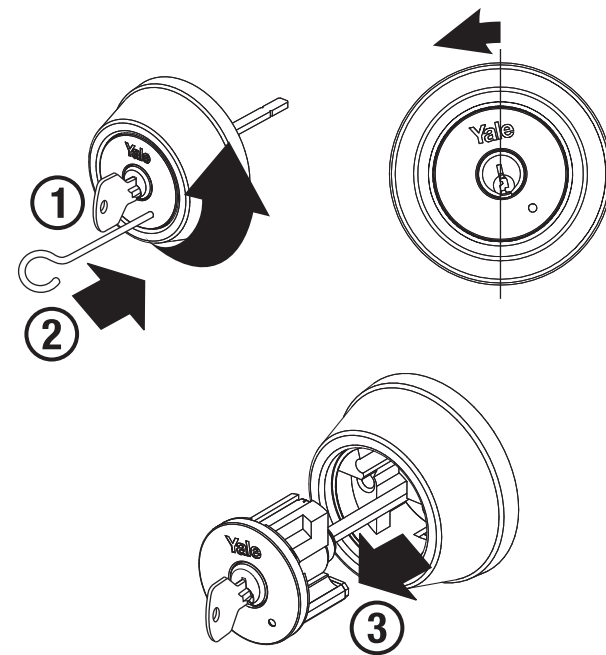

Yale Locks & Hardware

Product Support Tel 800.438.1951 • www.yalelocks.com

Yale Locks & Hardware is a division of Yale Security Inc., an ASSA ABLOY Group company. Yale® is a registered trademark of Yale Security Inc., an ASSA ABLOY Group company. YH Collection™ is a trademark of Yale Security Inc., an ASSA ABLOY Group company. Copyright © 2016, Yale Security Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Yale Security Inc. is prohibited.

YALE, with its unique global reach and range of products, is the world's favorite lock – the preferred solution for securing your home, family and personal belongings.

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience.