


BILL OF MATERIAL			
ITEM	DESCRIPTION	PART NUMBER	QTY.
1	INSIDE LEVER		1
2	PLASTIC INSERT		2
3	INSIDE ROSE		1
4	MACHINE SCREWS		2
5	INSIDE ROSE LINER		1
6	TURN BUTTON		1
7	TURN BUTTON INSERT		1
8	CHASSIS ASSEMBLY		1
9	THRU-BOLT RETAINER		1
10	OUTSIDE ROSE		1
11	STANDARD CYLINDER		1
12	LEVER/KNOB LR,LC,LG,K		1
13	LATCH BOLT		1
14	HINGES (UNDER SEP. NOA)		3
15	APPROVED DOOR & FRAME	(UNDER SEPARATE NOA)	1
16	MOUNT SCREWS THUMB		2
17	THUMB TURN		1
18	MOUNT SCREWS		2
19	MOUNT PLATE		1
20	DEADBOLT LATCH		1
21	EXT HOUSING & CYLINDER		1
22	LATCH/STRIKE SCREWS		4
23	STRIKE		1
24	STRIKE REINFORCEMENT		1
25	COMBO SCREWS		1
26	STRIKE PLATE		1

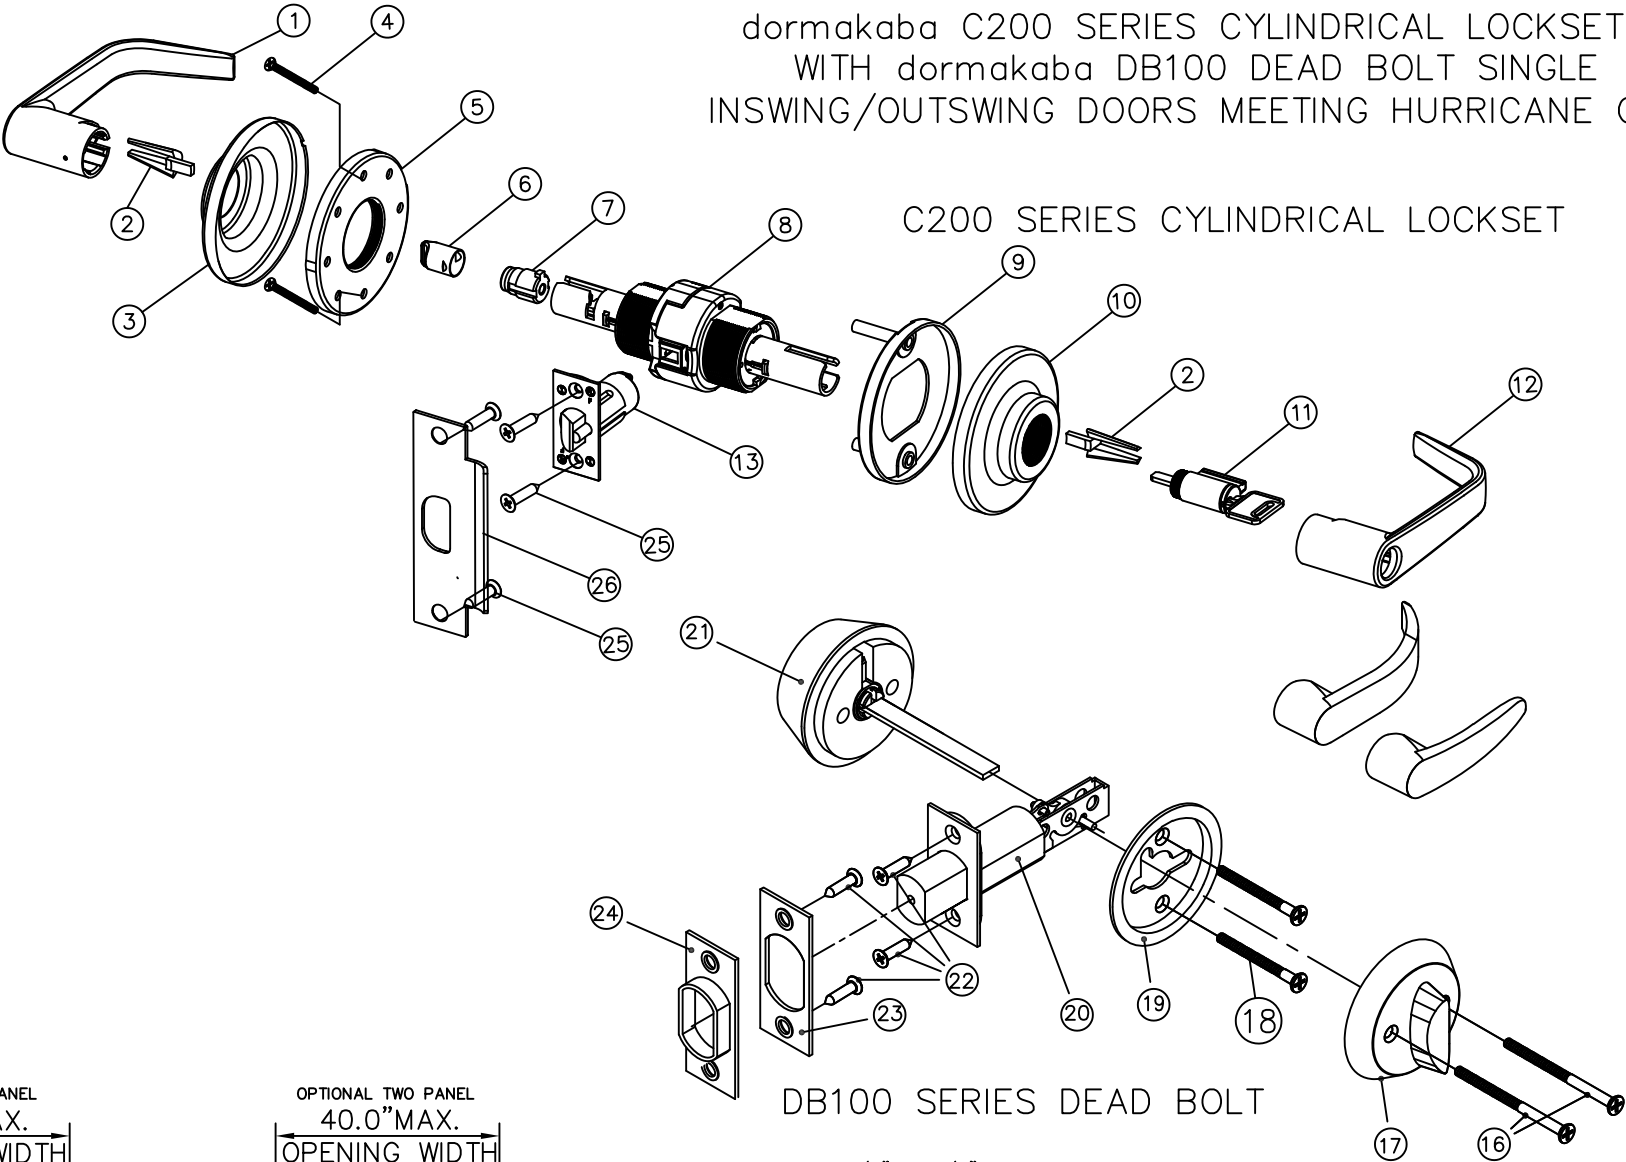

GENERAL NOTES


LIMITATIONS:

1. Device Complies with current Florida building code and has been tested to TAS 201-94, 202-94 and TAS 203-94
2. Each device is approved to be used as equal alternate to corresponding lock approved to be used in applicable 16 ga. (.060 min.) frame & in swing 18 ga. (.048 min.) commercial steel door holding current NOA.
- Lowest Design Pressure Rating shall apply.
3. Device shall be installed on a 18 ga. commercial steel door no larger than approved drawings as shown.
4. Steel reinforcement required as indicated on detail drawings.
5. Electrical devices are not part of this approval, and must be reviewed by the corresponding authority.


Certification:
Underwriter's Laboratories - UL10C
ANSI/BHMA Grade 1 Cylindrical Lockset.
1/2" Minimum latchbolt throw.
Frame - Steel 16 GA (.060) min.
Strike, hinge & header reinforcement as specified in this drawing.
Door - Steel 18 GA (.048) min.
Lock stile, hinge stile reinforcement as required.
All reinforcements to be spot welded or better by door manufacturer.
All dimensions in accordance with manufacturer's standard installation instructions.

Cylindrical Lockset model C200 SERIES
Outside knob/lever may be one of the designs shown.

Hermes F. Norero, P.E.
Florida License No. 73778
Building Drops, Inc
398 E. Dania Beach Blvd
Dania Beach, FL 33004
FBPE Cert. of Authorization 29578

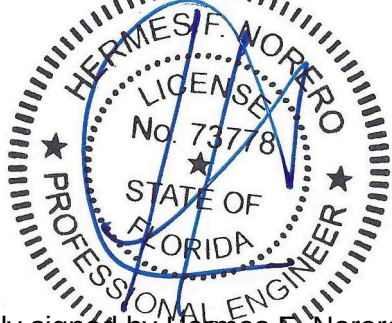

Digitally signed by Hermes F. Norero, P.E.
Reason: I am approving this document
Date: 2022.08.14 20:40:05 -04'00'

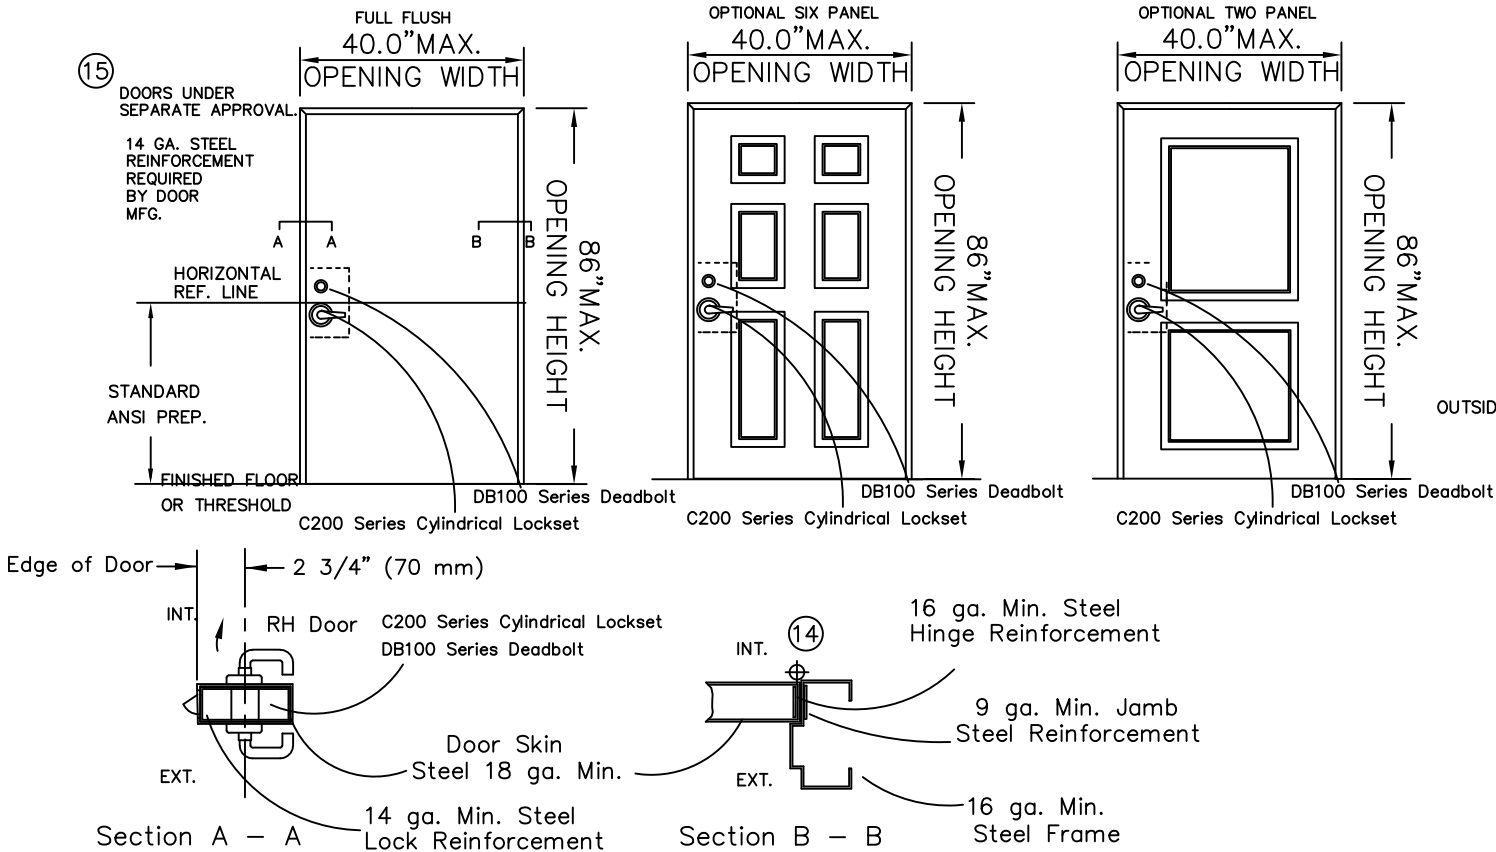

BACK SET: 2 3/4", 2 3/8" AVAILABLE
LATCHES: 1/2" THROW - STAINLESS STEEL
DEAD BOLT: 1" THROW - BRASS MATERIAL
HARDENED STEEL PIN CENTER
STRIKE: ANSI 1 1/4" X 4 7/8" X 1 3/16" LIP STANDARD.
LATCHBOLT/DEADBOLT DIMENSIONS:
LATCHBOLT: 1/2" THROW, .752" X .764"
DEADBOLT: 1" THROW, .625" X .750"

Design Pressure Rating		
Model C200 Series Cylindrical Lockset With DB100 Deadbolt 40" X 86" Max. Opening		
	INSWING	OUTSWING
POSITIVE	80 PSF	-80 PSF
NEGATIVE	80 PSF	-80 PSF
IMPACT RATING		
LARGE AND SMALL MISSILE IMPACT RESISTANT		

DESCRIPTION: dormakaba C200 Series Cylindrical Lockset & DB100 Deadbolt		 dormakaba USA 6161 E. 75TH STREET INDIANAPOLIS, ILLINOIS 46250	
SCALE: NONE	DRAWN BY: YC	DATE: 8-07-19	CHKD BY: DATE: 8-07-19

Deadbolt Revision	3	MS	8-04-22
		YC	8-07-19
Update Print	1	TA	6-11-07
REVISIONS	NO.	BY	DATE
DWG. 1 OF 1			
DWG. NO.	9000-406		