



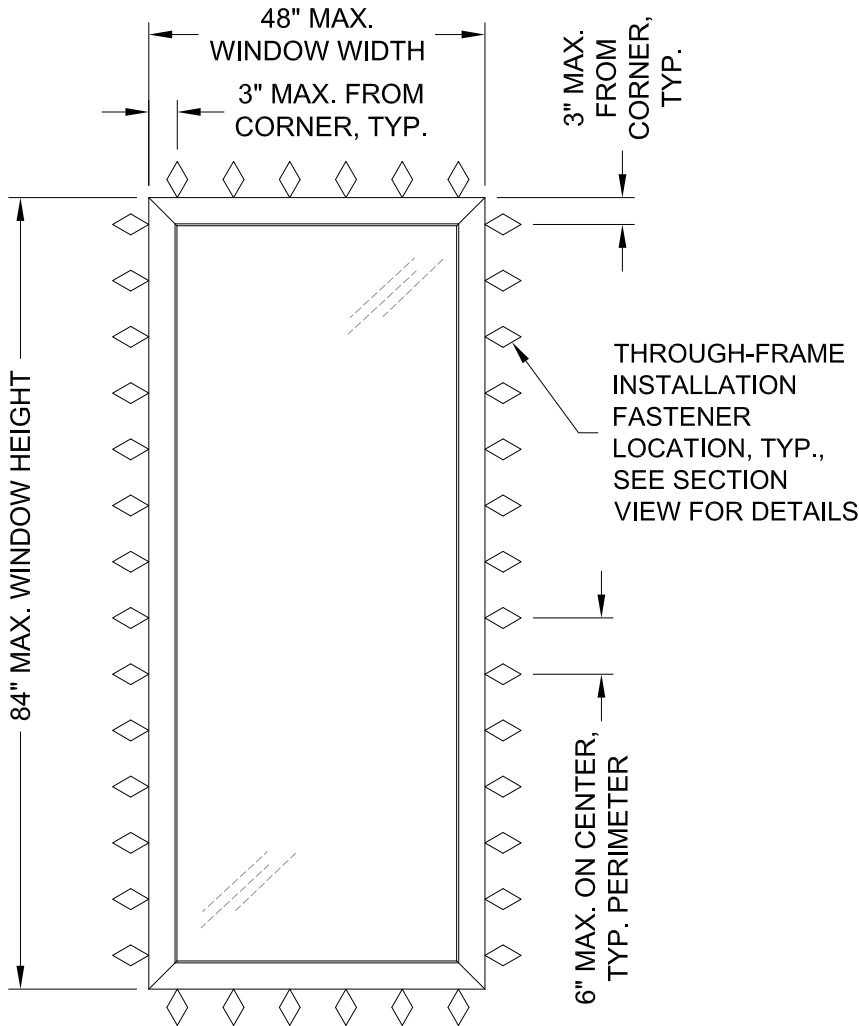

TYPICAL ELEVATION

| DESIGN PRESSURE RATING | IMPACT RATING |
|------------------------|---------------|
| +/-60 PSF              | NONE          |

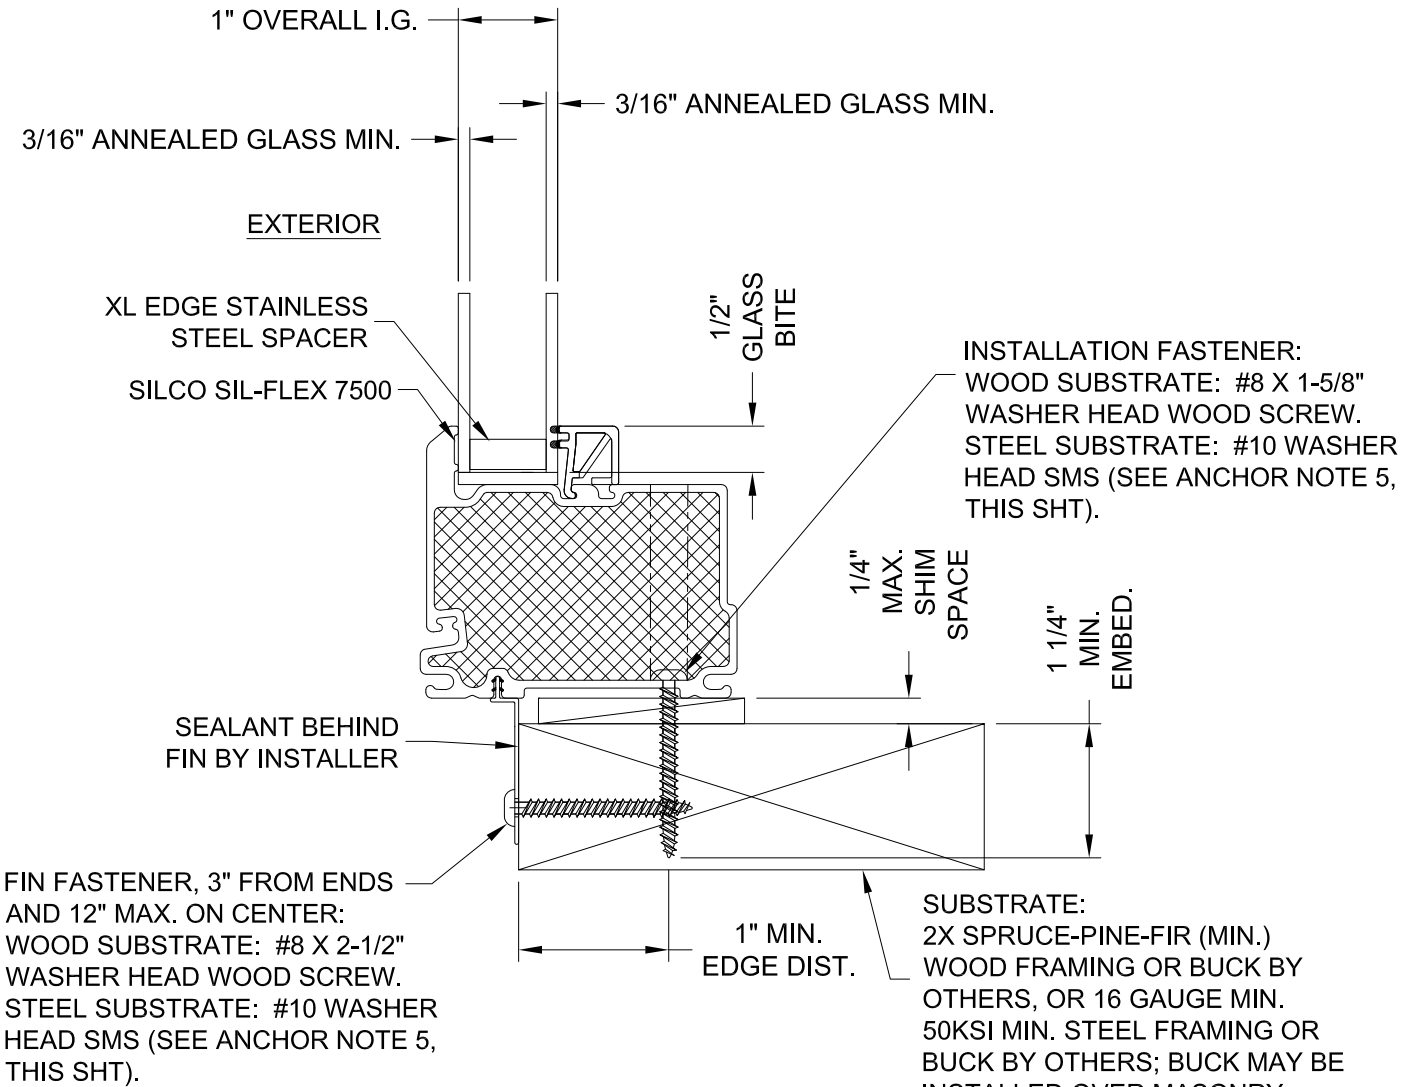


TYPICAL SECTION, HEAD/SILL/JAMB

- ANCHOR NOTES:
1. INSTALL ONE THROUGH-FRAME ANCHOR AT EACH LOCATION SHOWN IN THE ELEVATION, AND INSTALL FIN ANCHORS AS INDICATED IN DETAIL.
  2. INSTALL SHIMS AT EACH ANCHOR LOCATION WHERE A GAP OF 1/16" OR GREATER EXISTS BETWEEN PRODUCT FRAME AND SUBSTRATE.
  3. SHIMS SHALL BE LOAD-BEARING (PLASTIC OR METALLIC) AND CAPABLE OF TRANSFERRING LOADS TO SUBSTRATE.
  4. SPECIFIED ANCHOR EMBEDMENT TO SUBSTRATE SHALL BE BEYOND WALL FINISH OR STUCCO.
  5. ANCHORS TO METAL SUBSTRATES SHALL BE OF SUFFICIENT LENGTH TO PROVIDE FULL THREAD ENGAGEMENT THROUGH METAL WALL THICKNESS WITH ADDITIONAL 3 THREADS BEYOND

GENERAL NOTES

1. THIS DOCUMENT ADDRESSES ONLY PRODUCT ANCHORAGE TO ACHIEVE THE INDICATED DESIGN PRESSURES AT THE INDICATED SIZES, IN THE CONFIGURATION SHOWN IN THE ELEVATION. INSTALL PRODUCTS WITH MAXIMUM SHIM GAP, MINIMUM EDGE DISTANCE AND EMBEDMENT, AND WITH FASTENER TYPES AS SHOWN IN THE DETAIL ON THIS SHEET. FOR FULL PRODUCT CONSTRUCTION DETAILS SEE QUAST TEST REPORTS QCT24-7231.02/03.
2. THIS PRODUCT AS SHOWN AND GLAZED IN THIS DRAWING, IS NOT IMPACT RESISTANT AND REQUIRES THE USE OF IMPACT PROTECTIVE DEVICES (SHUTTERS) IN WINDBORNE DEBRIS REGIONS. THIS PRODUCT HAS BEEN TESTED TO AAMA/WDMA/CSA101/I.S.2/A440, AND MEETS THE REQUIREMENTS OF THE FLORIDA BUILDING CODE, CURRENT EDITION, FOR USE OUTSIDE THE HIGH VELOCITY HURRICANE ZONE.
3. THE DESIGN PRESSURE RATINGS IN THIS DRAWING ARE AS LIMITED BY ASTM E-1300 COMPLIANT GLASS CALCULATIONS, TESTED WATER AND STRUCTURALPRESSURES.
4. THE 4/3 ALLOWABLE STRESS INCREASE FACTOR (SHORT-TERM INCREASE FACTOR) HAS NOT BEEN USED IN THE ANCHOR ANALYSIS FOR THIS SYSTEM. THE 1.6 Cd FACTOR WAS USED IN THE ANALYSIS OF ANCHORAGE INTO WOOD SUBSTRATE.
5. THE OPENING SUBSTRATE MATERIALS (FRAMING, MASONRY, BUCKS) AND ATTACHMENT OF BUCKS TO THE SUBSTRATE ARE BY OTHERS AND SHALL BE VERIFIED BY THE ARCHITECT OR ENGINEER OF RECORD OR AS APPROVED BY THE AUTHORITY HAVING JURISDICTION (AHJ). BUCKING, OPENINGS, & BUCKING FASTENERS MUST BE PROPERLY DESIGNED & INSTALLED BY OTHERS IN ACCORDANCE WITH THE FBC TO TRANSFER SUPERIMPOSED LOADS TO THE STRUCTURE.
6. DISSIMILAR MATERIALS THAT COME INTO CONTACT SHALL BE COATED OR OTHERWISE PROTECTED PER FBC TO PREVENT GALVANIC REACTIONS. WOOD BUCKS, IF USED, SHALL BE PRESSURE TREATED, WITH EITHER A TREATMENT OR COATING COMPATIBLE WITH THIS PRODUCT. ALL ANCHORS USED SHALL BE OF A MATERIAL OR HAVE A COATING COMPATIBLE WITH THE PRESSURE TREATED WOOD BUCKS AND ALL OTHER WINDOW MATERIALS.
7. ALL HARDWARE & FASTENERS SHALL BE IN ACCORDANCE WITH THESE DRAWINGS, OR AS APPROVED, SIGNED, AND SEALED BY A FLORIDA-REGISTERED PROFESSIONAL ENGINEER ON A SITE-SPECIFIC BASIS.
8. SEALING AND FLASHING STRATEGIES FOR OVERALL WATER INFILTRATION RESISTANCE OF THE INSTALLED PRODUCT SHALL BE THE RESPONSIBILITY OF OTHERS AND ARE NOT ADDRESSED BY THIS DOCUMENT.

Lucas Turner  
2024.06.04  
16:05:50  
-05'00'

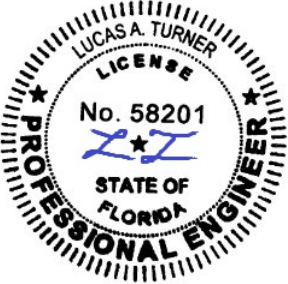

6/4/2024  
LUCAS A. TURNER, P.E.  
FL PE # 58201  
TURNER ENGINEERING &  
CONSULTING, INC.  
2428 OLD NATCHEZ TRC. TRL.  
CAMDEN, TN 38320  
PH. 941-380-1574

| REVISION                                                                                                                                                                                   |                 |               |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------------|
| 0                                                                                                                                                                                          | INITIAL RELEASE | 6/4/24        |
|  1530 PINE AVE. CRETE, NEBRASKA <a href="https://enerluxwindows.com/">https://enerluxwindows.com/</a> |                 |               |
| PRODUCT: 825 FIBERGLASS FIXED CASEMENT WINDOW                                                                                                                                              |                 |               |
| SHEET DESCRIPTION:                                                                                                                                                                         |                 |               |
| DWG NO: FPA-825-FCA-4X7-NI                                                                                                                                                                 |                 |               |
| SCALE: NTS                                                                                                                                                                                 | DATE: 9/25/2023 | SHEET: 1 of 1 |