

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.

2. WOOD FRAMING, METAL STRUCTURE AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.

3. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1–1/2” UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER’S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.

4. WHERE WOOD BUCK THICKNESS IS 1–1/2” OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER’S PUBLISHED INSTALLATION INSTRUCTIONS.

5. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.

6. BUCKS SHALL EXTEND BEYOND UNIT FRAME INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.

7. SHIM AS NEEDED AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16” OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4”.

8. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.

9. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.

10. FRAME MATERIAL: EXTRUDED RIGID PVC.

11. UNITS MUST BE GLAZED PER ASTM E1300, SEE SHEET 2 FOR GLAZING DETAIL.

12. APPROVED IMPACT PROTECTIVE SYSTEM IS NOT REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.
13. FOR ANCHORING THROUGH FIN INTO WOOD FRAMING OR 2X BUCK USE #8 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4” MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.

14. FOR ANCHORING THROUGH FIN INTO METAL STRUCTURE USE #8 SMS OR SELF DRILLING SCREW WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.

15. FOR ANCHORING THROUGH FRAME INTO WOOD FRAMING OR 2X BUCK USE #10 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4” MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.

16. FOR ANCHORING THROUGH FRAME INTO MASONRY/CONCRETE USE 3/16” TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4” MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2” MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.

17. FOR ANCHORING THROUGH FRAME INTO METAL STRUCTURE USE #10 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.

18. ALL FASTENERS TO BE CORROSION RESISTANT.

19. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER’S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:

19.1. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42

19.2. CONCRETE: MINIMUM COMPRESSIVE STRENGTH OF 2,000 PSI.

19.3. MASONRY: HOLLOW/FILLED BLOCK PER ASTM C90 WITH Fm=2,000PSI MINIMUM.


19.4. METAL STRUCTURE: STEEL 18GA (.048”) FY=33KSI/FU=52KSI OR ALUMINUM 6063–T5 FU=30KSI .125” THICK MINIMUM

20. GEOMETRIC SHAPES ARE ALSO APPROVED. APPROVED GEOMETRIC SHAPES DIMENSIONS SHALL NOT EXCEED INSCRIBED DIMENSIONS OF APPROVED RECTANGULAR ASSEMBLY SHOWN IN SHEET 2.

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2	ELEVATIONS AND GLAZING DETAIL
3 – 6	INSTALLATION DETAILS
7	COMPONENTS


ACADIAN WINDOWS AND SIDING, LLC		
119 ALPHA DRIVE DESTREHAN, LA 70047		
ACADIAN WINDOWS IMPACT SERIES FIXED 50" X 63" NOTES		
DRAWN: A.R.	DWG NO. 08-04059	REV -
SCALE NTS	DATE 05/24/2024	SHEET 1 OF 7
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

SIGNED: 07/18/2024

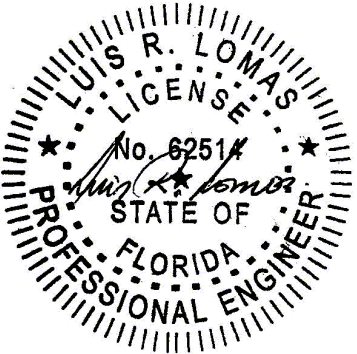


Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

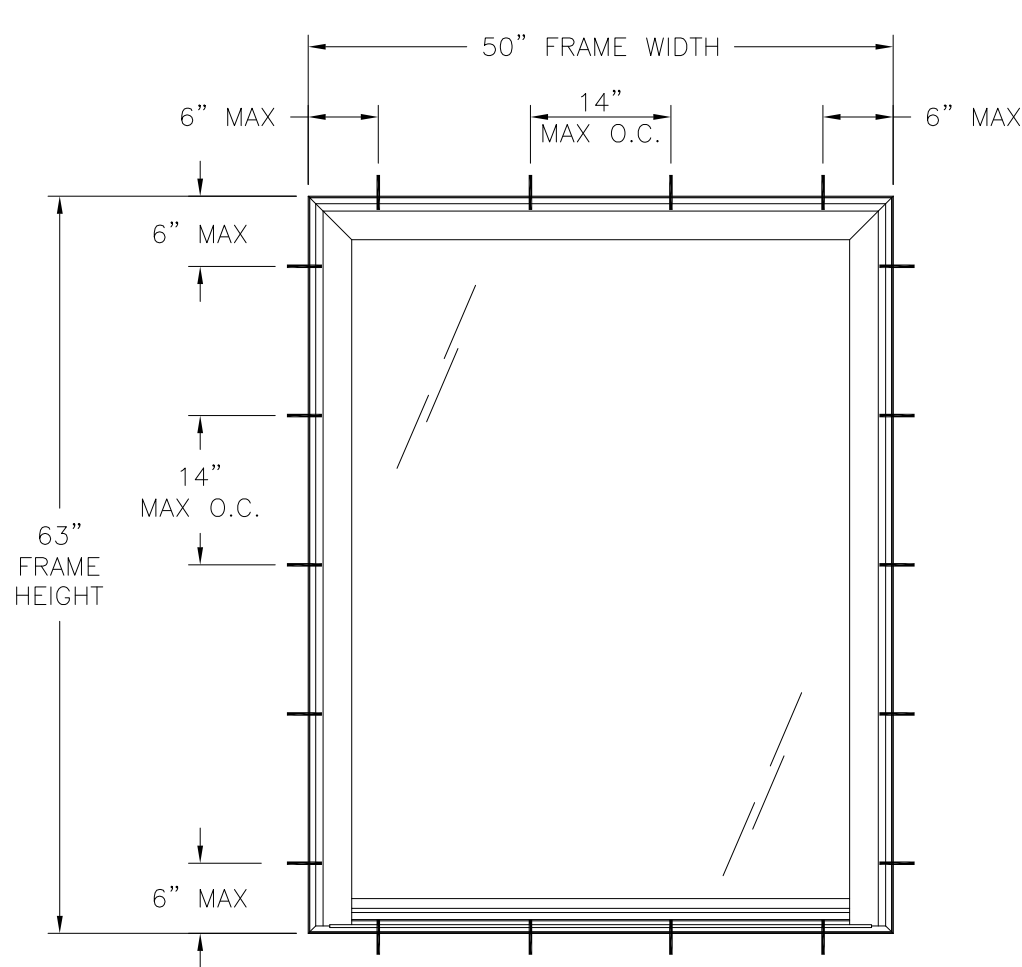

ACADIAN WINDOW IMPACT SERIES FIXED
FRAME INSTALLATION
EXTERIOR VIEW

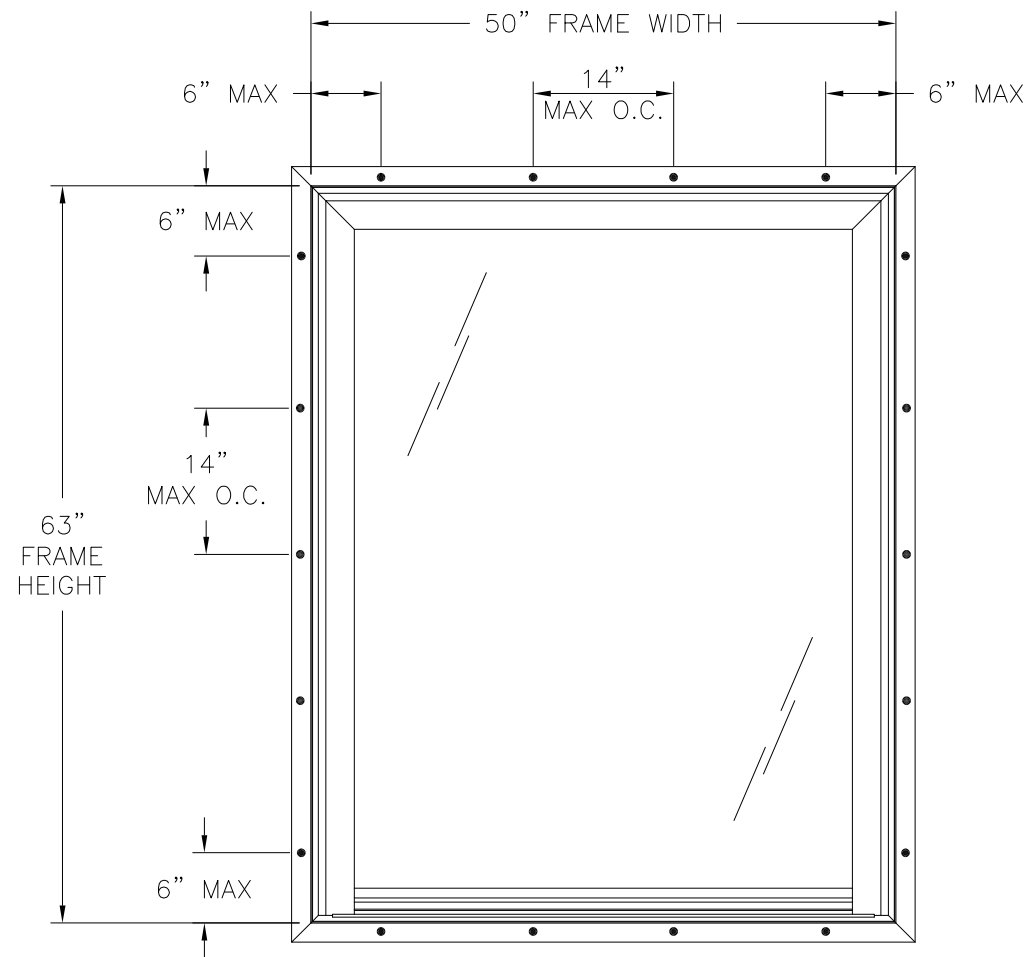

ACADIAN WINDOW IMPACT SERIES FIXED
FIN INSTALLATION
EXTERIOR VIEW

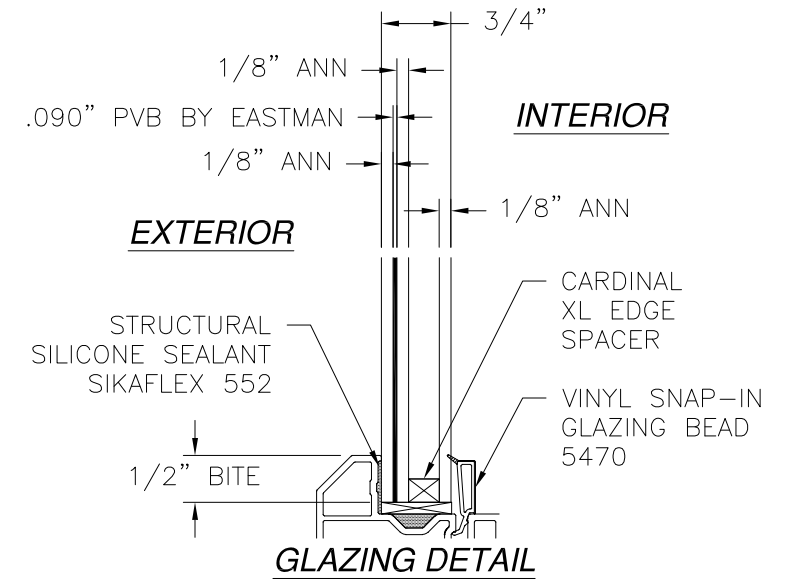


NOTES:
1. D.L.O.: 45" X 58"

DESIGN PRESSURE RATING	IMPACT RATING
± 55.0 PSF	LARGE & SMALL MISSILE IMPACT


MISSILE LEVEL D, WIND ZONE 4
50" X 63" UNIT SHOWN. OTHER SIZES APPROVED AS LONG AS
FRAME AREA DOES NOT EXCEED 21.87 FT²

SIGNED: 07/18/2024

ACADIAN WINDOWS AND SIDING, LLC 119 ALPHA DRIVE DESTREHAN, LA 70047		
ACADIAN WINDOWS IMPACT SERIES FIXED 50" X 63" ELEVATIONS AND GLAZING DETAIL		
DRAWN: A.R.	DWG NO. 08-04059	REV -
SCALE NTS	DATE 05/24/2024	SHEET 2 OF 7
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

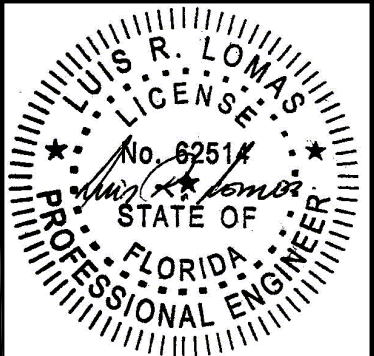


Luis R. Lomas P.E.
FL No.: 62514

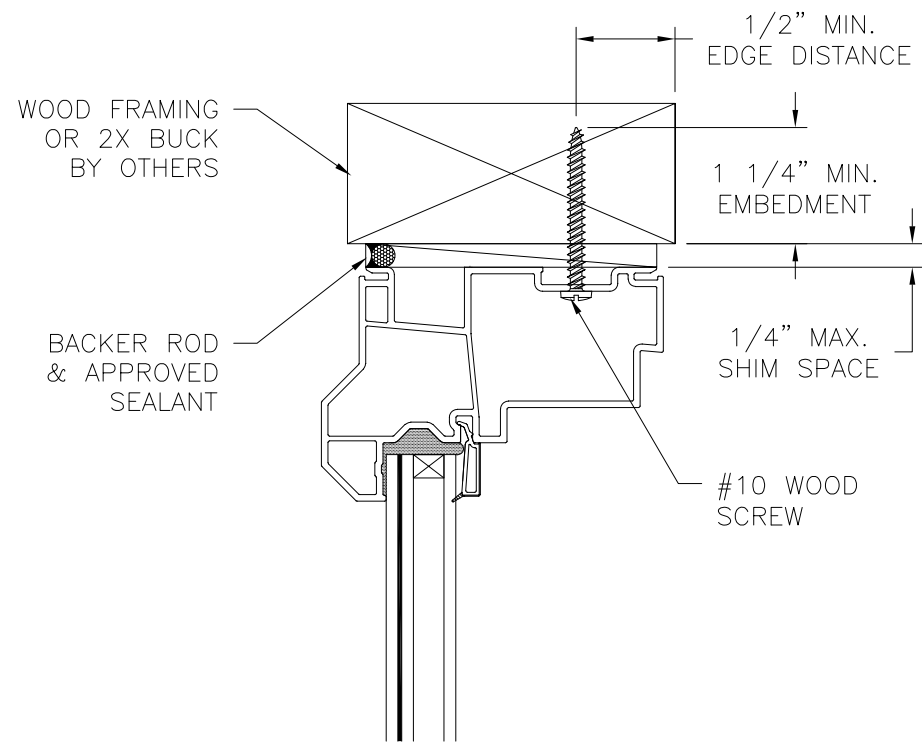


EXTERIOR

INTERIOR

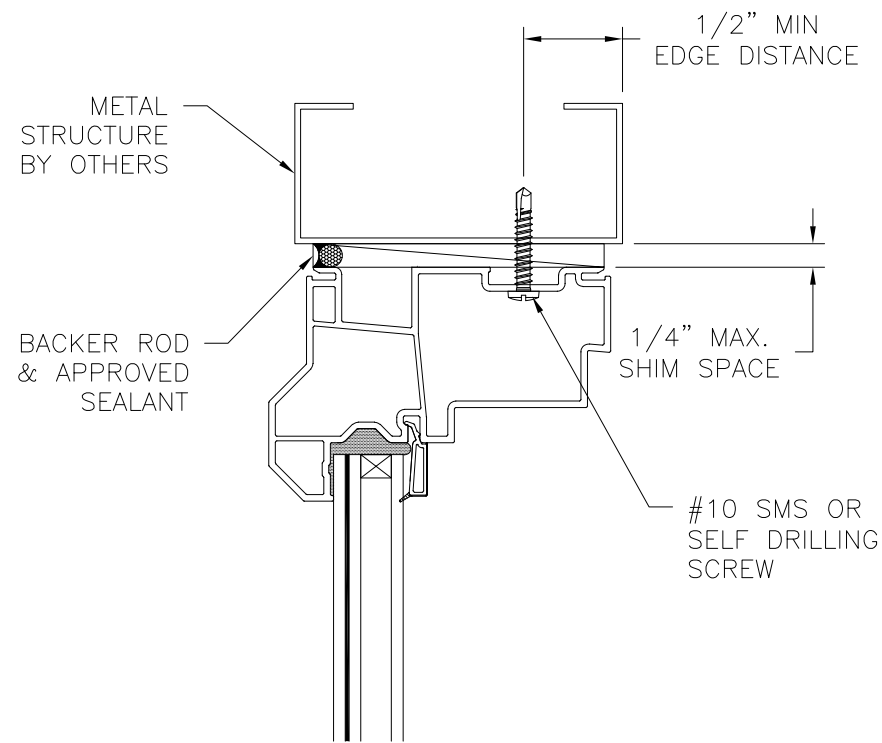


EXTERIOR


INTERIOR

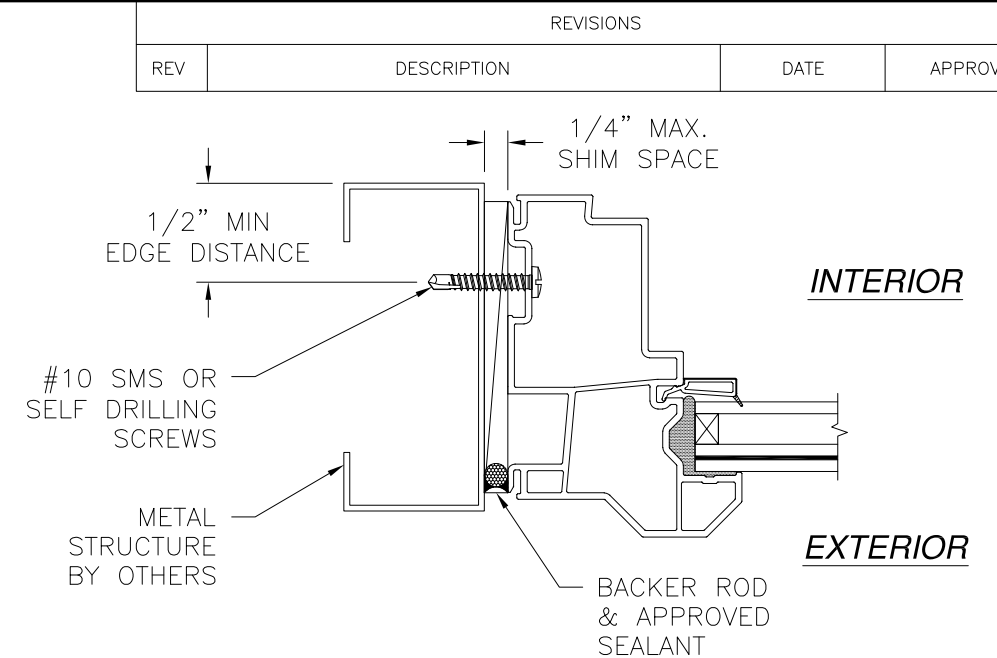


JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION

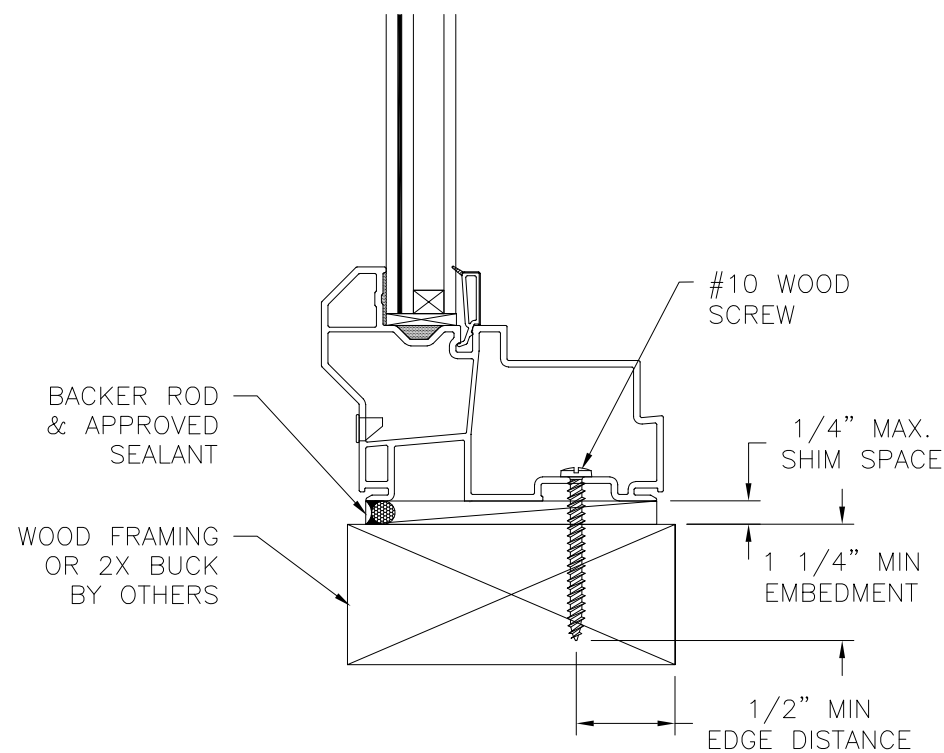

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

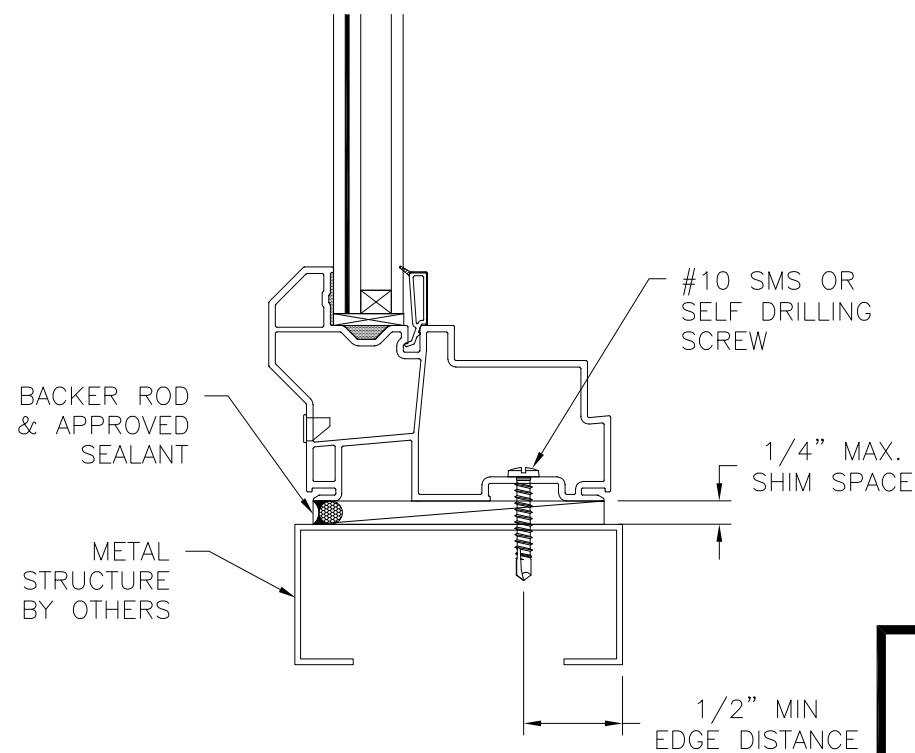

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

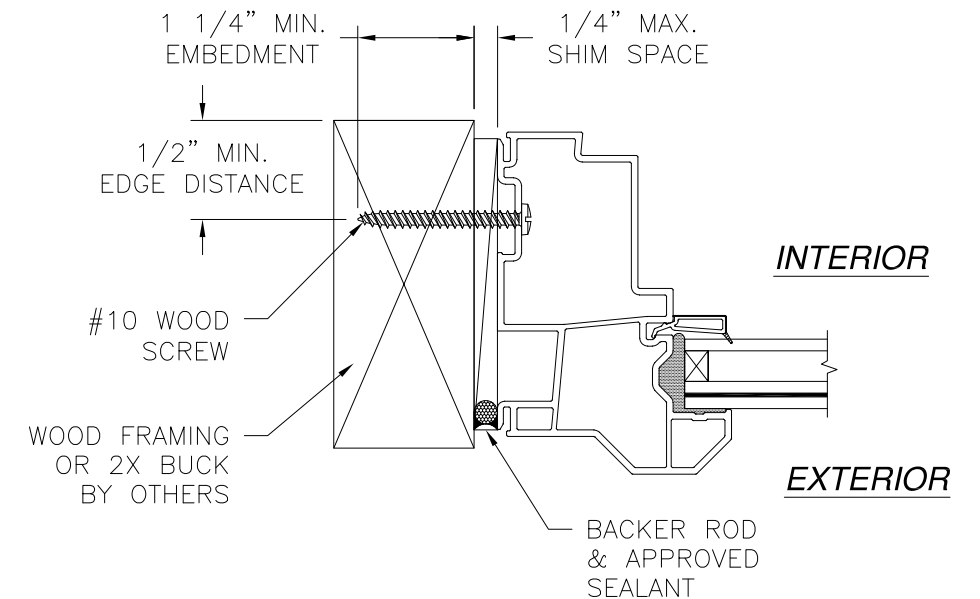

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

SIGNED: 07/18/2024

- NOTES:**
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


ACADIAN WINDOWS AND SIDING, LLC

119 ALPHA DRIVE
DESTREHAN, LA 70047


ACADIAN WINDOWS IMPACT SERIES FIXED
50" X 63"
INSTALLATION DETAILS

DRAWN: A.R.	DWG NO. 08-04059	REV -
SCALE NTS	DATE 05/24/2024	SHEET 3 OF 7

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

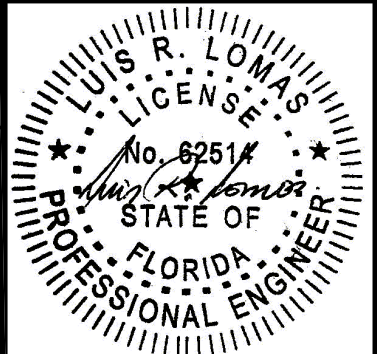


Luis R. Lomas P.E.
FL No.: 62514

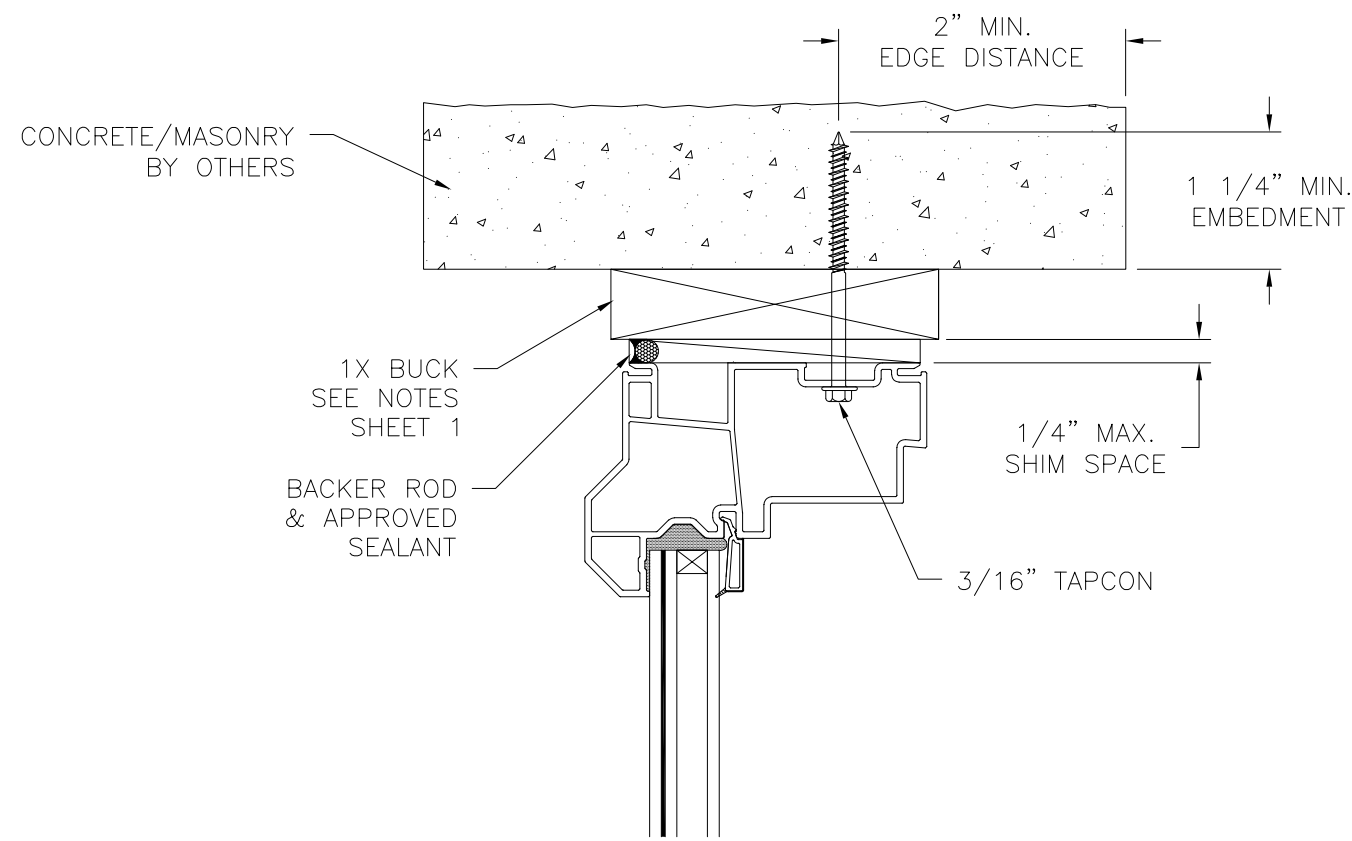


EXTERIOR

INTERIOR

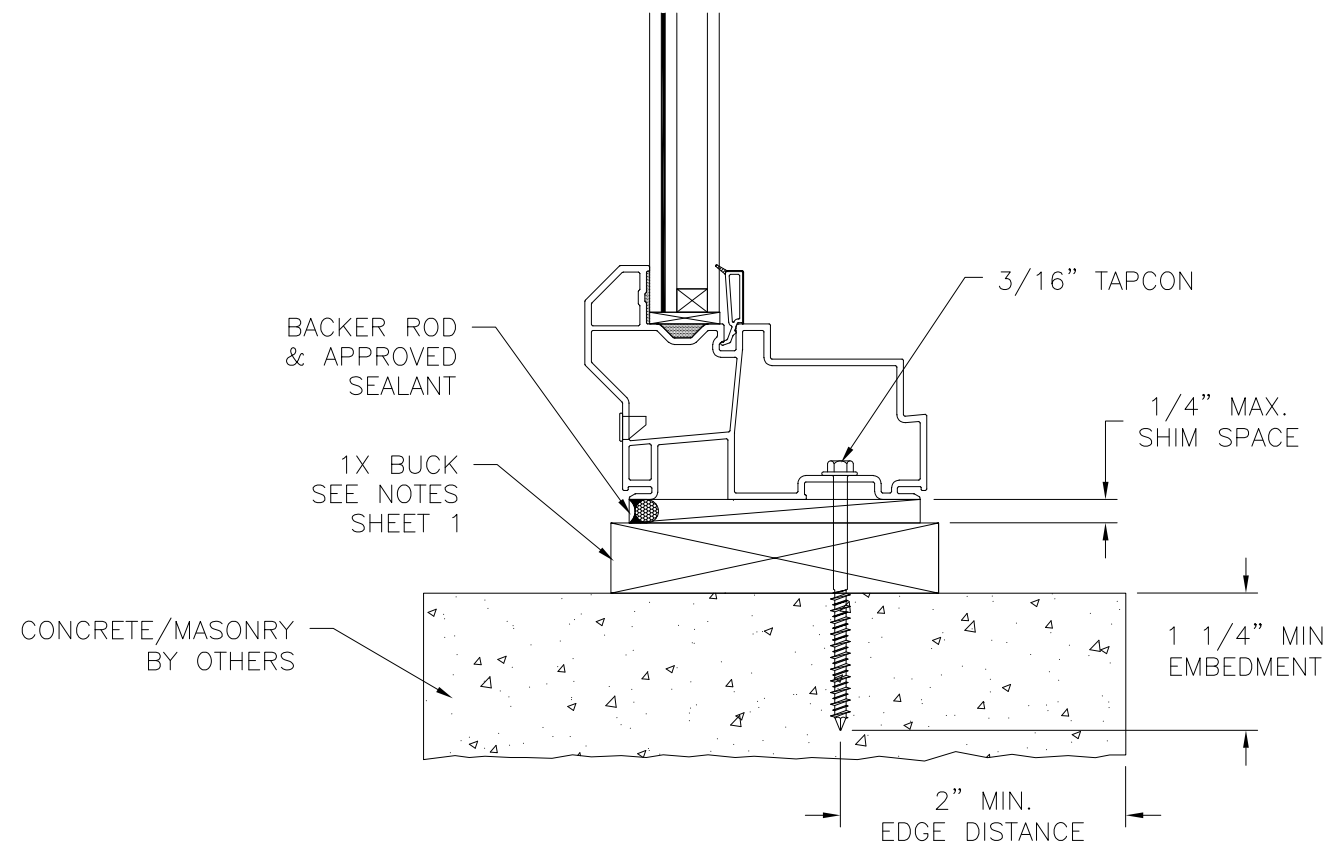

VERTICAL CROSS SECTION
CONCRETE/MASONRY INSTALLATION

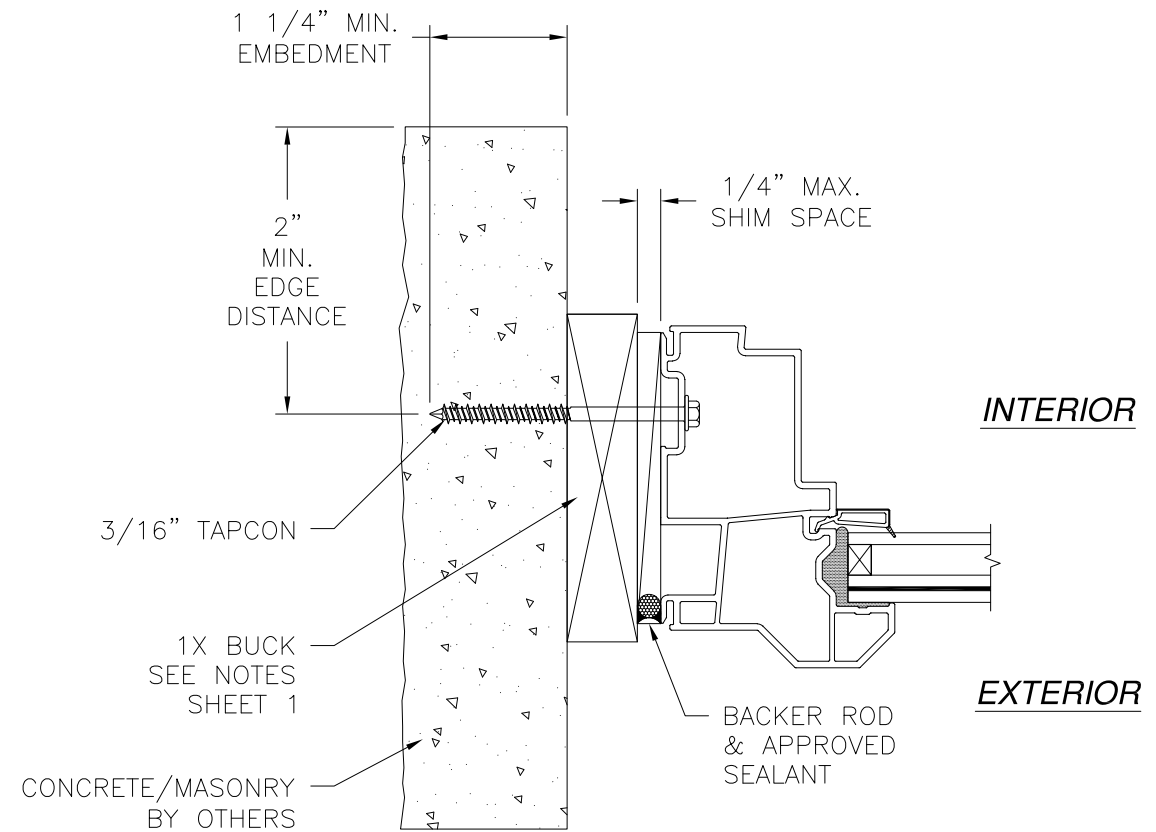

JAMB INSTALLATION DETAIL
CONCRETE/MASONRY INSTALLATION

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

ACADIAN WINDOWS AND SIDING, LLC

119 ALPHA DRIVE
DESTREHAN, LA 70047

ACADIAN WINDOWS IMPACT SERIES FIXED
50" X 63"
INSTALLATION DETAILS

DRAWN:
A.R.

DWG NO.
08-04059

REV
-


SCALE NTS

DATE 05/24/2024

SHEET 4 OF 7

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com


SIGNED: 07/18/2024

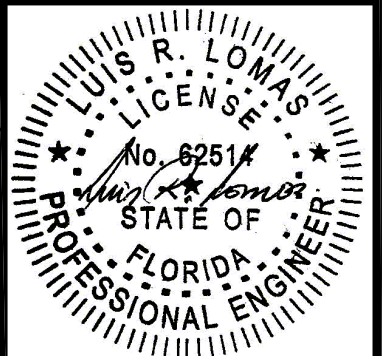

Luis R. Lomas P.E.
FL No.: 62514


REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

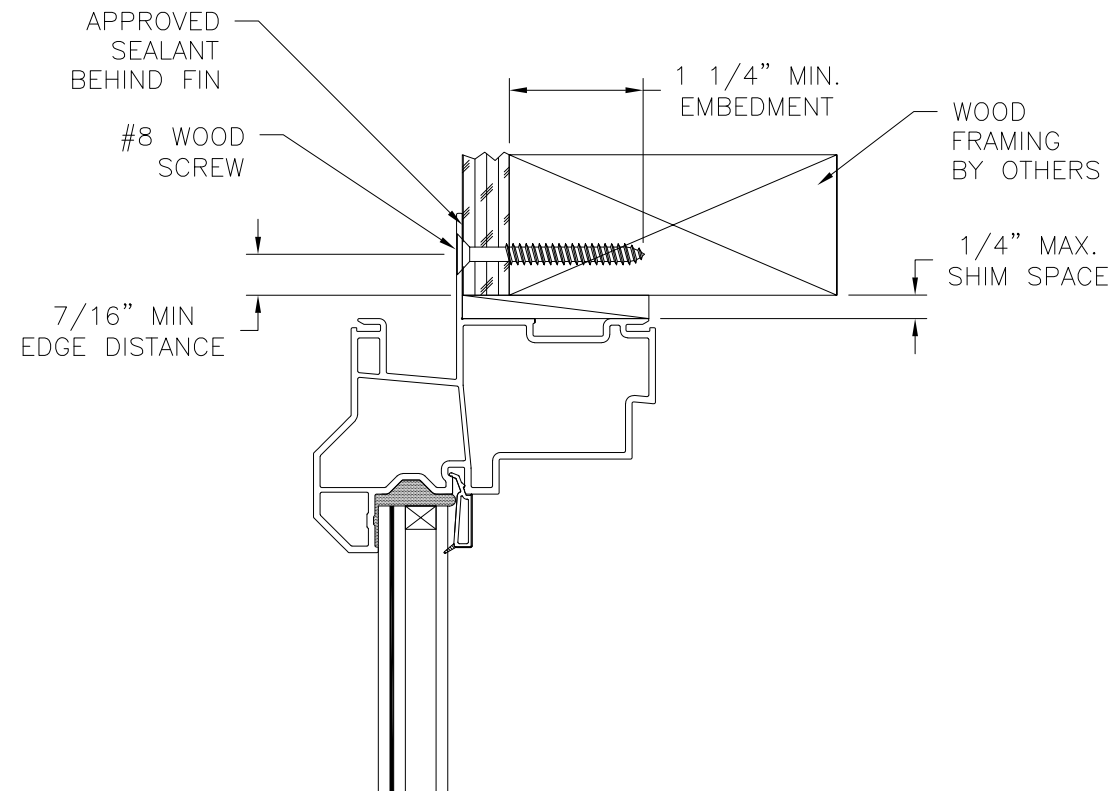


EXTERIOR

INTERIOR

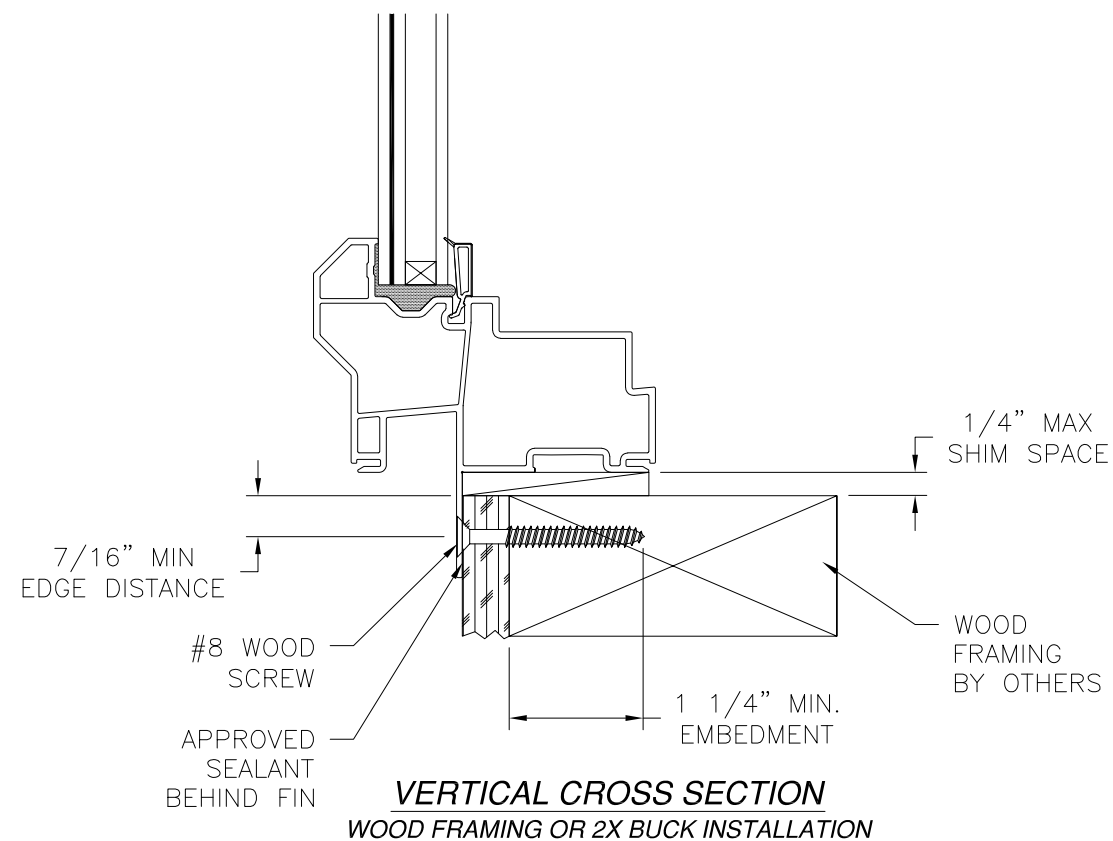

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

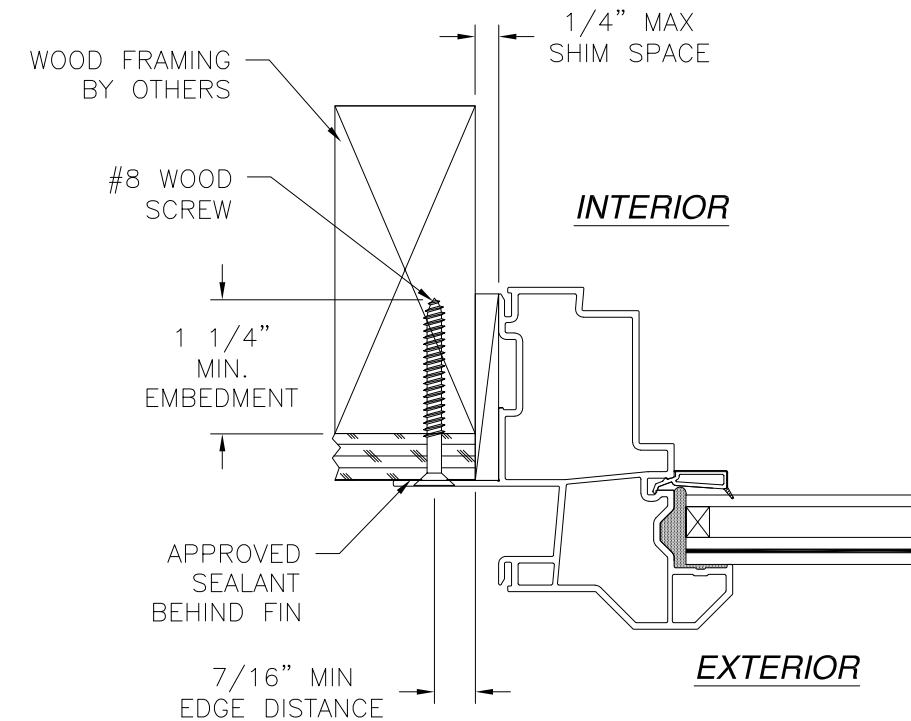




JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

- NOTES:**
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 07/18/2024

ACADIAN WINDOWS AND SIDING, LLC 119 ALPHA DRIVE DESTREHAN, LA 70047			
ACADIAN WINDOWS IMPACT SERIES FIXED 50" X 63" INSTALLATION DETAILS			
DRAWN: A.R.	DWG NO. 08-04059	REV -	
SCALE NTS	DATE 05/24/2024	SHEET 5 OF 7	
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com			Luis R. Lomas P.E. FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

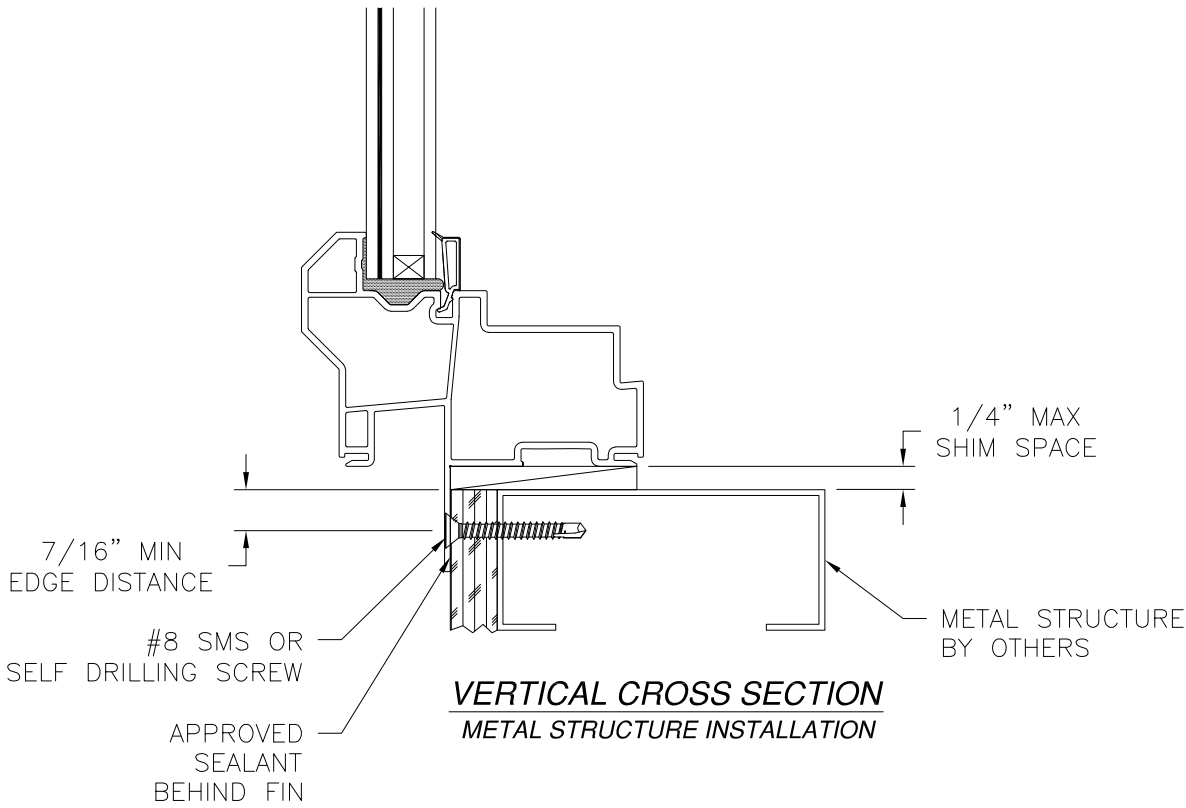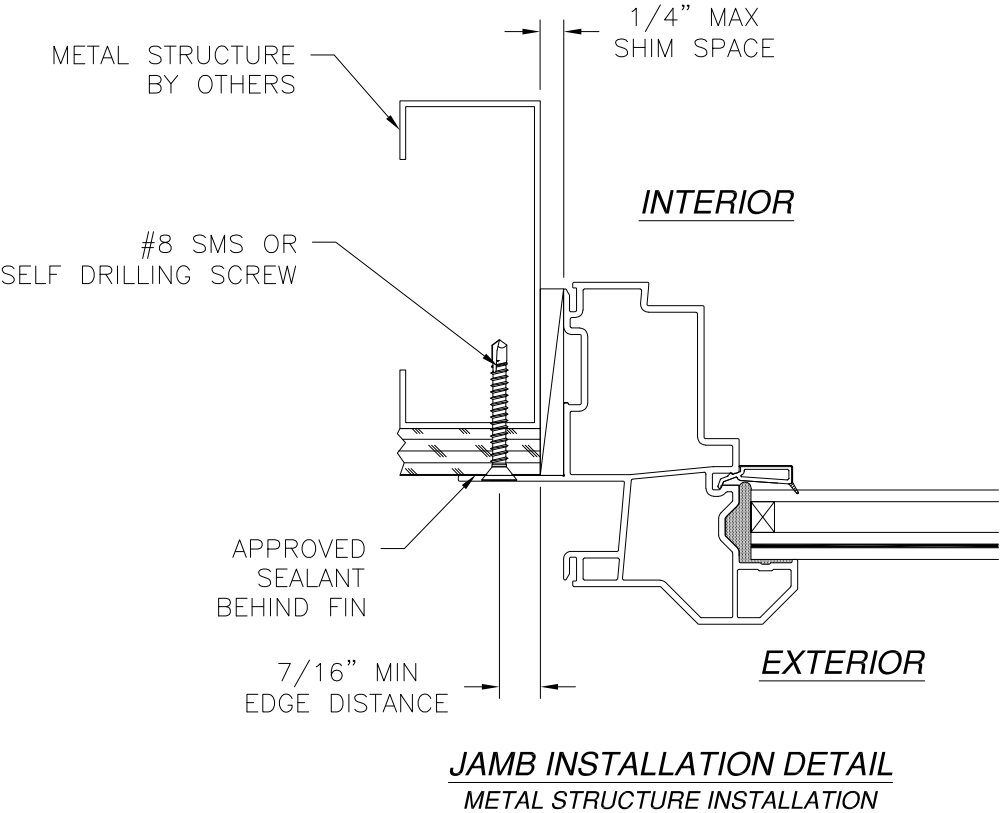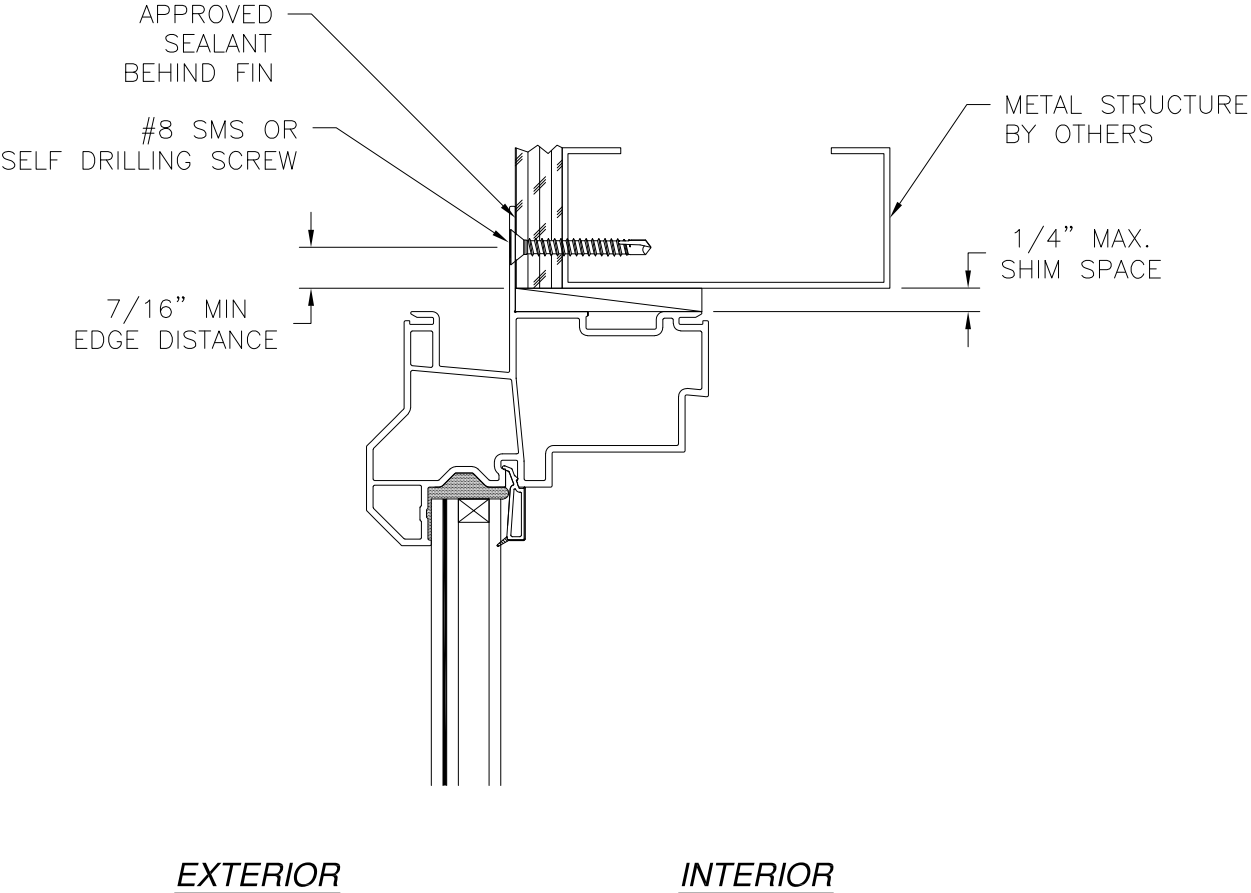

NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


SIGNED: 07/18/2024

ACADIAN WINDOWS AND SIDING, LLC 119 ALPHA DRIVE DESTREHAN, LA 70047		
ACADIAN WINDOWS IMPACT SERIES FIXED 50" X 63" INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-04059	REV -
SCALE NTS	DATE 05/24/2024	SHEET 6 OF 7
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

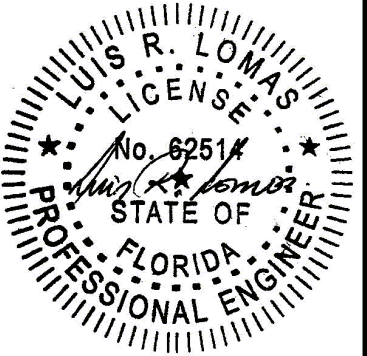


Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

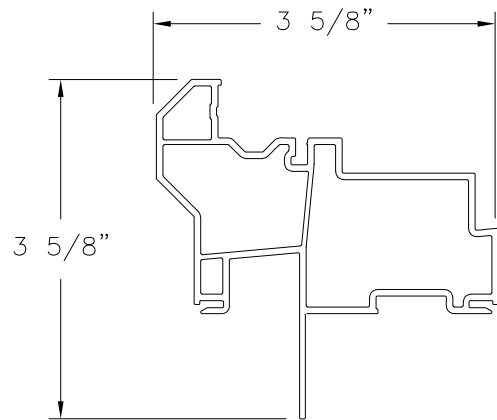

MAIN FRAME (10008676)
FIN INSTALLATION
RIGID PVC

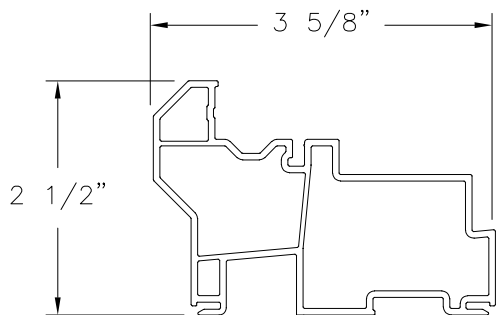

MAIN FRAME (10008696)
FINLESS INSTALLATION
RIGID PVC

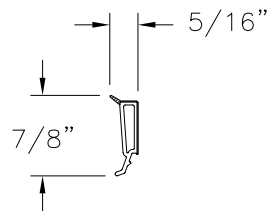

GLAZING BEAD (10005470)
RIGID PVC

SIGNED: 07/18/2024

ACADIAN WINDOWS AND SIDING, LLC 119 ALPHA DRIVE DESTREHAN, LA 70047		
ACADIAN WINDOWS IMPACT SERIES FIXED 50" X 63" COMPONENTS		
DRAWN: A.R.	DWG NO. 08-04059	REV -
SCALE NTS	DATE 05/24/2024	SHEET 7 OF 7
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

Luis R. Lomas P.E.
FL No.: 62514