

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
2. WOOD FRAMING, METAL STRUCTURE AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1-1/2" UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
4. WHERE WOOD BUCK THICKNESS IS 1-1/2" OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS.
5. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
6. BUCKS SHALL EXTEND BEYOND UNIT FRAME INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
7. SHIM AS REQUIRED AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4".
8. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
9. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
10. FRAME MATERIAL: EXTRUDED RIGID PVC.
11. UNITS MUST BE GLAZED PER ASTM E1300.
12. APPROVED IMPACT PROTECTIVE SYSTEM IS REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.

13. FOR ANCHORING THROUGH FIN INTO WOOD FRAMING OR 2X BUCK USE #8 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
16. FOR ANCHORING THROUGH FIN INTO METAL STRUCTURE USE #8 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
17. FOR ANCHORING THROUGH FRAME INTO WOOD FRAMING OR 2X BUCK USE #10 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
18. FOR ANCHORING THROUGH FRAME INTO MASONRY/CONCRETE USE 3/16" TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
19. FOR ANCHORING THROUGH FRAME INTO METAL STRUCTURE USE #10 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
20. ALL FASTENERS TO BE CORROSION RESISTANT.
21. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:
 - 21.1. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42
 - 21.2. CONCRETE: MINIMUM COMPRESSIVE STRENGTH OF 2,000 PSI.
 - 21.3. MASONRY: HOLLOW/FILLED BLOCK PER ASTM C90 WITH Fm=2,000 MINIMUM.
 - 21.4. METAL STRUCTURE: STEEL 18GA (.048") FY=33KSI/FU=52KSI OR ALUMINUM 6063-T5 FU=30KSI 1/8" THICK MINIMUM

SIGNED: 06/12/2024

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2	ELEVATIONS
3 - 7	INSTALLATION DETAILS
8	COMPONENTS

ACADIAN WINDOWS AND SIDING, LLC
119 ALPHA DRIVE
DESTREHAN, LA 70047

ACADIAN COMPASS SERIES SINGLE HUNG WINDOW
NON-IMPACT, 36" X 66"
NOTES

DRAWN:
A.R.

DWG NO.
08-04061


REV
-

SCALE NTS

DATE 06/12/2024


SHEET 1 OF 8

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

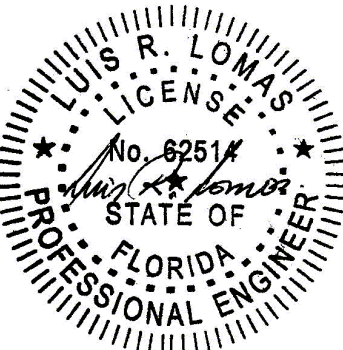


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

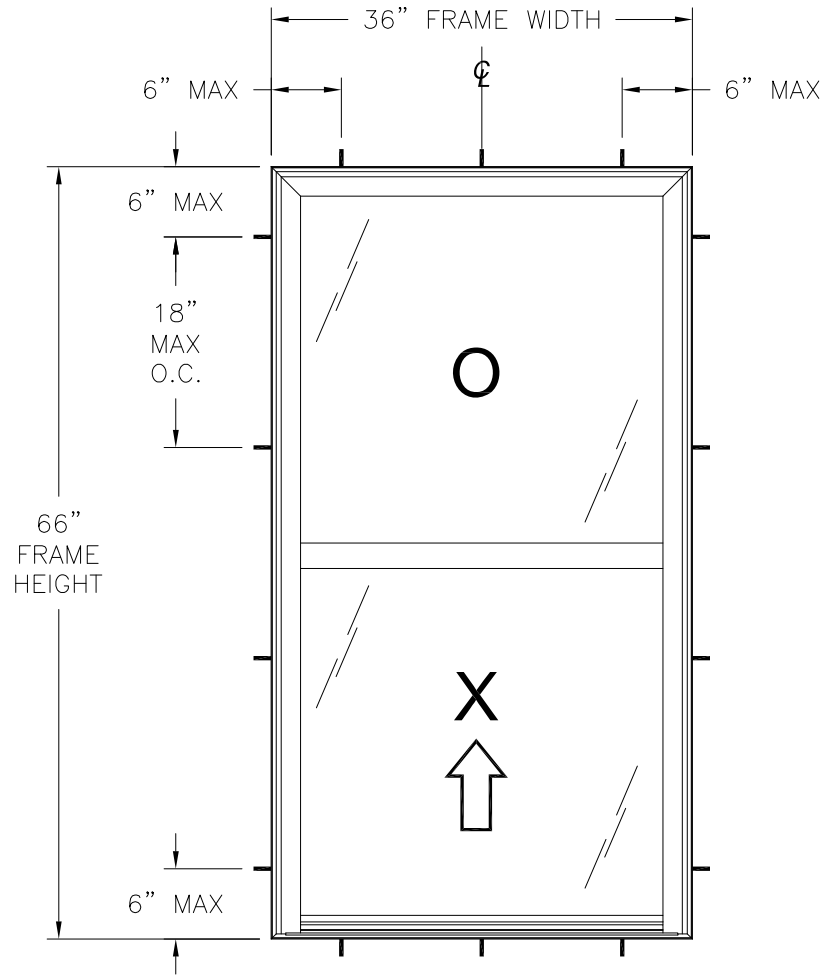

ACADIAN COMPASS SERIES SINGLE HUNG
EXTERIOR VIEW
FIN INSTALLATION

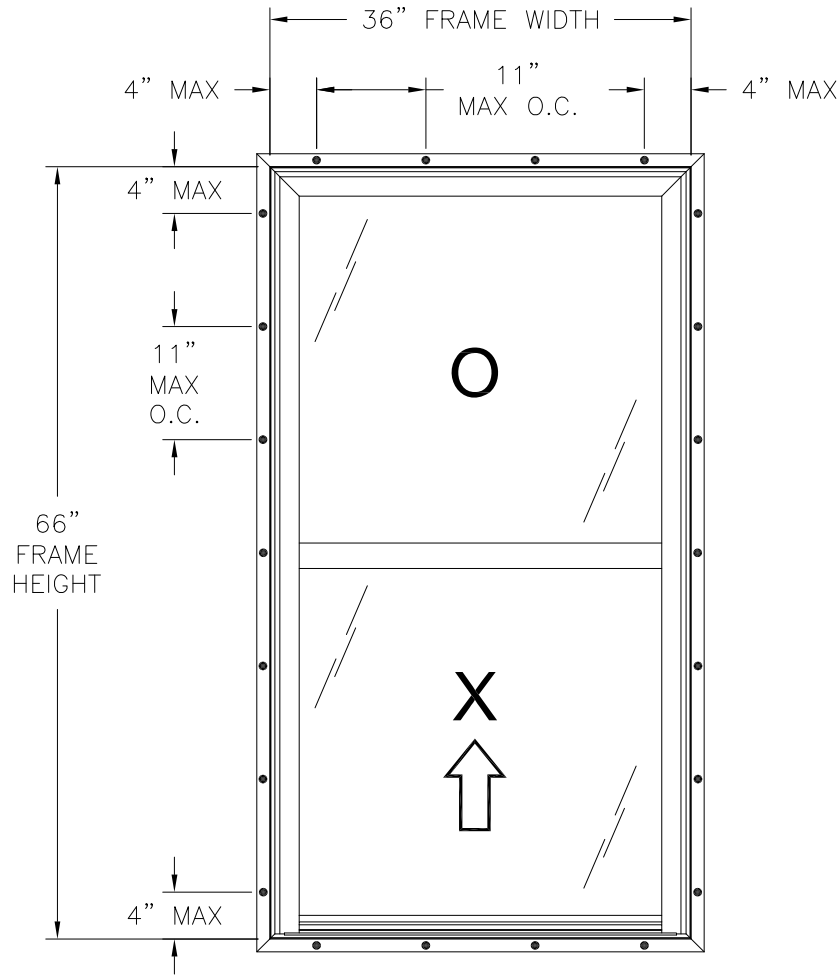

ACADIAN COMPASS SERIES SINGLE HUNG
EXTERIOR VIEW
FIN INSTALLATION

- NOTES:
- 1. SASH SIZE: 32 3/4" X 32 1/16"
 - 2. FIXED D.L.O.: 31" X 29 11/16"
 - 3. SASH D.L.O.: 30 3/8" X 29 1/2"

DESIGN PRESSURE RATING	IMPACT RATING
±50.0PSF	NONE

36" X 66" UNIT SHOWN. OTHER SIZES APPROVED AS LONG AS
FRAME AREA DOES NOT EXCEED 16.5 FT²

HARDWARE SCHEDULE	
A.	(2) COMPOSITE LOCK WITH KEEPER AT LOCK RAIL, 8" FROM EACH END
B.	(2) CONSTANT FORCE BALANCE SYSTEM WITH TILT LOCKING SHOE AT JAMBS
C.	(2) METAL PIVOT BAR AT BOTTOM RAIL, ONE AT EACH END
D.	(2) FLUSH MOUNT PLASTIC TILT LATCH AT LOCK RAIL, ONE AT EACH END
E.	ALUMINUM REINFORCEMENT (A6202) AT LOCK RAIL
F.	ALUMINUM REINFORCEMENT (A6189) AT FIXED MEETING RAIL


ACADIAN WINDOWS AND SIDING, LLC
119 ALPHA DRIVE
DESTREHAN, LA 70047

ACADIAN COMPASS SERIES SINGLE HUNG WINDOW
NON-IMPACT, 36" X 66"
ELEVATION

DRAWN: A.R.	DWG NO. 08-04061	REV -
SCALE NTS	DATE 06/12/2024	SHEET 2 OF 8


L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 06/12/2024

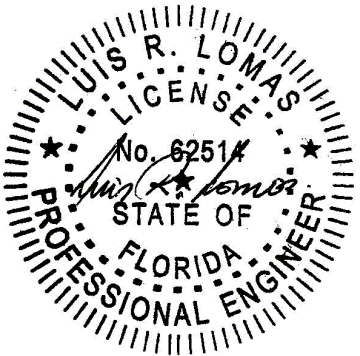



Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

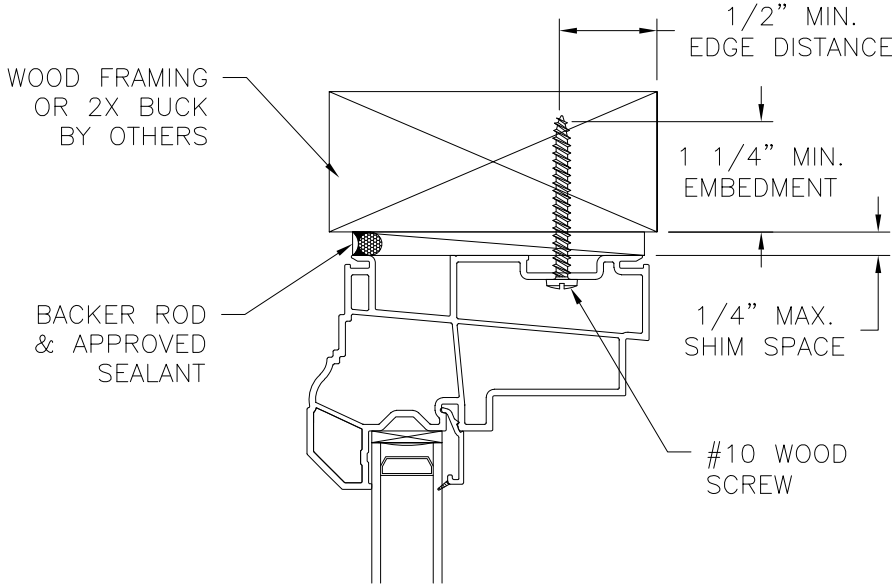


EXTERIOR

INTERIOR

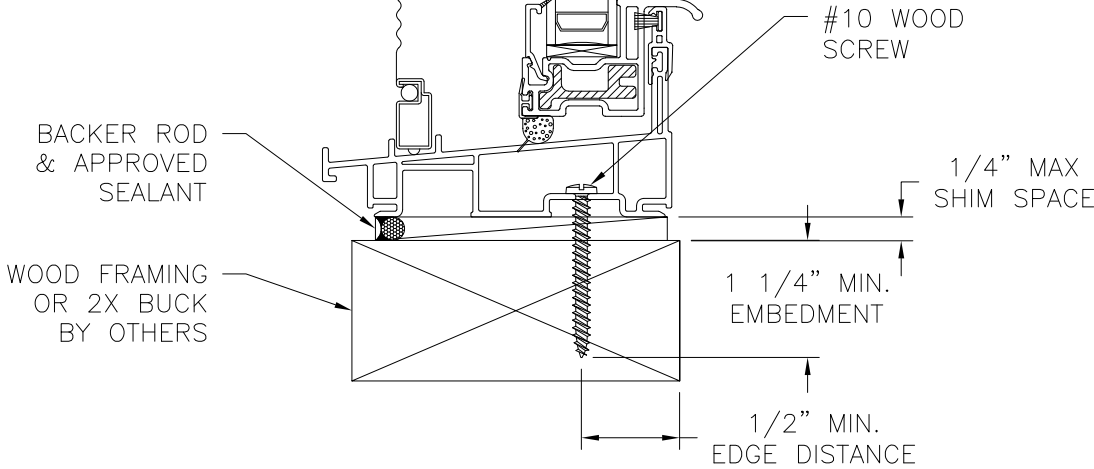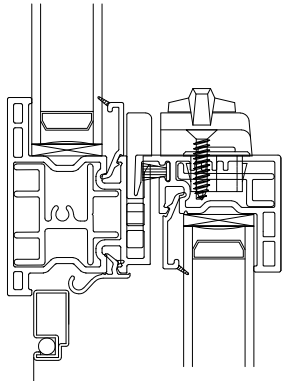

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

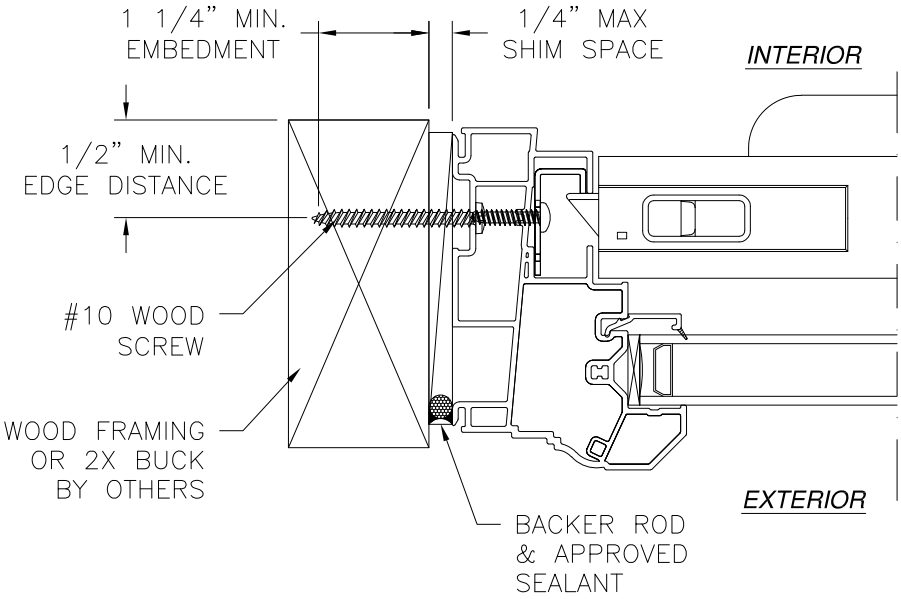


JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

- NOTES:
- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112



SIGNED: 06/12/2024

ACADIAN WINDOWS AND SIDING, LLC		
119 ALPHA DRIVE DESTREHAN, LA 70047		
ACADIAN COMPASS SERIES SINGLE HUNG WINDOW NON-IMPACT, 36" X 66" INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-04061	REV -
SCALE NTS	DATE 06/12/2024	SHEET 3 OF 8
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

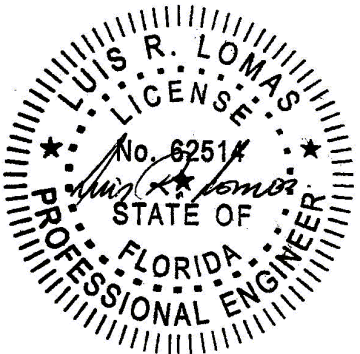

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

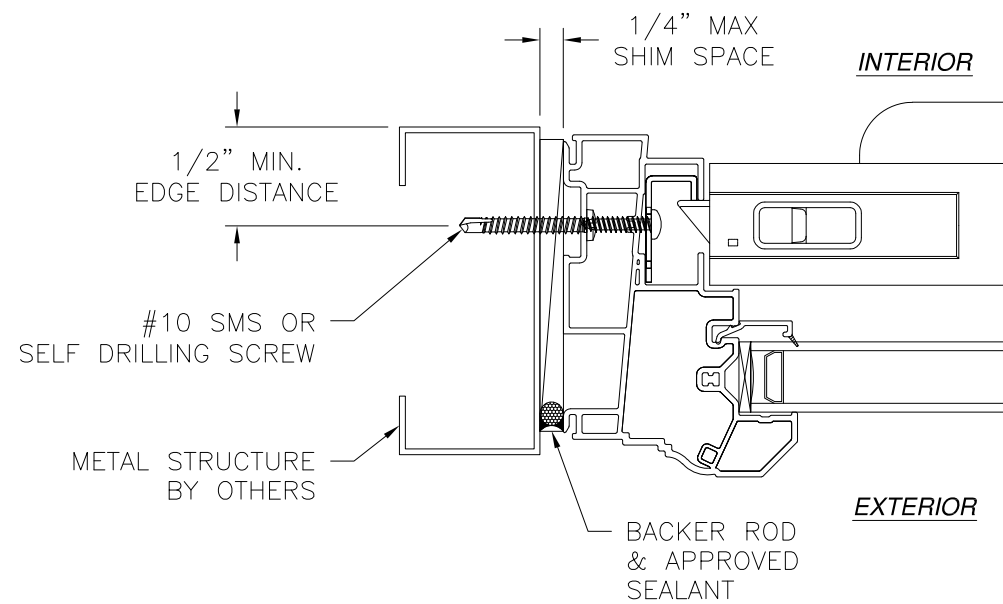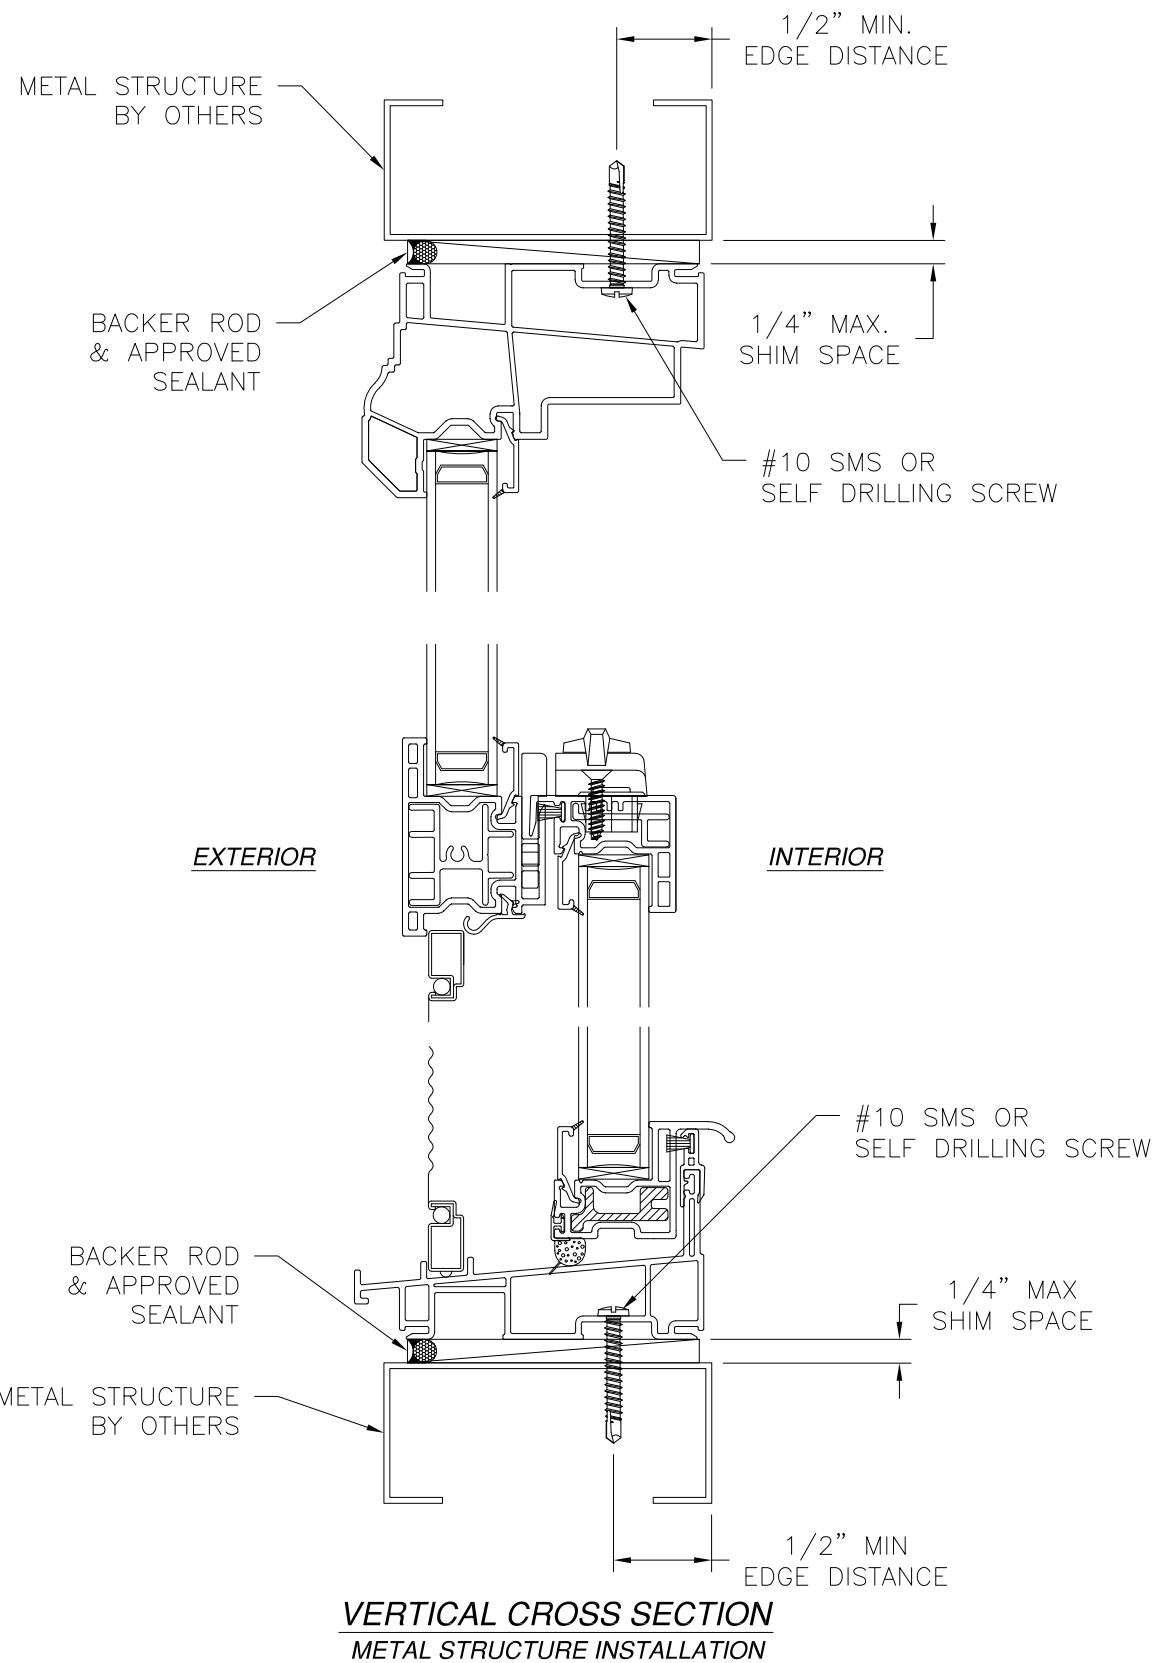


JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112




SIGNED: 06/12/2024

ACADIAN WINDOWS AND SIDING, LLC		
119 ALPHA DRIVE DESTREHAN, LA 70047		
ACADIAN COMPASS SERIES SINGLE HUNG WINDOW NON-IMPACT, 36" X 66" INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-04061	REV -
SCALE NTS	DATE 06/12/2024	SHEET 4 OF 8
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

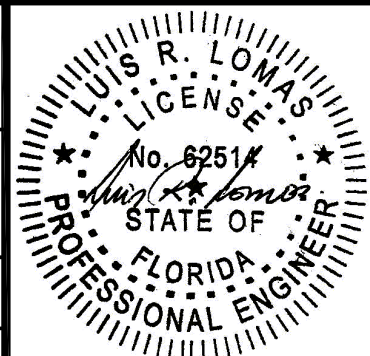


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

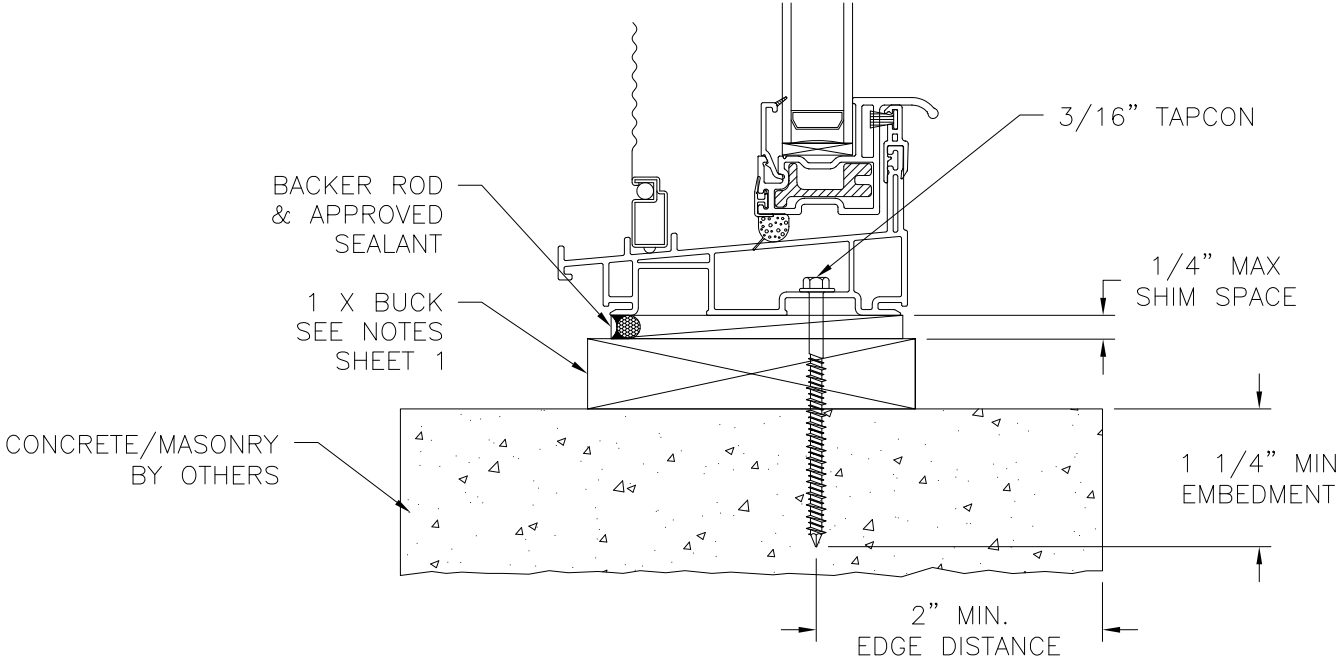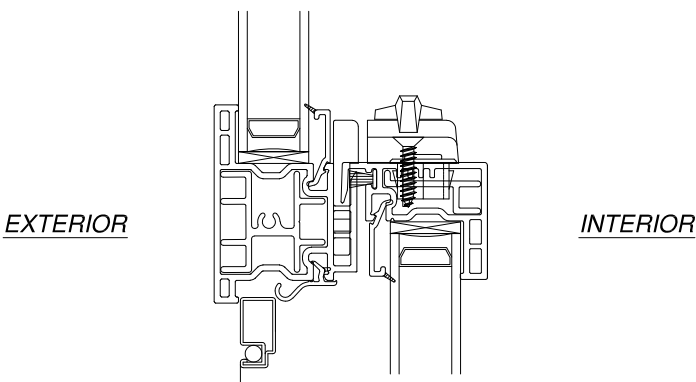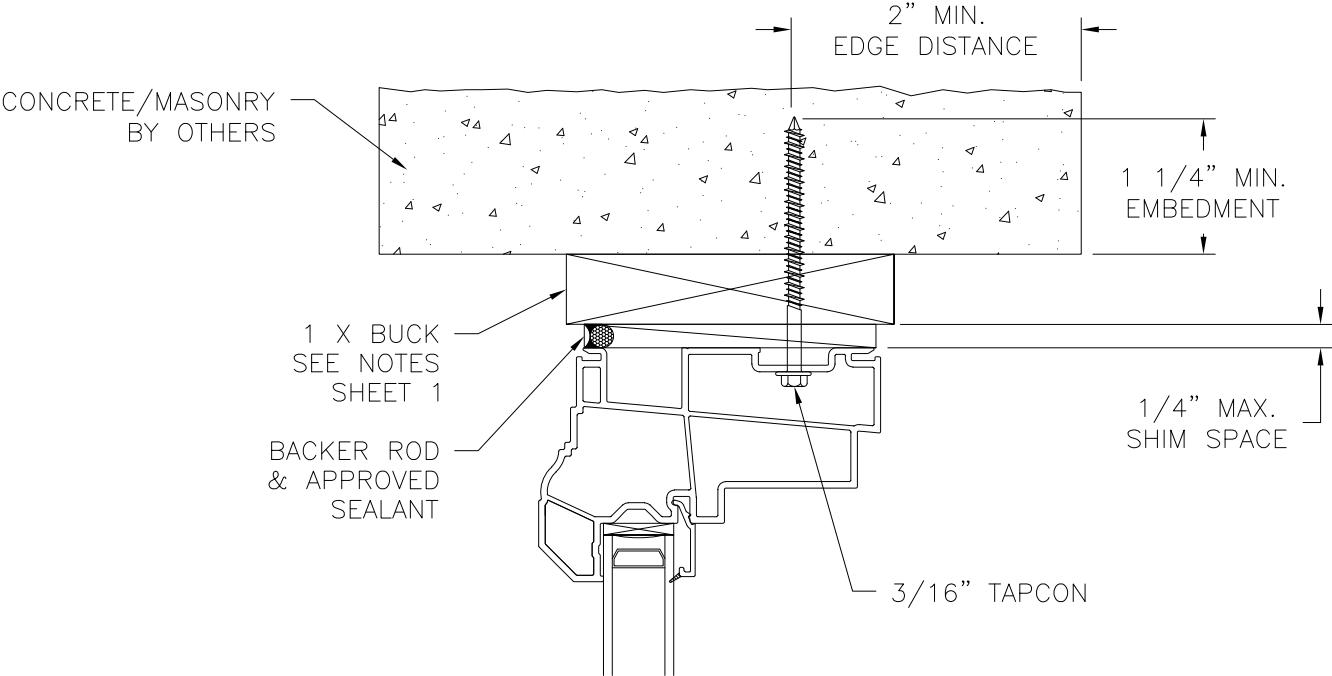

VERTICAL CROSS SECTION
CONCRETE/MASONRY INSTALLATION

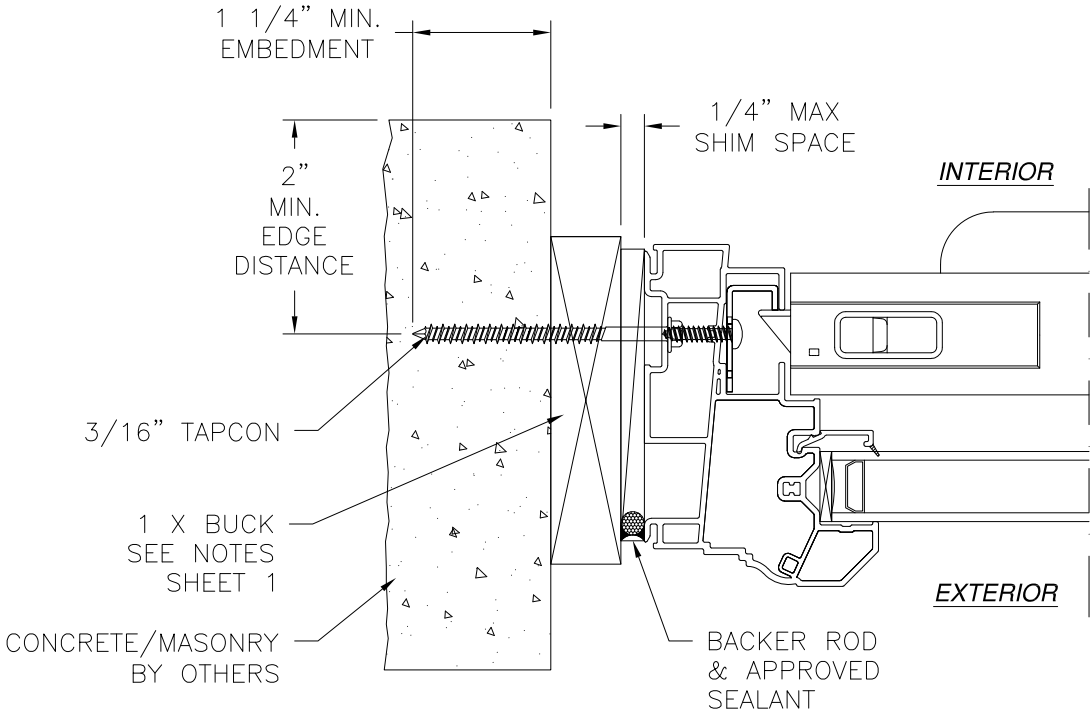

JAMB INSTALLATION DETAIL
CONCRETE/MASONRY INSTALLATION

- NOTES:**
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


ACADIAN WINDOWS AND SIDING, LLC
119 ALPHA DRIVE
DESTREHAN, LA 70047

ACADIAN COMPASS SERIES SINGLE HUNG WINDOW
NON-IMPACT, 36" X 66"
INSTALLATION DETAILS

DRAWN: A.R.	DWG NO. 08-04061	REV -
SCALE NTS	DATE 06/12/2024	SHEET 5 OF 8



L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 06/12/2024

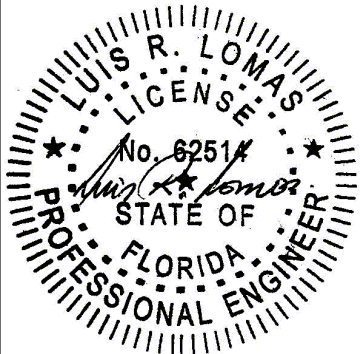

Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

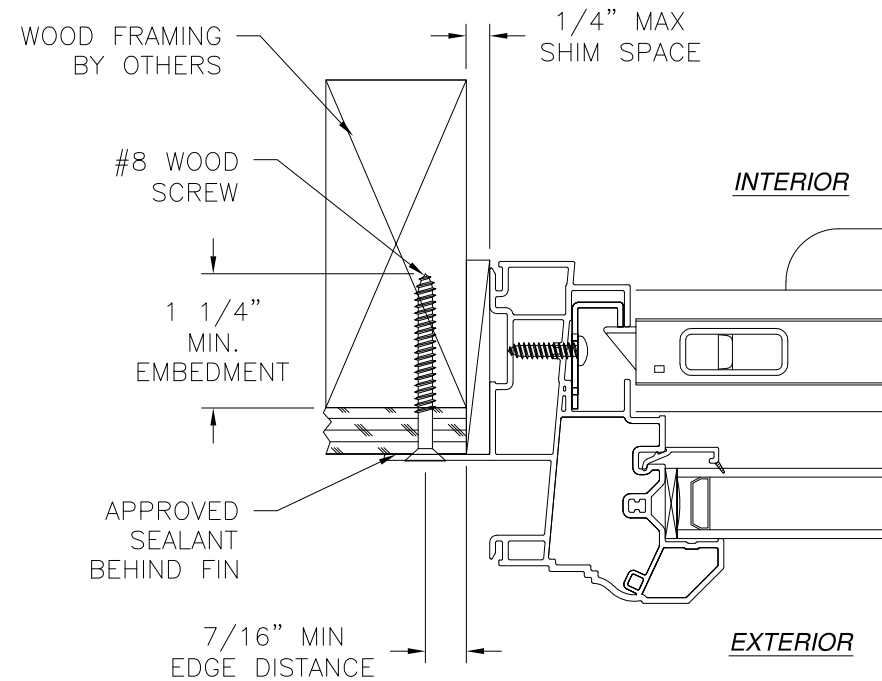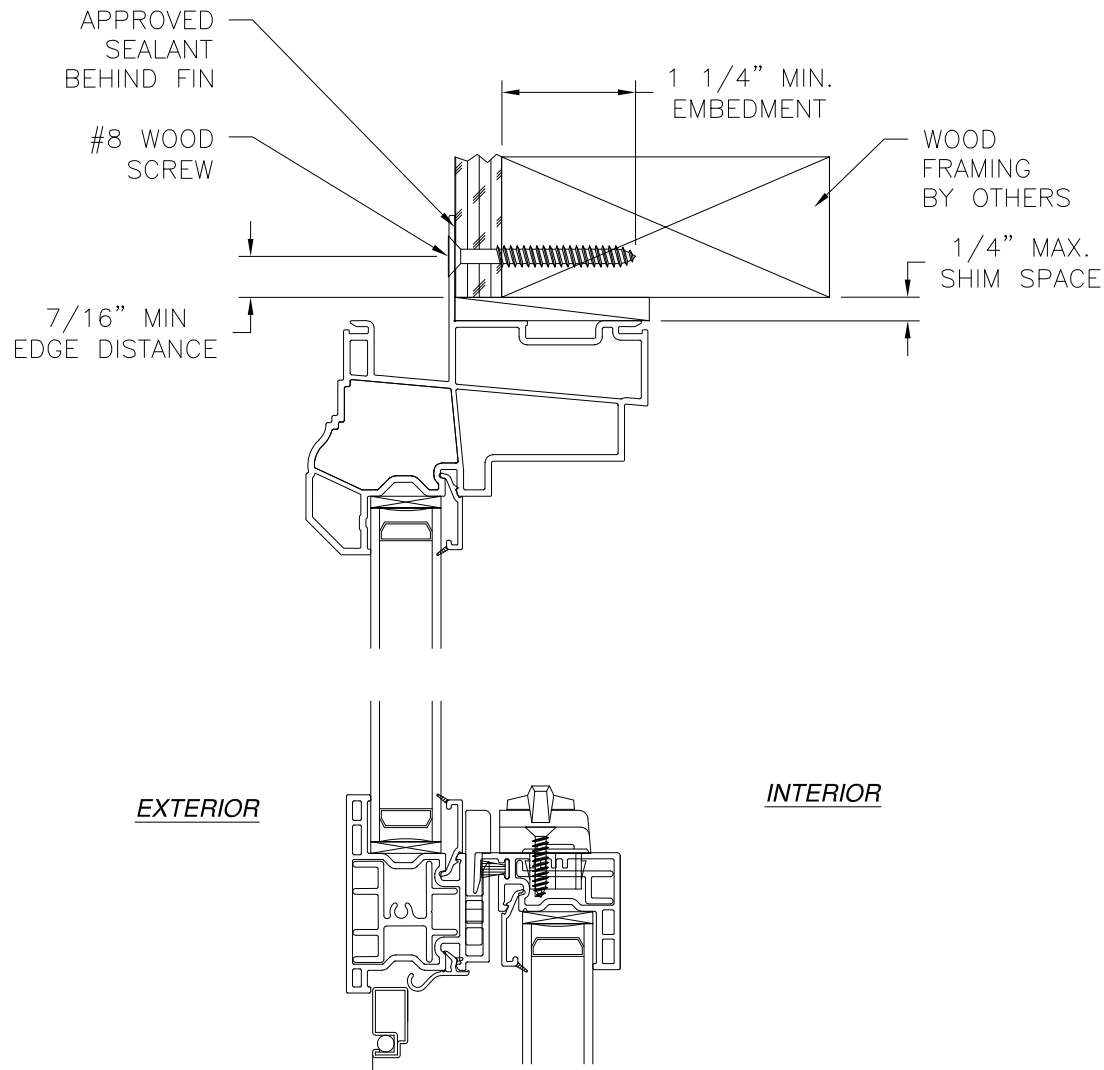

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


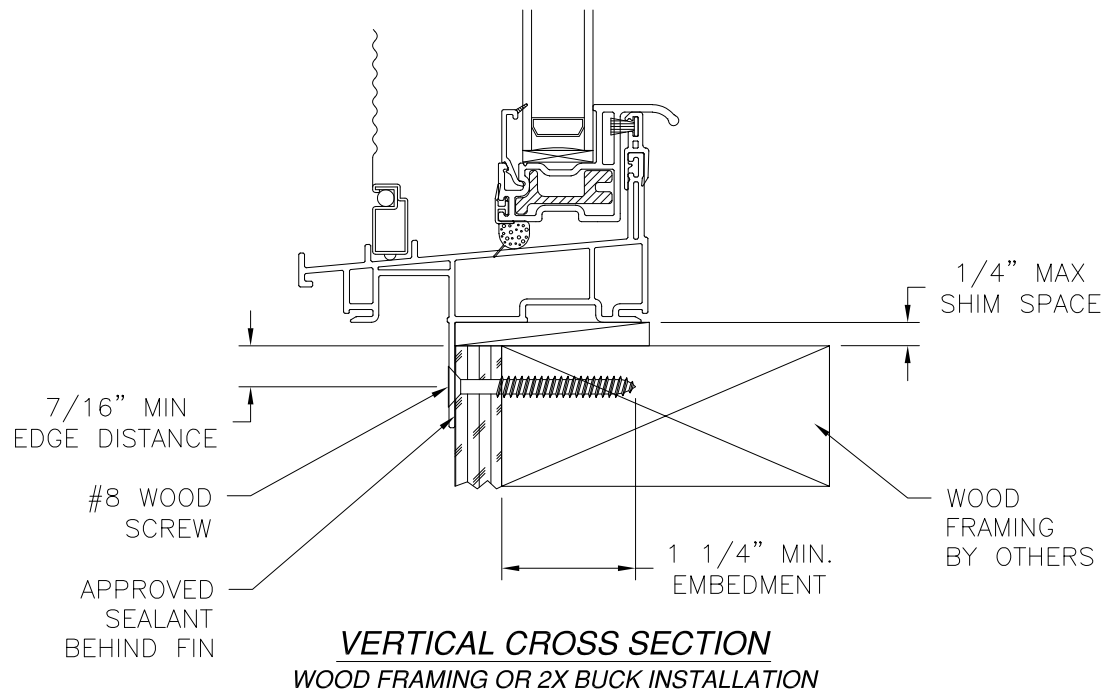


VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

SIGNED: 06/12/2024


ACADIAN WINDOWS AND SIDING, LLC 119 ALPHA DRIVE DESTREHAN, LA 70047			
ACADIAN COMPASS SERIES SINGLE HUNG WINDOW NON-IMPACT, 36" X 66" INSTALLATION DETAILS			
DRAWN: A.R.	DWG NO. 08-04061	REV -	
SCALE NTS	DATE 06/12/2024	SHEET 6 OF 8	
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com			Luis R. Lomas P.E. FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

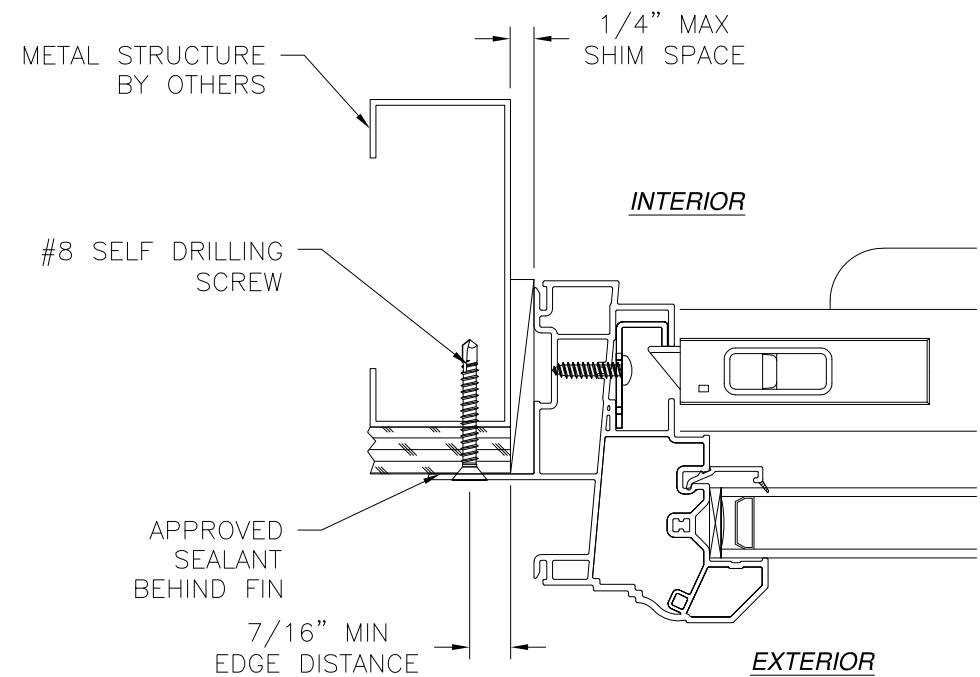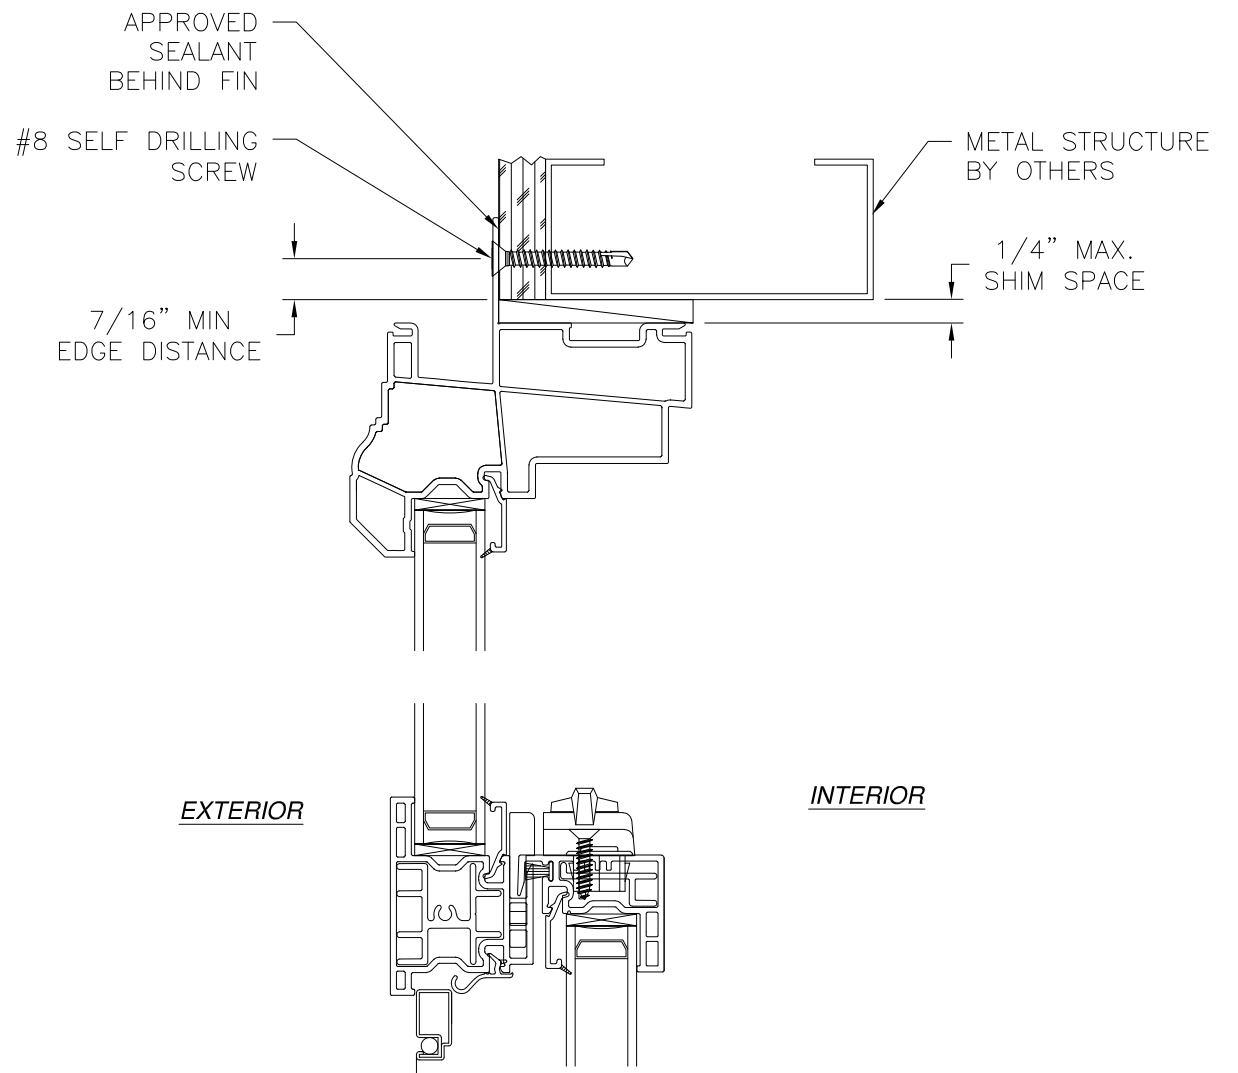

JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION


- NOTES:
- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

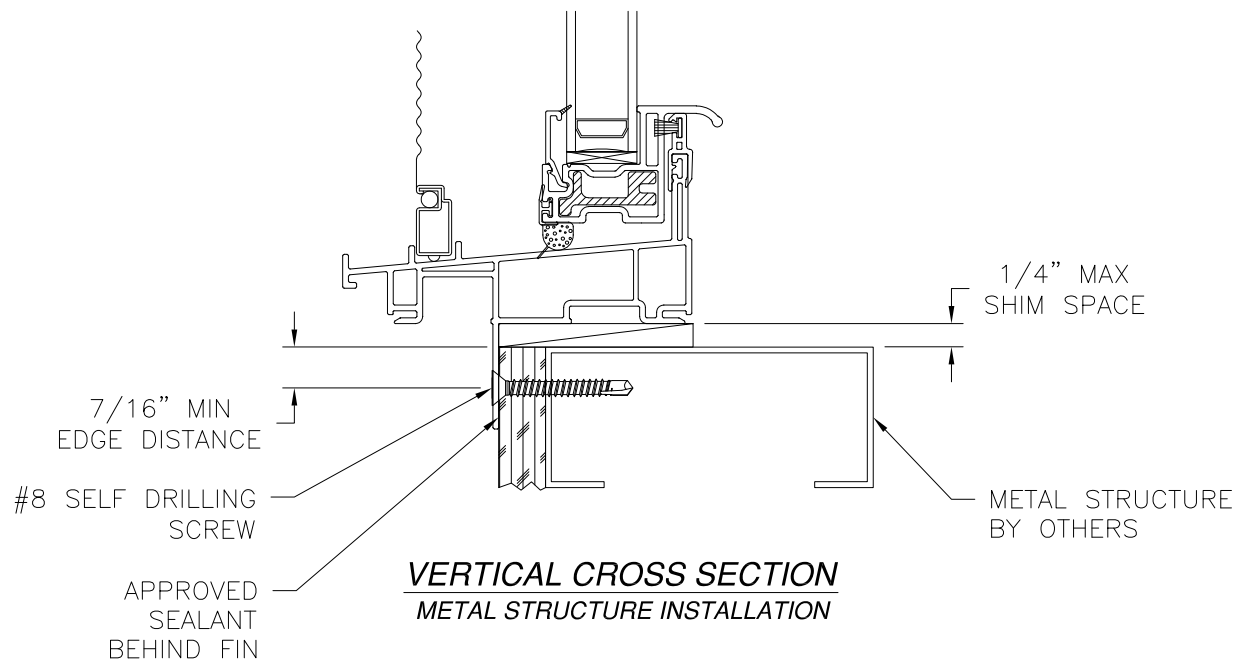

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION














SIGNED: 06/12/2024

ACADIAN WINDOWS AND SIDING, LLC		
119 ALPHA DRIVE DESTREHAN, LA 70047		
ACADIAN COMPASS SERIES SINGLE HUNG WINDOW NON-IMPACT, 36" X 66" INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-04061	REV -
SCALE NTS	DATE 06/12/2024	SHEET 7 OF 8
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

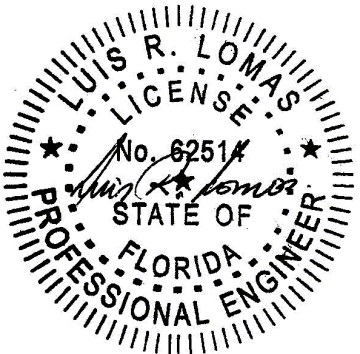

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

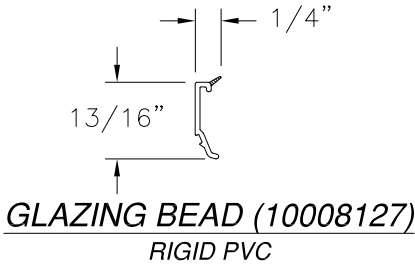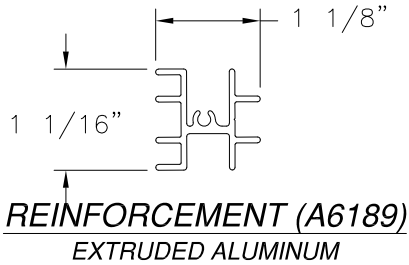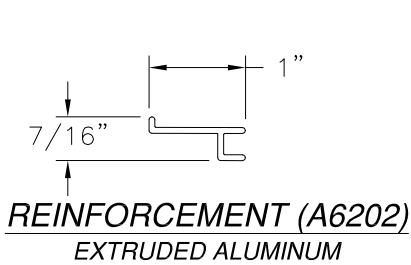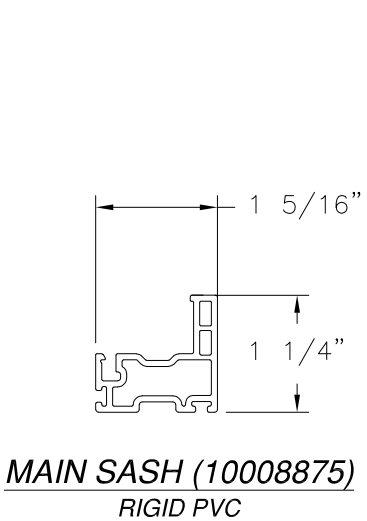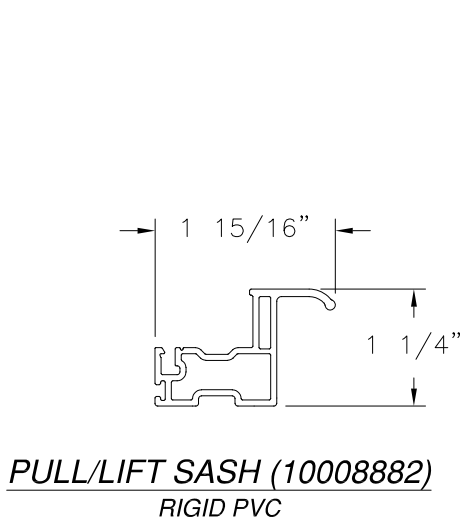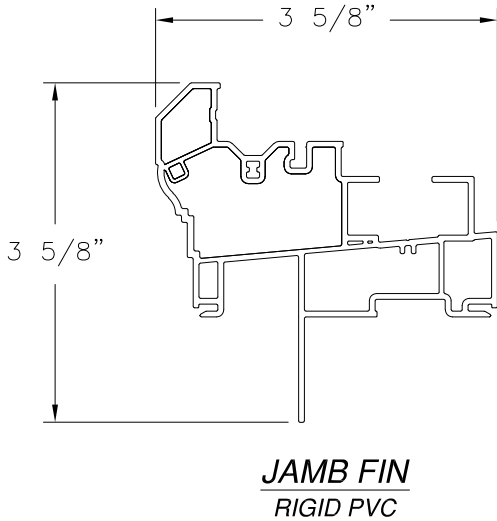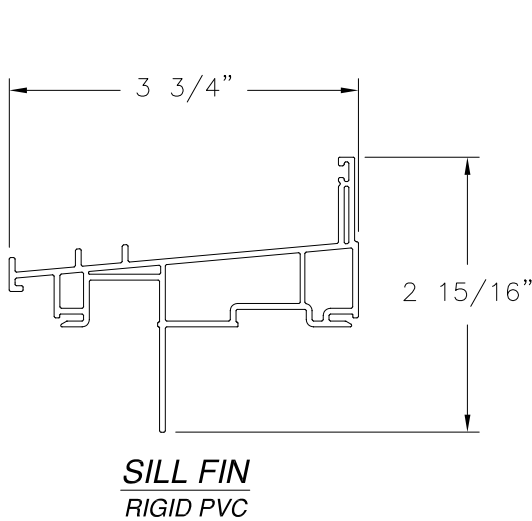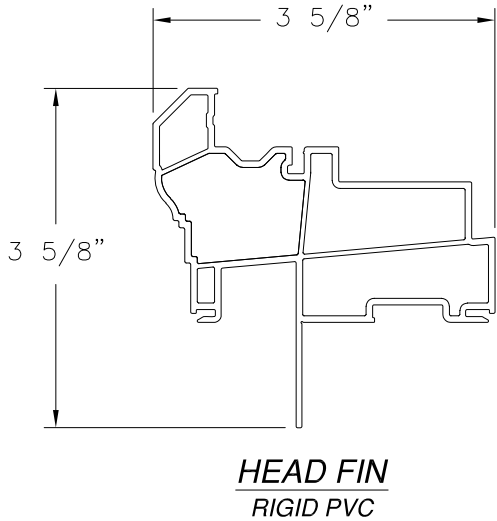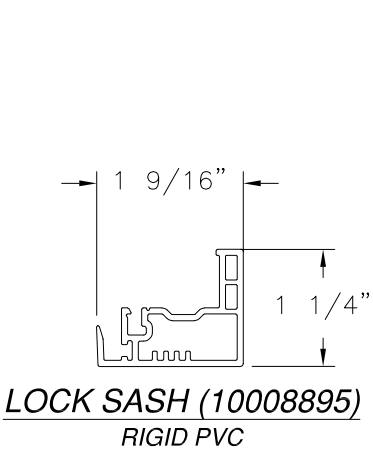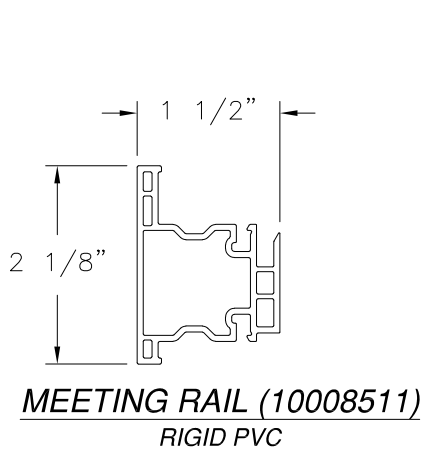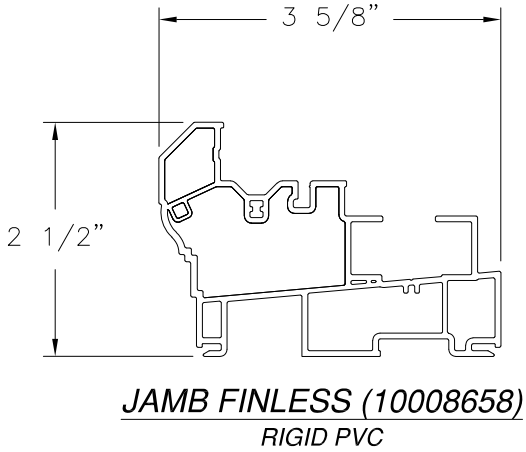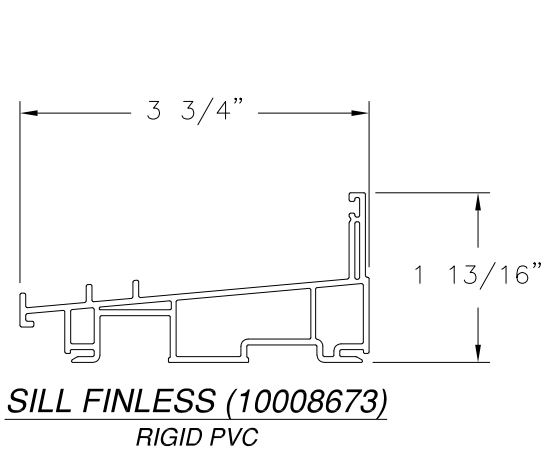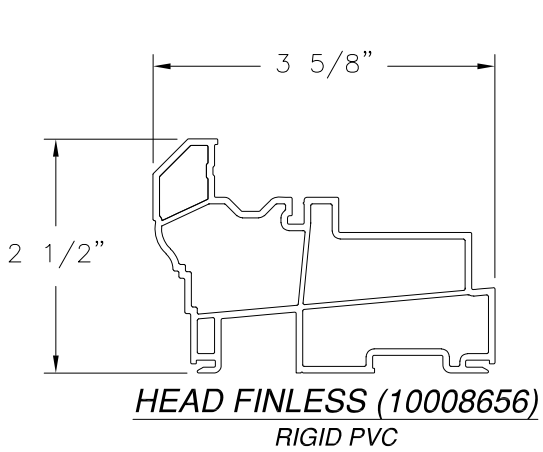


ACADIAN WINDOWS AND SIDING, LLC
119 ALPHA DRIVE
DESTREHAN, LA 70047

ACADIAN COMPASS SERIES SINGLE HUNG WINDOW
NON-IMPACT, 36" X 66"
COMPONENTS

DRAWN: A.R.	DWG NO. 08-04061	REV -
SCALE NTS	DATE 06/12/2024	SHEET 8 OF 8

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 06/12/2024

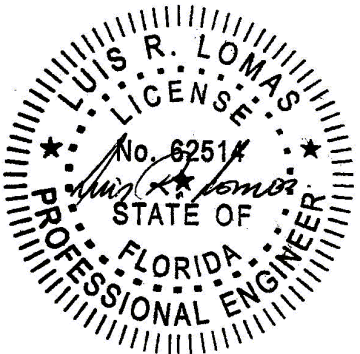

Luis R. Lomas P.E.
FL No.: 62514