

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
2. WOOD FRAMING, METAL STRUCTURE AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1–1/2” UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER’S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
4. WHERE WOOD BUCK THICKNESS IS 1–1/2” OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER’S PUBLISHED INSTALLATION INSTRUCTIONS.
5. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
6. BUCKS SHALL EXTEND BEYOND UNIT FRAME INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
7. SHIM AS NEEDED AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16” OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4”.
8. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
9. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
10. FRAME MATERIAL: EXTRUDED RIGID PVC.
11. UNITS MUST BE GLAZED PER ASTM E1300.
12. APPROVED IMPACT PROTECTIVE SYSTEM IS REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.

13. FOR ANCHORING THROUGH FIN INTO WOOD FRAMING OR 2X BUCK USE #8 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1” MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
14. FOR ANCHORING THROUGH FIN INTO METAL STRUCTURE USE #8 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
15. FOR ANCHORING THROUGH FRAME INTO WOOD FRAMING OR 2X BUCK USE #8 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4” MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
16. FOR ANCHORING THROUGH FRAME INTO MASONRY/CONCRETE USE 3/16” TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4” MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2” MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
17. FOR ANCHORING THROUGH FRAME INTO METAL STRUCTURE USE #8 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
18. ALL FASTENERS TO BE CORROSION RESISTANT.
19. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER’S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:

19.1. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42

19.2. CONCRETE: MINIMUM COMPRESSIVE STRENGTH OF 2,000 PSI.

19.3. MASONRY: HOLLOW/FILLED BLOCK PER ASTM C90 WITH Fm=2,000PSI MINIMUM.

19.4. METAL STRUCTURE: STEEL 18GA (.048”) FY=33KSI/FU=52KSI OR ALUMINUM 6063–T5 FU=30KSI .125” THICK MINIMUM

SIGNED: 08/08/2024

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2	ELEVATIONS
3 – 7	INSTALLATION DETAILS
8	COMPONENTS

ACADIAN WINDOWS AND SIDING, LLC

119 ALPHA DRIVE
DESTREHAN, LA 70047

ACADIAN COMPASS SERIES DOUBLE HUNG WINDOW
REINFORCED NON-IMPACT 36” X 72”
NOTES

DRAWN:
A.R.

DWG NO.
08-04080


REV
—

SCALE NTS

DATE 07/31/2024


SHEET 1 OF 8

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

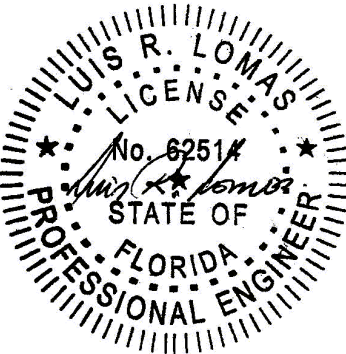


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

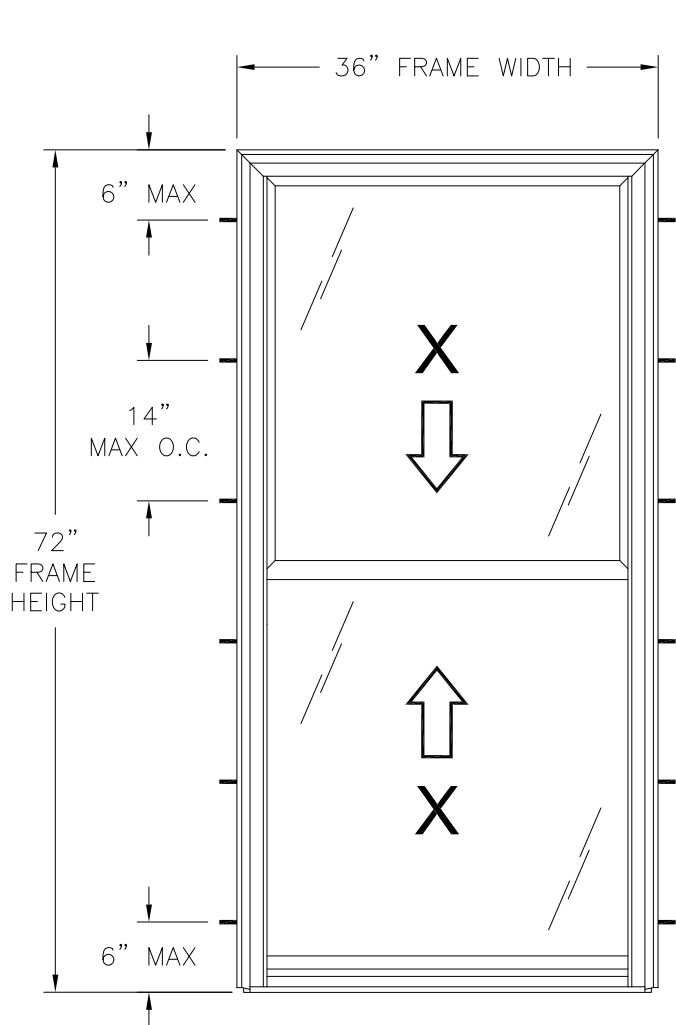

ACADIAN COMPASS SERIES DOUBLE HUNG WINDOW
EXTERIOR VIEW
FINLESS INSTALLATION

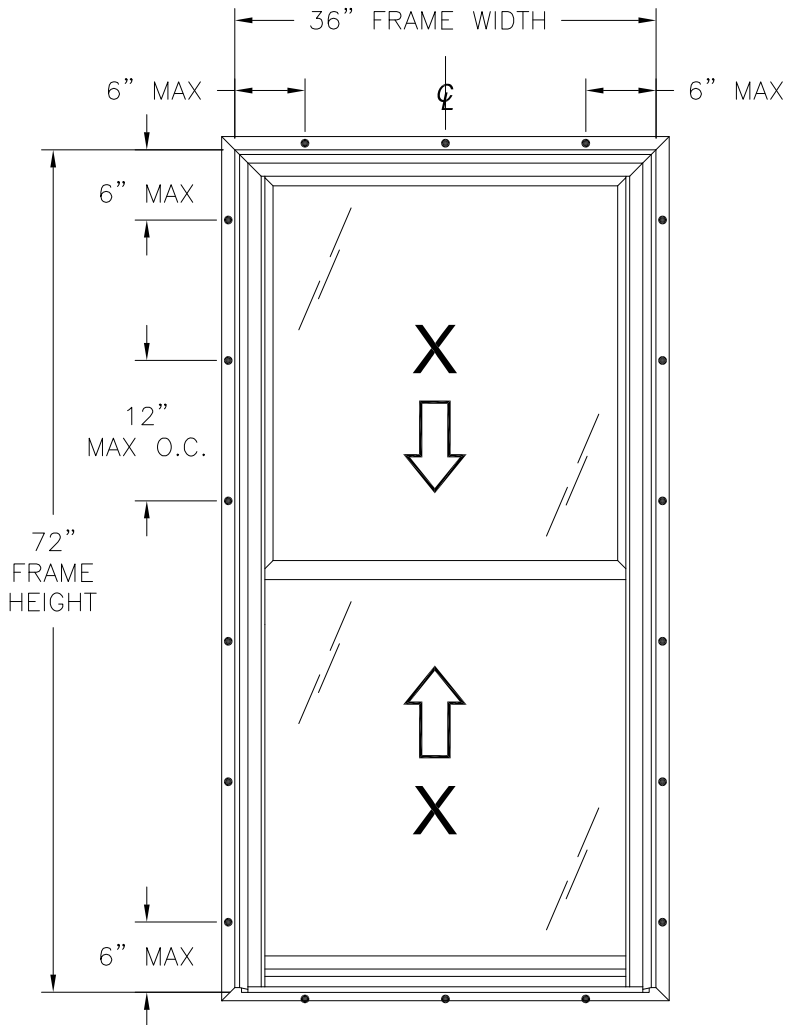

ACADIAN COMPASS SERIES DOUBLE HUNG WINDOW
EXTERIOR VIEW
FINLESS INSTALLATION

- NOTES:
1. TOP SASH SIZE: 35 3/4" X 35 1/4"
 2. BOTTOM SASH SIZE: 36 3/4" X 35 1/4"
 3. TOP SASH D.L.O.: 33 1/4" X 32 3/4"
 4. BOTTOM SASH D.L.O.: 34 1/4" X 32 3/4"


DESIGN PRESSURE RATING	IMPACT RATING
±50.0PSF	NONE

36" X 72" UNIT SHOWN. OTHER SIZES APPROVED AS LONG AS
FRAME AREA DOES NOT EXCEED 18.0 FT²

HARDWARE SCHEDULE	
A.	(2) COMPOSITE CAM LOCK WITH KEEPER AT LOCK RAIL, 6" IN FROM EACH END
B.	(4) CONSTANT FORCE BALANCE WITH LOCKING TILT SHOE AT JAMBS
C.	(4) METAL PIVOT BAR AT BOTTOM AND KEEPER RAIL, ONE AT EACH END
D.	(4) PLASTIC TILT LATCH (FLUSH MOUNT) AT TOP AND LOCK RAIL, ONE AT EACH END
E.	(2) PLASTIC NIGHT LATCH AT TOP SASH, ONE PER STILE
F.	ALUMINUM REINFORCEMENT (10006202) AT LOCK AND KEEPER RAIL




ACADIAN WINDOWS AND SIDING, LLC 119 ALPHA DRIVE DESTREHAN, LA 70047		
ACADIAN COMPASS SERIES DOUBLE HUNG WINDOW REINFORCED NON-IMPACT 36" X 72" ELEVATIONS		
DRAWN: A.R.	DWG NO. 08-04080	REV -
SCALE NTS	DATE 07/31/2024	SHEET 2 OF 8
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

SIGNED: 08/08/2024

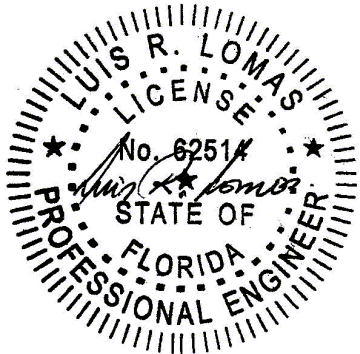

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

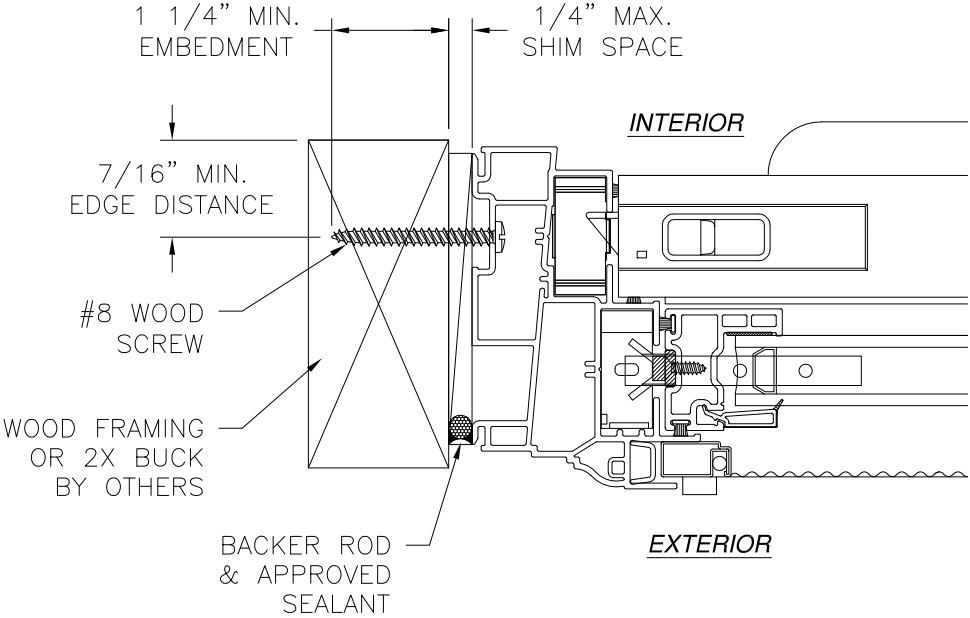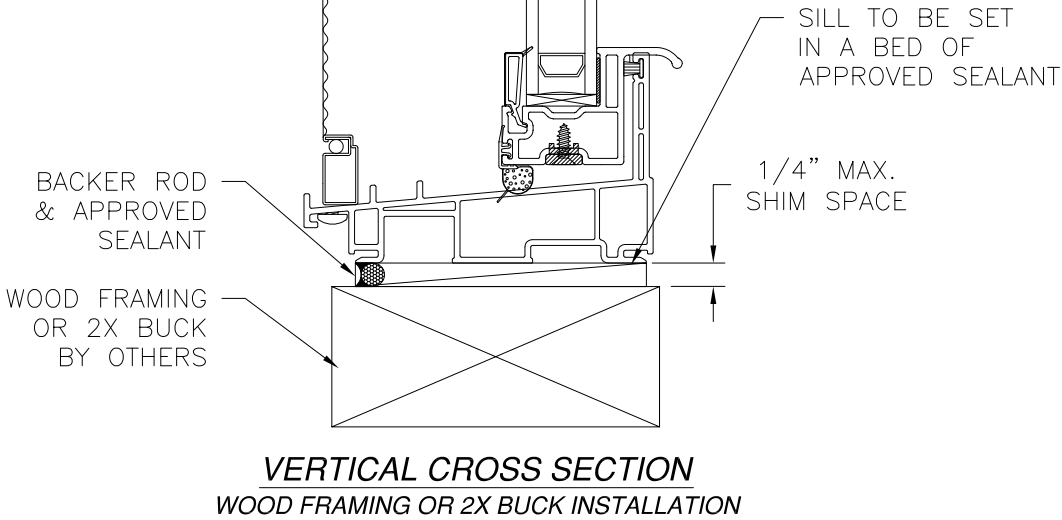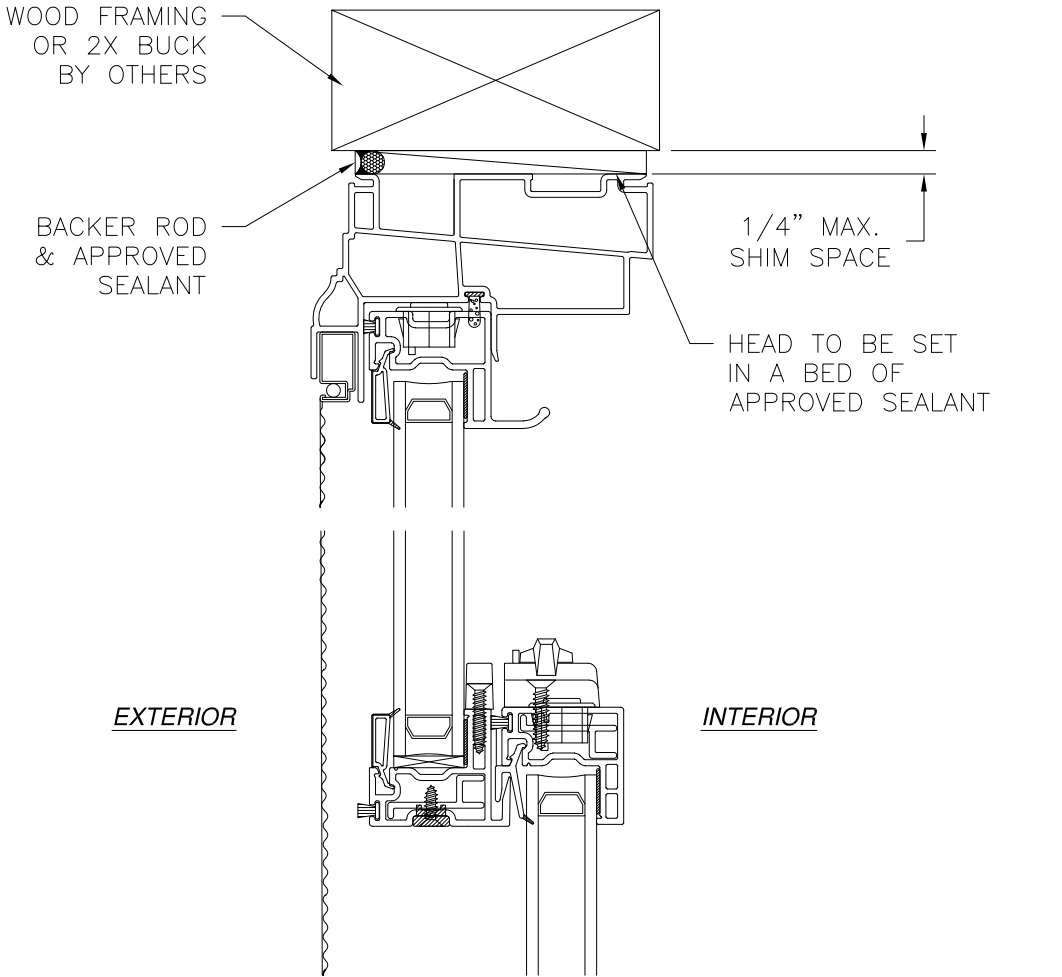


JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

- NOTES:
- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


SIGNED: 08/08/2024

ACADIAN WINDOWS AND SIDING, LLC		
119 ALPHA DRIVE DESTREHAN, LA 70047		
ACADIAN COMPASS SERIES DOUBLE HUNG WINDOW REINFORCED NON-IMPACT 36" X 72" INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-04080	REV -
SCALE NTS	DATE 07/31/2024	SHEET 3 OF 8
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

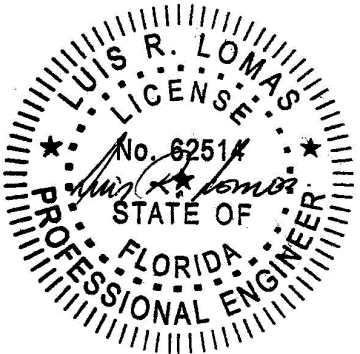


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

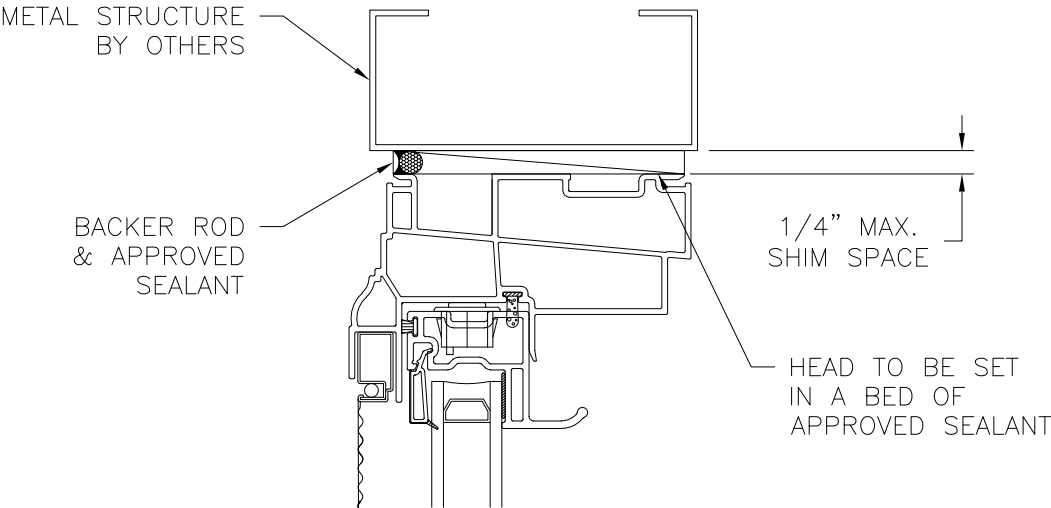


EXTERIOR

INTERIOR

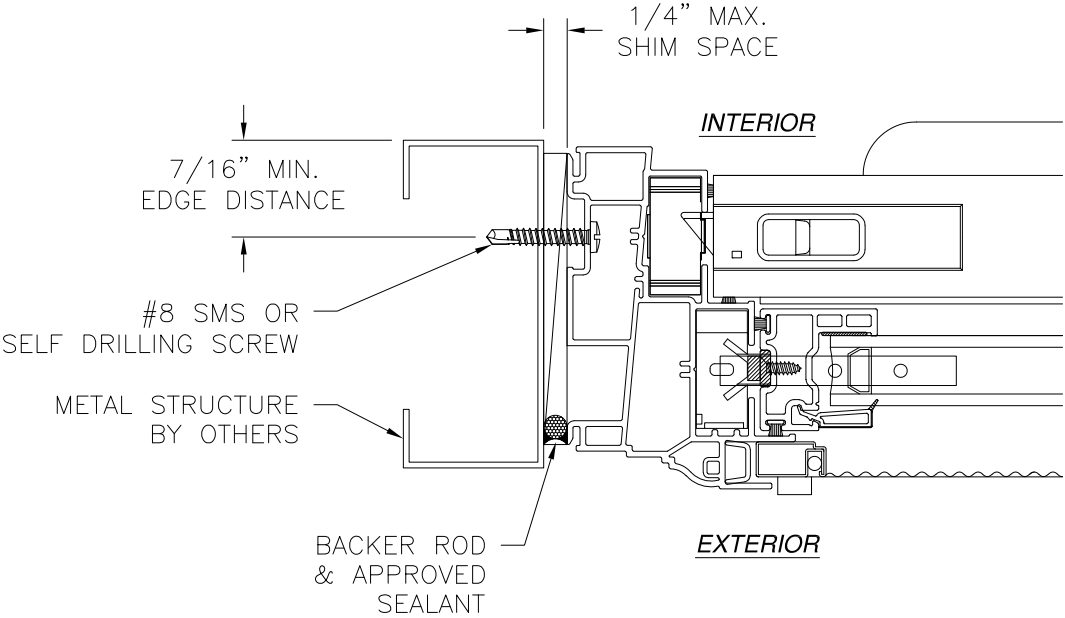

JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION

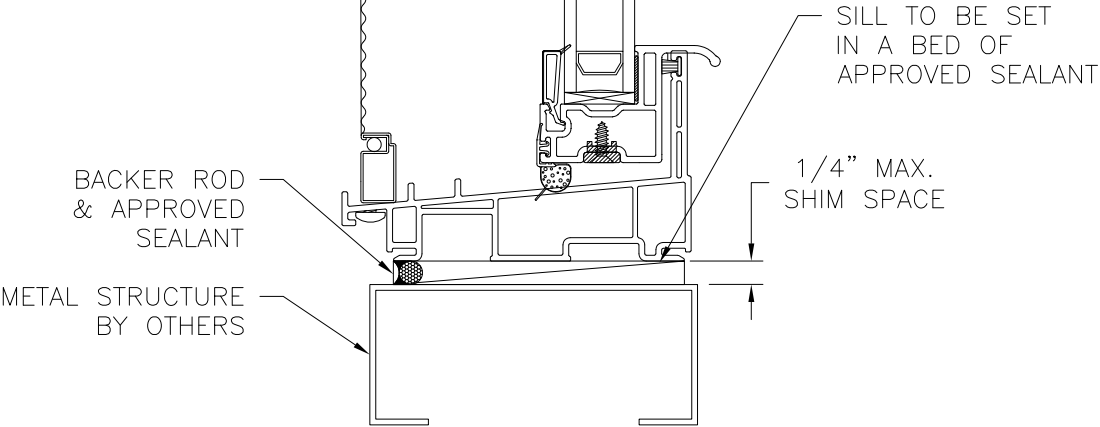


VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

- NOTES:
- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112



SIGNED: 08/08/2024

ACADIAN WINDOWS AND SIDING, LLC 119 ALPHA DRIVE DESTREHAN, LA 70047		
ACADIAN COMPASS SERIES DOUBLE HUNG WINDOW REINFORCED NON-IMPACT 36" X 72" INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-04080	REV -
SCALE NTS	DATE 07/31/2024	SHEET 4 OF 8
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

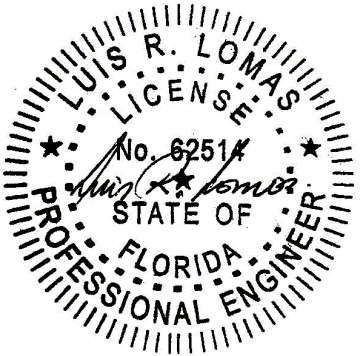


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

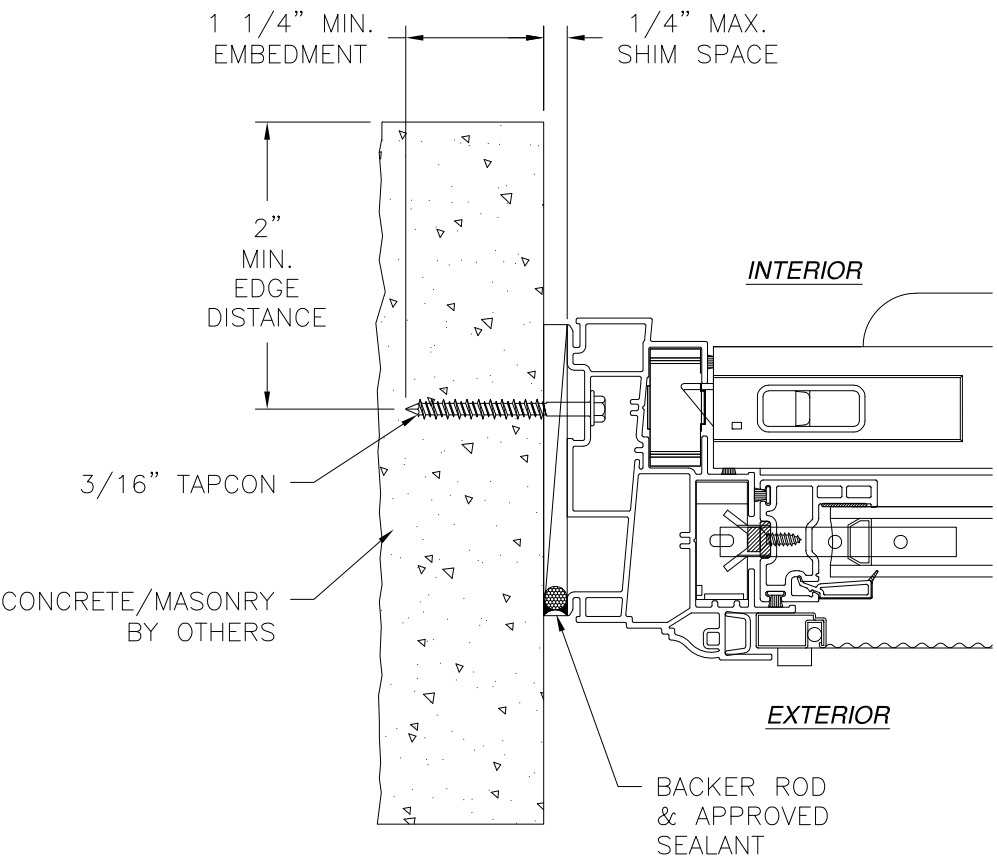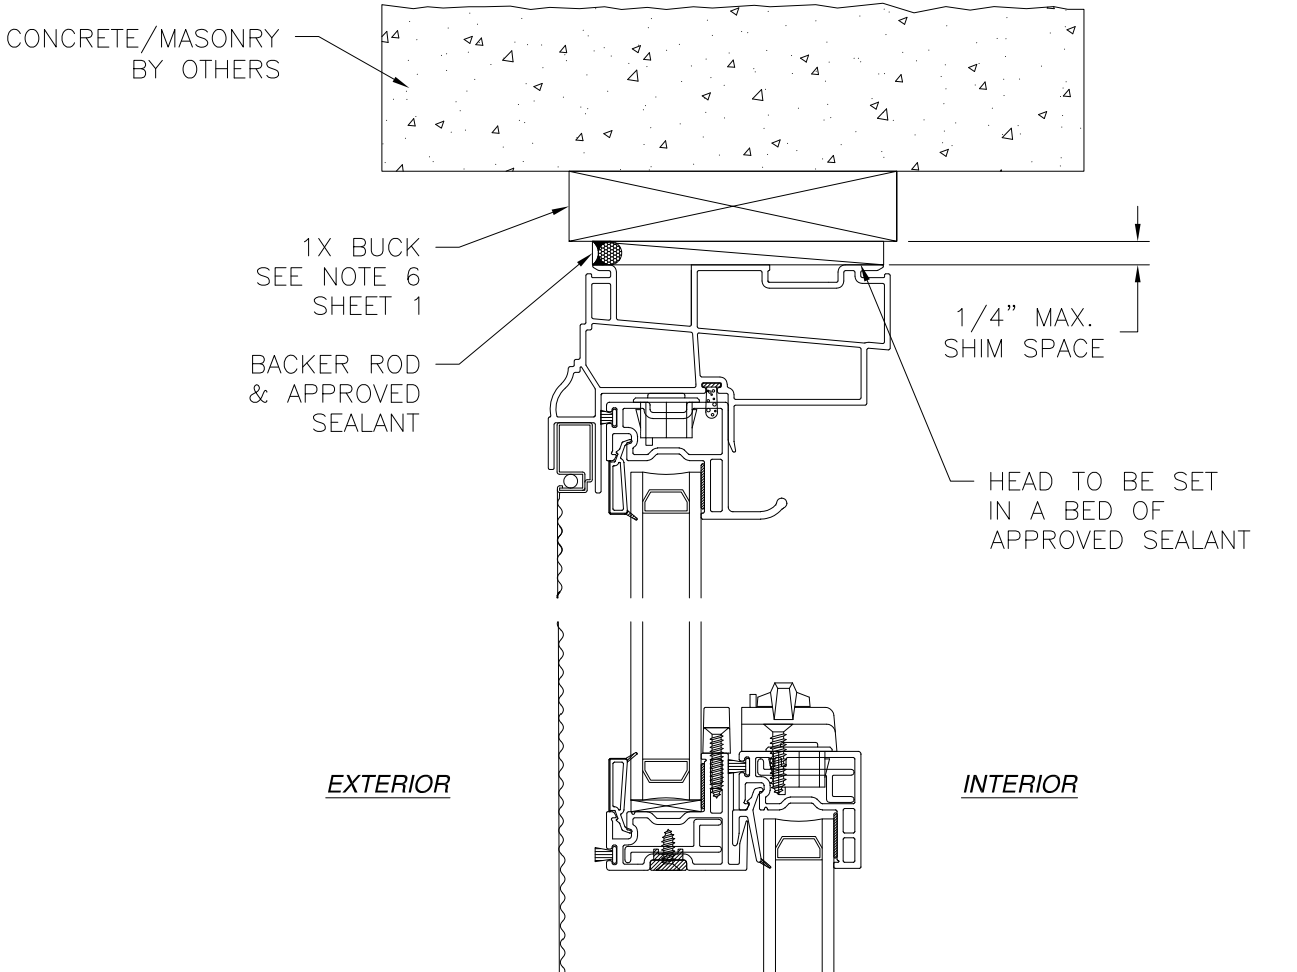

JAMB INSTALLATION DETAIL
CONCRETE/MASONRY WITHOUT 1X BUCK INSTALLATION
FOR CONCRETE/MASONRY INSTALLATION WITH 1X BUCK REFER TO
HEAD AND SILL INSTALLATION DETAILS


- NOTES:
- INTERIOR AND EXTERIOR FINISHES, BY OTHERS,
NOT SHOWN FOR CLARITY.
 - PERIMETER AND JOINT SEALANT BY OTHERS TO BE
DESIGNED IN ACCORDANCE WITH ASTM E2112

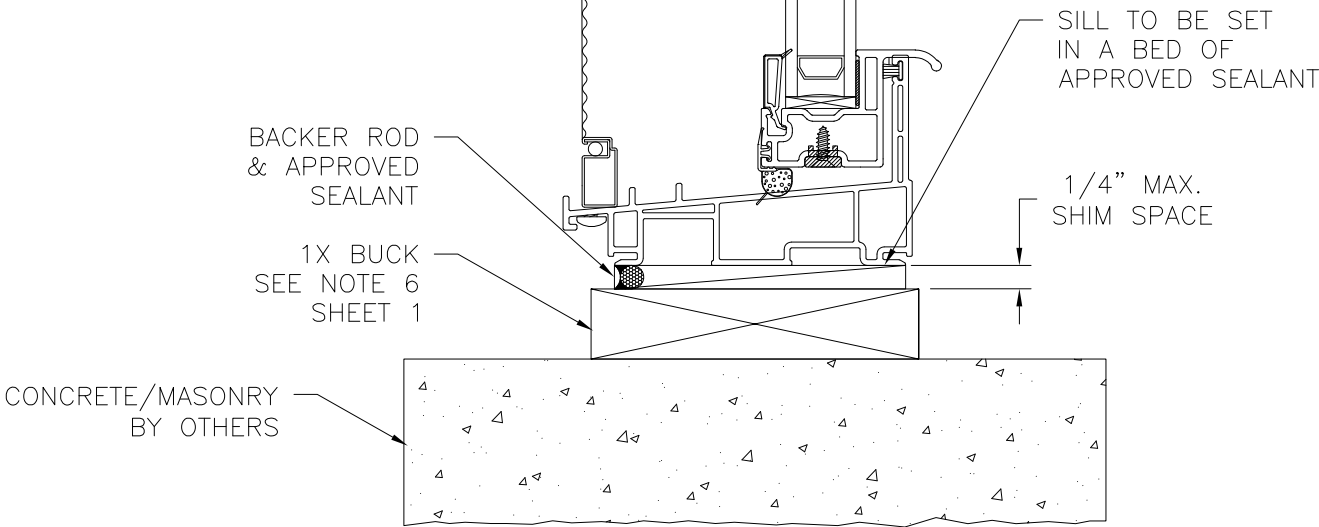

VERTICAL CROSS SECTION
CONCRETE/MASONRY WITH 1X BUCK INSTALLATION
FOR CONCRETE/MASONRY WITHOUT 1X BUCK REFER TO
JAMB INSTALLATION DETAIL

ACADIAN WINDOWS AND SIDING, LLC		
119 ALPHA DRIVE DESTREHAN, LA 70047		
ACADIAN COMPASS SERIES DOUBLE HUNG WINDOW REINFORCED NON-IMPACT 36" X 72" INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-04080	REV -
SCALE NTS	DATE 07/31/2024	SHEET 5 OF 8
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

SIGNED: 08/08/2024

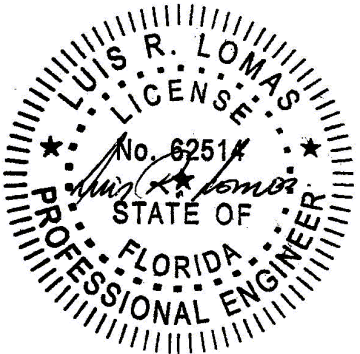

Luis R. Lomas P.E.
FL No.: 62514

APPROVED SEALANT BEHIND FIN

#8 WOOD SCREW

7/16" MIN EDGE DISTANCE

1 1/4" MIN. EMBEDMENT

WOOD FRAMING BY OTHERS

1/4" MAX. SHIM SPACE

EXTERIOR

INTERIOR

7/16" MIN EDGE DISTANCE

#8 WOOD SCREW

APPROVED SEALANT BEHIND FIN

1/4" MAX SHIM SPACE

1 1/4" MIN. EMBEDMENT

WOOD FRAMING BY OTHERS

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

WOOD FRAMING BY OTHERS

#8 WOOD SCREW

1 1/4" MIN. EMBEDMENT

APPROVED SEALANT BEHIND FIN

7/16" MIN EDGE DISTANCE

1/4" MAX SHIM SPACE

INTERIOR

EXTERIOR

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 08/08/2024

ACADIAN WINDOWS AND SIDING, LLC

119 ALPHA DRIVE
DESTREHAN, LA 70047

ACADIAN COMPASS SERIES DOUBLE HUNG WINDOW
REINFORCED NON-IMPACT 36" X 72"
FIN INSTALLATION DETAILS

DRAWN:
A.R.

DWG NO.

08-04080

REV
-


SCALE NTS

DATE

07/31/2024

SHEET 6 OF 8

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

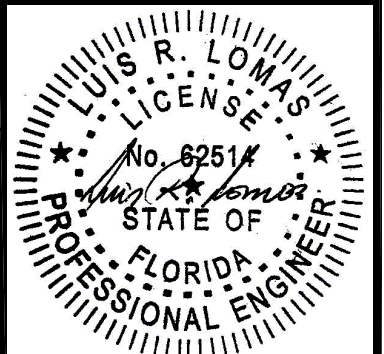

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

APPROVED SEALANT BEHIND FIN

#8 SMS OR SELF DRILLING SCREW

7/16" MIN EDGE DISTANCE

METAL STRUCTURE BY OTHERS

1/4" MAX. SHIM SPACE

EXTERIOR

INTERIOR

METAL STRUCTURE BY OTHERS

1/4" MAX SHIM SPACE

#8 SMS OR SELF DRILLING SCREW

APPROVED SEALANT BEHIND FIN

7/16" MIN EDGE DISTANCE

INTERIOR

EXTERIOR

JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION

- NOTES:
- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 08/08/2024

7/16" MIN EDGE DISTANCE

#8 SMS OR SELF DRILLING SCREW


APPROVED SEALANT BEHIND FIN

1/4" MAX SHIM SPACE

METAL STRUCTURE BY OTHERS


VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

ACADIAN WINDOWS AND SIDING, LLC		
119 ALPHA DRIVE DESTREHAN, LA 70047		
ACADIAN COMPASS SERIES DOUBLE HUNG WINDOW REINFORCED NON-IMPACT 36" X 72" FIN INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-04080	REV -
SCALE NTS	DATE 07/31/2024	SHEET 7 OF 8
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

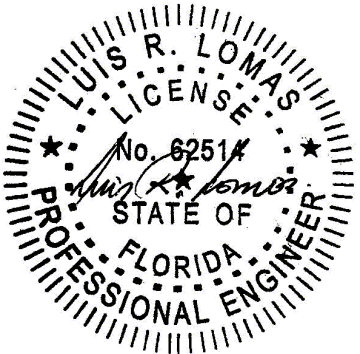


Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

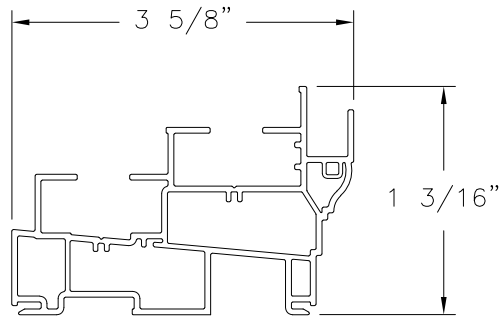


JAMB FINLESS (10008654)
EXTRUDED VINYL

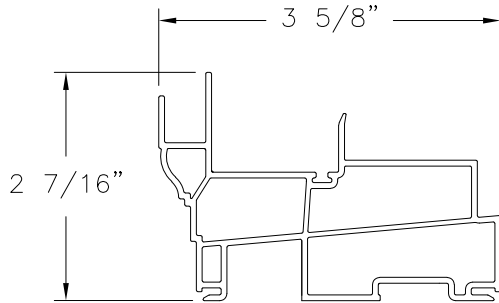


HEAD FINLESS (10008652)
EXTRUDED VINYL

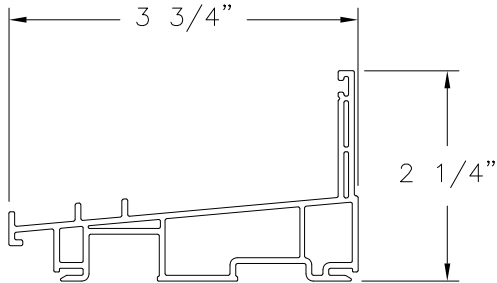


SILL FINLESS (10008692)
EXTRUDED VINYL

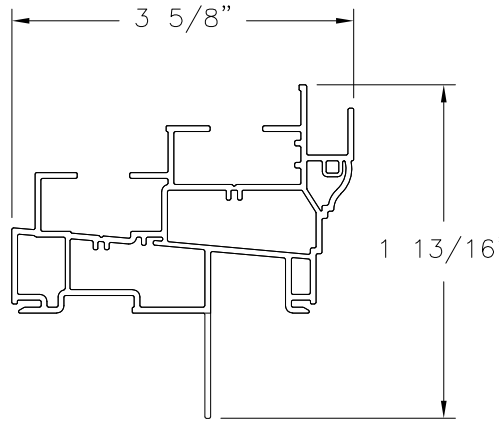


JAMB FIN (10008653)
EXTRUDED VINYL

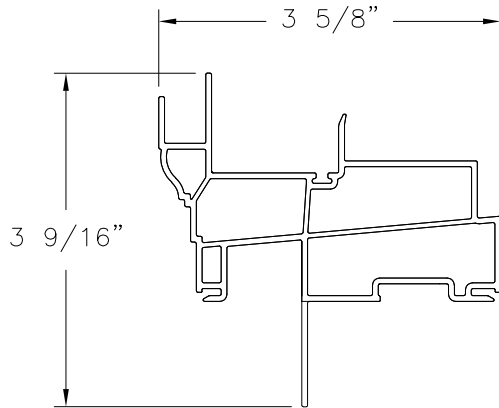


HEAD FIN (10008651)
EXTRUDED VINYL

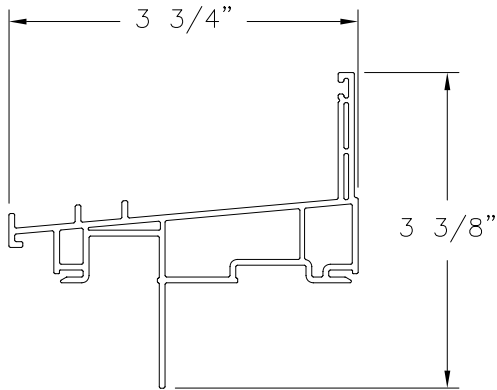


SILL FIN (10008672)
EXTRUDED VINYL

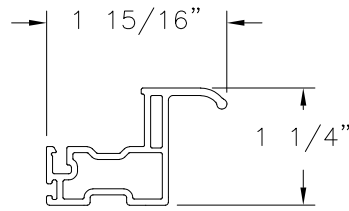


PULL/ LIFT RAIL (10008882)
EXTRUDED VINYL

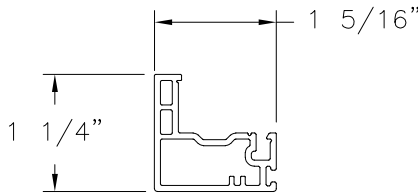


LOCK RAIL (10008885)
EXTRUDED VINYL

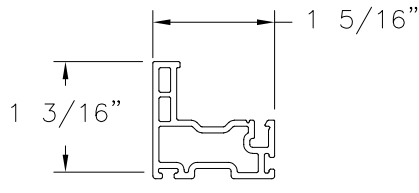


MAIN SASH (10008875)
EXTRUDED VINYL

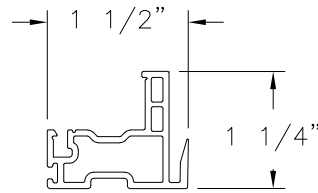


KEEPER SASH (10008890)
EXTRUDED VINYL

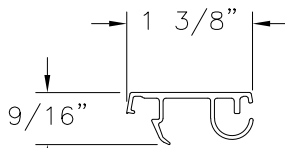


SASH STOP (10008483)
ALUMINUM 6005-T5

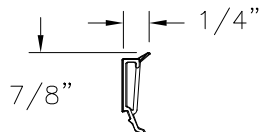

GLAZING BEAD (10005470)
EXTRUDED VINYL

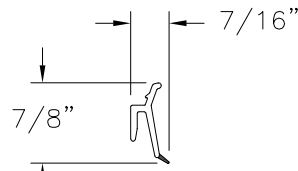


INTERLOCK GLAZING BEAD (1000551)
EXTRUDED VINYL



REINFORCEMENT (10006202)
ALUMINUM

ACADIAN WINDOWS AND SIDING, LLC		
119 ALPHA DRIVE DESTREHAN, LA 70047		
ACADIAN COMPASS SERIES DOUBLE HUNG WINDOW REINFORCED NON-IMPACT 36" X 72" COMPONENTS		
DRAWN: A.R.	DWG NO. 08-04080	REV -
SCALE NTS	DATE 07/31/2024	SHEET 8 OF 8
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

SIGNED: 08/08/2024

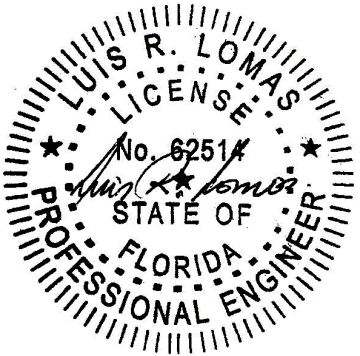

Luis R. Lomas P.E.
FL No.: 62514