

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

NOTES:


1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
2. WOOD FRAMING, METAL STRUCURE AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1-1/2" UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
4. WHERE WOOD BUCK THICKNESS IS 1-1/2" OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS.
5. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
6. BUCKS SHALL EXTEND BEYOND UNIT FRAME INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
7. SHIM AS NEEDED AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4".
8. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
9. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
10. FRAME MATERIAL: EXTRUDED RIGID PVC.
11. UNITS MUST BE GLAZED PER ASTM E1300, SEE SHEET 3 FOR GLASS DETAILS.
12. APPROVED IMPACT PROTECTIVE SYSTEM IS NOT REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS UP TO WIND ZONE 3.

13. FOR ANCHORING THROUGH FIN INTO WOOD FRAMING OR 2X BUCK USE #6 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 7/8" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
14. FOR ANCHORING THROUGH FIN INTO METAL STRUCTURE USE #6 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
15. FOR ANCHORING THROUGH FRAME OR STRAP INTO WOOD FRAMING OR 2X BUCK USE #10 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 3/8" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
16. FOR ANCHORING THROUGH FRAME OR STRAP INTO MASONRY/CONCRETE USE 1/4" TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
17. FOR ANCHORING THROUGH FRAME OR STRAP INTO METAL STRUCTURE USE #10 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
18. ALL FASTENERS TO BE CORROSION RESISTANT.
19. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:
 - A. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42
 - B. CONCRETE: MINIMUM COMPRESSIVE STRENGTH OF 2,000 PSI.
 - C. MASONRY: HOLLOW/FILLED BLOCK PER ASTM C90 WITH Fm=2,000PSI MINIMUM.
 - D. METAL STRUCTURE: STEEL 18GA (.048") FY=33KSI/FU=52KSI OR ALUMINUM 6063-T5 FU=30KSI .125" THICK MINIMUM

SIGNED: 07/15/2026


TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2	ELEVATIONS
3	HORIZONTAL CROSS SECTIONS & GLAZING DETAIL
4 - 14	INSTALLATION DETAILS
15	COMPONENTS

NT WINDOW, INC. 2900 WEST SEMINARY DR. FORT WORTH, TX 76133		
G140 PVC HORIZONTAL SLIDER WINDOW XOx 3-3-3 REINFORCED - IMPACT NOTES		
DRAWN: A.R.	DWG NO. 08-04149	REV -
SCALE NTS	DATE 04/30/2025	SHEET 1 OF 15
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

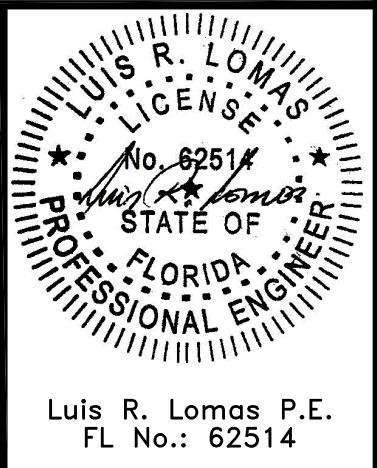


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

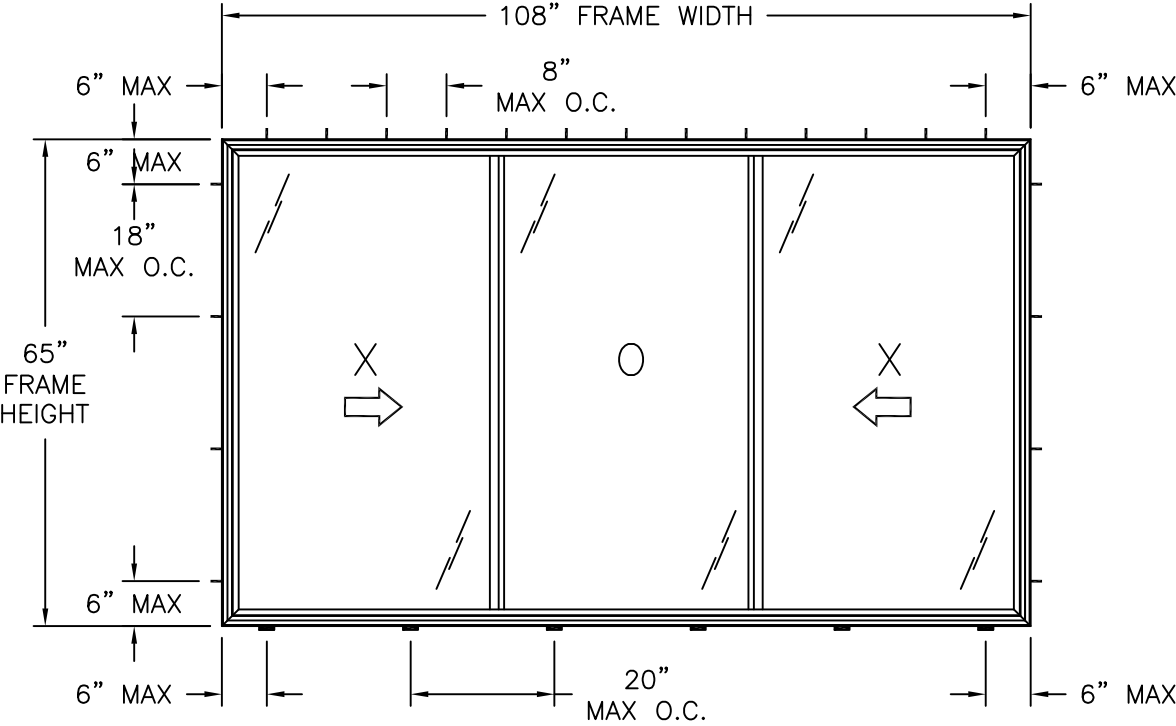


G140 PVC HORIZONTAL SLIDER WINDOW
FINLESS AND FLANGE INSTALLATION

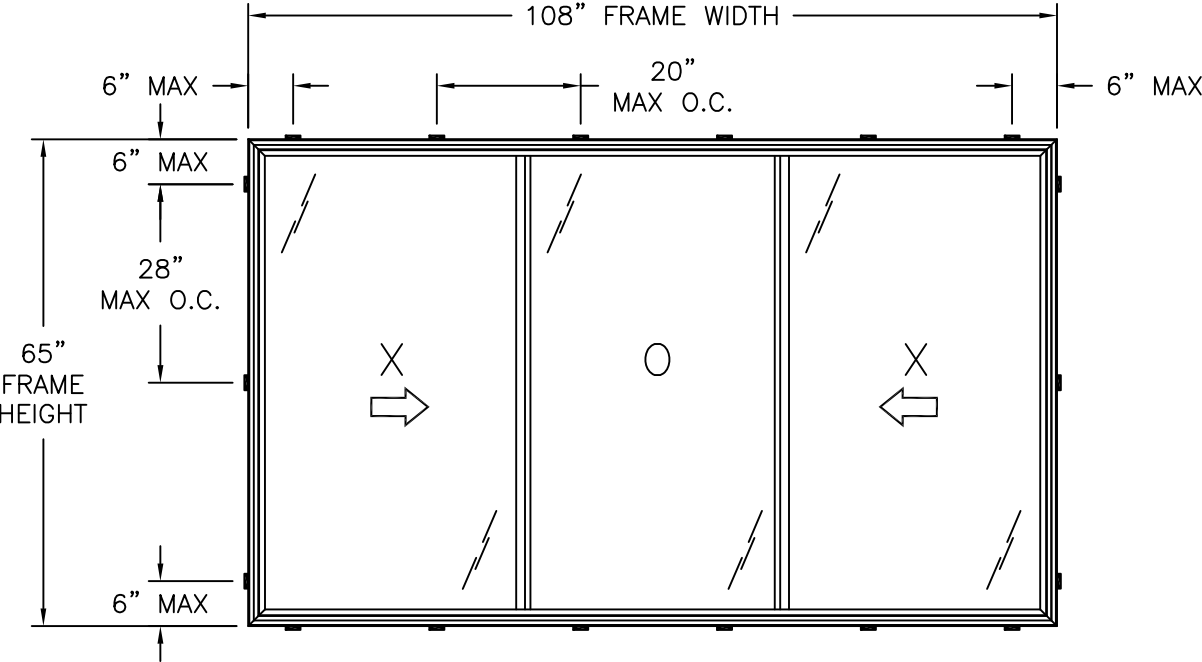

G140 PVC HORIZONTAL SLIDER WINDOW
STRAP INSTALLATION

- NOTES:
1. SASH SIZE: 35 5/8" X 61 7/16"
 2. FIXED D.L.O.: 32 3/4" X 60 1/2"
 3. SASH D.L.O.: 32 3/4" X 58 1/2"

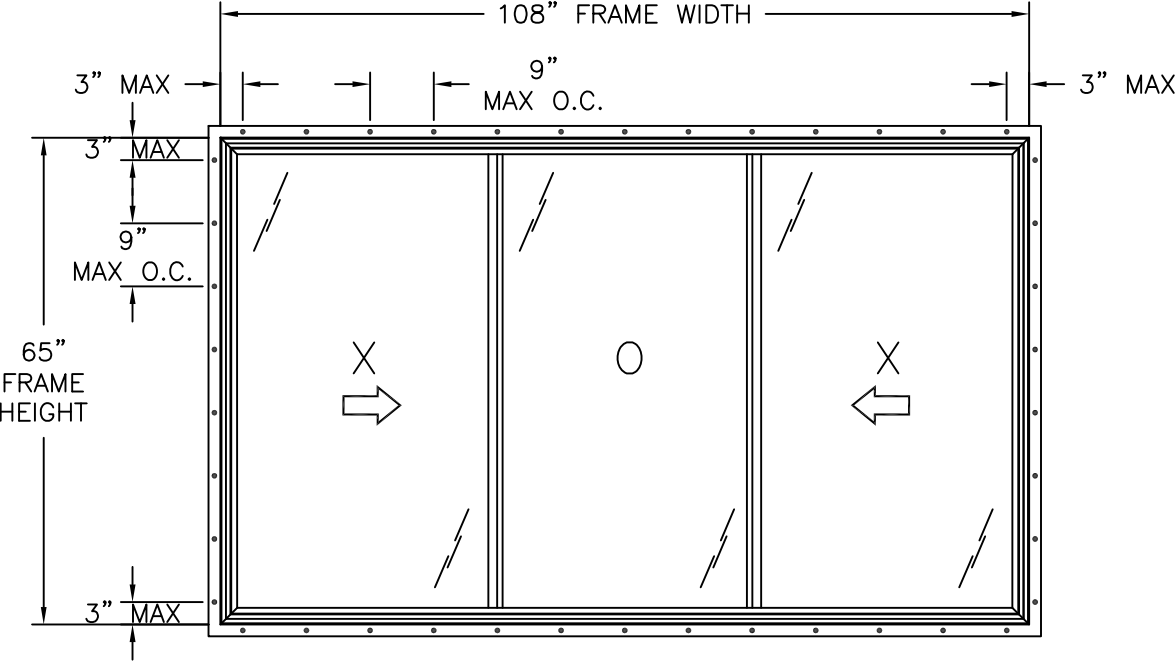

G140 PVC HORIZONTAL SLIDER WINDOW
FIN INSTALLATION

DESIGN PRESSURE RATING	IMPACT RATING
±50.0PSF	LARGE AND SMALL MISSILE IMPACT

MISSILE LEVEL D, WIND ZONE 3
108" X 65" UNIT SHOWN. OTHER SIZES APPROVED AS LONG AS
FRAME AREA DOES NOT EXCEED 48.75 FT²

SIGNED: 07/15/2026


HARDWARE SCHEDULE	
A.	(4) COMPOSITE CAM LOCK WITH KEEPERS AT LOCK STILE, 7" IN FROM EACH END
B.	(4) DUAL METAL ROLLER ASSEMBLY AT BOTTOM RAILS, ONE AT EACH END
C.	ALUMINUM REINFORCEMENT (16579) AT JAMB STILES
D.	ALUMINUM REINFORCEMENT (16582) AT LOCK STILES
E.	ALUMINUM REINFORCEMENT (16943) AT FIXED MEETING STILES

NT WINDOW, INC.
2900 WEST SEMINARY DR.
FORT WORTH, TX 76133

G140 PVC HORIZONTAL SLIDER WINDOW XOX
3-3-3 REINFORCED - IMPACT
ELEVATIONS


DRAWN: A.R.	DWG NO. 08-04149	REV -
SCALE NTS	DATE 04/30/2025	SHEET 2 OF 15

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

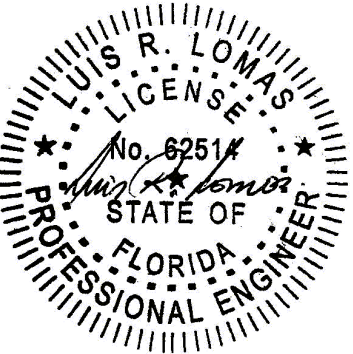


Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

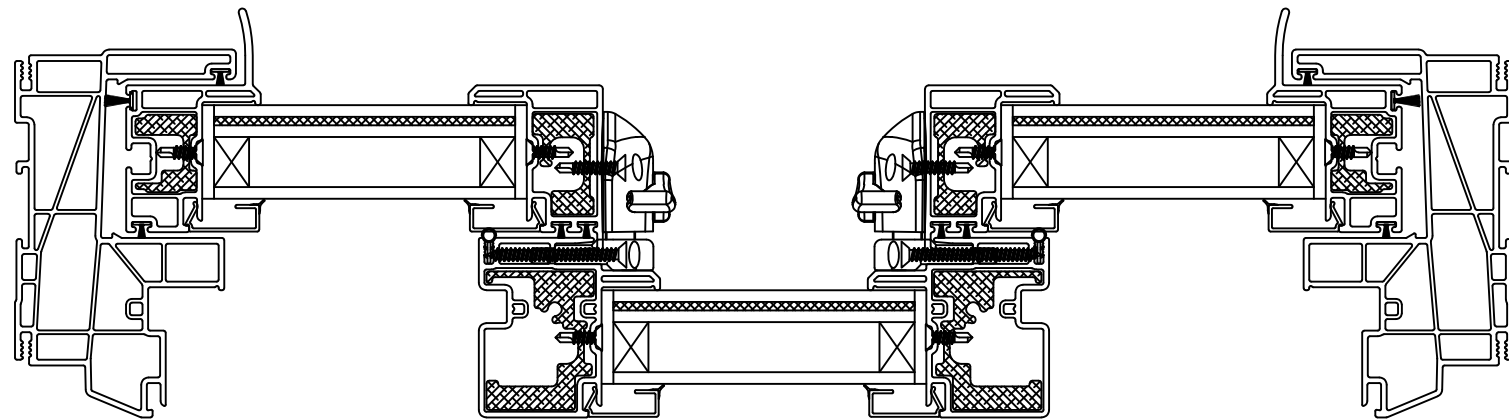

HORIZONTAL CROSS SECTION
FINLESS INSTALLATION

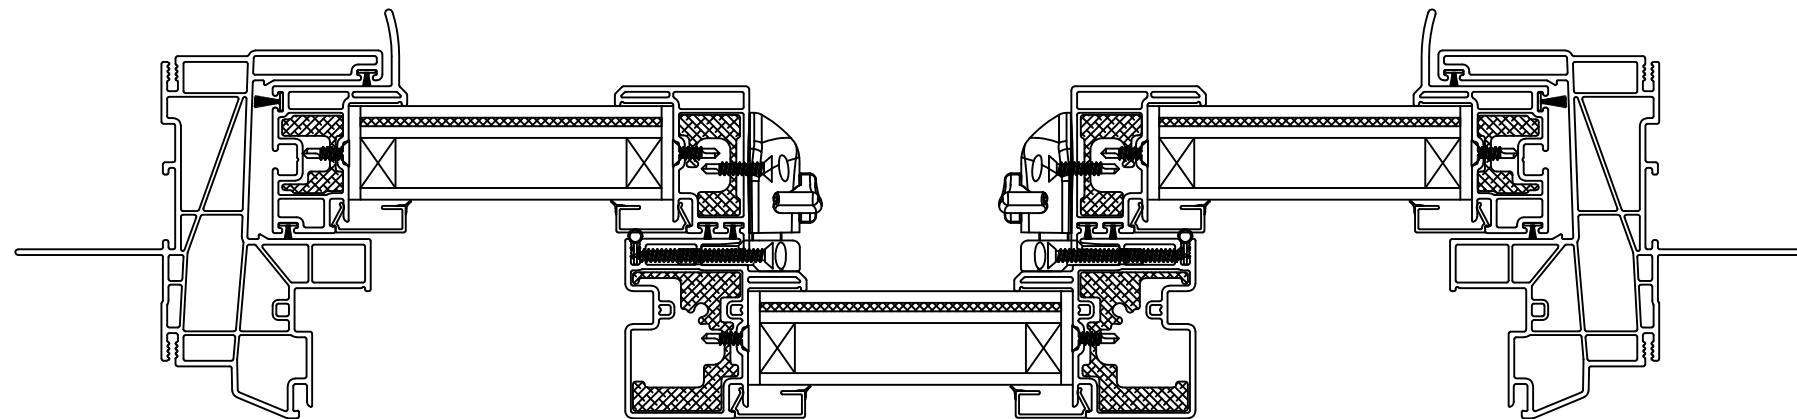

HORIZONTAL CROSS SECTION
FIN INSTALLATION



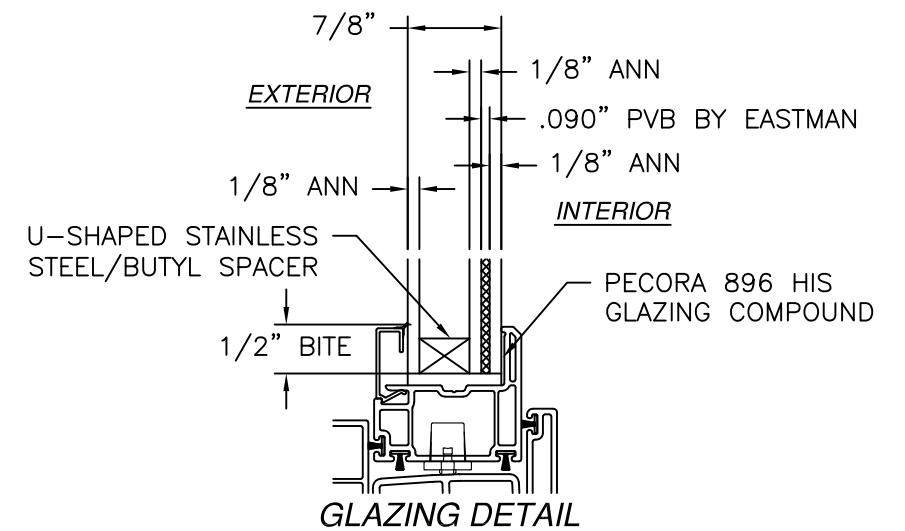


SIGNED: 07/15/2026

NT WINDOW, INC. 2900 WEST SEMINARY DR. FORT WORTH, TX 76133			
G140 PVC HORIZONTAL SLIDER WINDOW XO 3-3-3 REINFORCED - IMPACT HORIZONTAL CROSS SECTIONS & GLAZING DETAIL			
DRAWN: A.R.	DWG NO. 08-04149	REV -	
SCALE NTS	DATE 04/30/2025	SHEET 3 OF 15	
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com			

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

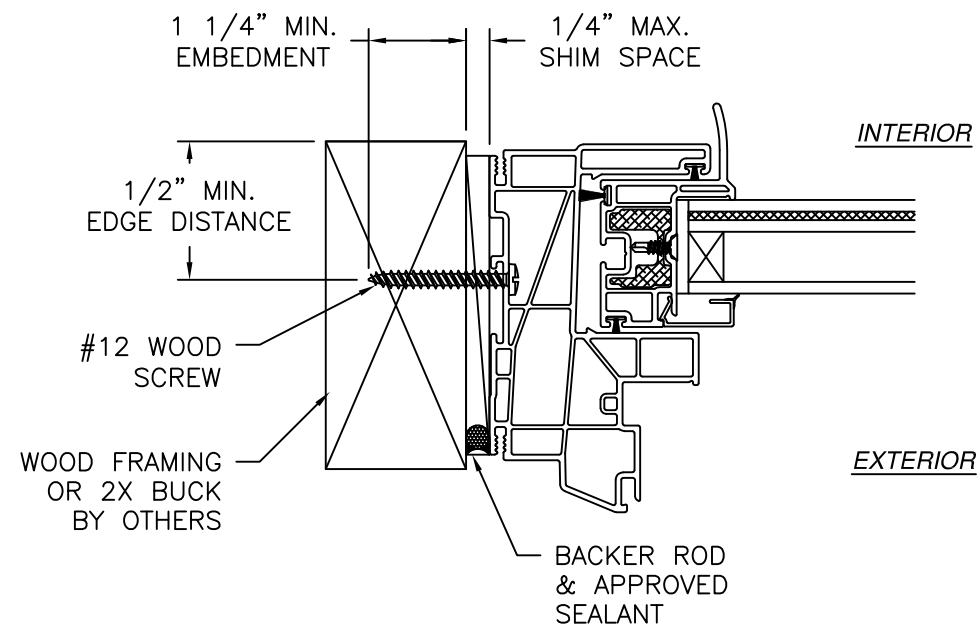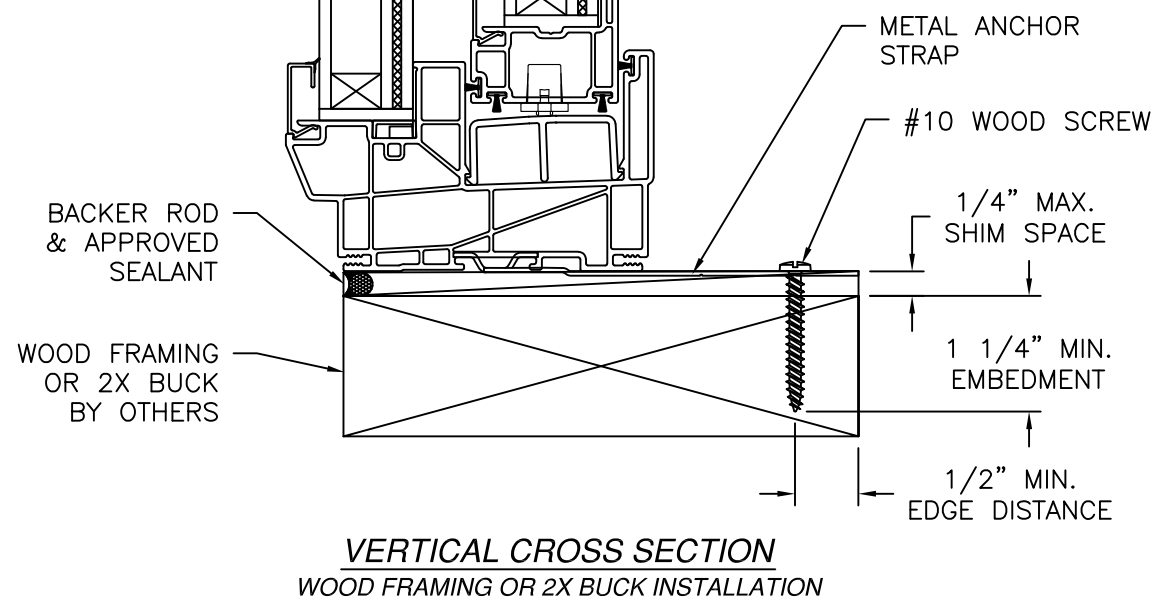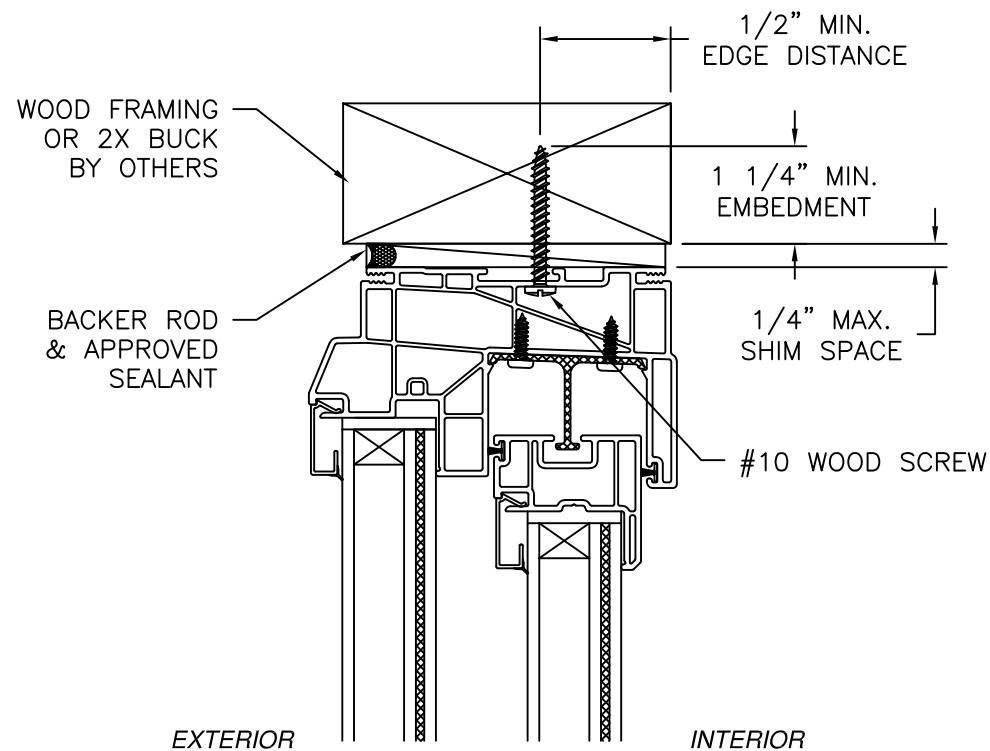


JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


SIGNED: 07/15/2026

NT WINDOW, INC. 2900 WEST SEMINARY DR. FORT WORTH, TX 76133		
G140 PVC HORIZONTAL SLIDER WINDOW XOx 3-3-3 REINFORCED - IMPACT FINLESS INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-04149	REV -
SCALE NTS	DATE 04/30/2025	SHEET 4 OF 15
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

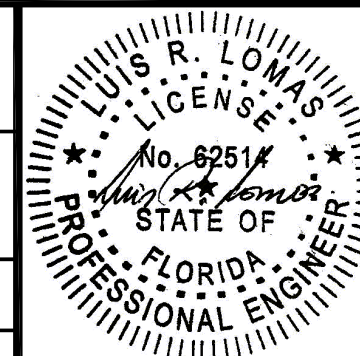


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

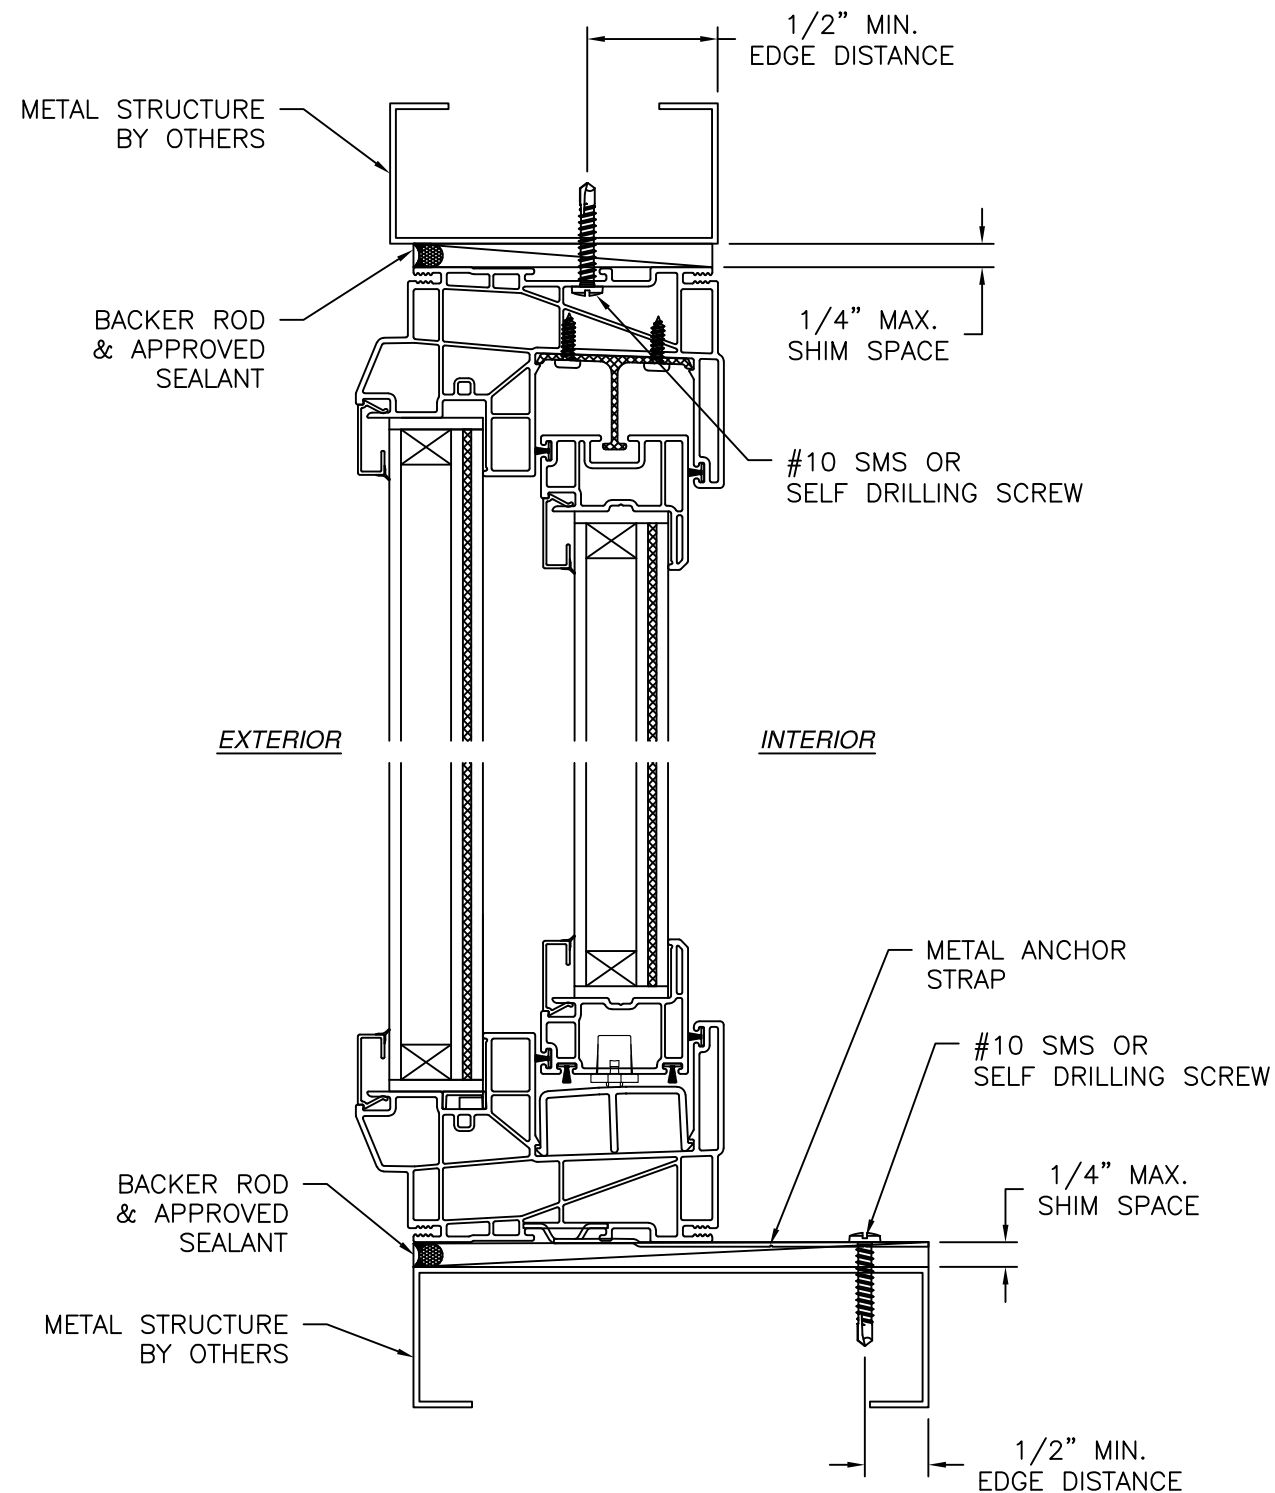

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

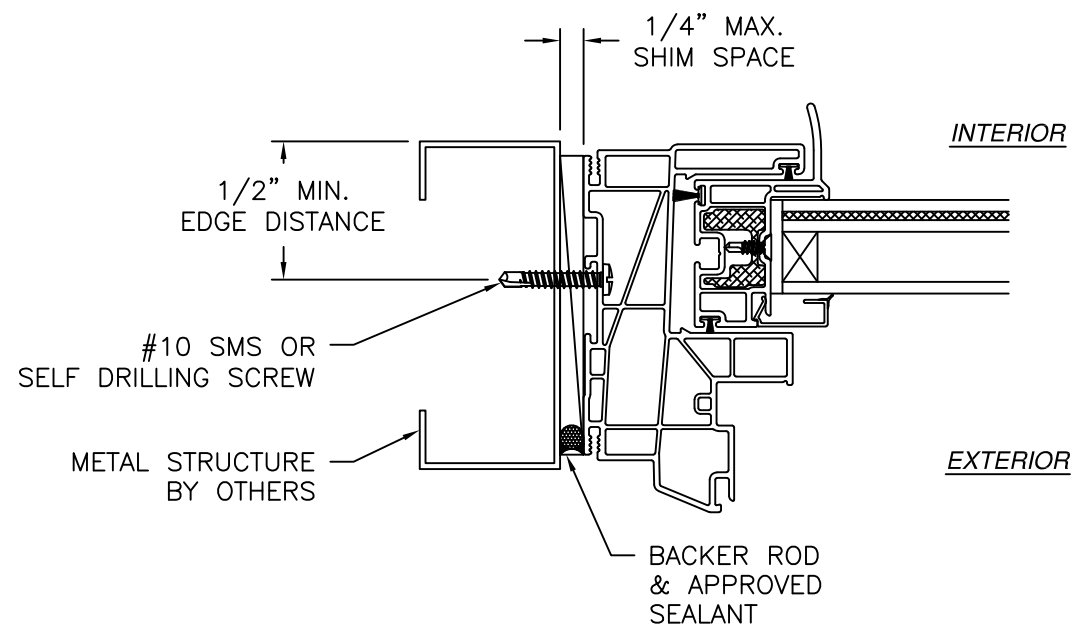


JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


SIGNED: 07/15/2026

NT WINDOW, INC. 2900 WEST SEMINARY DR. FORT WORTH, TX 76133		
G140 PVC HORIZONTAL SLIDER WINDOW XOx 3-3-3 REINFORCED - IMPACT FINLESS INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-04149	REV -
SCALE NTS	DATE 04/30/2025	SHEET 5 OF 15
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

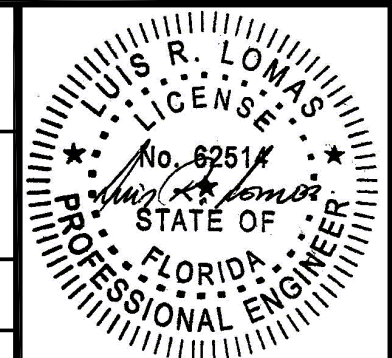


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

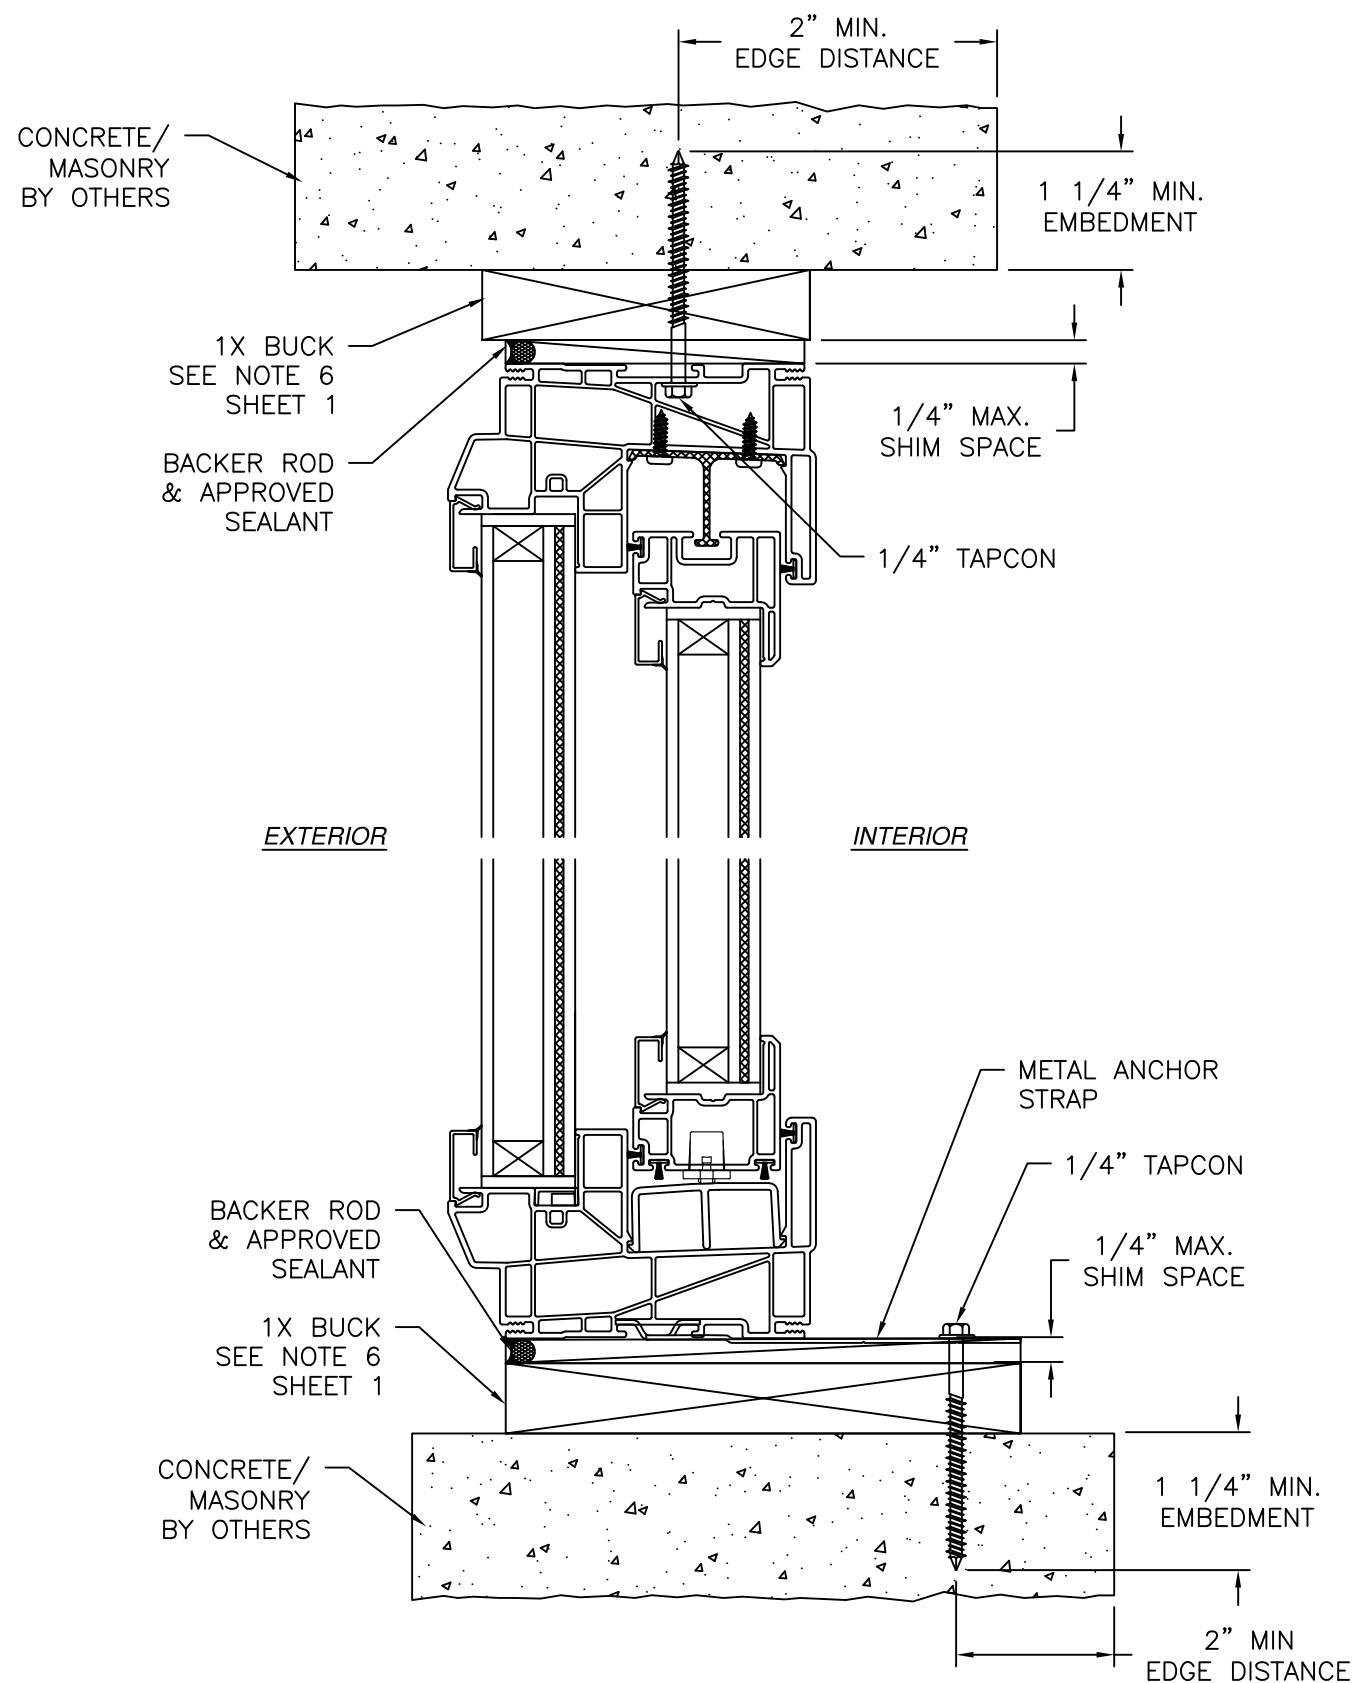

VERTICAL CROSS SECTION
 CONCRETE/MASONRY WITH 1X BUCK INSTALLATION
 FOR CONCRETE/MASONRY WITHOUT 1X BUCK REFER TO
 JAMB INSTALLATION DETAIL

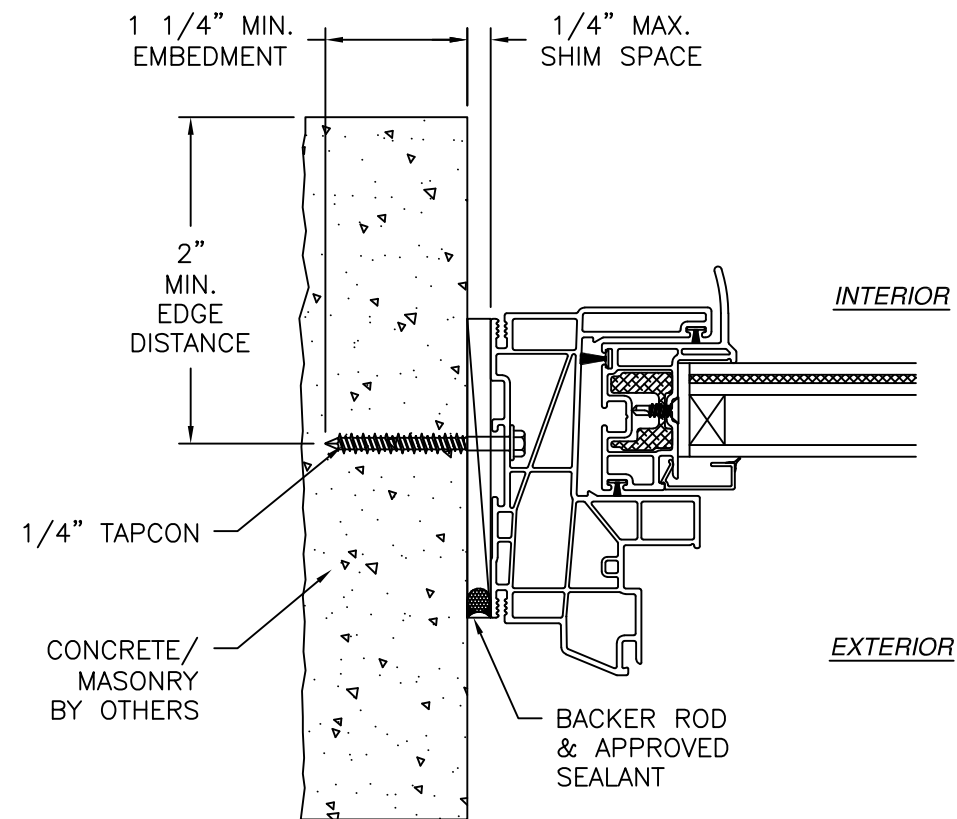


JAMB INSTALLATION DETAIL
 CONCRETE/MASONRY WITHOUT 1X BUCK INSTALLATION
 FOR CONCRETE/MASONRY WITH 1X BUCK REFER TO
 HEAD AND SILL INSTALLATION DETAILS

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112



SIGNED: 07/15/2026

NT WINDOW, INC. 2900 WEST SEMINARY DR. FORT WORTH, TX 76133		
G140 PVC HORIZONTAL SLIDER WINDOW XOx 3-3-3 REINFORCED - IMPACT FINLESS INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-04149	REV -
SCALE NTS	DATE 04/30/2025	SHEET 6 OF 15
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

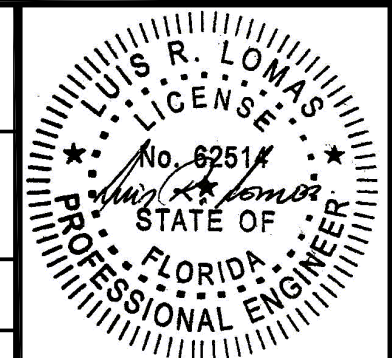

Luis R. Lomas P.E.
 FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

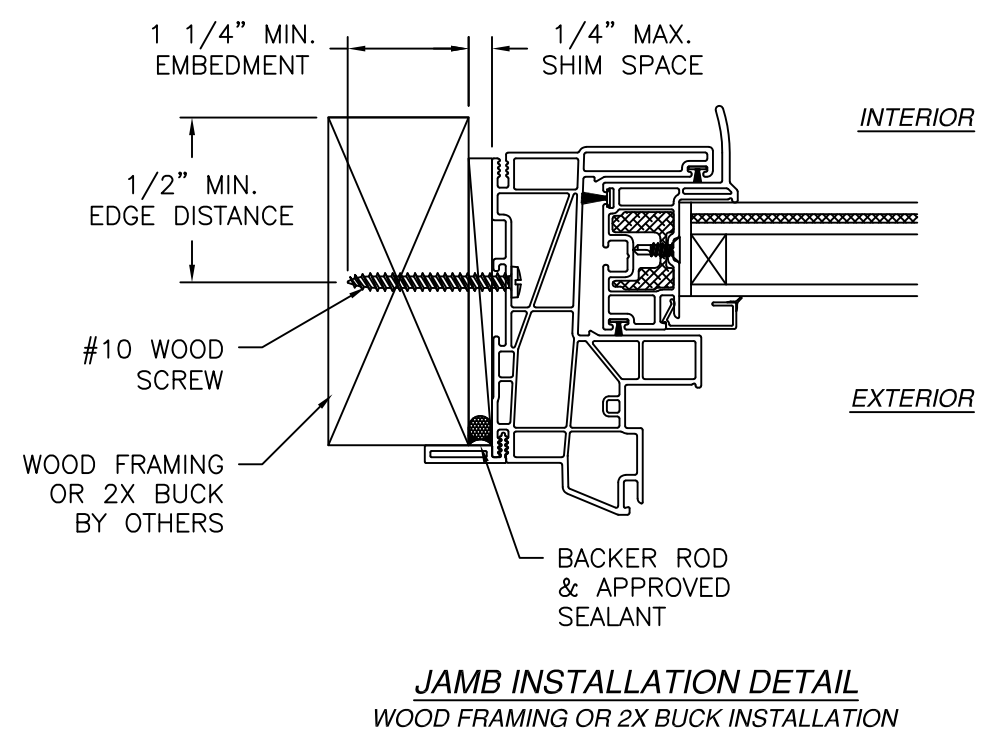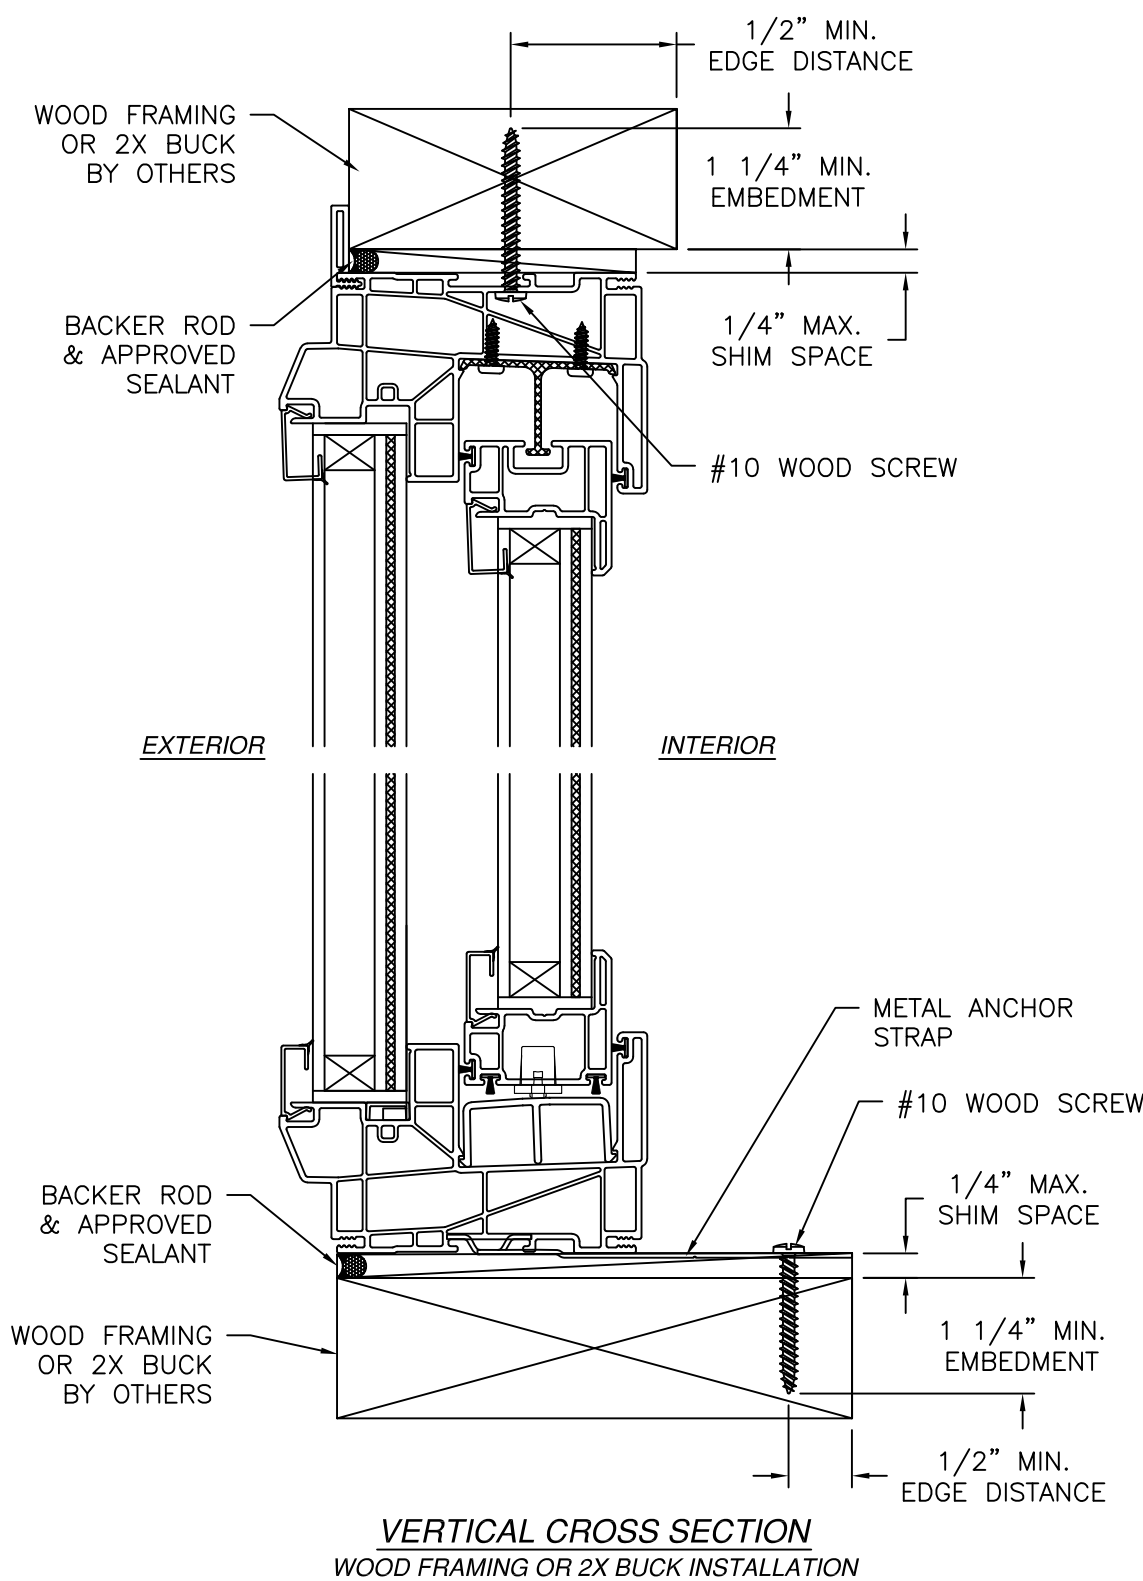

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

NT WINDOW, INC.
2900 WEST SEMINARY DR.
FORT WORTH, TX 76133

G140 PVC HORIZONTAL SLIDER WINDOW XOx
3-3-3 REINFORCED - IMPACT
FLANGE INSTALLATION DETAILS

DRAWN:
A.R.

DWG NO.
08-04149

REV
-

SCALE
NTS

DATE
04/30/2025



SHEET
7 OF 15

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 07/15/2026

Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

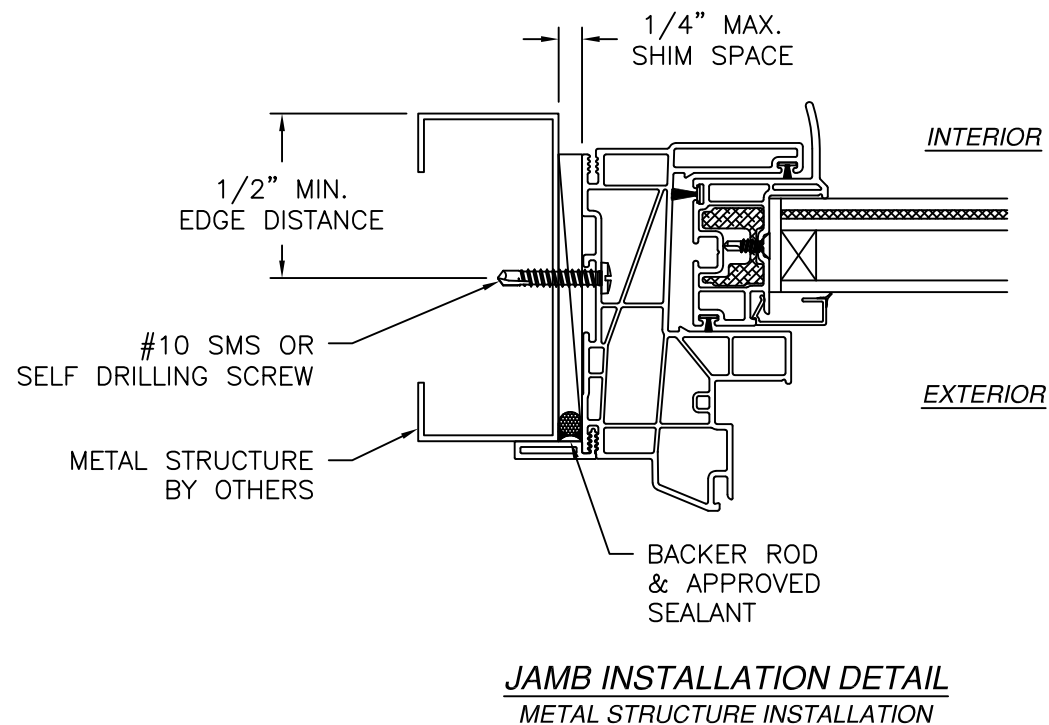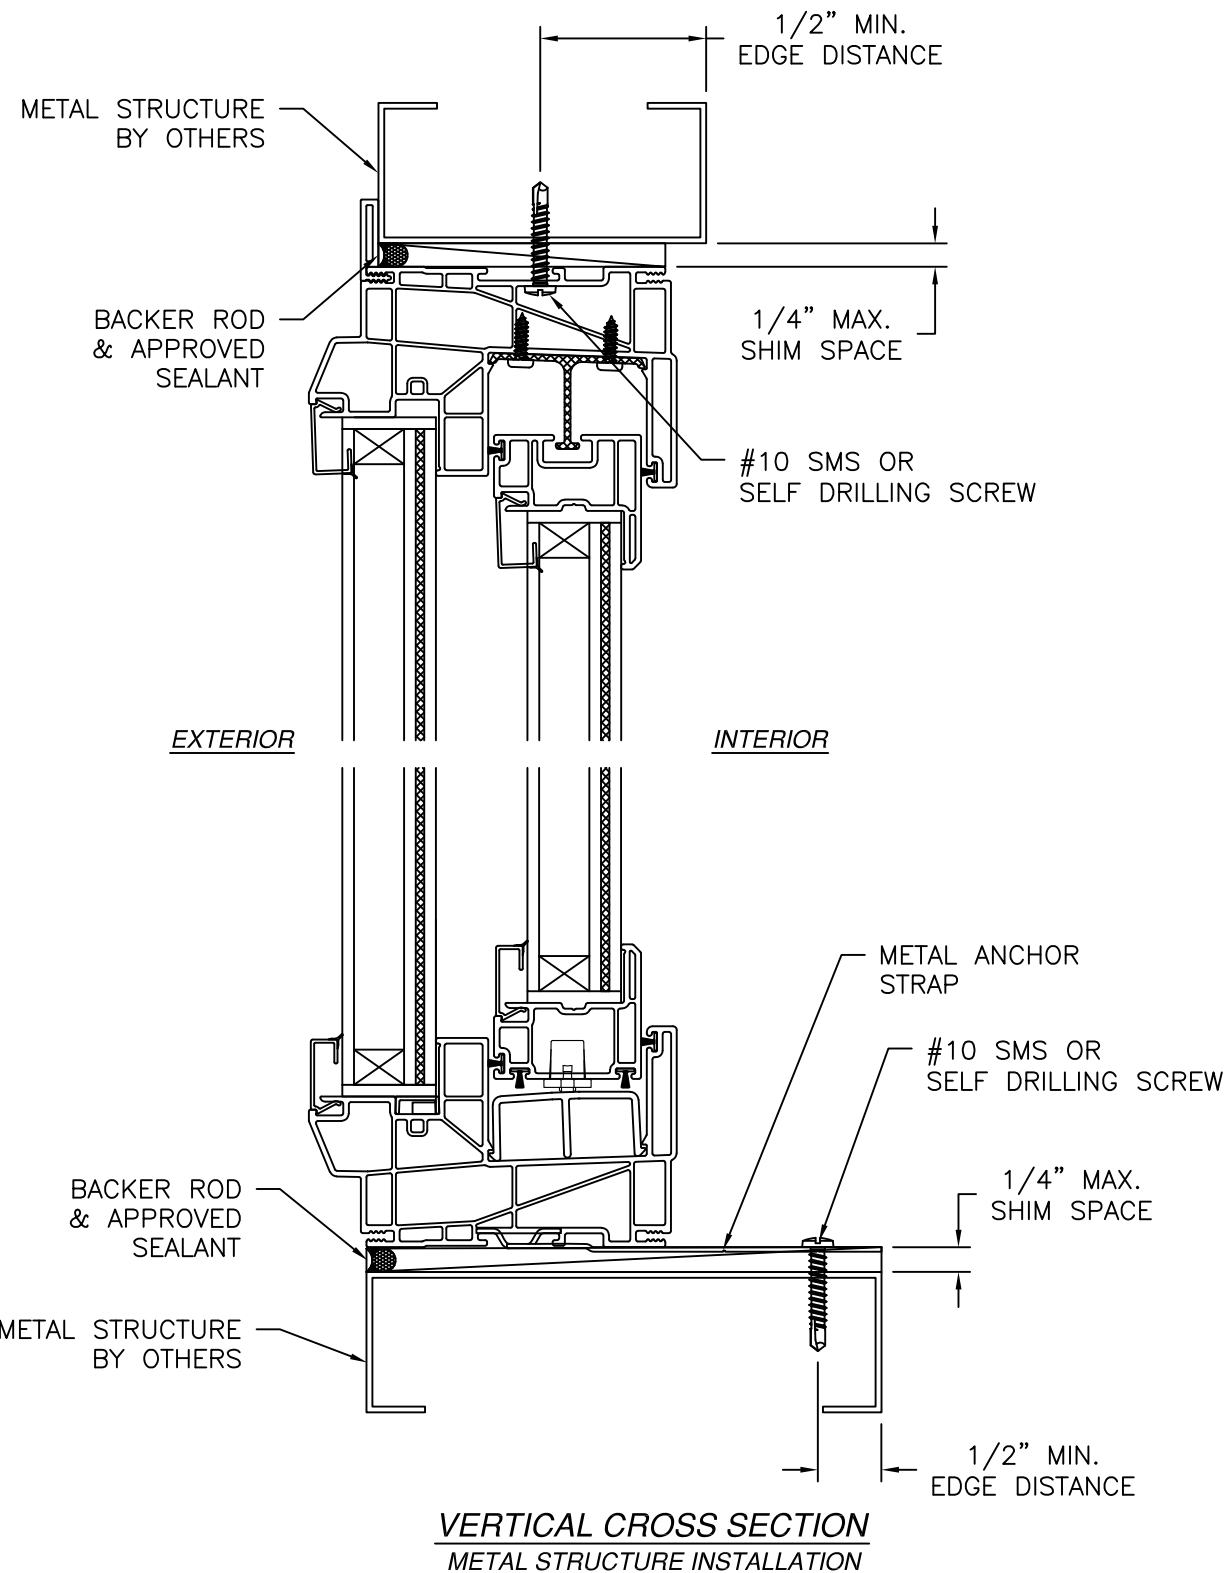

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


SIGNED: 07/15/2026

NT WINDOW, INC. 2900 WEST SEMINARY DR. FORT WORTH, TX 76133		
G140 PVC HORIZONTAL SLIDER WINDOW XOx 3-3-3 REINFORCED - IMPACT FLANGE INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-04149	REV -
SCALE NTS	DATE 04/30/2025	SHEET 8 OF 15
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

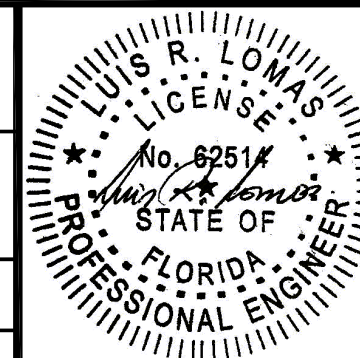


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

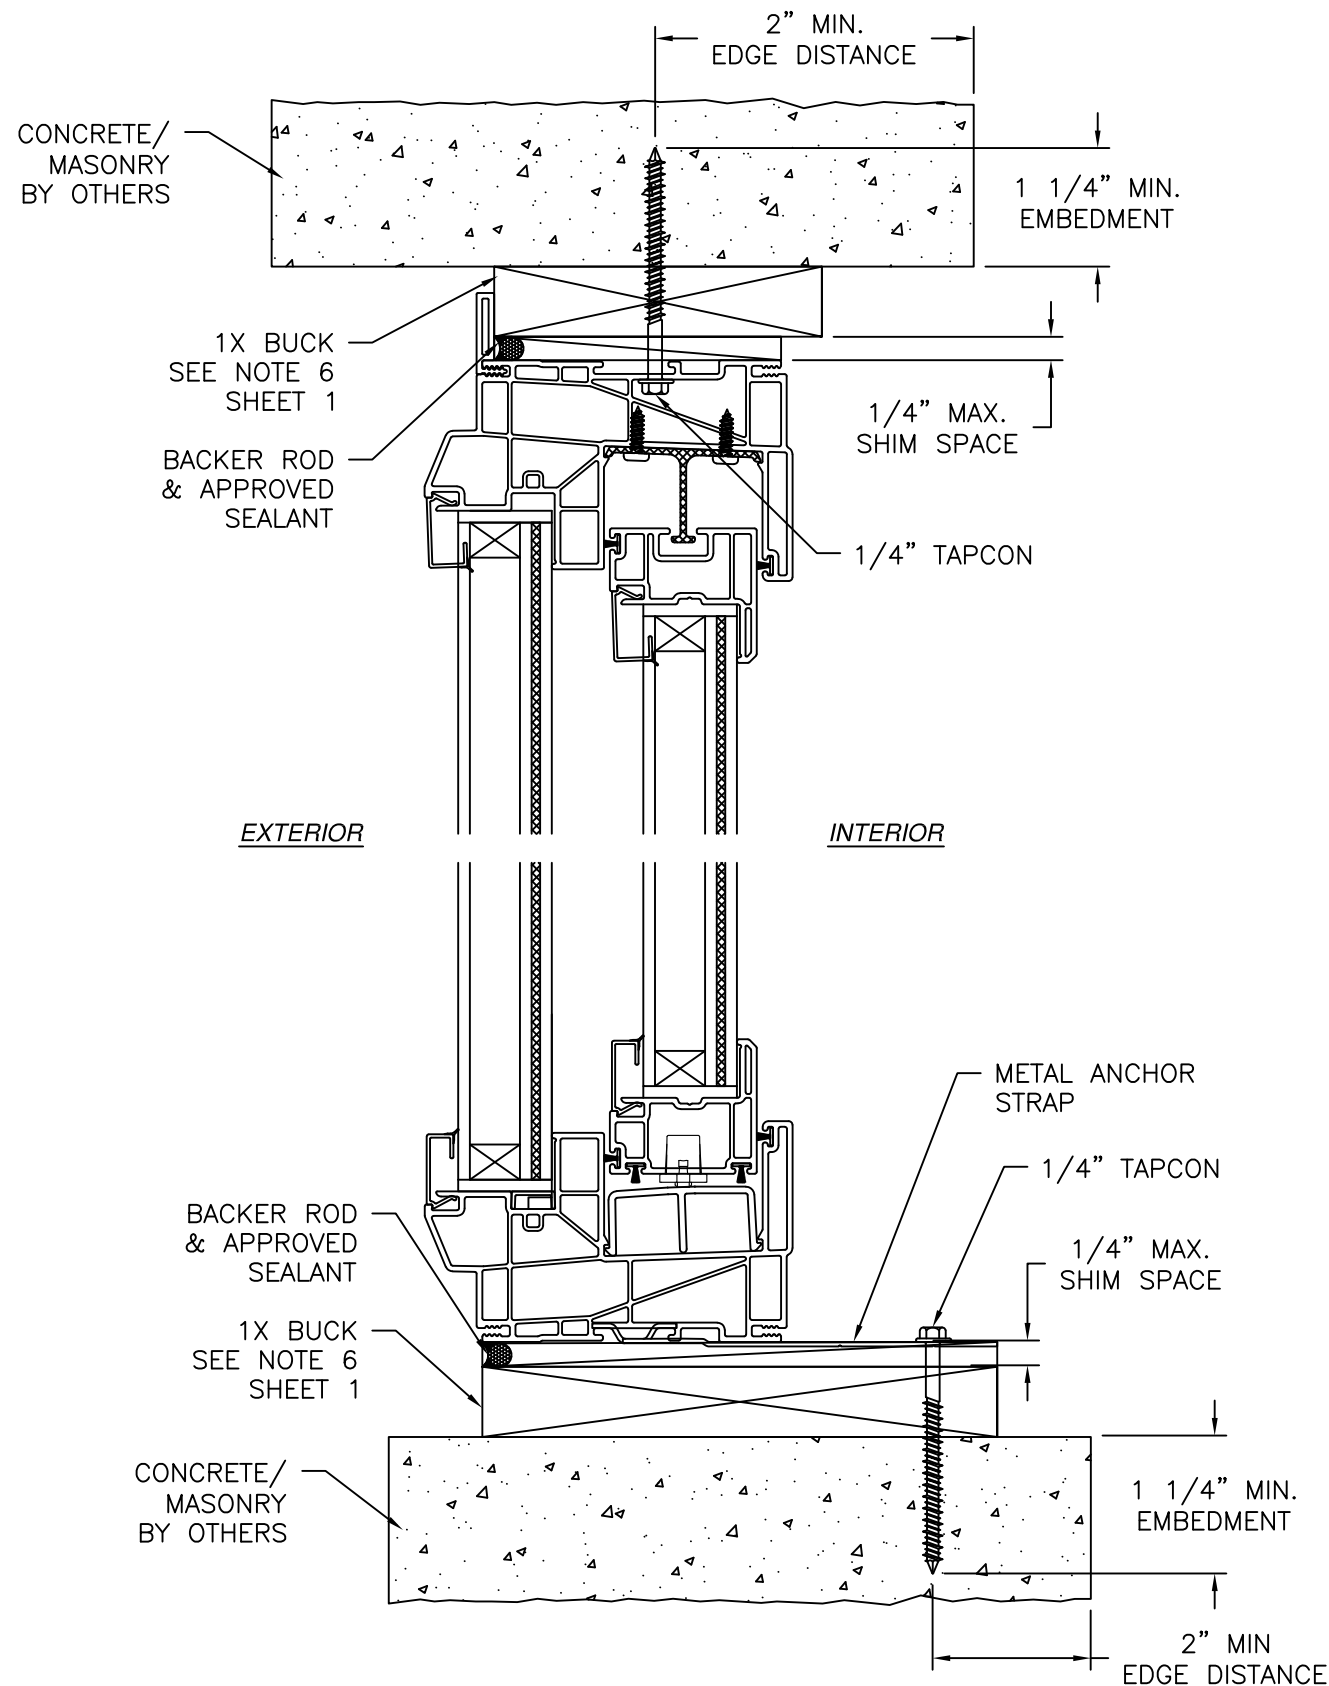

VERTICAL CROSS SECTION
 CONCRETE/MASONRY WITH 1X BUCK INSTALLATION
 FOR CONCRETE/MASONRY WITHOUT 1X BUCK REFER TO
 JAMB INSTALLATION DETAIL

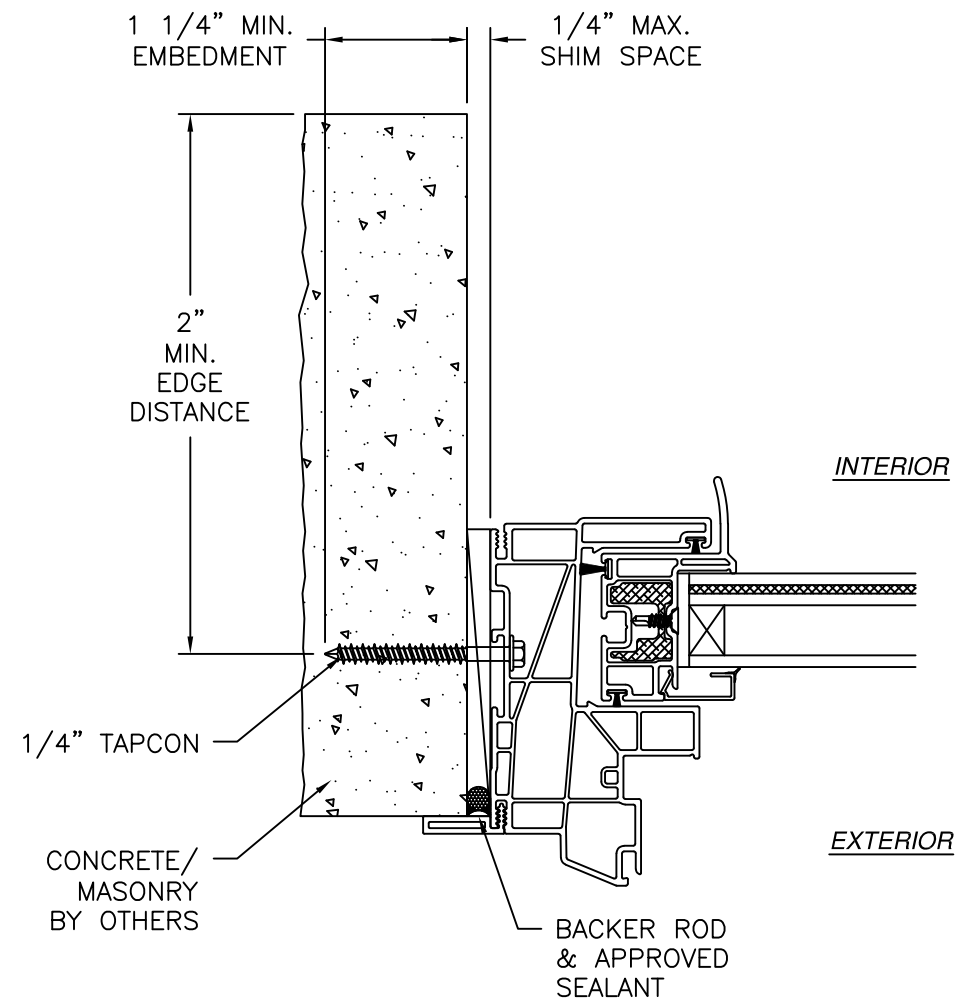

JAMB INSTALLATION DETAIL
 CONCRETE/MASONRY WITHOUT 1X BUCK INSTALLATION
 FOR CONCRETE/MASONRY INSTALLATION WITH 1X BUCK REFER TO
 HEAD AND SILL INSTALLATION DETAILS

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 07/15/2026

NT WINDOW, INC.
2900 WEST SEMINARY DR.
FORT WORTH, TX 76133

G140 PVC HORIZONTAL SLIDER WINDOW XOx
3-3-3 REINFORCED - IMPACT
FLANGE INSTALLATION DETAILS

DRAWN:
A.R.

DWG NO.
08-04149


REV
-

SCALE
NTS

DATE
04/30/2025



SHEET
9 OF 15

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

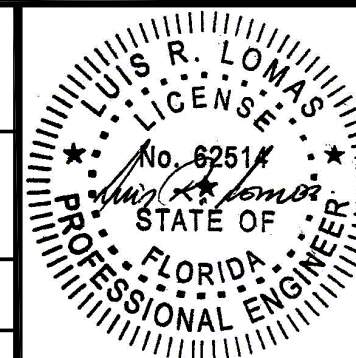


Luis R. Lomas P.E.
 FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

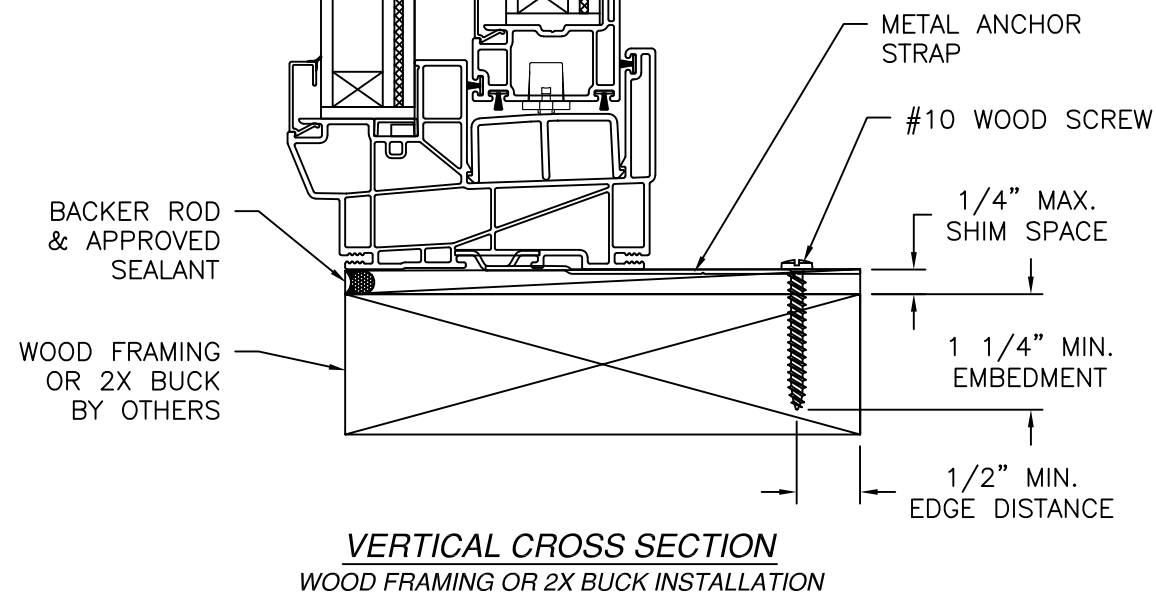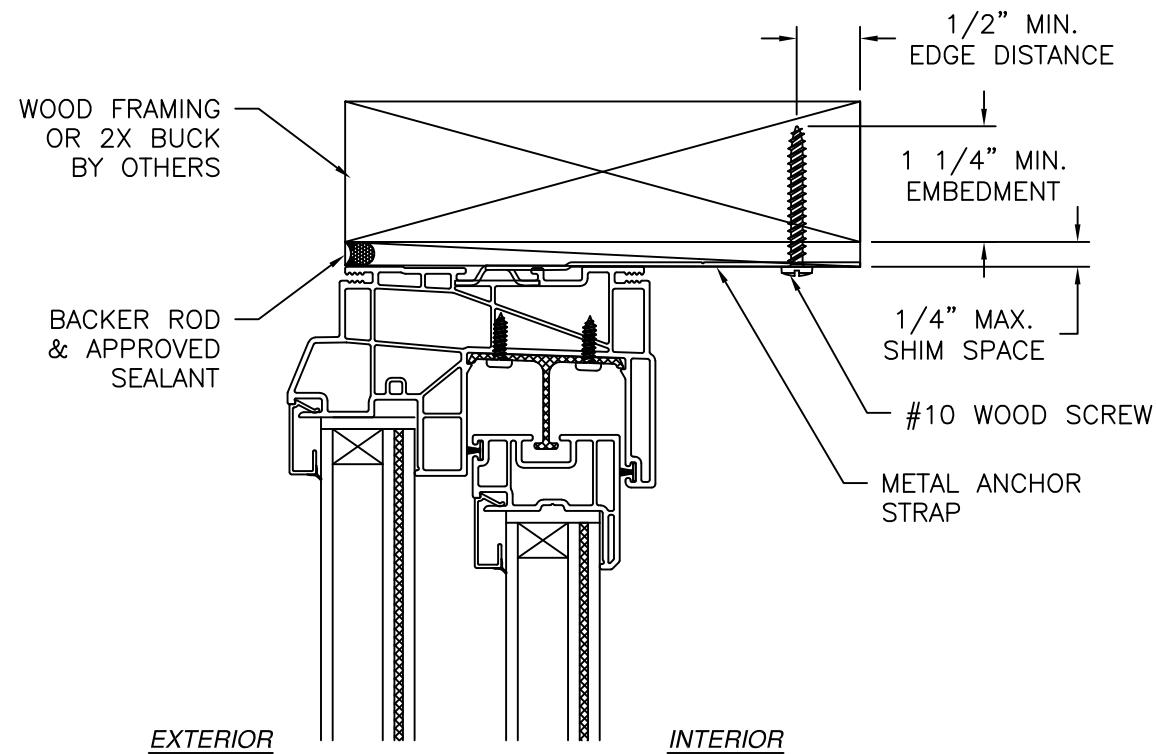

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

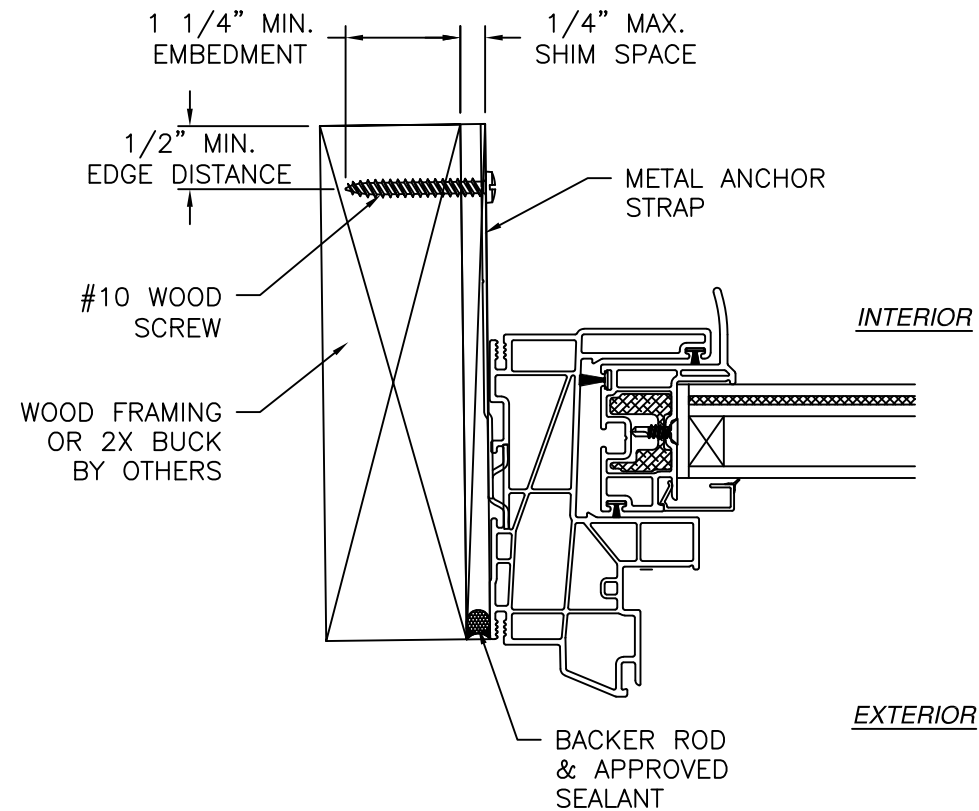


JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112




SIGNED: 07/15/2026

NT WINDOW, INC. 2900 WEST SEMINARY DR. FORT WORTH, TX 76133		
G140 PVC HORIZONTAL SLIDER WINDOW XOx 3-3-3 REINFORCED - IMPACT STRAP INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-04149	REV -
SCALE NTS	DATE 04/30/2025	SHEET 10 OF 15
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

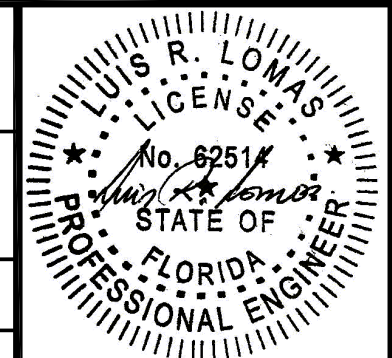

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

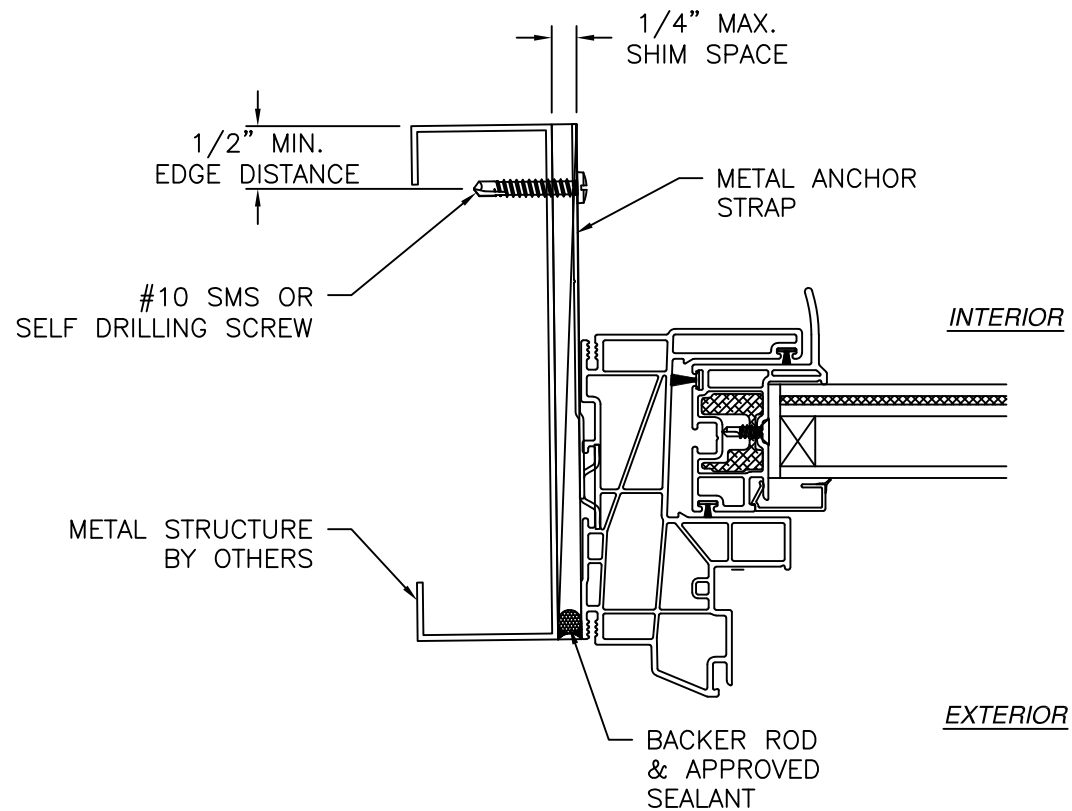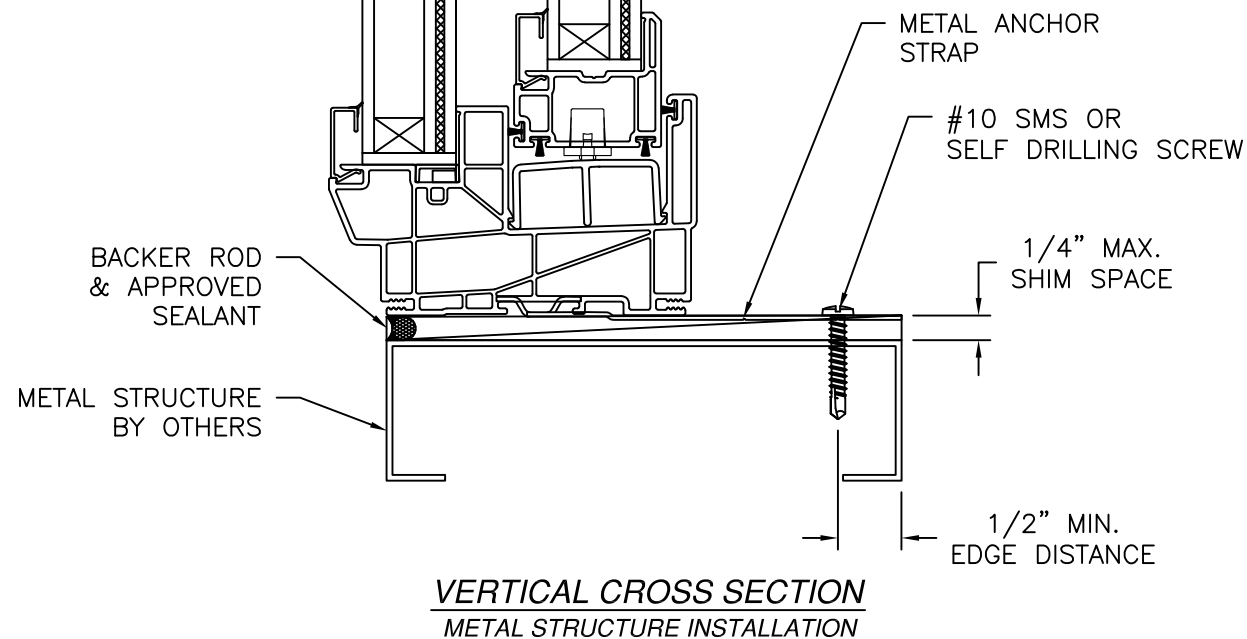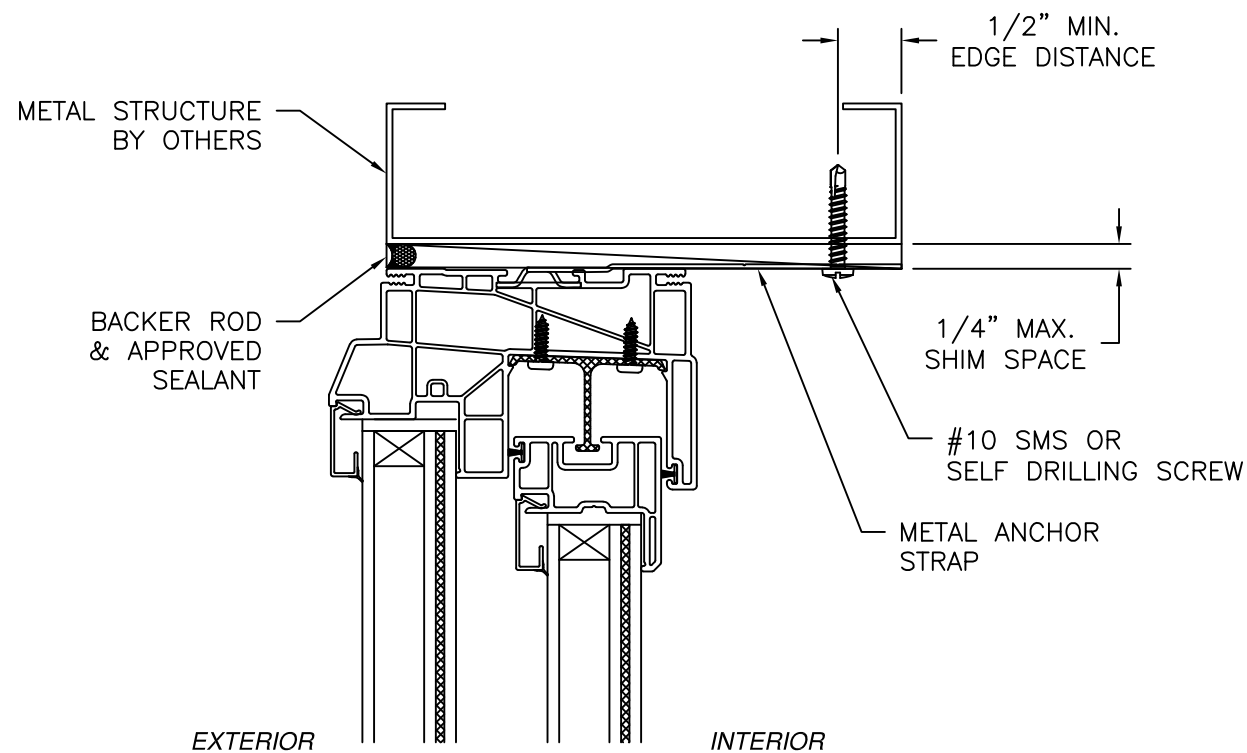


JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION



- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 07/15/2026


NT WINDOW, INC. 2900 WEST SEMINARY DR. FORT WORTH, TX 76133		
G140 PVC HORIZONTAL SLIDER WINDOW XOx 3-3-3 REINFORCED - IMPACT STRAP INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-04149	REV -
SCALE NTS	DATE 04/30/2025	SHEET 11 OF 15
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

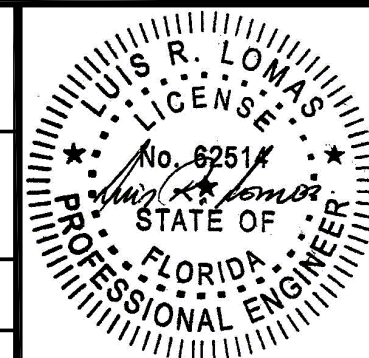

Luis R. Lomas P.E.
FL No.: 62514

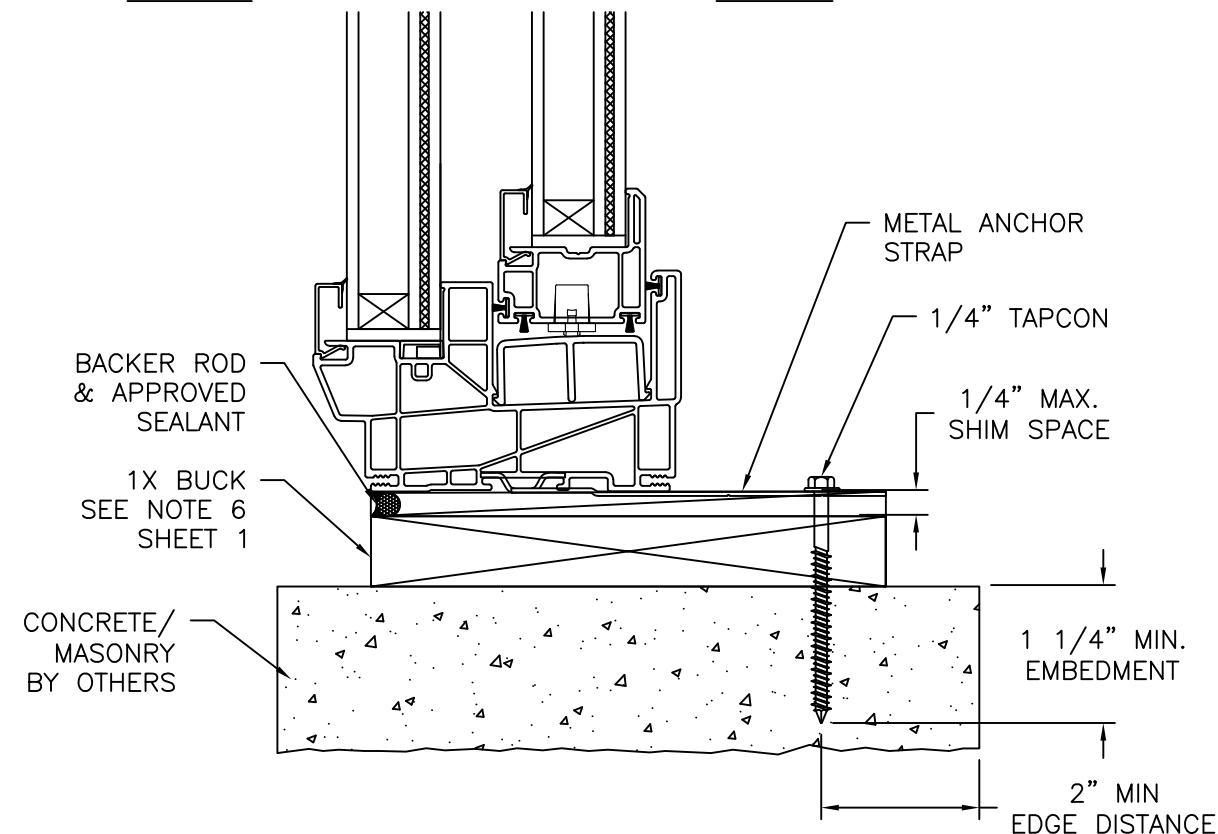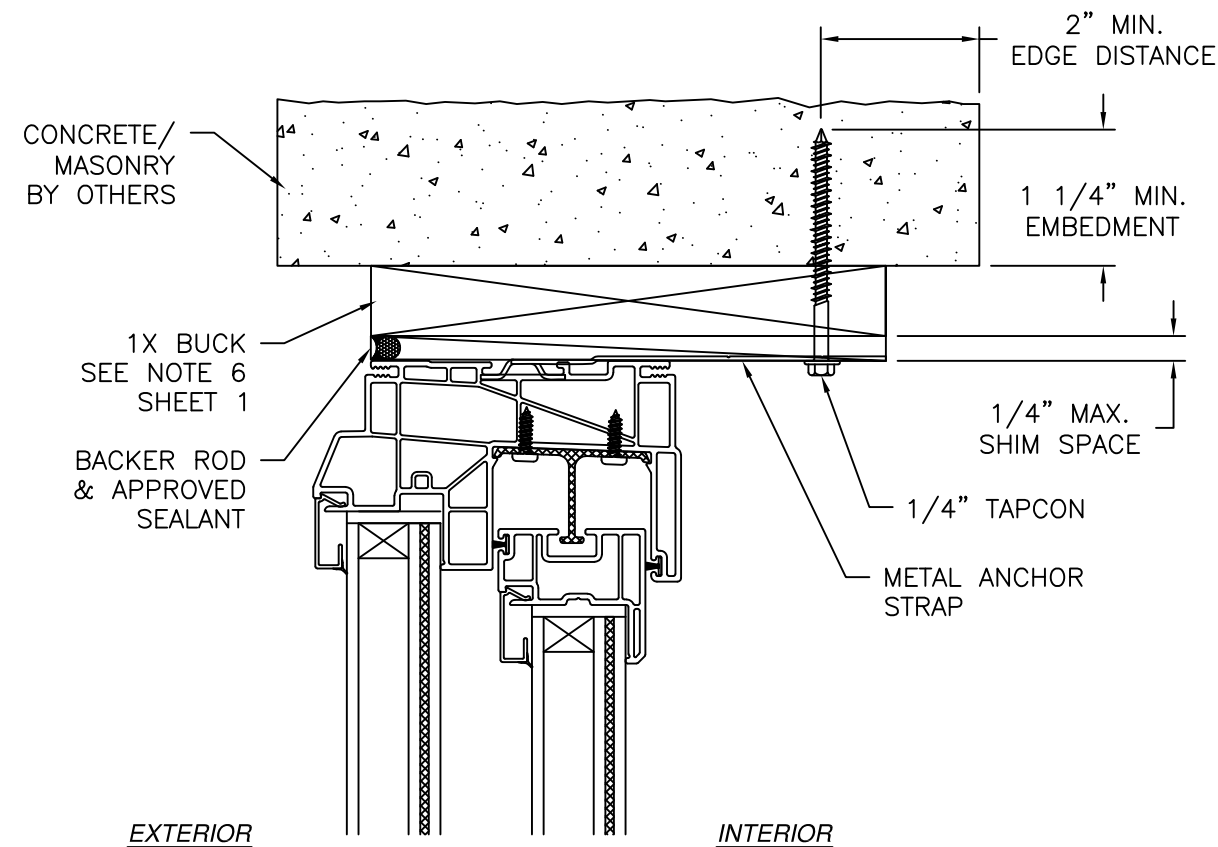

VERTICAL CROSS SECTION
CONCRETE/MASONRY WITH 1X BUCK INSTALLATION
FOR CONCRETE/MASONRY WITHOUT 1X BUCK REFER TO
JAMB INSTALLATION DETAIL

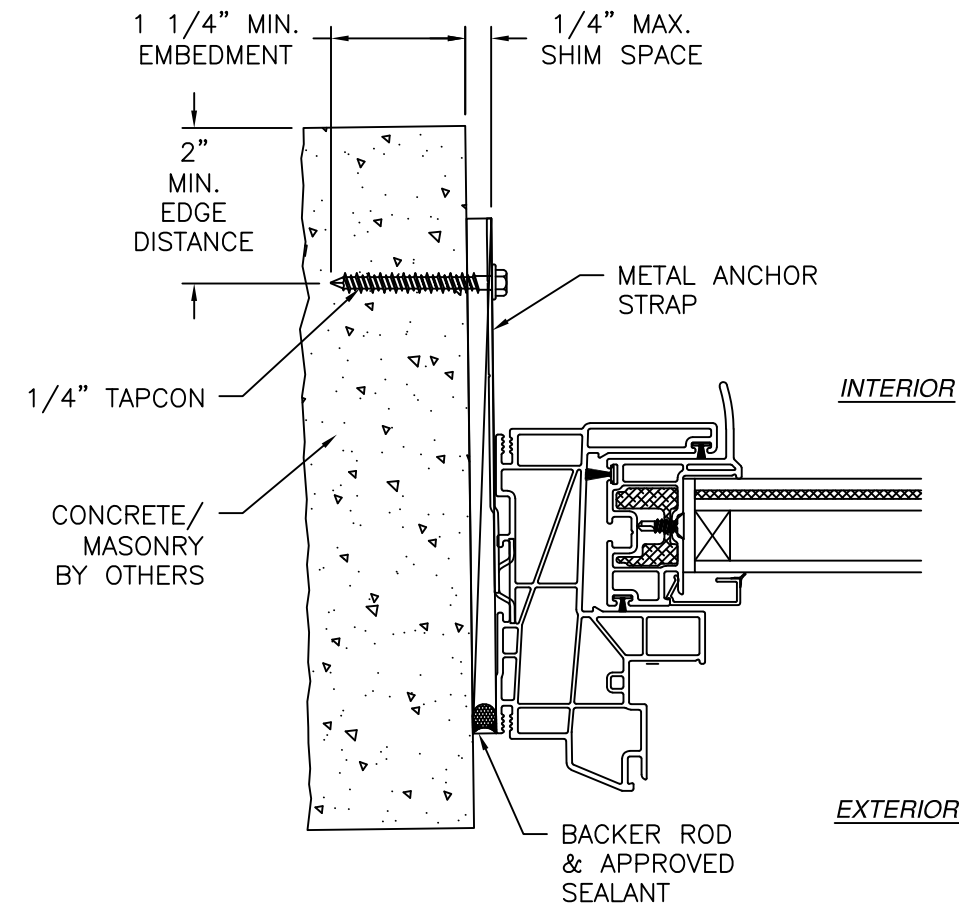


JAMB INSTALLATION DETAIL
CONCRETE/MASONRY WITHOUT 1X BUCK INSTALLATION
FOR CONCRETE/MASONRY WITH 1X BUCK REFER TO
HEAD AND SILL INSTALLATION DETAILS

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

NT WINDOW, INC. 2900 WEST SEMINARY DR. FORT WORTH, TX 76133		
G140 PVC HORIZONTAL SLIDER WINDOW XOx 3-3-3 REINFORCED - IMPACT STRAP INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-04149	REV -
SCALE NTS	DATE 04/30/2025	SHEET 12 OF 15
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		



SIGNED: 07/15/2026

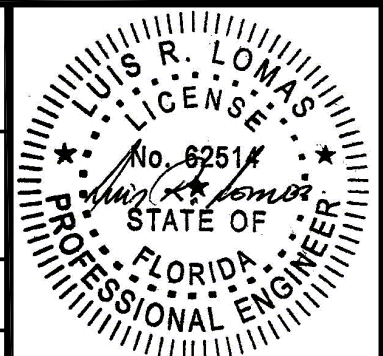

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

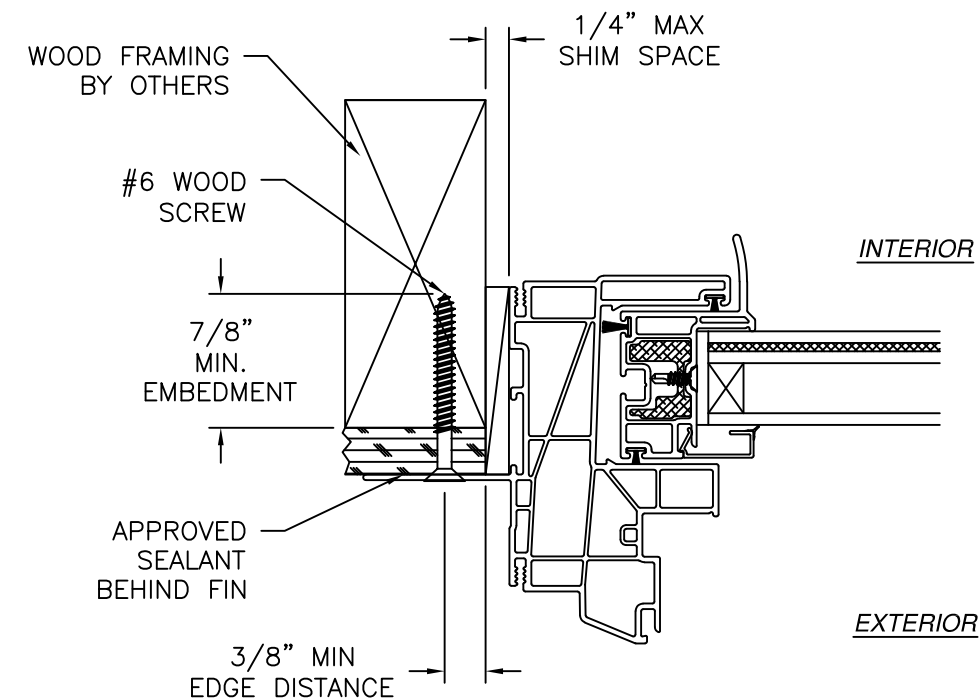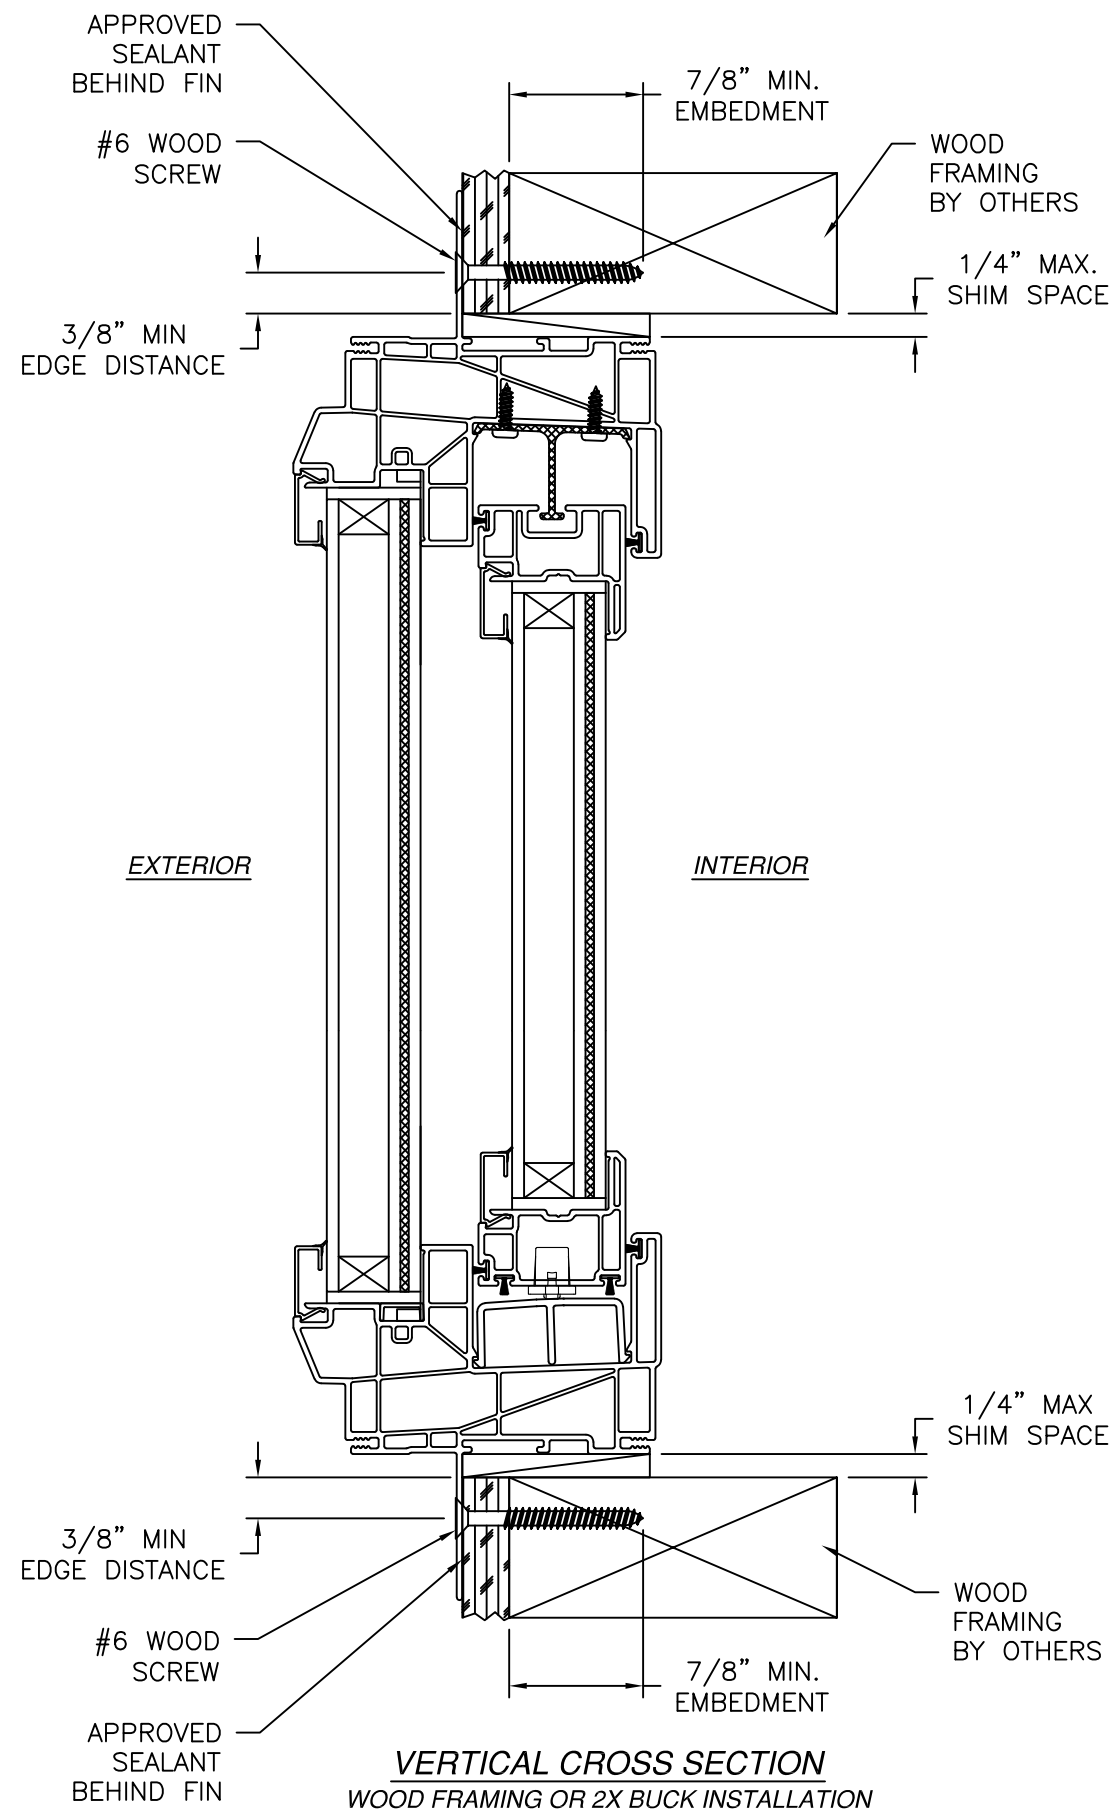


JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112



SIGNED: 07/15/2026

NT WINDOW, INC. 2900 WEST SEMINARY DR. FORT WORTH, TX 76133		
G140 PVC HORIZONTAL SLIDER WINDOW XOx 3-3-3 REINFORCED - IMPACT FIN INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-04149	REV -
SCALE NTS	DATE 04/30/2025	SHEET 13 OF 15
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

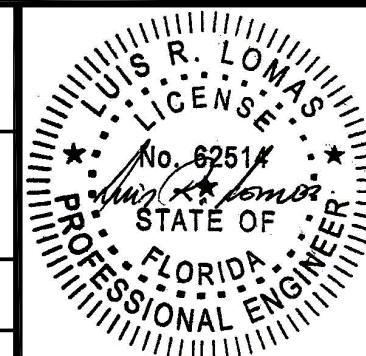

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

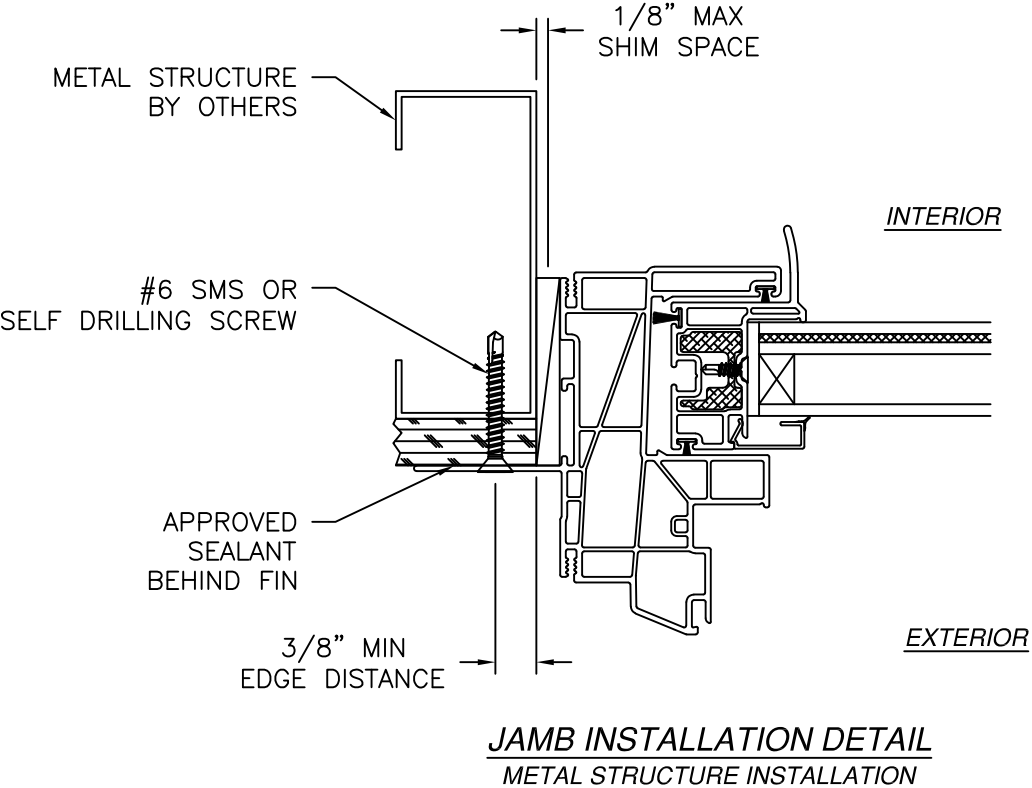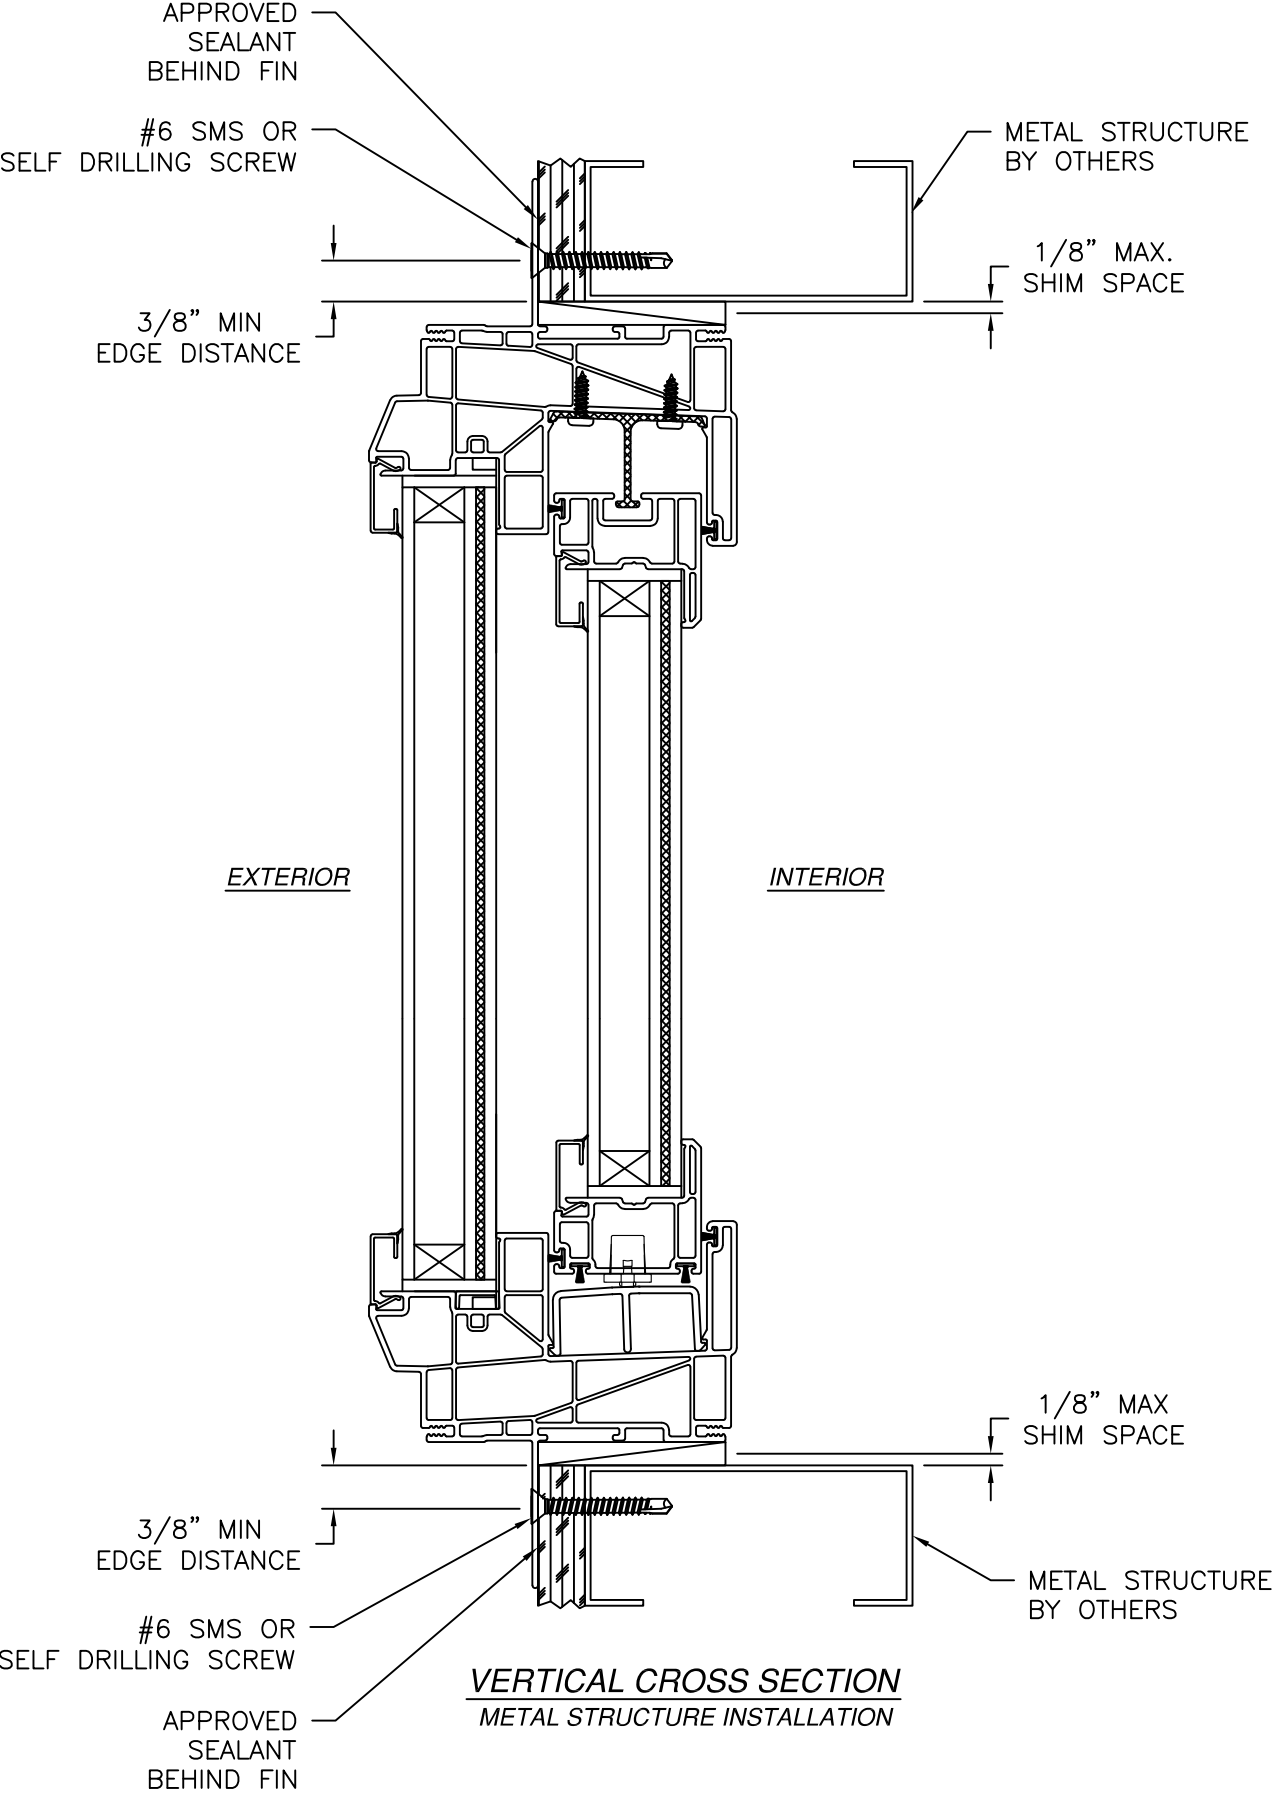

- NOTES:
- 1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


SIGNED: 07/15/2026

NT WINDOW, INC.
2900 WEST SEMINARY DR.
FORT WORTH, TX 76133

G140 PVC HORIZONTAL SLIDER WINDOW XOx
3-3-3 REINFORCED - IMPACT
FIN INSTALLATION DETAILS















DRAWN: A.R.	DWG NO. 08-04149	REV -
SCALE NTS	DATE 04/30/2025	SHEET 14 OF 15

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

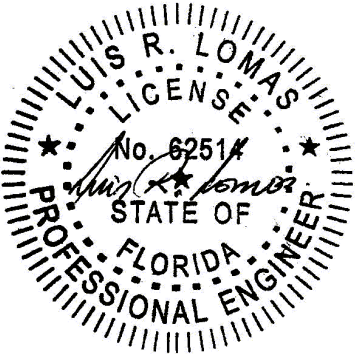

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

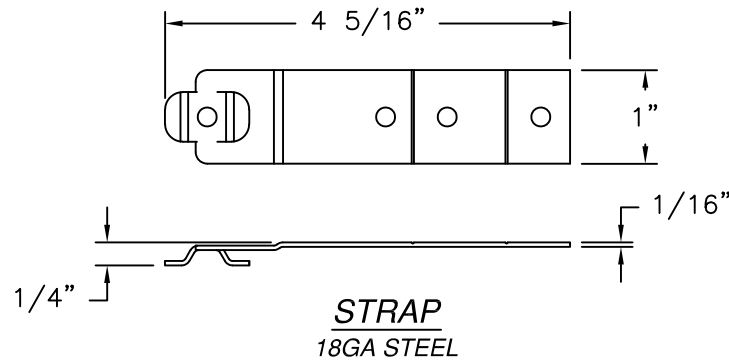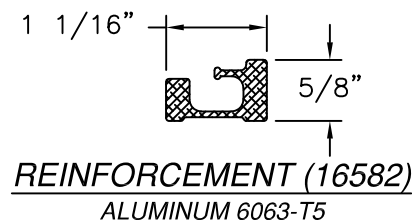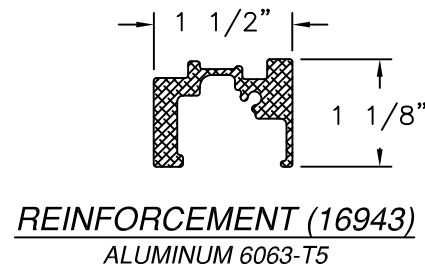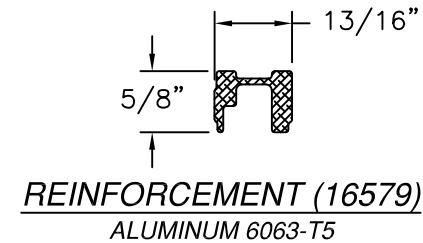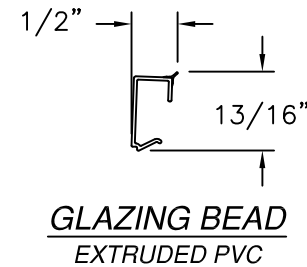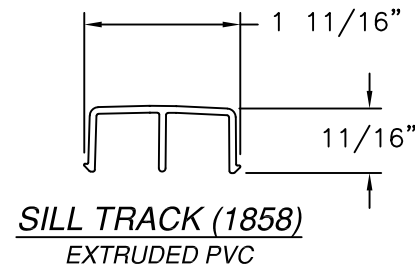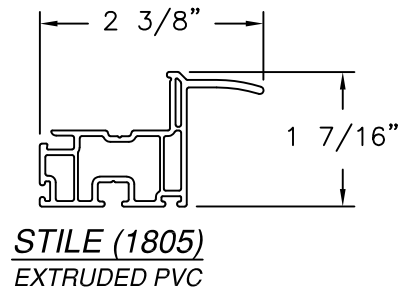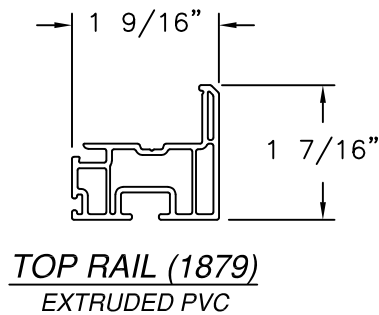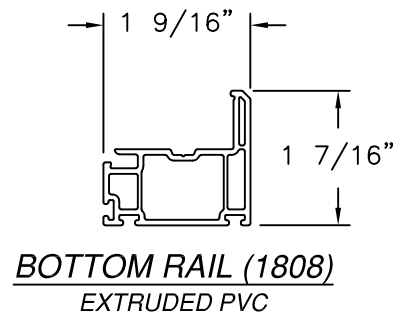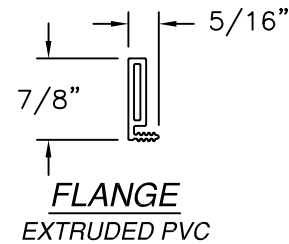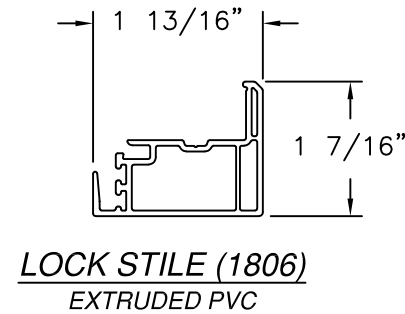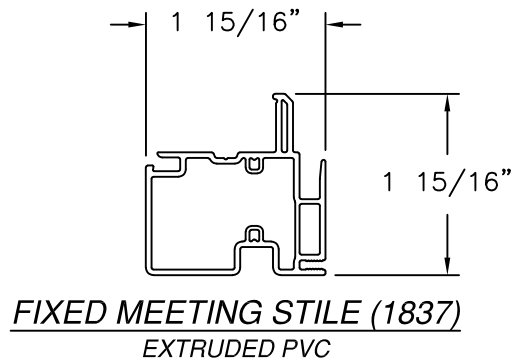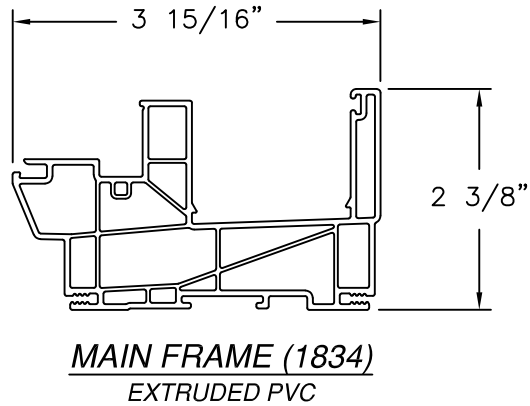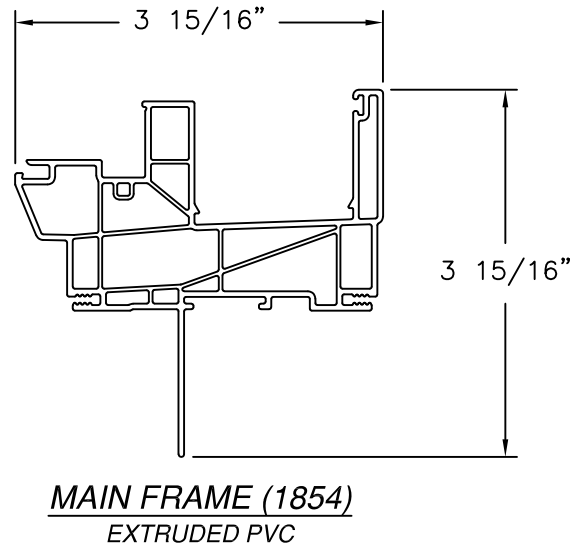

SIGNED: 07/15/2026

NT WINDOW, INC. 2900 WEST SEMINARY DR. FORT WORTH, TX 76133		
G140 PVC HORIZONTAL SLIDER WINDOW XOx 3-3-3 REINFORCED - IMPACT COMPONENTS		
DRAWN: A.R.	DWG NO. 08-04149	REV -
SCALE NTS	DATE 04/30/2025	SHEET 15 OF 15
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

