REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED CHARTS	06/30/26	R.L.

NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
2. WOOD FRAMING, METAL STRUCTURE AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1–1/2" UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
4. WHERE WOOD BUCK THICKNESS IS 1–1/2" OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS.
5. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
6. BUCKS SHALL EXTEND BEYOND UNIT FRAME INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
7. SHIM AS NEEDED AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 3/8".
8. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
9. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
10. FRAME MATERIAL: 3–4 LAYER OF CROSS GRAINED SOLID WOOD.
11. UNITS MUST BE GLAZED PER ASTM E1300.
12. APPROVED IMPACT PROTECTIVE SYSTEM IS REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.
13. FOR ANCHORING INTO WOOD FRAMING OR 2X BUCK USE #10 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
14. FOR ANCHORING INTO MASONRY/CONCRETE USE 1/4" TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2'' MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
15. FOR ANCHORING INTO METAL STRUCTURE USE #10 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
16. ALL FASTENERS TO BE CORROSION RESISTANT.
17. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:
    - 17.A. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42
    - 17.B. CONCRETE: MINIMUM COMPRESSIVE STRENGTH OF 2,000 PSI.
    - 17.C. MASONRY: HOLLOW/FILLED BLOCK PER ASTM C90 WITH Fm=2,000PSI MINIMUM.
    - 17.D. METAL STRUCTURE: STEEL 18GA (.048") FY=33KSI/FU=52KSI OR 1/4" THICK STRUCTURAL STEEL. METAL STUDS MUST BE FILLED WITH WOOD BACKER. WOOD BACKER SHOULD BE ABLE TO WITHSTAND APPLIED LOADS AND IT IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.

SIGNED: 08/06/2026

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2	ELEVATION AND DESIGN PRESSURE CHARTS
3	ANCHORING LAYOUTS
4 – 7	INSTALLATION DETAILS
8	COMPONENTS

NANA WALL SYSTEMS, INC.
100 MEADOWCREEK DRIVE, SUITE 250
CORTE MADERA, CA 94925

NW FIXED 710 WOOD WITH ALUMINUM CLAD
WINDOW NON–IMPACT
NOTES

DRAWN:	DWG NO.	REV
A.R.	08–04111	A
SCALE NTS	DATE 10/09/2024	SHEET 1 OF 8

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

LUIS R. LOMAS LICENSE No. 62514 STATE OF FLORIDA PROFESSIONAL ENGINEER

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED CHARTS	06/30/26	R.L.

Chart #1

Design pressure rating (psf)

Frame Height (in)	Frame width (in)															
	24.00		*30.00*		*36.00*		*42.00*		*48.00*		*54.00*		*59.06*		*60.00*	
	Pos	*Neg*	*Pos*	*Neg*	*Pos*	*Neg*	*Pos*	*Neg*	*Pos*	*Neg*	*Pos*	*Neg*	*Pos*	*Neg*	*Pos*	*Neg*
30.00	80.0	120.0	80.0	120.0	80.0	120.0	80.0	120.0	80.0	120.0	80.0	120.0	80.0	120.0	80.0	120.0
36.00	80.0	120.0	80.0	120.0	80.0	120.0	80.0	120.0	80.0	120.0	80.0	120.0	80.0	120.0	80.0	120.0
42.00	80.0	120.0	80.0	120.0	80.0	120.0	80.0	120.0	80.0	120.0	80.0	120.0	80.0	120.0	80.0	120.0
48.00	80.0	120.0	80.0	120.0	80.0	120.0	80.0	120.0	80.0	120.0	80.0	120.0	80.0	118.1	80.0	116.3
54.00	80.0	120.0	80.0	120.0	80.0	120.0	80.0	120.0	80.0	120.0	80.0	114.8	80.0	105.0	80.0	103.4
60.00	80.0	120.0	80.0	120.0	80.0	120.0	80.0	120.0	80.0	116.3	80.0	103.4	80.0	94.5	80.0	93.0
66.00	80.0	120.0	80.0	120.0	80.0	120.0	80.0	120.0	80.0	105.7	80.0	94.0	80.0	85.9	80.0	84.6
70.88	80.0	120.0	80.0	120.0	80.0	120.0	80.0	112.5	80.0	98.4	80.0	87.5	80.0	80.0	-	-
72.00	80.0	120.0	80.0	120.0	80.0	120.0	80.0	110.7	80.0	96.9	80.0	86.1	-	-	-	-
78.00	80.0	120.0	80.0	120.0	80.0	119.3	80.0	102.2	80.0	89.4	-	-	-	-	-	-
84.00	80.0	120.0	80.0	120.0	80.0	110.7	80.0	94.9	80.0	83.1	-	-	-	-	-	-
90.00	80.0	120.0	80.0	120.0	80.0	103.4	80.0	88.6	-	-	-	-	-	-	-	-
96.00	80.0	120.0	80.0	116.3	80.0	96.9	80.0	83.1	-	-	-	-	-	-	-	-
102.00	80.0	120.0	80.0	109.4	80.0	91.2	-	-	-	-	-	-	-	-	-	-
108.00	80.0	120.0	80.0	103.4	80.0	86.1	-	-	-	-	-	-	-	-	-	-
114.00	80.0	120.0	80.0	97.9	80.0	81.6	-	-	-	-	-	-	-	-	-	-
120.00	80.0	116.3	80.0	93.0	-	-	-	-	-	-	-	-	-	-	-	-
126.00	80.0	110.7	80.0	88.6	-	-	-	-	-	-	-	-	-	-	-	-
132.00	80.0	105.7	80.0	84.6	-	-	-	-	-	-	-	-	-	-	-	-
138.00	80.0	101.1	80.0	80.9	-	-	-	-	-	-	-	-	-	-	-	-
144.00	80.0	96.9	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Where water penetration resistance is required

Chart #2

Design pressure rating (psf)

Frame Height (in)	Frame width (in)															
	24.00		*30.00*		*36.00*		*42.00*		*48.00*		*54.00*		*59.06*		*60.00*	
	Pos	*Neg*	*Pos*	*Neg*	*Pos*	*Neg*	*Pos*	*Neg*	*Pos*	*Neg*	*Pos*	*Neg*	*Pos*	*Neg*	*Pos*	*Neg*
30.00	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0
36.00	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0
42.00	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0
48.00	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	118.1	118.1	116.3	116.3
54.00	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	114.8	114.8	105.0	105.0	103.4	103.4
60.00	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	116.3	116.3	103.4	103.4	94.5	94.5	93.0	93.0
66.00	120.0	120.0	120.0	120.0	120.0	120.0	120.0	120.0	105.7	105.7	94.0	94.0	85.9	85.9	84.6	84.6
70.88	120.0	120.0	120.0	120.0	120.0	120.0	112.5	112.5	98.4	98.4	87.5	87.5	80.0	80.0	-	-
72.00	120.0	120.0	120.0	120.0	120.0	120.0	110.7	110.7	96.9	96.9	86.1	86.1	-	-	-	-
78.00	120.0	120.0	120.0	120.0	119.3	119.3	102.2	102.2	89.4	89.4	-	-	-	-	-	-
84.00	120.0	120.0	120.0	120.0	110.7	110.7	94.9	94.9	83.1	83.1	-	-	-	-	-	-
90.00	120.0	120.0	120.0	120.0	103.4	103.4	88.6	88.6	-	-	-	-	-	-	-	-
96.00	120.0	120.0	116.3	116.3	96.9	96.9	83.1	83.1	-	-	-	-	-	-	-	-
102.00	120.0	120.0	109.4	109.4	91.2	91.2	-	-	-	-	-	-	-	-	-	-
108.00	120.0	120.0	103.4	103.4	86.1	86.1	-	-	-	-	-	-	-	-	-	-
114.00	120.0	120.0	97.9	97.9	81.6	81.6	-	-	-	-	-	-	-	-	-	-
120.00	116.3	116.3	93.0	93.0	-	-	-	-	-	-	-	-	-	-	-	-
126.00	110.7	110.7	88.6	88.6	-	-	-	-	-	-	-	-	-	-	-	-
132.00	105.7	105.7	84.6	84.6	-	-	-	-	-	-	-	-	-	-	-	-
138.00	101.1	101.1	80.9	80.9	-	-	-	-	-	-	-	-	-	-	-	-
144.00	96.9	96.9	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Where water penetration resistance is NOT required

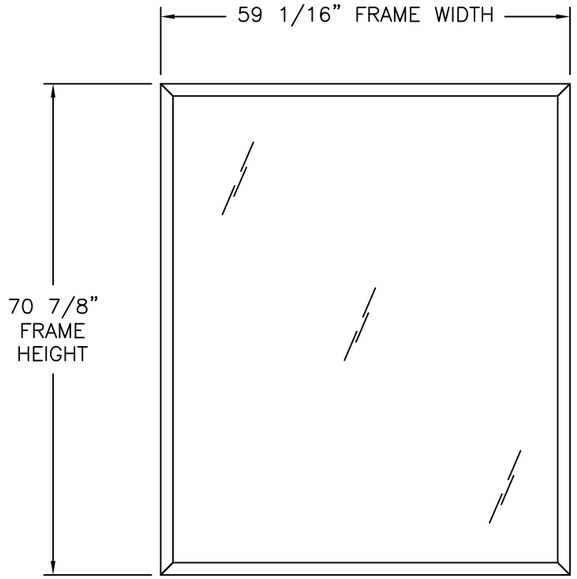

NOTES:
1. D.L.O.: 53 9/16" X 65 3/8"

NW FIXED 710 WOOD WITH ALUMINUM CLAD WINDOW

EXTERIOR VIEW

DESIGN PRESSURE RATING	*IMPACT RATING*
±80.0PSF	*NONE*

FOR ADDITIONAL SIZES SEE CHARTS #1 AND #2

59 1/16 X 70 7/8" UNIT SHOWN. OTHER SIZES APPROVED AS LONG AS FRAME AREA DOES NOT EXCEED 29.06 FT²

SIGNED: 08/06/2026

NANA WALL SYSTEMS, INC.
100 MEADOWCREEK DRIVE, SUITE 250
CORTE MADERA, CA 94925

NW FIXED 710 WOOD WITH ALUMINUM CLAD
WINDOW NON-IMPACT
ELEVATION AND DESIGN PRESSURE CHARTS

DRAWN:	DWG NO.	REV
A.R.	08-04111	A
SCALE NTS	DATE 10/09/2024	SHEET 2 OF 8

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

LUIS R. LOMAS · LICENSE · No. 62514 · STATE OF FLORIDA · PROFESSIONAL ENGINEER

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED CHARTS	06/30/26	R.L.

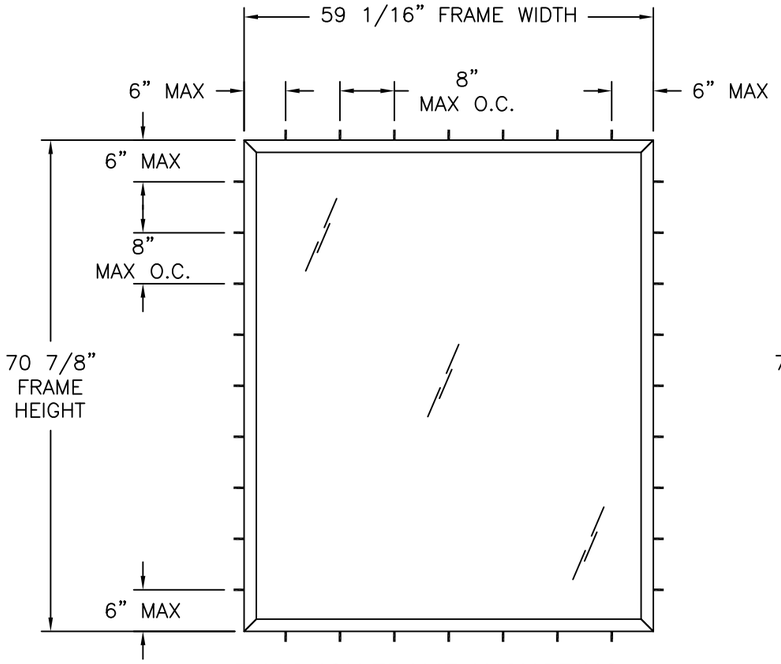

THROUGH FRAME ANCHORING
FOR DP RATINGS 30.0PSF OR HIGHER

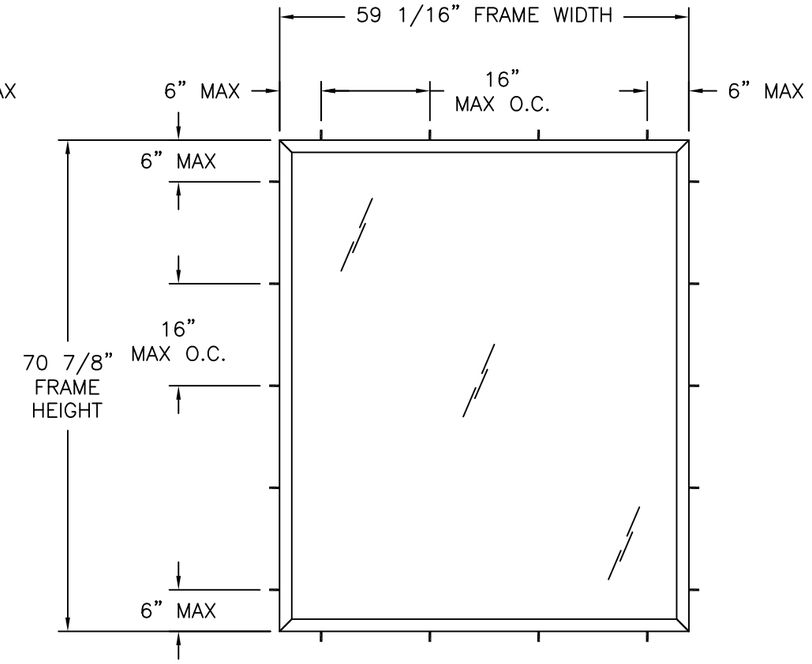

THROUGH FRAME ANCHORING
FOR DP RATINGS LOWER THAN 30.0PSF

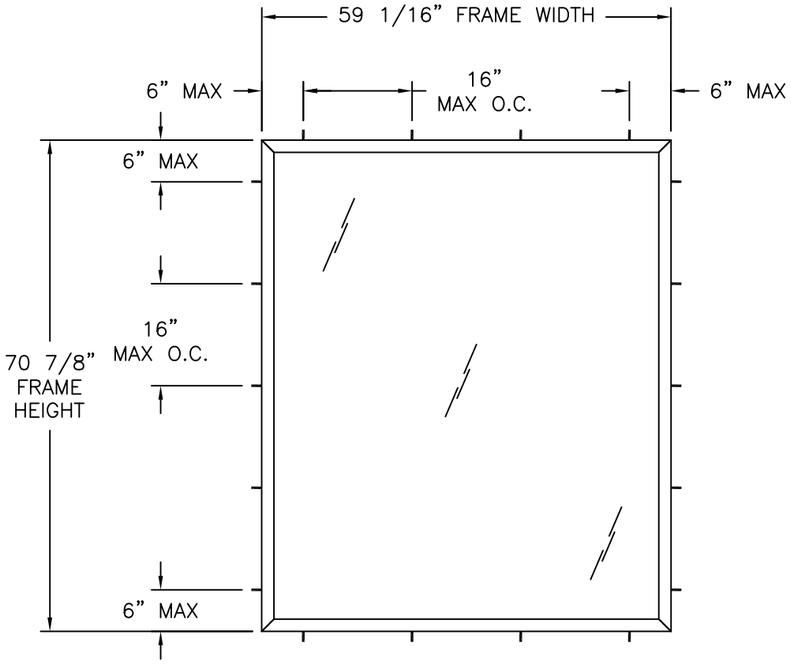

FLAT CLIP OR ANGLE ANCHORING
FOR ALL RATINGS

SIGNED: 08/06/2026

NANA WALL SYSTEMS, INC.
100 MEADOWCREEK DRIVE, SUITE 250
CORTE MADERA, CA 94925

NW FIXED 710 WOOD WITH ALUMINUM CLAD
WINDOW NON-IMPACT
ANCHORING LAYOUTS

DRAWN:	DWG NO.	REV
A.R.	08-04111	A
SCALE NTS	DATE 10/09/2024	SHEET 3 OF 8

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

LUIS R. LOMAS LICENSE No. 62514 STATE OF FLORIDA PROFESSIONAL ENGINEER

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED CHARTS	06/30/26	R.L.

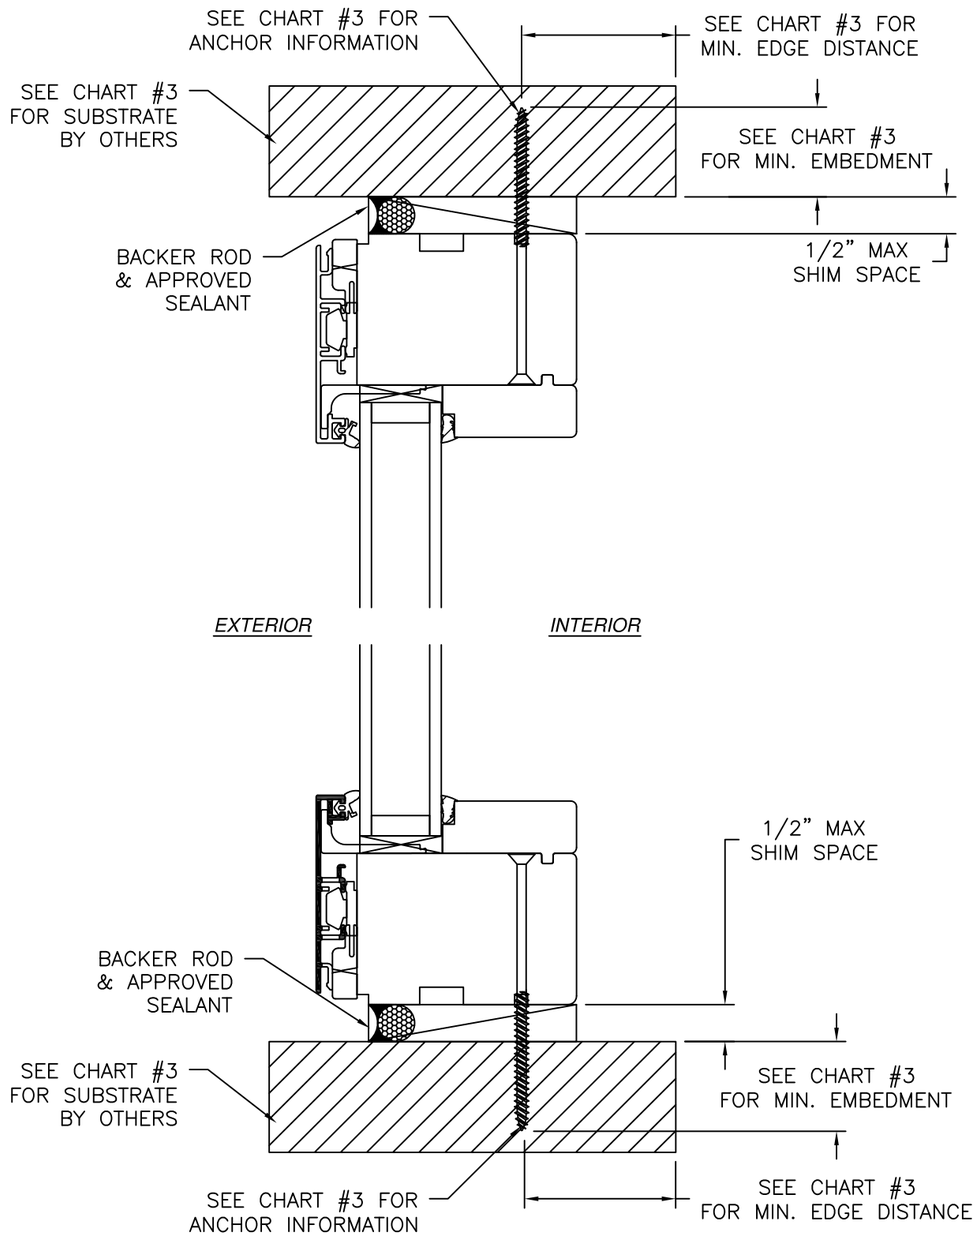

VERTICAL CROSS SECTION

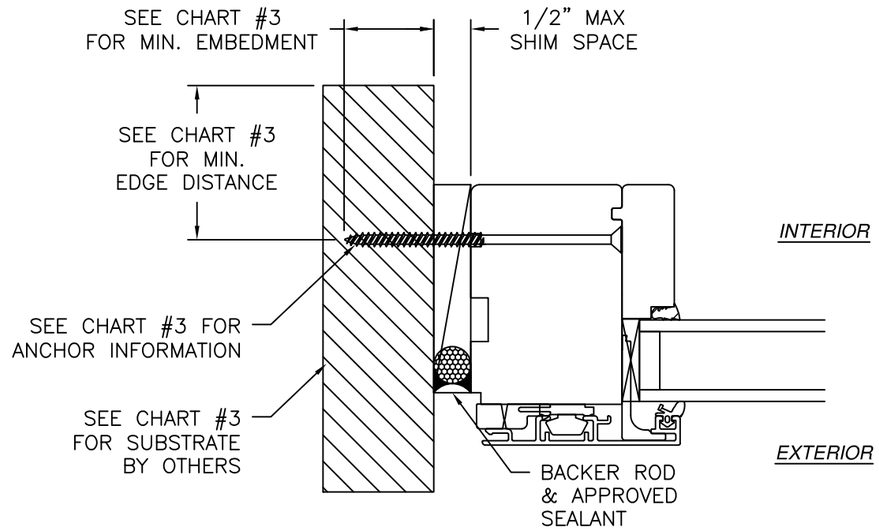

JAMB INSTALLATION DETAIL

CHART #3

ANCHOR DETAILS			
SUBSTRATE	**ANCHOR**	**MIN. EDGE DISTANCE**	**MIN. EMBEDMENT**
WOOD OR 2X BUCK	#10 WOOD SCREW	1/2"	1 1/4" SEE NOTE 16D SHEET 1
METAL STRUCTURE	#10 SMS OR SELF DRILLING SCREW	1/2"	SEE NOTE 15 SHEET 1
CONCRETE/MASONRY	1/4" TAPCON	2"	1 1/4"

NOTES:

1. *INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.*
2. *PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112.*
3. *WEEP HOLES NOT SHOWN FOR CLARITY.*

SIGNED: 08/06/2026

NANA WALL SYSTEMS, INC.
100 MEADOWCREEK DRIVE, SUITE 250
CORTE MADERA, CA 94925

NW FIXED 710 WOOD WITH ALUMINUM CLAD WINDOW NON-IMPACT INSTALLATION DETAILS

DRAWN:	DWG NO.	REV
A.R.	08-04111	A
SCALE NTS	DATE 10/09/2024	SHEET 4 OF 8

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

LUIS R. LOMAS LICENSE No. 62514 STATE OF FLORIDA PROFESSIONAL ENGINEER

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED CHARTS	06/30/26	R.L.

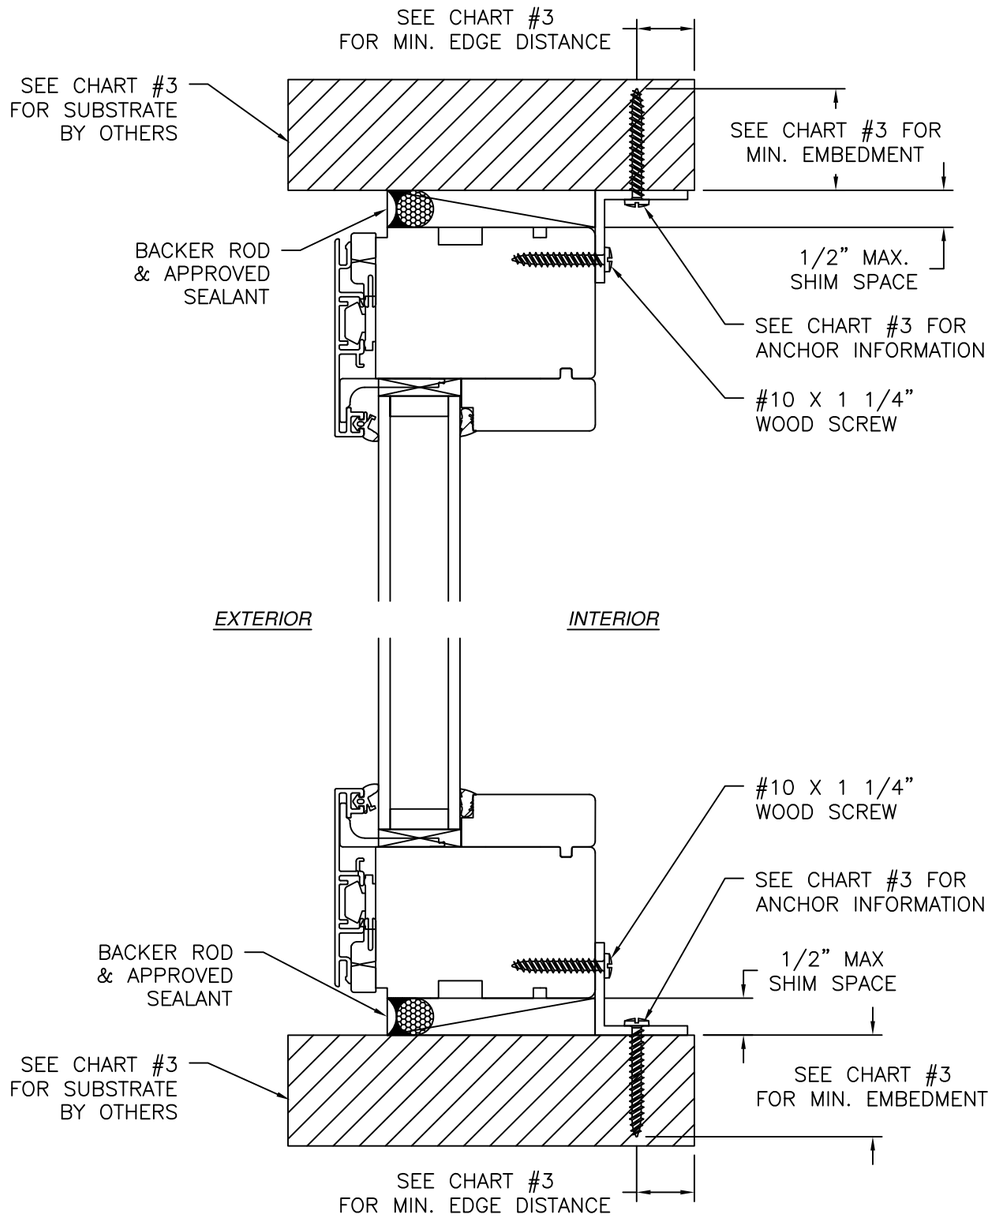

VERTICAL CROSS SECTION

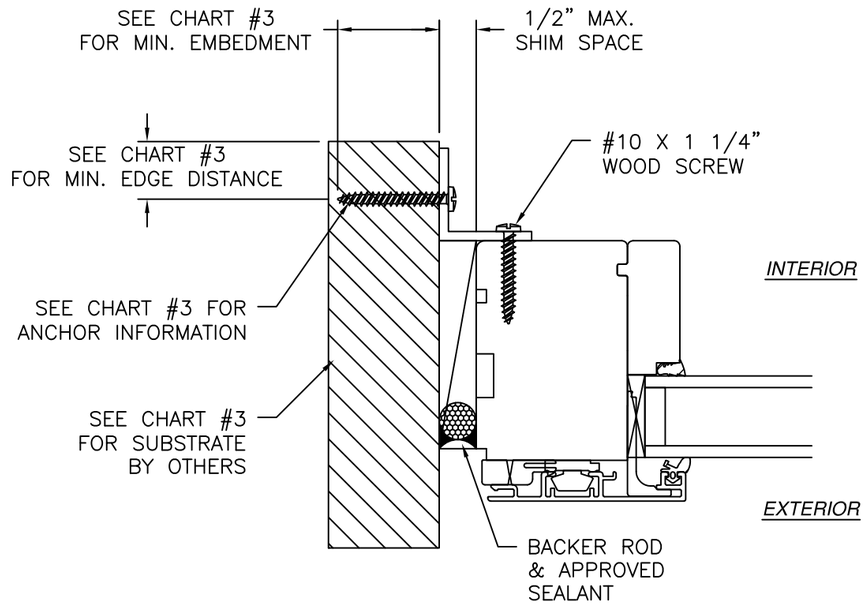

JAMB INSTALLATION DETAIL

CHART #3

ANCHOR DETAILS			
SUBSTRATE	**ANCHOR**	**MIN. EDGE DISTANCE**	**MIN. EMBEDMENT**
WOOD OR 2X BUCK	#10 WOOD SCREW	1/2"	1 1/4" SEE NOTE 16D SHEET 1
METAL STRUCTURE	#10 SMS OR SELF DRILLING SCREW	1/2"	SEE NOTE 15 SHEET 1
CONCRETE/MASONRY	1/4" TAPCON	2"	1 1/4"

SIGNED: 08/06/2026

NOTES:

1. *INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.*
2. *PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112.*
3. *WEEP HOLES NOT SHOWN FOR CLARITY.*

NANA WALL SYSTEMS, INC.
100 MEADOWCREEK DRIVE, SUITE 250
CORTE MADERA, CA 94925

NW FIXED 710 WOOD WITH ALUMINUM CLAD
WINDOW NON-IMPACT
INSTALLATION DETAILS WITH ANGLE CLIP

DRAWN:	DWG NO.	REV
A.R.	08-04111	A
SCALE NTS	DATE 10/09/2024	SHEET 5 OF 8

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

LUIS R. LOMAS
LICENSE
No. 62514
STATE OF
FLORIDA
PROFESSIONAL ENGINEER

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED CHARTS	06/30/26	R.L.

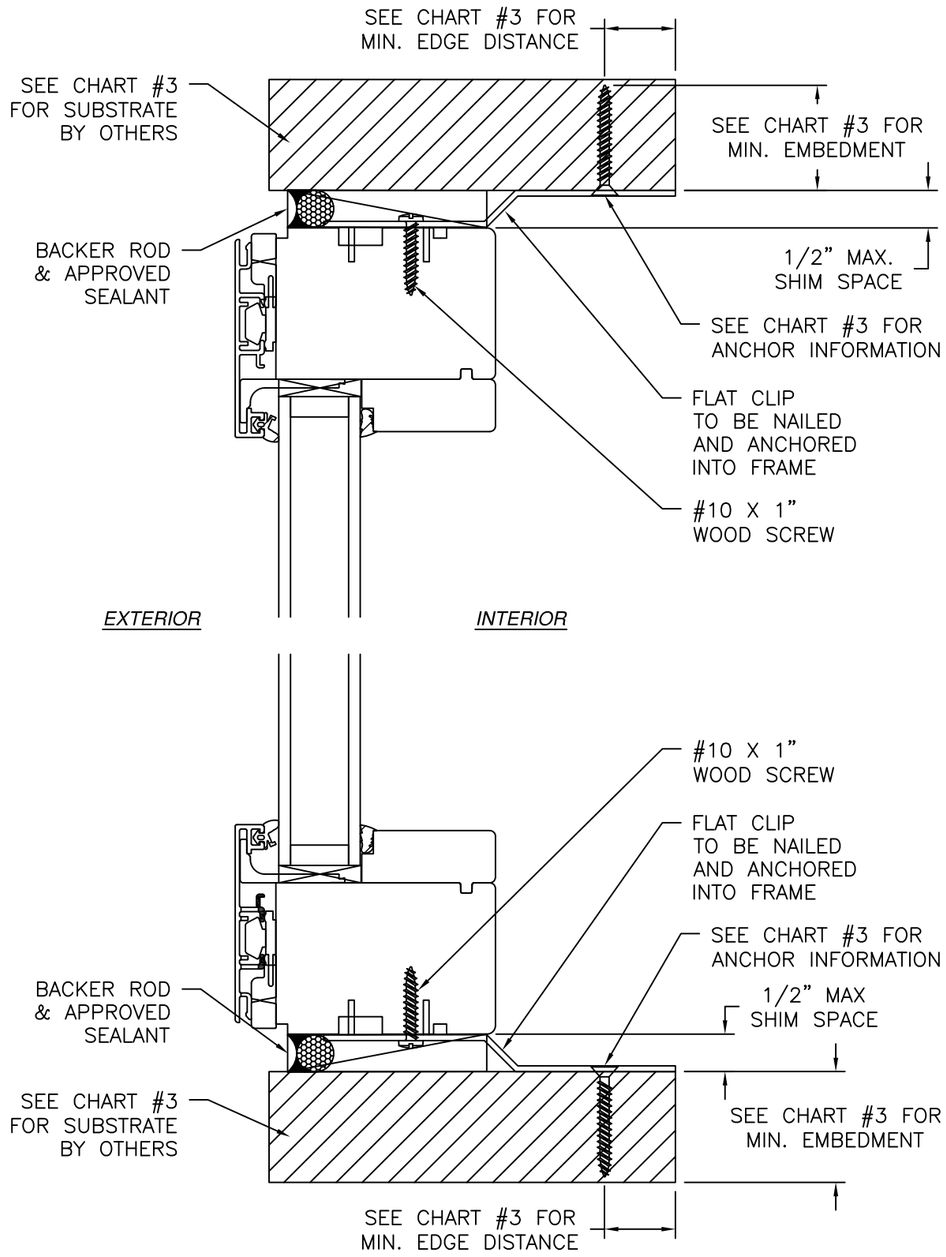

VERTICAL CROSS SECTION

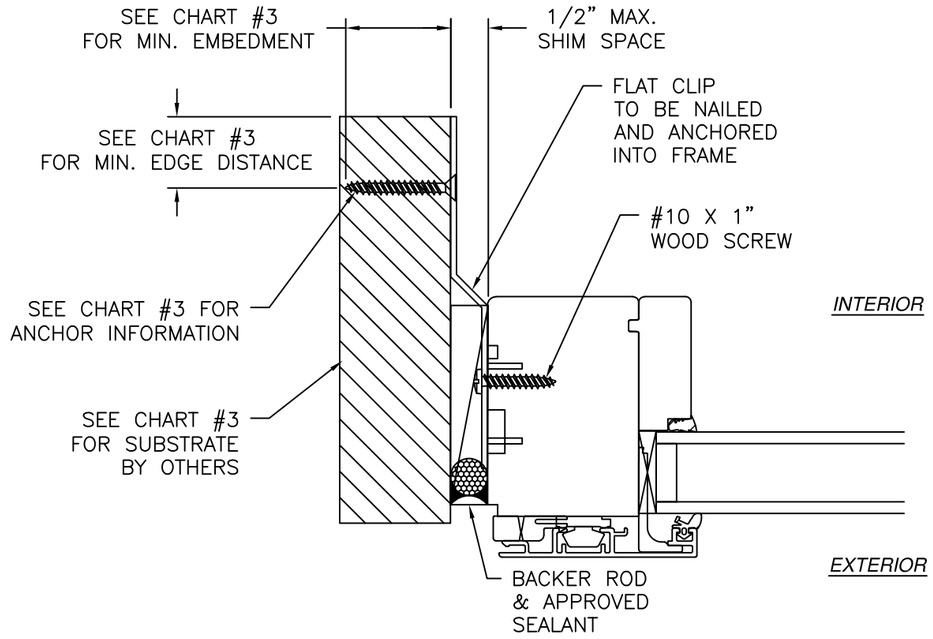

JAMB INSTALLATION DETAIL

CHART #3

ANCHOR DETAILS			
SUBSTRATE	**ANCHOR**	**MIN. EDGE DISTANCE**	**MIN. EMBEDMENT**
WOOD OR 2X BUCK	#10 WOOD SCREW	1/2"	1 1/4" SEE NOTE 16D SHEET 1
METAL STRUCTURE	#10 SMS OR SELF DRILLING SCREW	1/2"	SEE NOTE 15 SHEET 1
CONCRETE/MASONRY	1/4" TAPCON	2"	1 1/4"

SIGNED: 08/06/2026

NOTES:
1. *INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.*
2. *PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112.*
3. *WEEP HOLES NOT SHOWN FOR CLARITY.*

NANA WALL SYSTEMS, INC.
100 MEADOWCREEK DRIVE, SUITE 250
CORTE MADERA, CA 94925

NW FIXED 710 WOOD WITH ALUMINUM CLAD
WINDOW NON-IMPACT
INSTALLATION DETAILS WITH FLAT CLIP

DRAWN:	DWG NO.	REV
A.R.	08-04111	A
SCALE NTS	DATE 10/09/2024	SHEET 6 OF 8

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

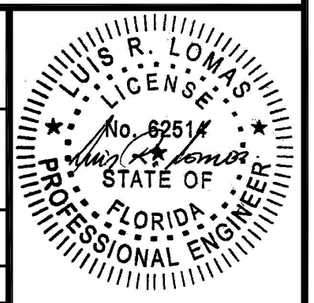

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED CHARTS	06/30/26	R.L.

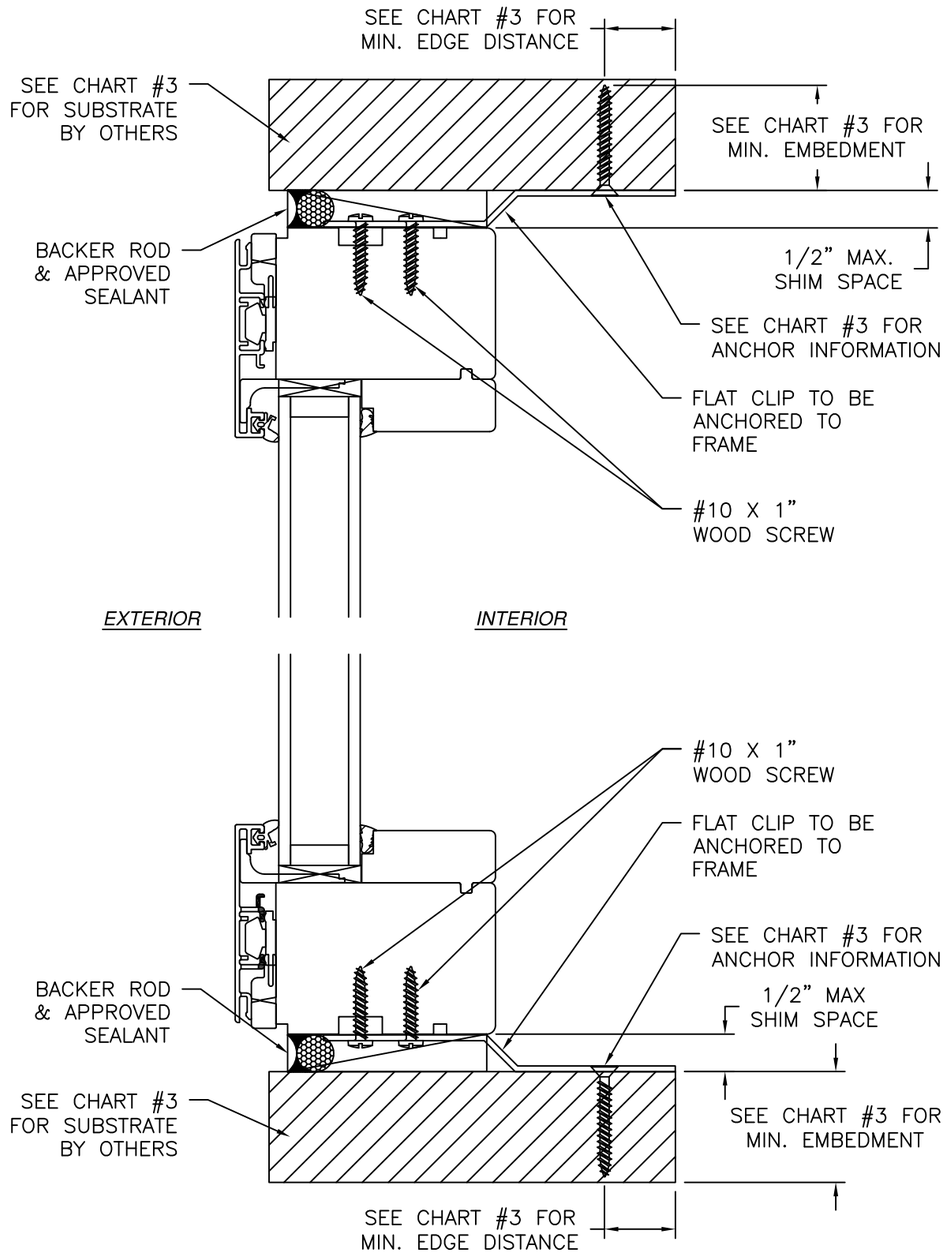

VERTICAL CROSS SECTION

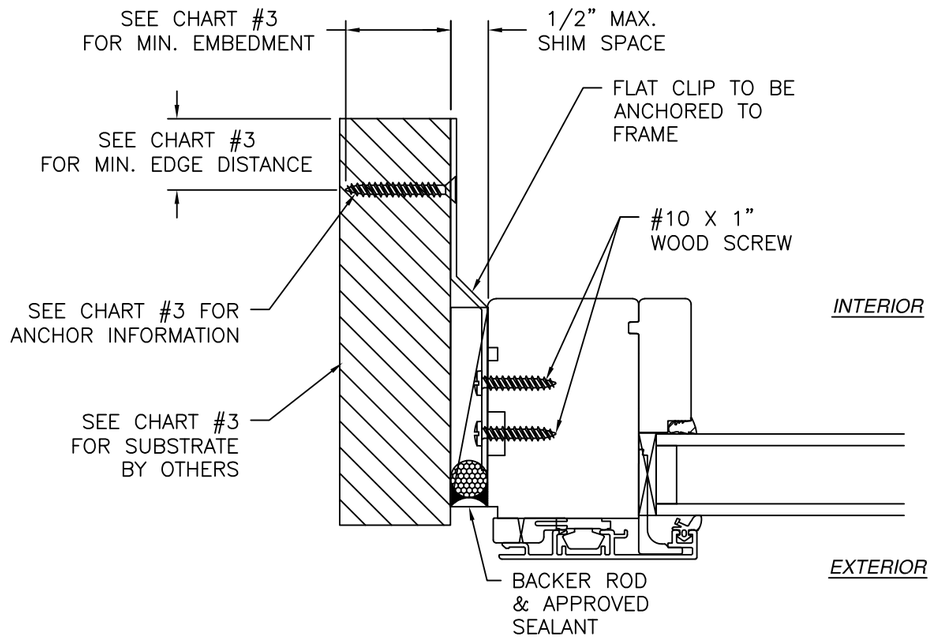

JAMB INSTALLATION DETAIL

CHART #3

ANCHOR DETAILS			
SUBSTRATE	**ANCHOR**	**MIN. EDGE DISTANCE**	**MIN. EMBEDMENT**
WOOD OR 2X BUCK	#10 WOOD SCREW	1/2"	1 1/4" SEE NOTE 16D SHEET 1
METAL STRUCTURE	#10 SMS OR SELF DRILLING SCREW	1/2"	SEE NOTE 15 SHEET 1
CONCRETE/MASONRY	1/4" TAPCON	2"	1 1/4"

SIGNED: 08/06/2026

NOTES:
1. *INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.*
2. *PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112.*
3. *WEEP HOLES NOT SHOWN FOR CLARITY.*

NANA WALL SYSTEMS, INC.
100 MEADOWCREEK DRIVE, SUITE 250
CORTE MADERA, CA 94925

NW FIXED 710 WOOD WITH ALUMINUM CLAD
WINDOW NON-IMPACT
INSTALLATION DETAILS WITH FLAT CLIP

DRAWN:	DWG NO.	REV
A.R.	08-04111	A
SCALE NTS	DATE 10/09/2024	SHEET 7 OF 8

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

LUIS R. LOMAS LICENSE No. 62514 STATE OF FLORIDA PROFESSIONAL ENGINEER

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED CHARTS	06/30/26	R.L.

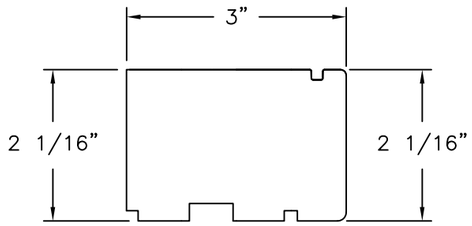

MAIN FRAME
3-4 LAYER OF CROSS GRAINED SOLID WOOD

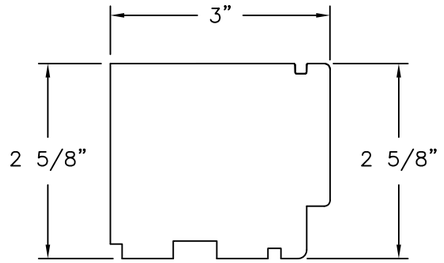

ALTERNATE FRAME (110MM)
3-4 LAYER OF CROSS GRAINED SOLID WOOD

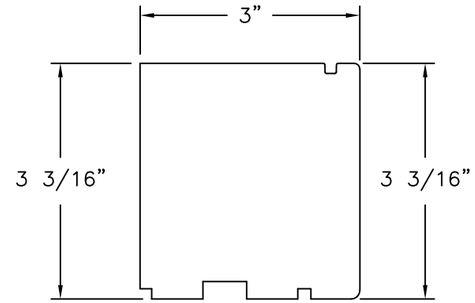

ALTERNATE FRAME (104MM)
3-4 LAYER OF CROSS GRAINED SOLID WOOD

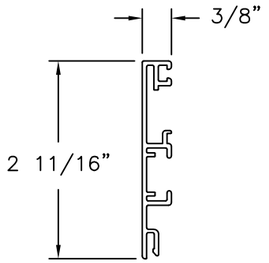

EXTERIOR COVER
ALUMINUM 6063-T5

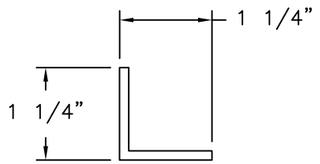

ANGLE CLIP
6063-T5 ALUMINUM (.125" THICK)

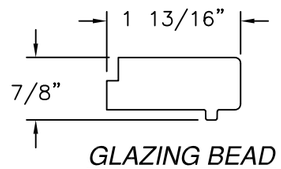

GLAZING BEAD
SOLID WOOD

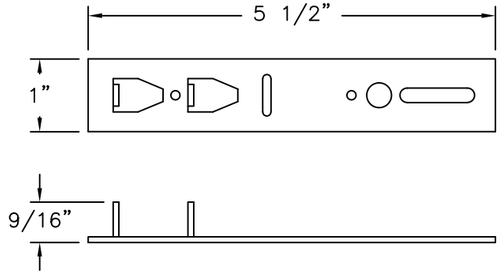

FLAT CLIP
GALVANIZED STEEL (.058" THICK)

SIGNED: 08/06/2026

NANA WALL SYSTEMS, INC.
100 MEADOWCREEK DRIVE, SUITE 250
CORTE MADERA, CA 94925

NW FIXED 710 WOOD WITH ALUMINUM CLAD WINDOW NON-IMPACT COMPONENTS

DRAWN:	DWG NO.	REV
A.R.	08-04111	A
SCALE NTS	DATE 10/09/2024	SHEET 8 OF 8

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

LUIS R. LOMAS LICENSE No. 62514 STATE OF FLORIDA PROFESSIONAL ENGINEER

Luis R. Lomas P.E.
FL No.: 62514