


KINGSPAN LIGHT & AIR FENESTRATION, INC.




U-LITE™ MONOLITHIC POLYCARBONATE STANDING SEAM PANEL

(HVHZ) (NON-IMPACT)

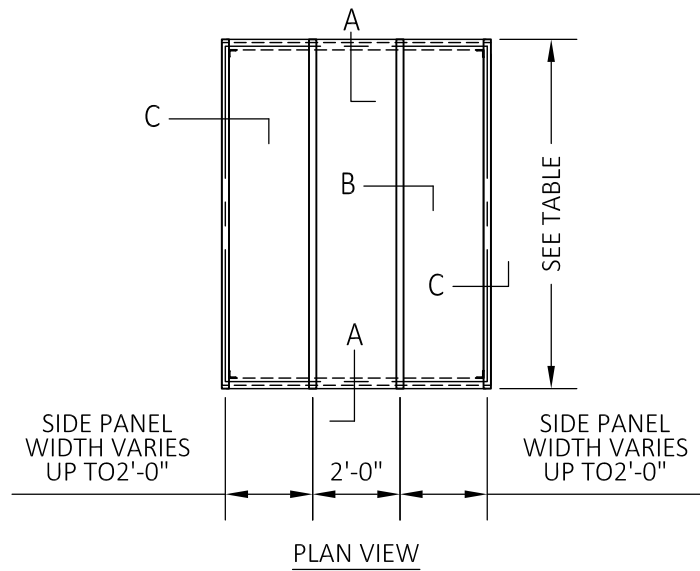


FRAME HEIGHT	DESIGN PRESSURE (PSF)
5'-0"	150
5'-6"	140
6'-0"	126
6'-6"	115
7'-0"	105
7'-6"	97
8'-0"	90

- MAX. DESIGN PRESSURE APPLIES TO ASSEMBLIES SUCH THAT PURLIN & BATTEN SPACING ARE NOT EXCEEDED AS SHOWN HEREIN.
- STRUCTURAL ADEQUACY OF SUPPORTING SUBSTRUCTURE IS NOT PART OF THIS APPROVAL AND SHALL BE REVIEWED BY THE AUTHORITY HAVING JURISDICTION.
- CPI EXTRUDED ALUMINUM COMPONENTS SHALL BE 6005-T5 ALLOY/TEMPER.
- ALUMINUM SUPPORT FRAMING, BY OTHERS, IS MIN. 6005-T5, 1/8" WALL THICKNESS.

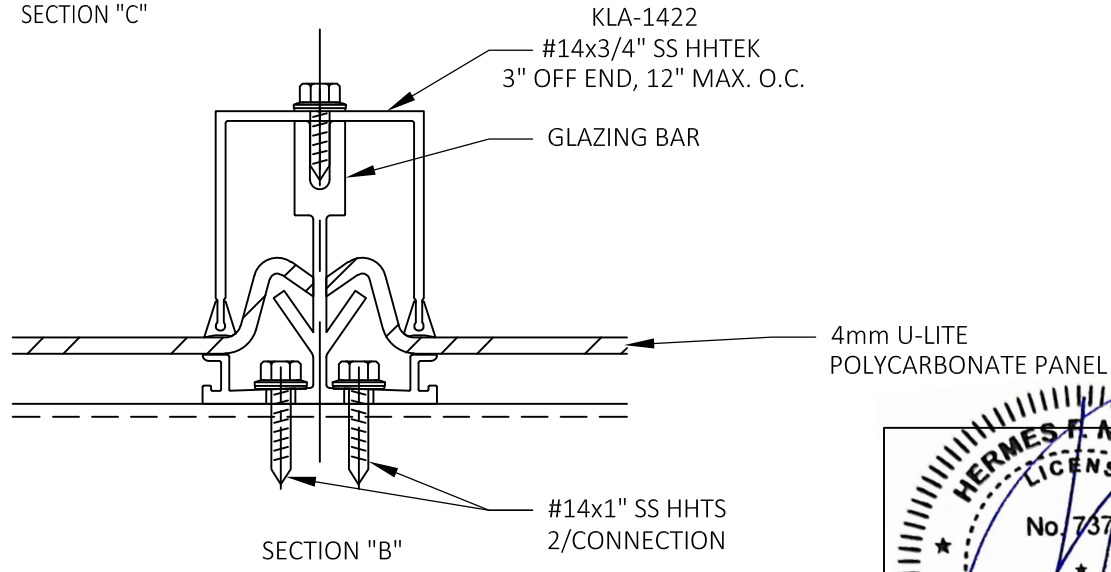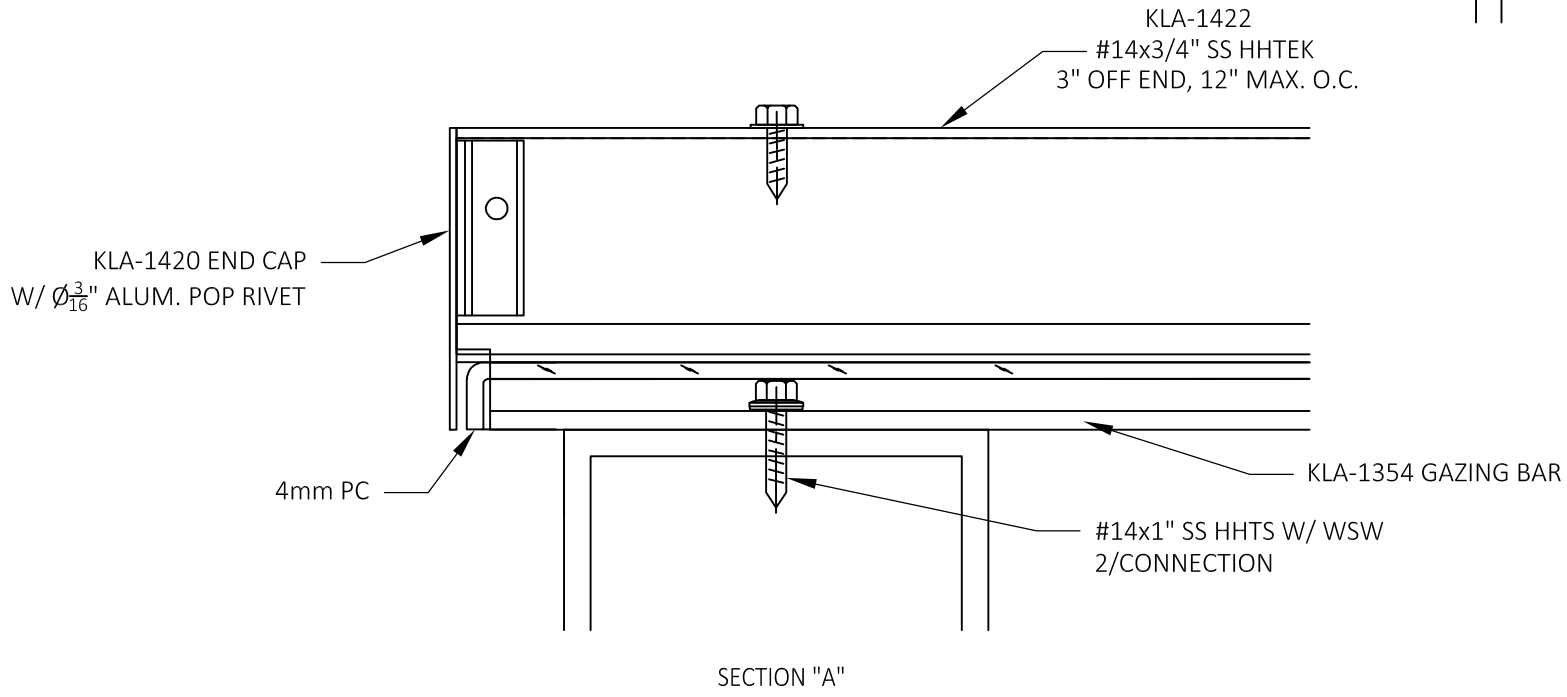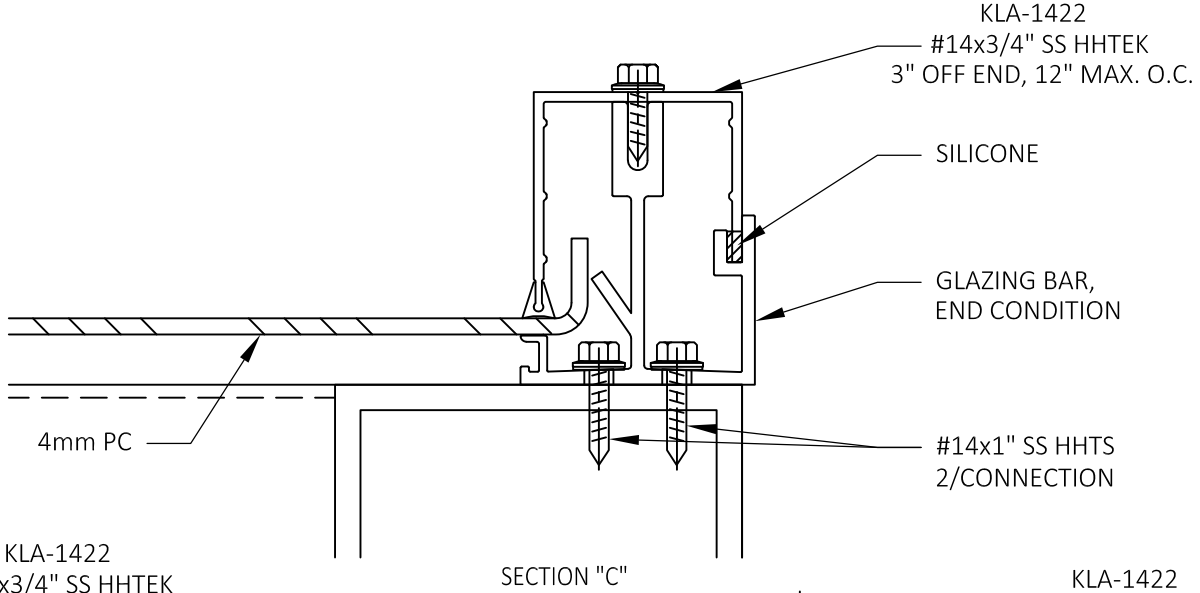

Digitally signed by Hermes F. Norero, P.E.
Reason: I am approving this document
Date: 2025.02.26 07:17:29 -08'00'

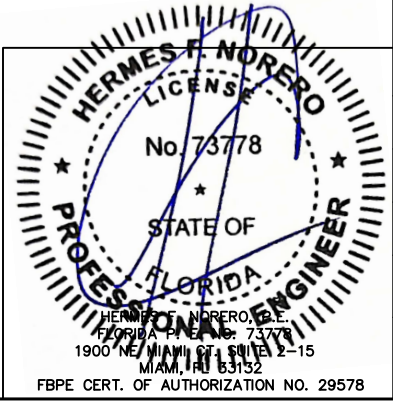

DATE				
DESCRIPTION				
REV.				
 28662 N. BALLARD DR., LAKE FOREST, IL 60045 (647) 816-1060 • FAX (647) 816-1925				
PROJECT: U-LITE MONOLITHIC POLYCARBONATE STANDING SEAM PANEL				
ARCHITECT:				
ERECTOR:				
DRAWING NO. KLA019				
REV. -				
DRAWN BY MS				
DATE 02/07/25				
CHECKED BY				
DATE				
REFERENCE NO.				
SHEET NO. 1 OF 1				