9/28/2026 8:55 AM
c:\users\julianarodriguez\building drops, inc\building drops landing - documents\common\projects\2026 code change projects\ply gem siding group\cc-26-0134 - fbc 2026 code change\dwgs\fl32502\pgsg006.dwg

PLY GEM SIDING GROUP

MASTIC ALUMINUM & VINYL SOFFIT PRODUCTS

LEGEND:

- DOUBLE 6 HAS "V" GROOVES EVERY 6" ACROSS WIDTH, AND EACH PANEL IS 12" WIDE.
- TRIPLE 4 OR T4 HAS "V" GROOVES EVERY 4" ACROSS WIDTH, AND EACH PANEL IS 12" WIDE.
- QUAD 4 HAS "V" GROOVES EVERY 4" ACROSS WIDTH, AND EACH PANEL IS 16" WIDE.
- TRIPLE 2-2/3 HAS "V" GROOVES EVERY 2-2/3" ACROSS WIDTH, AND EACH PANEL IS 8" WIDE.
- DOUBLE 5 HAS "V" GROOVES EVERY 5" ACROSS WIDTH, AND EACH PANEL IS 10" WIDE.
- SINGLE 6 OR S6 HAS "V" GROOVES EVERY 6" ACROSS WIDTH, AND EACH PANEL IS 6" WIDE.
- WRIPLE 3-1/3 HAS "V" GROOVES EVERY 3-1/3" ACROSS WIDTH, AND EACH PANEL IS 10" WIDE.





QUAD 4"

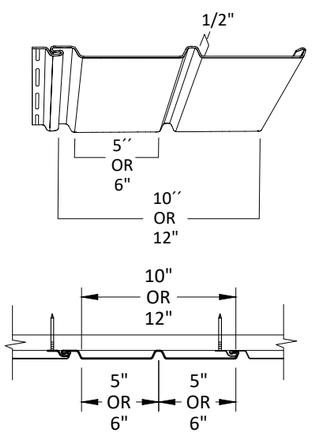

DOUBLE 5" & DOUBLE 6"

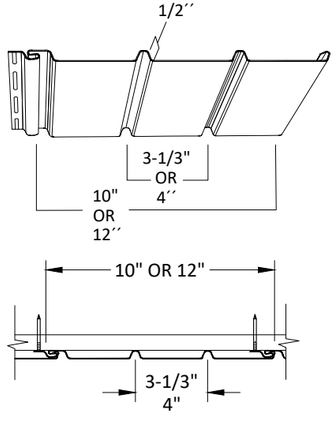

TRIPLE 4" & TRIPLE 3-1/3"

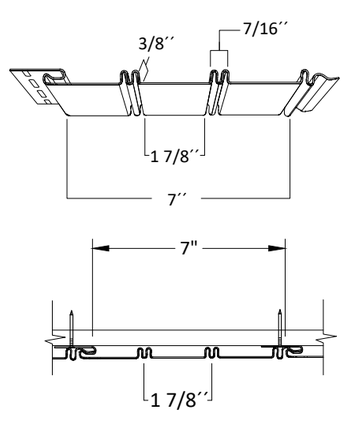

BEADED 7"

GENERAL NOTES

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH THE CURRENT EDITION FLORIDA BUILDING CODE (FBC), **EXCLUDING** HVHZ AND HAS BEEN EVALUATED ACCORDING TO THE FOLLOWING:
   - ASTM D3679-21
   - AAMA 1402-09
2. ADEQUACY OF THE EXISTING STRUCTURAL CONCRETE/MASONRY AND 2X FRAMING AS A MAIN WIND FORCE RESISTING SYSTEM CAPABLE OF WITHSTANDING AND TRANSFERRING APPLIED PRODUCT LOADS TO THE FOUNDATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
3. ALUMINUM AND VINYL SOFFITS MEETS THE REQUIREMENTS OF THE CURRENT FLORIDA BUILDING CODE.
4. VINYL SOFFIT SPECIFICATIONS:
   - SIDING MATERIAL: PVC (PER ASTM D3679)
   - MINIMUM WALL THICKNESS: 0.038"
   - SEE SHEETS 3 & 4 FOR ALLOWABLE DESIGN PRESSURES.
5. ALUMINUM SOFFIT SPECIFICATIONS:
   - ALUMINUM MATERIAL: 3105 (PER AAMA 1402)
   - MINIMUM WALL THICKNESS: 0.013"
   - SEE SHEETS 3 & 4 FOR ALLOWABLE DESIGN PRESSURES.
6. MASTIC VINYL SOFFIT PRODUCTS ARE MFG. FROM A FORMULATED PVC COMPOUND MEETING OR EXCEEDING THE REQUIREMENTS OF ASTM D3679 STD. FOR PVC SIDING AND COMPOUNDS.
7. WALLS AND FRAMING TO RECEIVE ALUMINUM AND VINYL SOFFIT SHALL BE CHECKED FOR STRUCTURAL ADEQUACY, CRACKS AND DEFECTS THAT SHALL BE ELIMINATED.
8. WALLS AND FRAMING WHERE THE SOFFIT ARE TO BE INSTALLED SHALL BE DESIGNED BY A REGISTERED ARCHITECT OR ENGINEER BY A REGISTERED ARCHITECT OR ENGINEER ACCODING TO THE FBC AND THE MINIMUM REQUIREMENTS OF THIS DRAWING.
9. INSTALLATION OF THE SOFFIT AND ACCESSORY PRODUCTS SHALL BE DONE IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS AND THE APPLICABLE SECTIONS OF THE FBC.
10. EXTERIOR WALLS SHALL BE PROVIDED WITH A CONTINUOUS WATER-RESISTIVE BARRIER AND REQUIRED FLASHING IN ACCORDANCE WITH THE MANUFACTURER'S INSTALLATION INSTRUCTIONS AND THE CURRENT FLORIDA BUILDING CODE.
11. OPTIONAL FASCIA MAY BE PROVIDED AND INSTALLED IN COMPLIANCE WITH THE CURRENT FLORIDA BUILDING CODE AND MANUFACTURER'S INSTALLATION REQUIREMENTS.
12. INSTALLATION FASTENERS AND ASSOCIATED HARDWARE MUST BE MADE OF CORROSION RESISTANT MATERIAL OR HAVE A CORROSION RESISTANT COATING.
    - 12.1. FASTENERS USED WITHIN 3,000 FEET OF A SALTWATER COASTLINE AND INSTALLED IN ENCLOSED SPACES SHALL BE GALVANIZED IN ACCORDANCE WITH SECTION 1711.1.1 (E.G., ASTM A153 CLASS D, ASTM A641 CLASS 3S, OR EQUIVALENT CORROSION RESISTANCE).
    - 12.2. CONNECTORS AND METAL PLATES USED WITHIN 3,000 FEET OF A SALTWATER COASTLINE SHALL BE STANDARD GALVANIZED IN ACCORDANCE WITH SECTION 1711.1.2 (E.G., ASTM A653 G90, ASTM A123, OR PROTECTIVE COATING PER TPI 1).
    - 12.3. FASTENERS USED WITHIN 300 FEET OF A SALTWATER COASTLINE MUST BE STAINLESS-STEEL RING-SHANK NAILS IN ACCORDANCE WITH SECTION 1711.1.1 (E.G., ASTM A240 TYPE 304, TYPE A305, OR TYPE 316 STAINLESS STEEL).

PLY GEM SIDING GROUP
2405 CAMPBELL ROAD,
SIDNEY, OH 45365

TITLE: *MASTIC ALUMINUM & VINYL SOFFIT PRODUCTS*
GENERAL NOTES AND SOFFIT DETAILS

PREPARED BY:
BUILDING DROPS, INC.
1900 NE MIAMI CT. SUITE 2-15
MIAMI, FL 33132
PH: (954)399-8478
FAX: (954)744.4738
WEB: www.buildingdrops.com

REMARKS	BY	DATE
2026 FBC UPD.	JR	08/26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

Digitally signed by Hermes F. Norero, P.E.
Reason: I am approving this document
Date: 2026.09.29 19:28:59 -04'00'

HERMES F. NORERO LICENSE No. 73778 STATE OF FLORIDA PROFESSIONAL ENGINEER

HERMES F. NORERO, P.E.
FLORIDA P.E. No. 73778
BUILDING DROPS, INC
1900 NE MIAMI CT. SUITE 2-15
MIAMI, FL 33132
FBPE CERT. OF AUTHORIZATION No. 29578

FL #: FL32502

DATE: 07.10.23
DWG. BY: DI
CHK. BY: HFN
SCALE: NTS
DWG. #: PGSG006
SHEET: 1
REV. A

9/28/2026 8:55 AM
c:\users\julianarodriguez\building drops, inc\building drops landing - documents\common\projects\2026 code change projects\ply gem siding group\cc-26-0134 - fbc 2026 code change\dwgs\fl32502\pgsg006.dwg

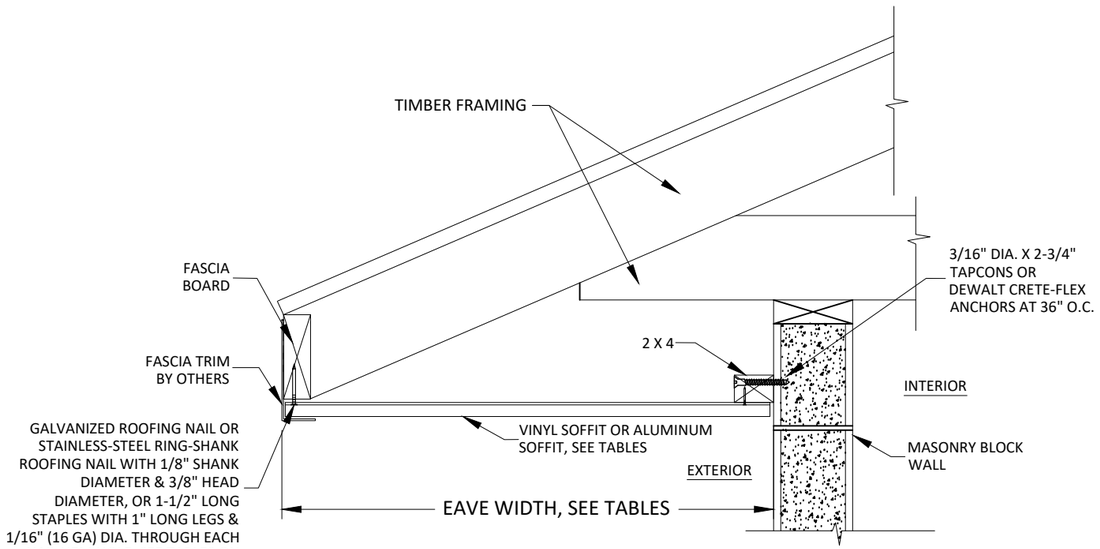

A/2 VERTICAL SECTION
SOFFIT INSTALLATION DETAIL
MASONRY BLOCK WALLS

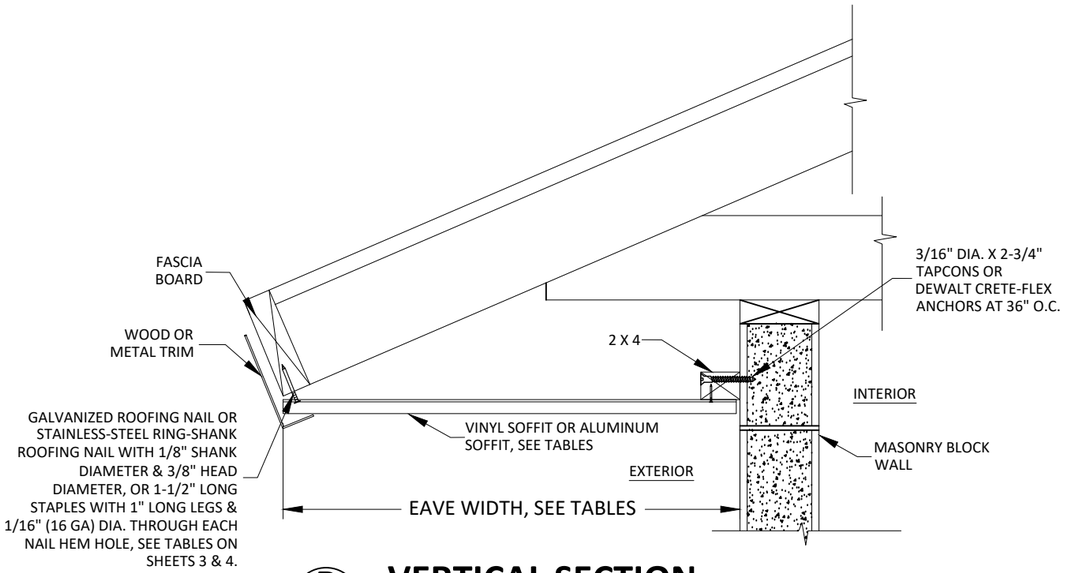

B/2 VERTICAL SECTION
SOFFIT INSTALLATION DETAIL
MASONRY BLOCK WALLS

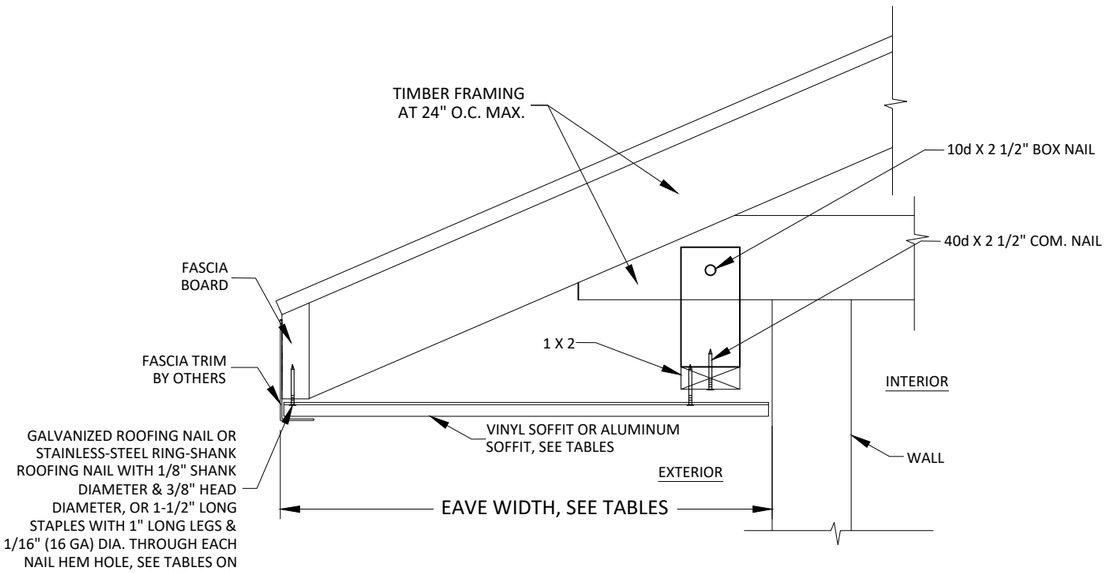

C/2 VERTICAL SECTION
SOFFIT INSTALLATION DETAIL
INTO ROOF FRAMING

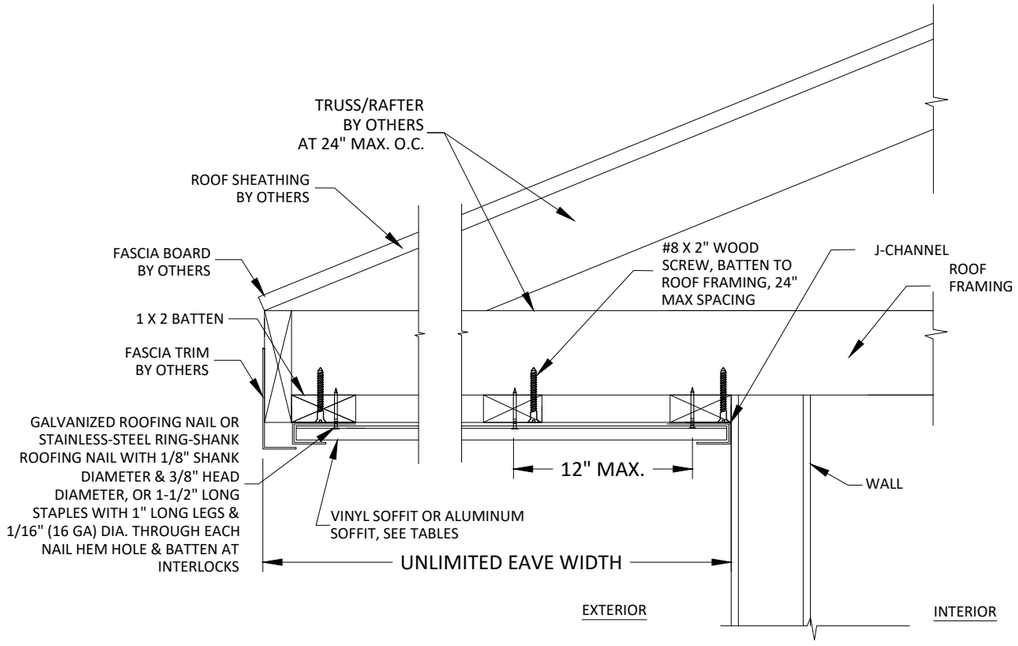

D/2 VERTICAL SECTION
SOFFIT INSTALLATION DETAIL
WIDE EAVES AND EXTERIOR CEILINGS

PLY GEM SIDING GROUP
2405 CAMPBELL ROAD,
SIDNEY, OH 45365

TITLE: *MASTIC ALUMINUM & VINYL SOFFIT PRODUCTS*
SHORT SPAN INSTALLATION DETAILS AND MULTI SPAN INSTALLATION DETAILS

PREPARED BY:
BUILDING DROPS, INC.
1900 NE MIAMI CT. SUITE 2-15
MIAMI, FL 33132
PH: (954)399-8478
FAX: (954)744.4738
WEB: www.buildingdrops.com

REMARKS	BY	DATE
2026 FBC UPD.	JR	08/26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

HERMES F. NORERO LICENSE No. 73778 STATE OF FLORIDA PROFESSIONAL ENGINEER

HERMES F. NORERO, P.E.
FLORIDA P.E. No. 73778
BUILDING DROPS, INC
1900 NE MIAMI CT. SUITE 2-15
MIAMI, FL 33132
FBPE CERT. OF AUTHORIZATION No. 29578

FL #: FL32502

DATE: 07.10.23

DWG. BY: DI | CHK. BY: HFN

SCALE: NTS

DWG. #: PGSG006

SHEET: 2 | REV. A

NOTE:
A FACTOR OF SAFETY OF 1.5 HAS BEEN UTILIZED IN DETERMINING ALLOWABLE DESIGN PRESSURE.

ALLOWABLE DESIGN WIND PRESSURE (PSF)

MASTIC SOFFIT TYPE	EAVE WIDTH (IN)					
	10"	12"	16"	18"	21"	24"
ENVOY (ALUMINUM) 12", NAILS SVG12N20, SVG12V20	+169.1 -169.1	+93.0 -135.3	+66.4 -96.6	+112.5 -107.6	+79.8 -76.3	+59.5 -56.9
ENVOY (ALUMINUM) 12", STAPLES SVG12N20, SVG12V20	+169.1 -177.0	+93.0 -141.6	+66.4 -101.1	+112.5 -107.6	+79.8 -76.3	+59.5 -56.9
ENVOY (ALUMINUM) 6", NAILS SVG6N, SVG6V	+338.2 -338.2	+93.0 -270.6	+66.4 -193.3	+225.0 -215.1	+159.6 -152.5	+119.0 -113.8
ENVOY (ALUMINUM) 6", STAPLES SVG6N, SVG6V	+338.2 -338.2	+93.0 -283.2	+66.4 -202.3	+225.0 -215.1	+159.6 -152.5	+119.0 -113.8
ENDURANCE (ALUMINUM) 12", NAILS SVGN420144, SVGV420144	+142.4 -142.4	+78.3 -113.9	+55.9 -81.4	+94.7 -90.6	+67.2 -64.2	+50.1 -47.9
ENDURANCE (ALUMINUM) 12", STAPLES SVGN420144, SVGV420144	+142.4 -177.0	+113.9 -141.6	+81.4 -101.1	+94.7 -90.6	+67.2 -64.2	+50.1 -47.9
ENVOY (ALUMINUM) 12", NAILS SAS12219, LFAS12219, SAS12319, LCAS12319, LFAS21319, SAX12219T, LFAX12219T	+169.1 -169.1	+93.0 -135.3	+66.4 -96.6	+112.5 -107.6	+79.8 -76.3	+59.5 -56.9
ENVOY (ALUMINUM) 12", STAPLES SAS12219, LFAS12219, SAS12319, LCAS12319, LFAS21319, SAX12219T, LFAX12219T	+169.1 -177.0	+93.0 -141.6	+66.4 -101.1	+112.5 -107.6	+79.8 -76.3	+59.5 -56.9
ENVOY QUAD (ALUMINUM) 16", NAILS SAS16419, LCAS16419	+126.8 -126.8	+93.0 -101.5	+66.4 -72.5	+84.4 -80.7	+59.8 -57.2	+44.6 -42.7
ENVOY QUAD (ALUMINUM) 16", STAPLES SAS16419, LCAS16419	+126.8 -132.8	+93.0 -106.2	+66.4 -75.9	+84.4 -80.7	+59.8 -57.2	+44.6 -42.7
ENDURANCE (ALUMINUM) 12", NAILS SAS12216, LFAS12216, SAS122316, LCAS122316, LFAS122316	+142.4 -142.4	+78.3 -113.9	+55.9 -81.4	+94.7 -90.6	+67.2 -64.2	+50.1 -47.9
ENDURANCE (ALUMINUM) 12", STAPLES SAS12216, LFAS12216, SAS122316, LCAS122316, LFAS122316	+142.4 -177.0	+78.3 -141.6	+55.9 -101.1	+94.7 -90.6	+67.2 -64.2	+50.1 -47.9
ECONOMY (ALUMINUM) SOFFIT 12", NAILS SAS12313, LFAS12313, LCAS12313	+115.7 -115.7	+63.6 -92.6	+45.4 -66.1	+77.0 -73.6	+54.6 -52.2	+40.7 -38.9
ECONOMY (ALUMINUM) SOFFIT 12", STAPLES SAS12313, LFAS12313, LCAS12313	+115.7 -177.0	+63.6 -141.6	+45.4 -101.1	+77.0 -73.6	+54.6 -52.2	+40.7 -38.9
ECONOMY (ALUMINUM) SOFFIT 16", NAILS SAS16413, LFAS16413	+86.8 -86.8	+63.6 -69.4	+45.4 -49.6	+57.7 -55.2	+40.9 -39.1	+30.5 -29.2
ECONOMY (ALUMINUM) SOFFIT 16", STAPLES SAS16413, LFAS16413	+86.8 -132.8	+63.6 -106.2	+45.4 -75.9	+57.7 -55.2	+40.9 -39.1	+30.5 -29.2
VENTURA™ (VINYL) 10", NAILS HVS10V, HVS10N	+227.3 -80.1	+181.8 -64.1	+129.9 -45.8	+128.6 -46.1	+91.2 -38.8	+68.0 -33.6
VENTURA™ (VINYL) 10", STAPLES HVS10V, HVS10N	+227.3 -95.4	+181.8 -76.3	+129.9 -54.5	+128.6 -47.7	+91.2 -40.2	+68.0 -34.7
PRO-BEAD (VINYL) 8", NAILS PBS80N, PBS80V	+206.6 -91.0	+165.3 -72.8	+118.1 -52.0	+146.1 -52.4	+103.6 -44.1	+77.3 -38.1
PRO-BEAD (VINYL) 8", STAPLES PBS80N, PBS80V	+206.6 -108.4	+165.3 -86.8	+118.1 -62.0	+146.1 -54.2	+103.6 -45.7	+77.3 -39.4
PRO-SELECT (VINYL) 10", NAILS PSS10N, PSS10V	+237.6 -83.7	+190.1 -67.0	+135.8 -47.9	+134.4 -48.2	+95.3 -40.6	+71.1 -35.1
PRO-SELECT (VINYL) 10", STAPLES PSS10N, PSS10V	+237.6 -99.8	+190.1 -79.8	+135.8 -57.0	+134.4 -49.9	+95.3 -42.0	+71.1 -36.3
PRO-TECH PLUS (VINYL) 12", NAILS PTS12N, PTS12V, PTS12CV	+206.6 -60.7	+165.3 -48.5	+118.1 -34.7	+97.4 -35.0	+69.1 -29.4	+51.5 -25.4
PRO-TECH PLUS (VINYL) 12", STAPLES PTS12N, PTS12V, PTS12CV	+206.6 -72.3	+165.3 -57.8	+118.1 -41.3	+97.4 -36.2	+69.1 -30.4	+51.5 -26.3
UNIVERSAL (VINYL) 12", NAILS UVS12N, UVS12P, UVS12CP	+185.9 -54.6	+148.8 -43.7	+106.3 -31.2	+87.7 -31.5	+62.2 -26.5	+46.4 -22.9
UNIVERSAL (VINYL) 12", STAPLES UVS12N, UVS12P, UVS12CP	+185.9 -65.1	+148.8 -52.1	+106.3 -37.2	+87.7 -32.5	+62.2 -27.4	+46.4 -23.7
UNIVERSAL (VINYL) 10", NAILS TRMS10N, TRMS10V	+206.6 -72.8	+165.3 -58.3	+118.1 -41.6	+116.9 -41.9	+82.9 -35.3	+61.8 -30.5
UNIVERSAL (VINYL) 10", STAPLES TRMS10N, TRMS10V	+206.6 -86.8	+165.3 -69.4	+118.1 -49.6	+116.9 -43.4	+82.9 -36.5	+61.8 -31.5
PRO-TECH PLUS (VINYL) 10", NAILS PTS10N, PTS10V	+206.6 -72.8	+173.5 -61.2	+124.0 -43.7	+122.8 -44.0	+87.1 -37.1	+64.9 -32.0
PRO-TECH PLUS (VINYL) 10", STAPLES PTS10N, PTS10V	+206.6 -86.8	+173.5 -72.9	+124.0 -52.1	+122.8 -45.5	+87.1 -38.4	+64.9 -33.1
SEE DETAILS A2, B2 & C2						

ALLOWABLE DESIGN PRESSUES (PSF)
MULTI-SPAN TABLE (EXTERIOR CEILINGS)

MASTIC SOFFIT TYPE	
PRO-BEAD (VINYL) 8", NAILS SOLID - PBS80N VENTED - PBS80V	+/-55.1
PRO-BEAD (VINYL) 8", STAPLES SOLID - PBS80N VENTED - PSB80V	+/-55.1
PRO-SELECT DOUBLE 5 (VINYL) 10", NAILS SOLID - PSS10N VENTED - PSS10V	+/-38.3
PRO-SELECT DOUBLE 5 (VINYL) 10", STAPLES SOLID - PSS10N VENTED - PSS10V	+/-38.3
PRO-TECH PLUS TRIPLE 4 (VINYL) 12", NAILS SOLID - PTS12N CENTER VENT - PTS12CV FULL VENT - PTS12V	+/-36.7
PRO-TECH PLUS TRIPLE 4 (VINYL) 12", STAPLES SOLID - PTS12N CENTER VENT - PTS12CV FULL VENT - PTS12V	+/-36.7
UNIVERSAL DOUBLE 5 (VINYL) 10", NAILS SOLID - TRMS10N VENTED - TRMS10V	+/-44.0
UNIVERSAL DOUBLE 5 (VINYL) 10", STAPLES SOLID - TRMS10N VENTED - TRMS10V	+/-44.0
PRO-TECH PLUS DOUBLE 5 (VINYL) 10", NAILS SOLID - PTS10N VENTED - PTS10V	+/-41.9
PRO-TECH PLUS DOUBLE 5 (VINYL) 10", STAPLES SOLID - PTS10N VENTED - PTS10V	+/-41.9
VENTURA™ TRIPLE 3 1/3 (VINYL) 10", NAILS SOLID - HVS10N VENTED - HVS10V	+/-40.0
VENTURA™ TRIPLE 3 1/3 (VINYL) 10", STAPLES SOLID - HVS10N VENTED - HVS10V	+/-40.0
UNIVERSAL TRIPLE 4 (VINYL) 10", NAILS SOLID - UVS12N CENTER VENT - UVS12CP FULL VENT - UVS12P	+/-40.8
UNIVERSAL TRIPLE 4 (VINYL) 10", STAPLES SOLID - UVS12N CENTER VENT - UVS12CP FULL VENT - UVS12P	+/-40.8
SEE DETAIL D2	

PLY GEM SIDING GROUP
2405 CAMPBELL ROAD,
SIDNEY, OH 45365

TITLE: *MASTIC ALUMINUM & VINYL SOFFIT PRODUCTS*
MASTIC DESIGN PRESSURE TABLES

PREPARED BY:
BUILDING DROPS, INC.
1900 NE MIAMI CT. SUITE 2-15
MIAMI, FL 33132
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com

REMARKS	BY	DATE
2026 FBC UPD.	JR	08/26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

HERMES F. NORIEGA LICENSE No. 73778 STATE OF FLORIDA PROFESSIONAL ENGINEER
HERMES F. NORIEGA, P.E.
FLORIDA LICENSE No. 73778
BUILDING DROPS, INC
1900 NE MIAMI CT. SUITE 2-15
MIAMI, FL 33132
FBPE CERT. OF AUTHORIZATION No. 29578

FL #: FL32502

DATE: 07.10.23

DWG. BY: DI | CHK. BY: HFN

SCALE: NTS

DWG. #: PGSG006

SHEET: 3 | REV. A

OF 4

9/28/2026 8:55 AM
c:\users\julianarodriguez\building drops, inc\building drops landing - documents\common\projects\2026 code change projects\ply gem siding group\cc-26-0134 - fbc 2026 code change\dwgs\fl32502\pgsg0096.dwg

NOTE:
A FACTOR OF SAFETY OF 1.5 HAS BEEN UTILIZED IN DETERMINING ALLOWABLE DESIGN PRESSURE.

ALLOWABLE DESIGN WIND PRESSURE (PSF)						
PERFORMANCE COLLECTION PGPC SOFFIT TYPE	EAVE WIDTH (IN)					
	10"	12"	16"	18"	21"	24"
TRIPLE 3 1/3" (VINYL) 10", NAILS VST3N, VST3V	+227.3 -80.1	+181.8 -64.1	+129.9 -45.8	+128.6 -46.1	+91.2 -38.8	+68.0 -33.6
TRIPLE 3 1/3" (VINYL) 10", STAPLES VST3N, VST3V	+227.3 -95.4	+181.8 -76.3	+129.9 -54.5	+128.6 -47.7	+91.2 -40.2	+68.0 -34.7
BEADED (VINYL) SOFFIT 8", NAILS VSB223N, VSB223V	+206.6 -91.0	+165.3 -72.8	+118.1 -52.0	+146.1 -52.4	+103.6 -44.1	+77.3 -38.1
BEADED (VINYL) SOFFIT 8", STAPLES VSB223N, VSB223V	+206.6 -108.4	+165.3 -86.8	+118.1 -62.0	+146.1 -54.2	+103.6 -45.7	+77.3 -39.4
PREMIUM DOUBLE 5" (VINYL) 10", NAILS VSD5N, VSD5FV	+237.6 -83.7	+190.1 -67.0	+135.8 -47.9	+134.4 -48.2	+95.3 -40.6	+71.1 -35.1
PREMIUM DOUBLE 5" (VINYL) 10", STAPLES VSD5N, VSD5FV	+237.6 -99.8	+190.1 -79.8	+135.8 -57.0	+134.4 -49.9	+95.3 -42.0	+71.1 -36.3
PREMIUM TRIPLE 4" (VINYL) 12", NAILS VST4N, VST4FV, VST4CV	+206.6 -60.7	+165.3 -48.5	+118.1 -34.7	+97.4 -35.0	+69.1 -29.4	+51.5 -25.4
PREMIUM TRIPLE 4" (VINYL) 12", STAPLES VST4N, VST4FV, VST4CV	+206.6 -72.3	+165.3 -57.8	+118.1 -41.3	+97.4 -36.2	+69.1 -30.4	+51.5 -26.3
ECONOMY TRIPLE 4" (VINYL) 12", NAILS EVS12N, EVS12P, EVS12CP	+185.9 -54.6	+148.8 -43.7	+106.3 -31.2	+87.7 -31.5	+62.2 -26.5	+46.4 -22.9
ECONOMY TRIPLE 4" (VINYL) 12", STAPLES EVS12N, EVS12P, EVS12CP	+185.9 -65.1	+148.8 -52.1	+106.3 -37.2	+87.7 -32.5	+62.2 -27.4	+46.4 -23.7
ECONOMY DOUBLE 5" (VINYL) 10", NAILS EVSD5N, EVSD5V	+206.6 -72.8	+165.3 -58.3	+118.1 -41.6	+116.9 -41.9	+82.9 -35.3	+61.8 -30.5
ECONOMY DOUBLE 5" (VINYL) 10", STAPLES EVSD5N, EVSD5V	+206.6 -86.8	+165.3 -69.4	+118.1 -49.6	+116.9 -43.4	+82.9 -36.5	+61.8 -31.5
DOUBLE 5" (VINYL) 10", NAILS SVSD5N, SVSD5FV	+216.9 -76.5	+173.5 -61.2	+124.0 -43.7	+122.8 -44.0	+87.1 -37.1	+64.9 -32.0
DOUBLE 5" (VINYL) 10", STAPLES SVSD5N, SVSD5FV	+216.9 -91.1	+173.5 -72.9	+124.0 -52.1	+122.8 -45.5	+87.1 -38.4	+64.9 -33.1
SEE DETAILS A2, B2 & C2						

ALLOWABLE DESIGN PRESSUES (PSF) MULTI-SPAN TABLE (EXTERIOR CEILINGS) PERFORMANCE COLLECTION PGPC SOFFIT TYPE	
BEADED (VINYL) 8", NAILS SOLID - VSB223N VENTED - VSB223V	+/-55.1
BEADED (VINYL) 8", STAPLES SOLID - VSB223N VENTED - VSB223V	+/-55.1
PREMIUM DOUBLE 5 (VINYL) 10", NAILS SOLID - VSD5N VENTED - VSD5FV	+/-38.3
PREMIUM DOUBLE 5 (VINYL) 10", STAPLES SOLID - VSD5N VENTED - VSD5FV	+/-38.3
PREMIUM TRIPLE 4 (VINYL) 12", NAILS SOLID - VST4N CENTER VENT - VST4CV FULL VENT - VST4FV	+/-36.7
PREMIUM TRIPLE 4 (VINYL) 12", STAPLES SOLID - VST4N CENTER VENT - VST4CV FULL VENT - VST4FV	+/-36.7
ECONOMY DOUBLE 5 (VINYL) 10", NAILS SOLID - EVSD5N VENTED - EVSD5V	+/-44.0
ECONOMY DOUBLE 5 (VINYL) 10", STAPLES SOLID - EVSD5N VENTED - EVSD5V	+/-44.0
TRIPLE 3 1/3 (VINYL) 10", NAILS SOLID - VST3N VENTED - VST3V	+/-40.0
TRIPLE 3 1/3 (VINYL) 10", STAPLES SOLID - VST3N VENTED - VST3V	+/-40.0
ECONOMY TRIPLE 4 (VINYL) 10", NAILS SOLID - EVS12N CENTER VENT - EVS12CP FULL VENT - EVS12P	+/-40.8
ECONOMY TRIPLE 4 (VINYL) 10", STAPLES SOLID - EVS12N CENTER VENT - EVS12CP FULL VENT - EVS12P	+/-40.8
DOUBLE 5 (VINYL) 10", NAILS SOLID - SVSD5N VENTED - SVSD5FV	+/-41.9
DOUBLE 5 (VINYL) 10", STAPLES SOLID - SVSD5N VENTED - SVSD5FV	+/-41.9
SEE DETAIL D2	

PLY GEM SIDING GROUP
2405 CAMPBELL ROAD,
SIDNEY, OH 45365

TITLE: *MASTIC ALUMINUM & VINYL SOFFIT PRODUCTS*
PGPC PERFORMANCE DESIGN PRESSURE TABLES

PREPARED BY:
BUILDING DROPS, INC.
1900 NE MIAMI CT. SUITE 2-15
MIAMI, FL 33132
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com

REMARKS	BY	DATE
2026 FBC UPD.	JR	08/26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

HERMES F. NORERO LICENSE No. 73778 STATE OF FLORIDA PROFESSIONAL ENGINEER

HERMES F. NORERO, P.E.
FLORIDA P.E. NO. 73778
BUILDING DROPS, INC
1900 NE MIAMI CT. SUITE 2-15
MIAMI, FL 33132
FBPE CERT. OF AUTHORIZATION No. 29578

FL #: FL32502

DATE: 07.10.23

DWG. BY: DI | CHK. BY: HFN

SCALE: NTS

DWG. #: PGSG006

SHEET: 4 | REV. A

OF 4

9/28/2026 8:55 AM
c:\users\julianarodriguez\building drops, inc\building drops landing - documents\common\projects\2026 code change projects\ply gem siding group\cc-26-0134 - fbc 2026 code change\dwgs\fl32502\pgsg006.dwg