

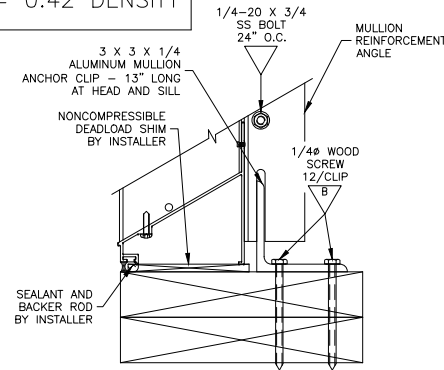


WOOD OPENING MINIMUM G = 0.42 DENSITY

A JAMB ANCHOR


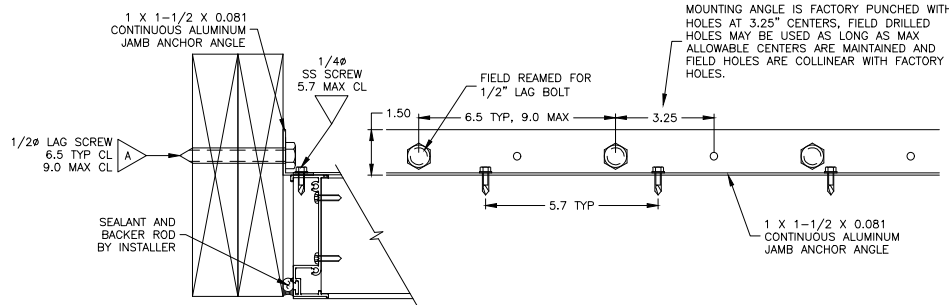


C MULLION ANCHOR

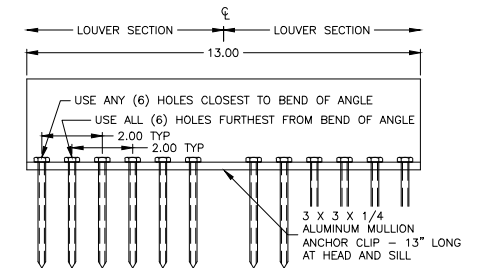


MASONRY OPENING

A JAMB ANCHOR

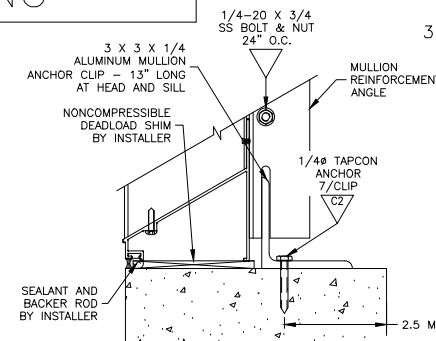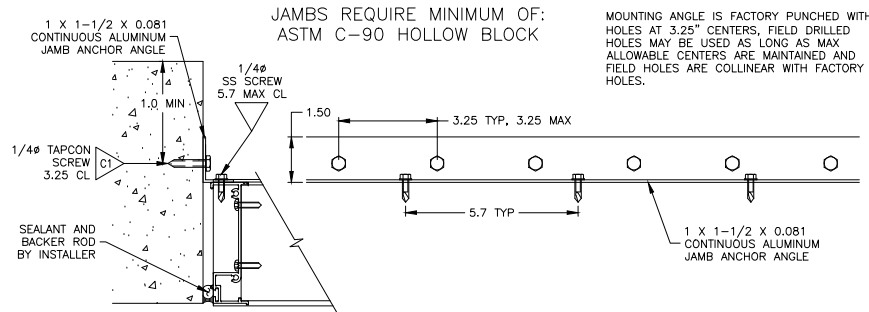


MULLION ANCHORS REQUIRE MINIMUM OF:
3,192 PSI CONCRETE OR
3,192 PSI GROUT FILLED ASTM C-90 HOLLOW BLOCK


C MULLION ANCHOR

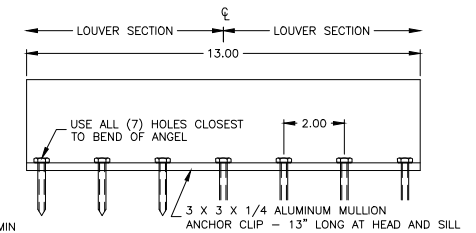


W/O SUPPORT ANGLE




W/ SUPPORT ANGLE



MULTIPLE SECTION W/ MULLION

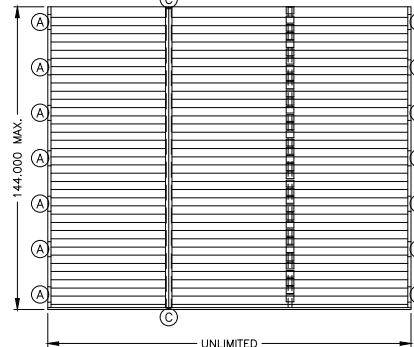

AVAILABLE SHAPES

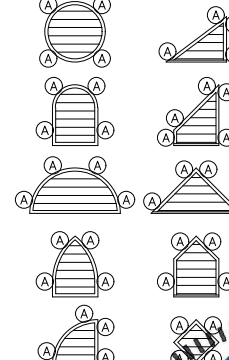

FIELD FASTENER SCHEDULE (BY INSTALLER)


TYPE	DESCRIPTION	MIN. EMBED.	MIN. EDGE DIST.	MIN. SPACING
A	1/2" LAG SCREW	3"	2 1/2"	3"
B	1/4" WOOD SCREW	3"	1 1/2"	1 1/2"
C1	1/4" TAPCON ANCHOR	1 1/4"	1"	3.25" (MAX)
C2	1/4" TAPCON ANCHOR	1 3/4"	2.5"	2" (MAX)

INSTALLER TO PROVIDE SEPARATION OF DISSIMILAR MATERIALS AS REQUIRED

INSTRUCTIONAL

PAIN	PART NO.	MAT'L	GAUGE	DESCRIPTION
				DRAWN BY: STEELE DATE: 08/22/2011 SUPERSEDES: SCALE: CAD DRAWING NO.: 633858
TITLE: K6744X INSTALLATION DETAILS 1 OF 2				ECD: IAN36764 ENG. REF: K6744X IOM PART #: 475583

Digitally signed by Hermes F Norero
Reason: I am approving this document
Date: 2021.07.11 19:59:00 -04'00'

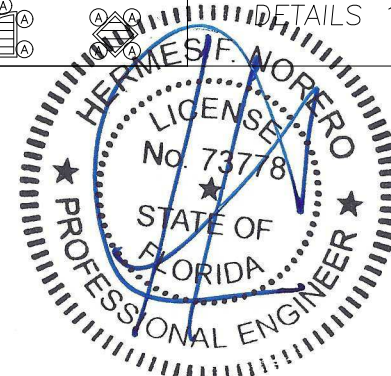

Hermes F. Norero, P.E.
FL PE No. 73778
Building Drops, Inc.
398 Dania Beach Blvd.
Suite 338
Dania Beach, FL 33004
FBPE Cert. of Auth. 29578

