












— (2) 1/4 x 1/2"
CARRIAGE BOLTS AND
1/4" FLANGE NUTS

12 GA BOTTOM BRACKET
ATTACHED WITH (3)
1/4-14x7/8" SELF DRILLING
CRIMPTITE SCREWS (2 THROUGH
STRUT AND BRACKET)




(4) SECTION DOORS WITH-
(6) 3" 18 GA 80 KSI U-BARS
LOCATED AS SHOWN

STATIC PRESSURE RATINGS	APPROVED SIZES
DESIGN PRESSURE(PSF): +31.6/−35.4	MAX WIDTH: 12'−2"
	MAX HEIGHT: 24'−1"
IMPACT/CYCLIC RATED: YES	MAX SECTION HEIGHT: 24'

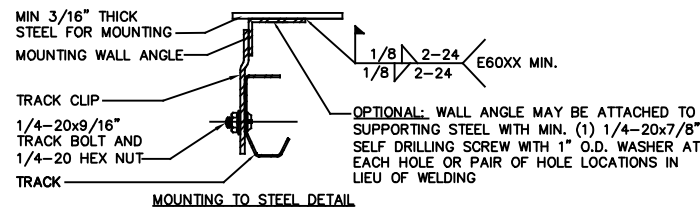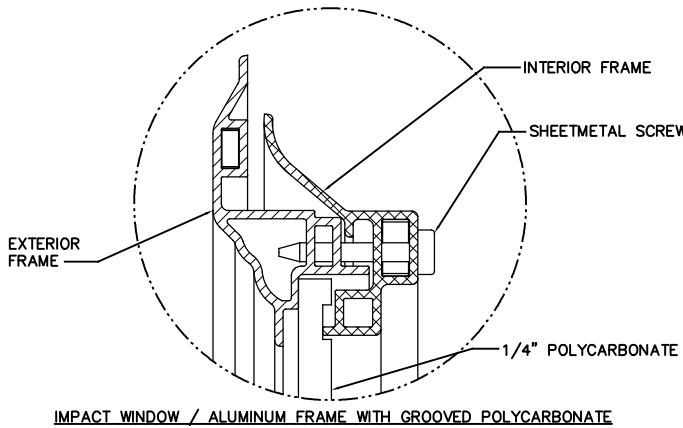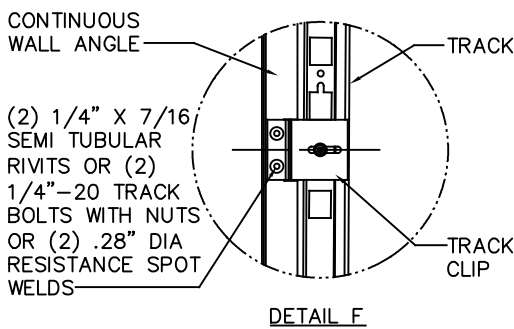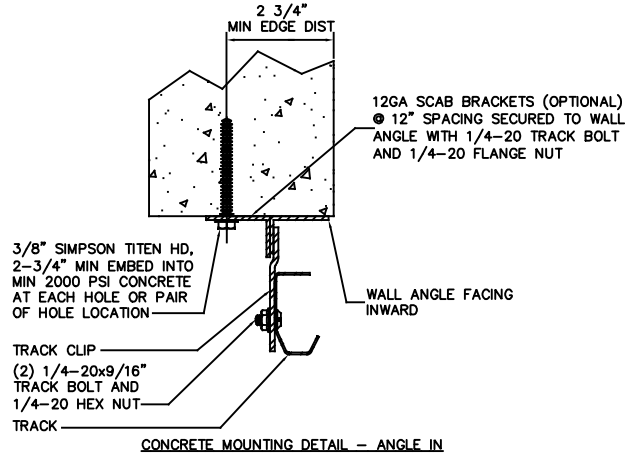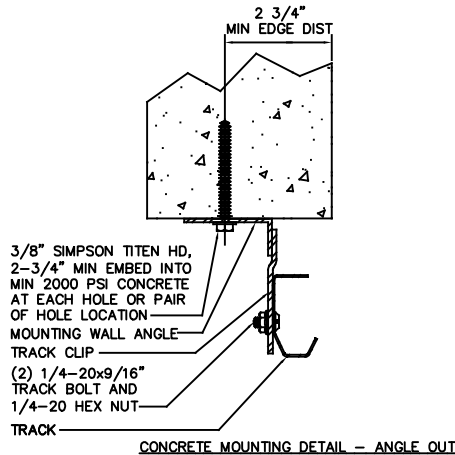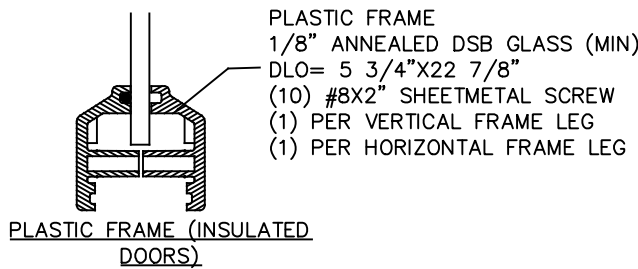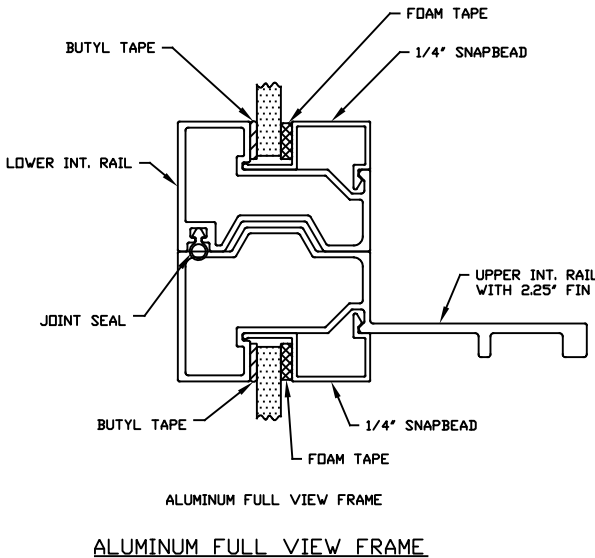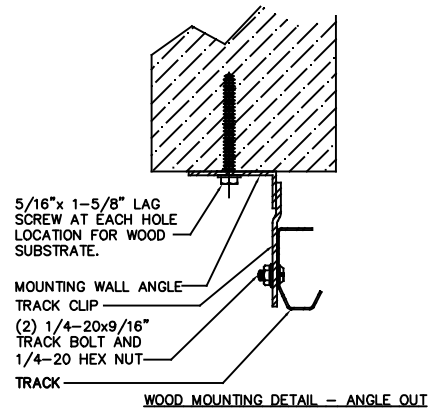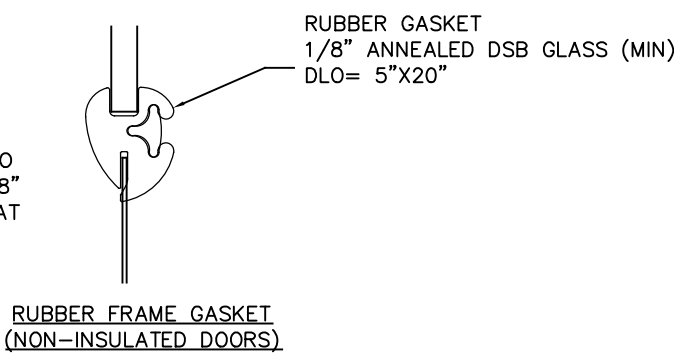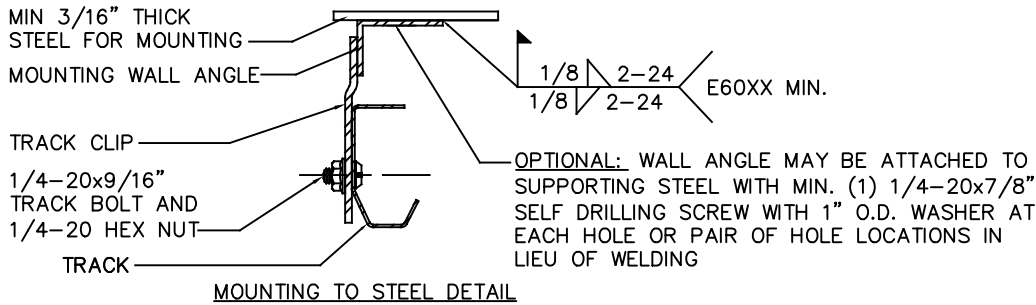

STATIC PRESSURE RATINGS	APPROVED SIZES
DESIGN PRESSURE(PSF): +31.6/-35.4	MAX WIDTH: 12'-2"
	MAX HEIGHT: 24'-1"
IMPACT/CYCLIC RATED: YES	MAX SECTION HEIGHT: 24'

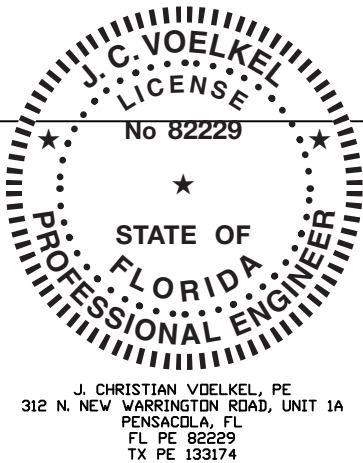

THE DRAWINGS AND ALL OTHER INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL AND PROPRIETARY PROPERTY OF OVERHEAD DOOR CORPORATION AND ITS AFFILIATED COMPANIES. THIS DRAWING AND INFORMATION, IN WHOLE OR IN PART, MAY NOT BE COPIED IN ANY MANNER OR DISCLOSED TO ANYONE WITHOUT THE PRIOR WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION. NO DISCLOSURE OF ANY OF THIS DRAWING OR INFORMATION IS INTENDED TO OPERATE AS A LICENSE OR AUTHORIZATION TO USE IT FOR ANY PURPOSE WITHOUT THE SPECIFIC WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION.									
TOLERANCES UNLESS OTHERWISE SPECIFIED		FINISH		The Genuine. The Original.		NAME		DATE	
HOLE DIAMETER		N/A		OVERHEAD DOOR		DRAWN BY:		1/14/21	
UNDER .251 +.004/--.003	WHOLE NUMBERS: ± .25					T CLARK			
.251 TO .500 +.006/--.003	.X ± .1								
OVER .500 +.008/--.003	.XX ± .03								
FRACTIONS		UNIT OF MEASURE		MATERIAL		CHECKED BY:		1/8/21	
± 1/16	.XXX ± .010	EA		N/A		J QIAN			
THIRD ANGLE PROJECTION						APPROVED BY:		2/17/21	
REF DWG	USED ON					T CLARK			
								DRAWING NUMBER	
								D- 411792	
								SCALE: N/A	
								SHEET 3 OF 3	