


24 Ga. STEEL PANELS OVER 16 Ga. STEEL PURLINS

1. THIS SYSTEM HAS BEEN DESIGNED AND TESTED TO MEET ALL OF THE REQUIREMENTS OF THE 8TH EDITION (2023) FLORIDA BUILDING CODE, FOR USE OUTSIDE OF THE HIGH VELOCITY HURRICANE ZONE (HVHZ).
2. THIS SYSTEM HAS BEEN TESTED PER TAS 202 AND 203. IMPACT RESISTANCE IS NOT REQUIRED FOR SOFFIT PANELS.
3. THIS SYSTEM HAS BEEN DESIGNED FOR INSTALLATION OVER 16 Ga. STEEL PURLINS ($F_u = 45$ ksi min). THE PURLINS ARE NOT A PART OF THIS APPROVAL, AND MUST ADEQUATELY SUPPORT THE LOADS IMPOSED BY THE PANEL SYSTEM AND TRANSFER THEM SAFELY TO THE BUILDING STRUCTURE.
4. DESIGN LOADS MUST BE CALCULATED BY A PROFESSIONAL ENGINEER OR ARCHITECT FOR EACH PROJECT. THE (ASD) PROJECT PRESSURE CANNOT EXCEED THE DESIGN PRESSURES LISTED IN THE TABLE ON THIS SHEET.
5. ALL ANCHORS SECURING THE SYSTEM TO PRESSURE TREATED WOOD SHALL BE CAPABLE OF RESISTING CORROSION CAUSED BY THE CHEMICALS IN THE WOOD.
6. MATERIALS INCLUDING BUT NOT LIMITED TO STEEL/METAL SCREWS THAT COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL BE PROTECTED PER FBC REQUIREMENTS.
7. NO INCREASE IN ALLOWABLE STRESS HAS BEEN USED IN THE DESIGN OF THIS PRODUCT. $C_d = 1.6$ WAS USED FOR WOOD SCREWS ONLY.
8. PANELS ARE MADE FROM 24 Ga. STEEL ($F_y = 61$ ksi min), GALVANIZED TO MEET ASTM A525 G90.
9. PANELS ARE FASTENED TO THE 16 Ga. PURLINS WITH #8-18 x 3/4" PAN FLAT HEAD TEKS SCREWS (OR EQUAL). (1) FASTENER AT JAMBS, (1) PER PURLIN FOR 12" PURLIN SPACING, (2) PER PURLIN FOR 60" PURLIN SPACING, AND (2) PER PURLIN AT PANEL JOINTS.

PURLIN SPACING (in)	MAXIMUM DESIGN PRESSURE (+/- psf)
12	100
60	26.6

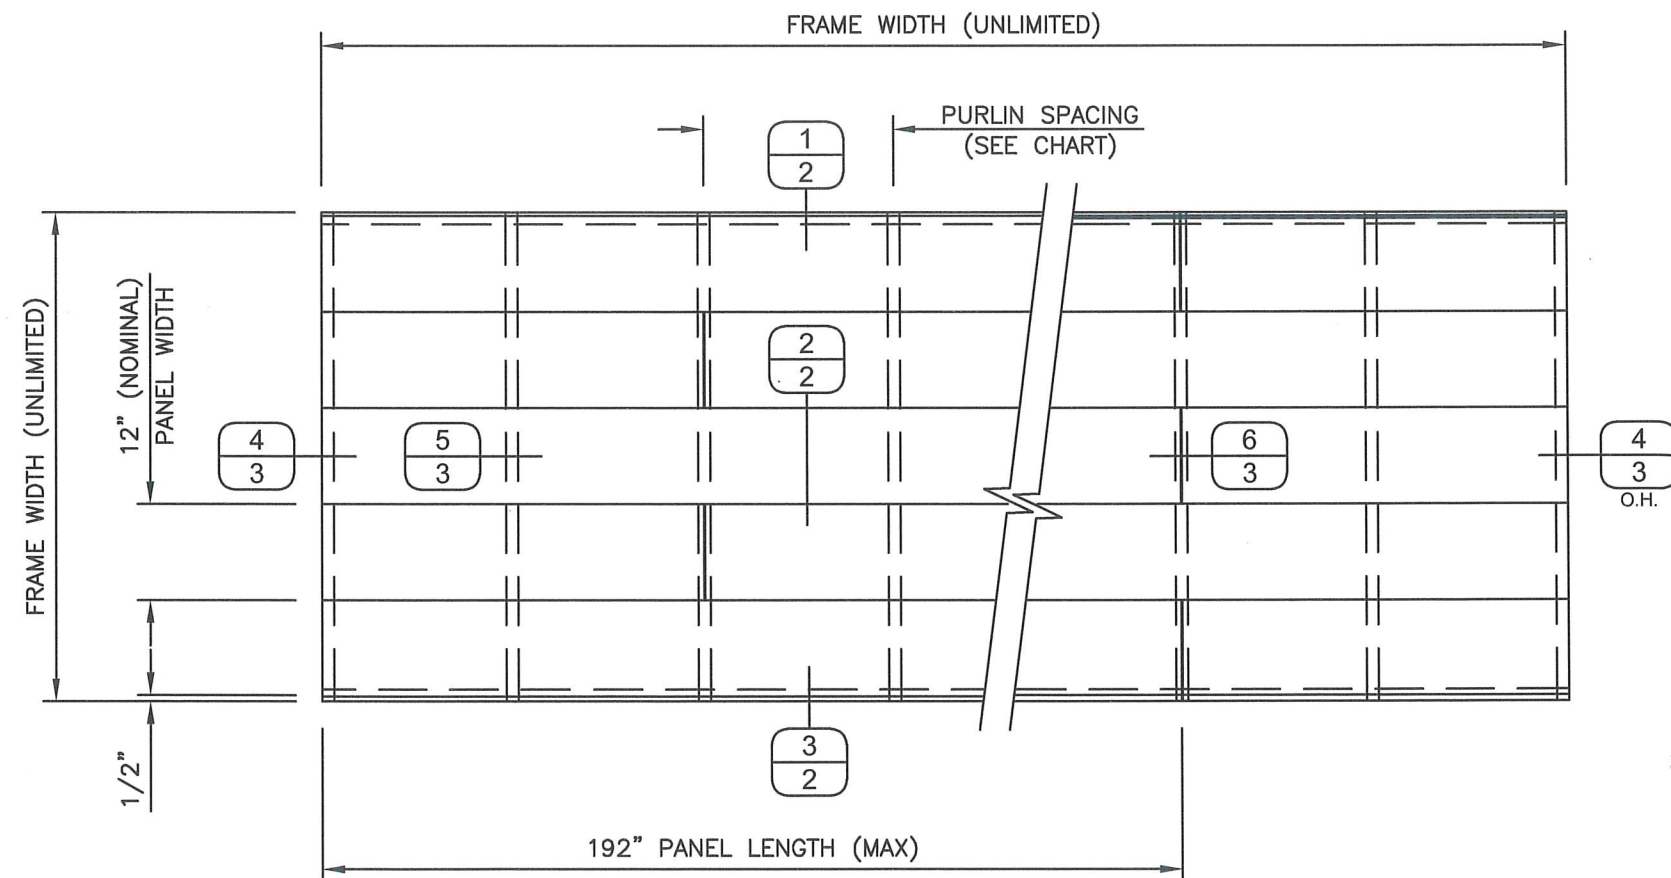

EXTERIOR VIEW
(NOT TO SCALE)



Digitally signed
by Scott Wolters
Date: 2026.08.17
20:43:10 -04'00'

DWG:	FP100SS-PUR
SHEET:	1 / 1

65 10TH STREET
LYNCHBURG, VA 24504

PH: (434) 847-2445
www.sentrigard.com


1ST SUBMITTAL
PRINTS ISSUED FOR

REV.#	—	—
-------	---	---

3/17/26	DATE
---------	------

24 Ga. STEEL PANELS OVER 16 Ga. STEEL PURLINS


SENTRIGARD FP100 SERIES SOFFIT PANELS
24 Ga. STEEL PANELS OVER 16 Ga. STEEL PURLINS

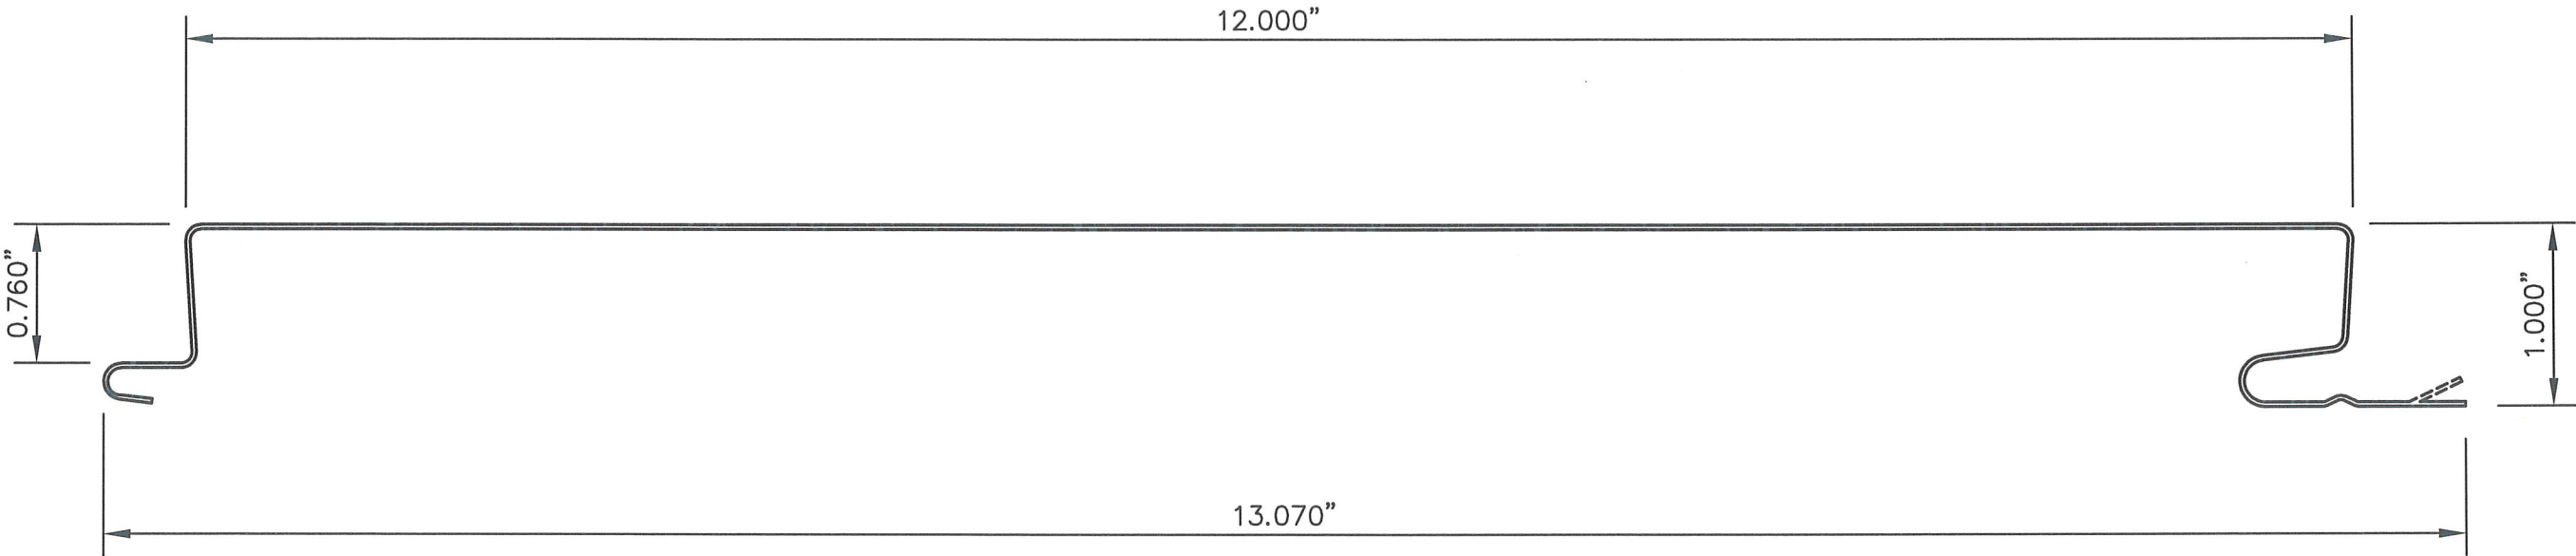

1
24 Ga. STEEL
(Fy=61 ksi MIN)

SCOTT WOLTERS
FL PE# 62354

WOLTERS ENGINEERING
(COA# 27194)
15211 97TH ROAD N.
WEST PALM BEACH, FL 33412
PH/FAX: (561) 225-1982

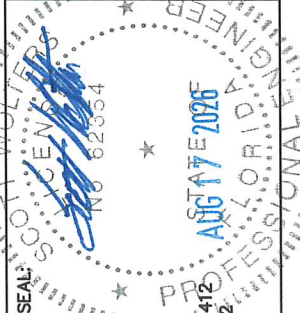

SENTRIGARD
METAL ROOFING SYSTEMS

65 10TH STREET
LYNCHBURG, VA 24504

PH: (434) 847-2445
www.sentrigard.com

REV.#	DATE
1ST SUBMITTAL	8/17/26
PRINTS ISSUED FOR	