

REGENCY PLUS, INC.

SERIES 5215 VINYL XOx OUTSWING CASEMENT WINDOW

LARGE MISSILE IMPACT

INSTALLATION ANCHORAGE DETAILS

NOTES:

1.

THE PRODUCT SHOWN HEREIN IS TESTED AND DESIGNED TO COMPLY WITH REQUIREMENTS OF THE 9TH EDITION (2026) FLORIDA BUILDING CODE, BUILDING AND RESIDENTIAL VOLUMES INCLUDING THE HIGH VELOCITY HURRICANE ZONE (HVHZ).
2.

2X WOOD FRAMING, 1X OR 2X WOOD BUCK, METAL FRAMING AND CONCRETE/MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND CONCRETE/MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3.

1X BUCK OVER CONCRETE/MASONRY IS OPTIONAL. WHEN 1X BUCK IS USED, INSTALLATION ANCHORS WILL PASS THROUGH WINDOW FRAME AND 1X BUCK INTO CONCRETE/MASONRY SUBSTRATE. WHEN USED, 1X BUCKS SHALL BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE AND IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD. DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
4.

THE PRODUCT SHOWN HEREIN HAS BEEN TESTED TO THE FOLLOWING BY MOLIMA, LLC, 1410 EDEN ROAD, YORK, PA 17402
- 4.1.

TAS 201, TAS 202 AND TAS 203. SEE TEST REPORT NO. 31512.03-106-13-R2, DATED 4/15/26, SIGNED AND SEALED BY MICHAEL D. STEMMELE, FL P.E.
- 4.2.

AAMA/WDMA/CSA 101/I.S.2/A440-2022/2017. SEE TEST REPORT NO. 31512.01-106-11-R2, DATED 4/15/26.
- 4.3.

ASTM E1886-19 AND ASTM E1996-20. SEE TEST REPORT NO. 31512.02-106-11-R2, DATED 4/15/26.
5.

MATERIAL:
- 5.1.

FRAME: EXTRUDED RIGID PVC BY *VISION EXTRUSIONS GROUP LIMITED* PER CURRENT MIAMI-DADE NOA.
- 5.2.

REINFORCEMENT:
- 5.2.1.

VENTS AND FIXED PANEL PERIMETERS, ITEM NO. ST-888, 0.050 GALVANIZED STEEL OPEN TUBE
- 5.2.2.

INTERMEDIATE JAMBS (T-MULLION). ITEM NO. GS 1500750, 0.12 HR STEEL C-SECTION (BACK-TO-BACK)
- 5.3.

LAMINATE GLASS INTERLAYER: TROSIFOL INTERLAYER BY KURARAY AMERICA, INC. PER CURRENT MIAMI-DADE NOA.
6.

GLAZING:
- 6.1.

GLAZING DETAIL AS TESTED:
- 6.1.1.

OVERALL: 7/8" NOMINAL INSULATING LAMINATED GLASS.
- 6.1.2.

GLASS THICKNESS: (1) LITE OF 3/16" NOMINAL TEMPERED GLASS TO THE INTERIOR AND (1) LITE OF LAMINATED GLASS TO THE EXTERIOR.
- 6.1.3.

LAMINATED LITE: (2) LITES OF 3/32" NOMINAL ANNEALED GLASS SEPARATED BY A 0.090" TROSIFOL INTERLAYER BY KURARAY AMERICA, INC.
- 6.1.4.

SPACER TYPE/SIZE: 11/32" NOMINAL CARDINAL ENDUR IG STAINLESS STEEL SPACER.
- 6.1.5.

GLAZING SYSTEM: INTERIOR GLAZED USING SIKAFLEX 552 BACKBEDDING WITH A SNAP-IN (2) LEAF DUAL DUROMETER RIGID VINYL GLAZING BEAD.
- 6.2.

SETTING BLOCKS SHALL BE IN COMPLIANCE WITH THE 9TH EDITION (2026) FLORIDA BUILDING CODE, SECTION 2411.3.3.1. SETTING BLOCKS SHALL BE NEOPRENE WITH A 70 TO 90 SHORE A DUROMETER.
- 6.3.

AS TESTED GLAZING MEETS ASTM E1300-24 FOR THE DESIGN CONDITIONS SHOWN IN THIS PRODUCT APPROVAL DOCUMENT.
7.

APPROVED IMPACT PROTECTIVE SYSTEM IS NOT REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS INCLUDING THE HVHZ.
8.

SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4".
9.

SEE INSTALLATION NOTES AND ANCHOR SCHEDULE ON SHEET 5 FOR DETAILS RELATED TO ANCHORAGE AND INSTALLATION REQUIREMENTS.
10.

ALL FASTENERS TO BE CORROSION RESISTANT, AND/OR HAVE A CORROSION RESISTANT COATING, OR MEET THE REQUIREMENTS OF SECTION 1711, 9TH EDITION (2026) FBC AND SECTION R332, 9TH EDITION (2026) FRC WHEN APPLICABLE.

| TABLE OF CONTENTS |                                                                 |
|-------------------|-----------------------------------------------------------------|
| SHEET             | DESCRIPTION                                                     |
| 1                 | NOTES                                                           |
| 2, 3 & 4          | ELEVATION AND ANCHOR ELEVATIONS                                 |
| 5                 | ANCHOR SCHEDULE AND INSTALLATION NOTES                          |
| 6                 | VERTICAL SECTIONS - CONCRETE & WOOD SUBSTRATES                  |
| 7                 | VERTICAL SECTIONS - METAL SUBSTRATES                            |
| 8                 | HORIZONTAL SECTIONS - CONCRETE/MASONRY, WOOD & METAL SUBSTRATES |
| 9 & 10            | COMPONENTS AND FRAME CONSTRUCTION                               |
| 11                | BILL OF MATERIALS                                               |

| PERFORMANCE RATING           |                                                       |
|------------------------------|-------------------------------------------------------|
| DESIGN PRESSURE RATING (PSF) | IMPACT RATING                                         |
| +/- 55 PSF                   | LARGE MISSILE IMPACT<br>MISSILE LEVEL D - WIND ZONE 4 |

This item has been electronically signed and sealed by Robert J. Amoruso on the date adjacent to the seal using a SHA authentication code. Printed copies of this document are not considered signed and sealed and the SHA authentication code must be verified on any electronic copies.

REGENCY PLUS, INC.  
2000 LOCUST GAP HIGHWAY  
MT. CARMEL, PA 17851


SERIES TECH 5215 VINYL XOx OS CASEMENT WINDOW - LMI

ANCHORAGE DETAILS

|                      |      |     |  |  |
|----------------------|------|-----|--|--|
| REVISION DESCRIPTION | DATE |     |  |  |
|                      | BY   | RJA |  |  |
| 2026 FBC UPDATE      |      |     |  |  |
| REV.                 | A    |     |  |  |

|                  |                |                |                |
|------------------|----------------|----------------|----------------|
| DATE:<br>2/10/26 | DWN BY:<br>RJA | CHK BY:<br>RJA | SCALE:<br>NONE |
|------------------|----------------|----------------|----------------|

ROBERT J. AMORUSO, P.E. #49752  
AMORUSO CONSULTING ENG., LLC  
FBPE REGISTRATION NO. 38327  
226 N NOVA RD, NO. 142  
ORMOND BEACH, FL 32174  
RJAENGPE@GMAIL.COM




Digitally signed  
by Robert J  
Amoruso  
Date: 2026.08.27  
08:45:41 -04'00'

PROJECT#: ACE-2025-131/133

DWG/REV: RPLS0088-FPAS, Rev. A

SHT: 1 of 11

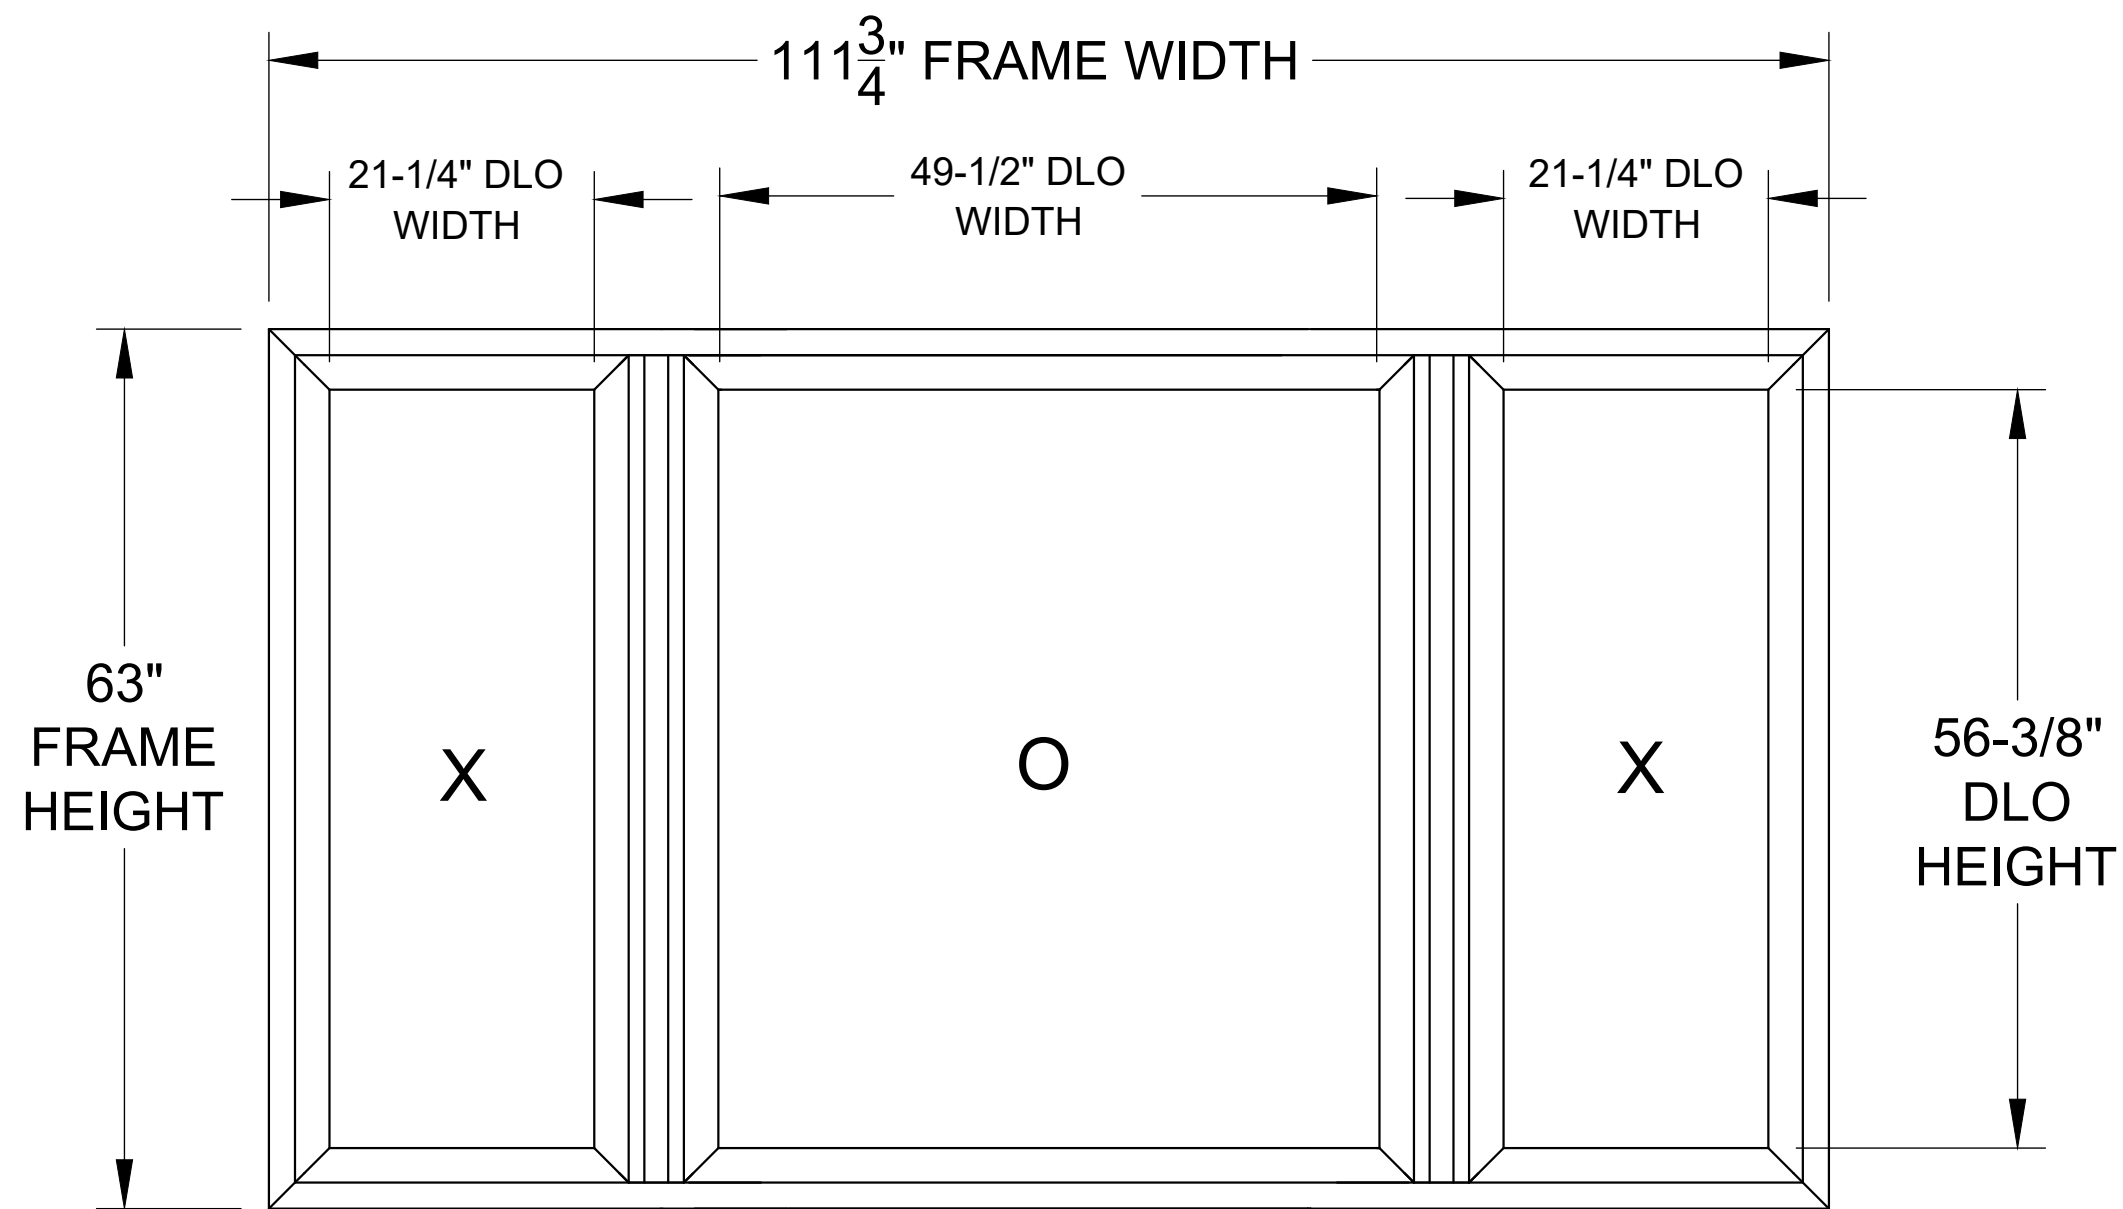

SERIES 5215 VINYL OUTSWING  
CASEMENT WINDOW  
EXTERIOR VIEW

NOTES:

1. MAXIMUM ACTIVE PANEL (VENT) SIZE: 26-1/2" X 61-3/4"
2. FIXED PANEL SIZE: 54-3/4" X 61-3/4"
3. WEEP HOLES EMPLOYED AT SILL. SEE SHEET 9 FOR LOCATION.
4. HARDWARE, SEE TABLE AT RIGHT.
5. SEE SHEET 9 FOR COMPONENT IDENTIFICATION.

| PERFORMANCE RATING           |                                                       |
|------------------------------|-------------------------------------------------------|
| DESIGN PRESSURE RATING (PSF) | IMPACT RATING                                         |
| +/- 55 PSF                   | LARGE MISSILE IMPACT<br>MISSILE LEVEL D - WIND ZONE 4 |


| Description                                          | Quantity | Location                                                                                                        |
|------------------------------------------------------|----------|-----------------------------------------------------------------------------------------------------------------|
| Rotary operator                                      | 2        | 10-1/2" From the jambs on the sill                                                                              |
| (3) Bar hinge                                        | 4        | Top rails/head and bottom rails/sill at the hinge stiles                                                        |
| Single handle (5) point integrated metal lock system | 2        | 9" From the bottom of the intermediate jambs with lock points located 2", 12", 26", 38" and 53" from the bottom |
| Metal keepers                                        | 10       | Lock stile at the lock locations                                                                                |
| Metal snubber                                        | 10 sets  | 11", 21", 30", 39" and 49" From the bottom of the jambs with corresponding snubbers on the hinge stiles         |

REGENCY PLUS, INC.  
2000 LOCUST GAP HIGHWAY  
MT. CARMEL, PA 17851

| SERIES TECH 5215 VINYL XO OS CASEMENT WINDOW - LMI ANCHORAGE DETAILS | DATE    | BY  | REVISION DESCRIPTION | REV. |
|----------------------------------------------------------------------|---------|-----|----------------------|------|
|                                                                      | 7/28/26 | RJA | 2026 FBC UPDATE      | A    |
|                                                                      |         |     |                      |      |
|                                                                      |         |     |                      |      |

|                  |                |                |                |
|------------------|----------------|----------------|----------------|
| DATE:<br>2/10/26 | DWN BY:<br>RJA | CHK BY:<br>RJA | SCALE:<br>NONE |
|------------------|----------------|----------------|----------------|

ROBERT J. AMORUSO, P.E. #49752  
AMORUSO CONSULTING ENG., LLC  
FBPE REGISTRATION NO. 38327  
226 N NOVA RD, NO. 142  
ORMOND BEACH, FL 32174  
RJAENGPE@GMAIL.COM



Digitally signed  
by Robert J  
Amoruso  
Date: 2026.08.27  
08:47:19 -04'00'

PROJECT#: ACE-2025-131/133

DWG/REV: RPLS0088-FPAS, Rev. A

SHT: 2 of 11

| SERIES TECH 5215 VINYL XO OS CASEMENT WINDOW - LMI<br>ANCHORAGE DETAILS | DATE    | BY  | REVISION DESCRIPTION | REV. |
|-------------------------------------------------------------------------|---------|-----|----------------------|------|
|                                                                         | 7/28/26 | RJA | 2026 FBC UPDATE      | A    |
|                                                                         |         |     |                      |      |
|                                                                         |         |     |                      |      |

|                  |                |                |                |
|------------------|----------------|----------------|----------------|
| DATE:<br>2/10/26 | DWN BY:<br>RJA | CHK BY:<br>RJA | SCALE:<br>NONE |
|------------------|----------------|----------------|----------------|

ROBERT J. AMORUSO, P.E. #49752  
AMORUSO CONSULTING ENG., LLC  
FBPE REGISTRATION NO. 38327  
226 N NOVA RD, NO. 142  
ORMOND BEACH, FL 32174  
RJAENGPE@GMAIL.COM




Digitally signed  
by Robert J  
Amoruso  
Date: 2026.08.27  
08:47:31 -04'00'

PROJECT#: ACE-2025-131/133


DWG/REV: RPLS0088-FPAS, Rev. A

SHT: 3 of 11

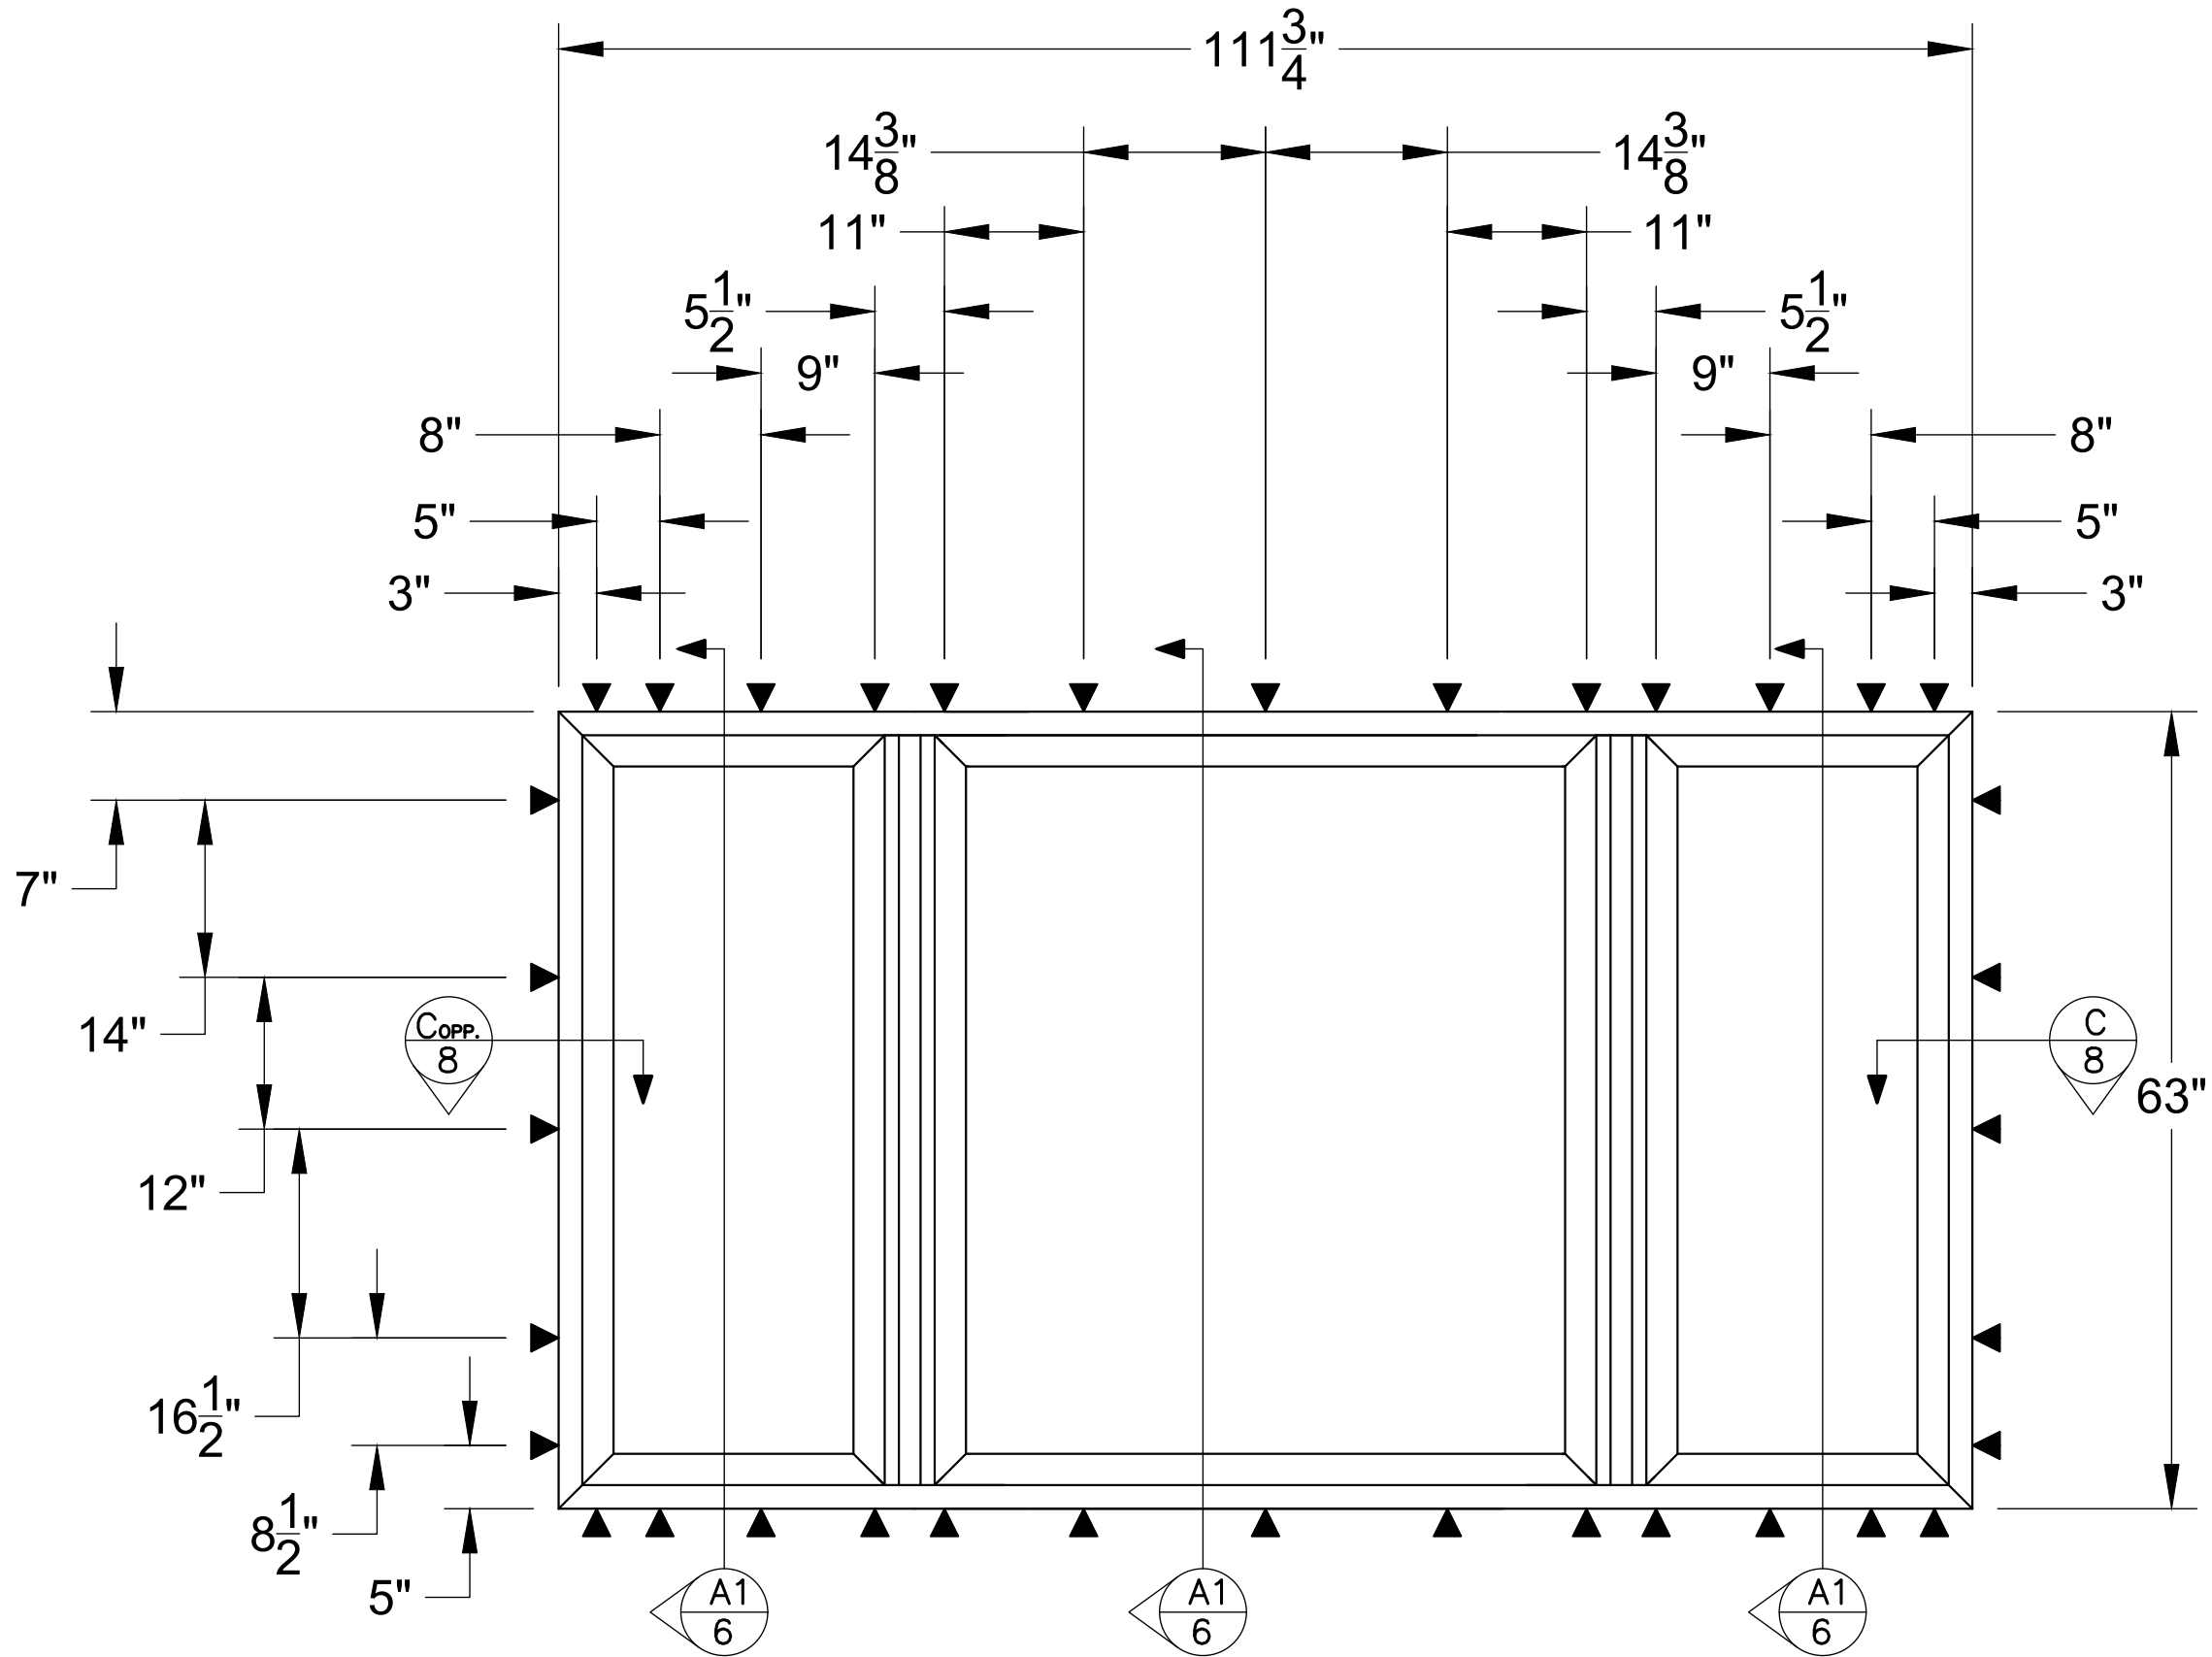

SERIES 5215 VINYL OUTSWING  
CASEMENT WINDOW  
EXTERIOR VIEW  
CONCRETE & CMU ANCHORAGE

- INSTALLATION NOTES:
1. HEAD AND SILL ANCHORAGE THE SAME.
  2. JAMB ANCHORAGE SAME.
  3. +/- 1" TOLERANCE ON ANCHOR LOCATION.  
3.1. TAPCON MINIMUM SPACING IS 4" OC.

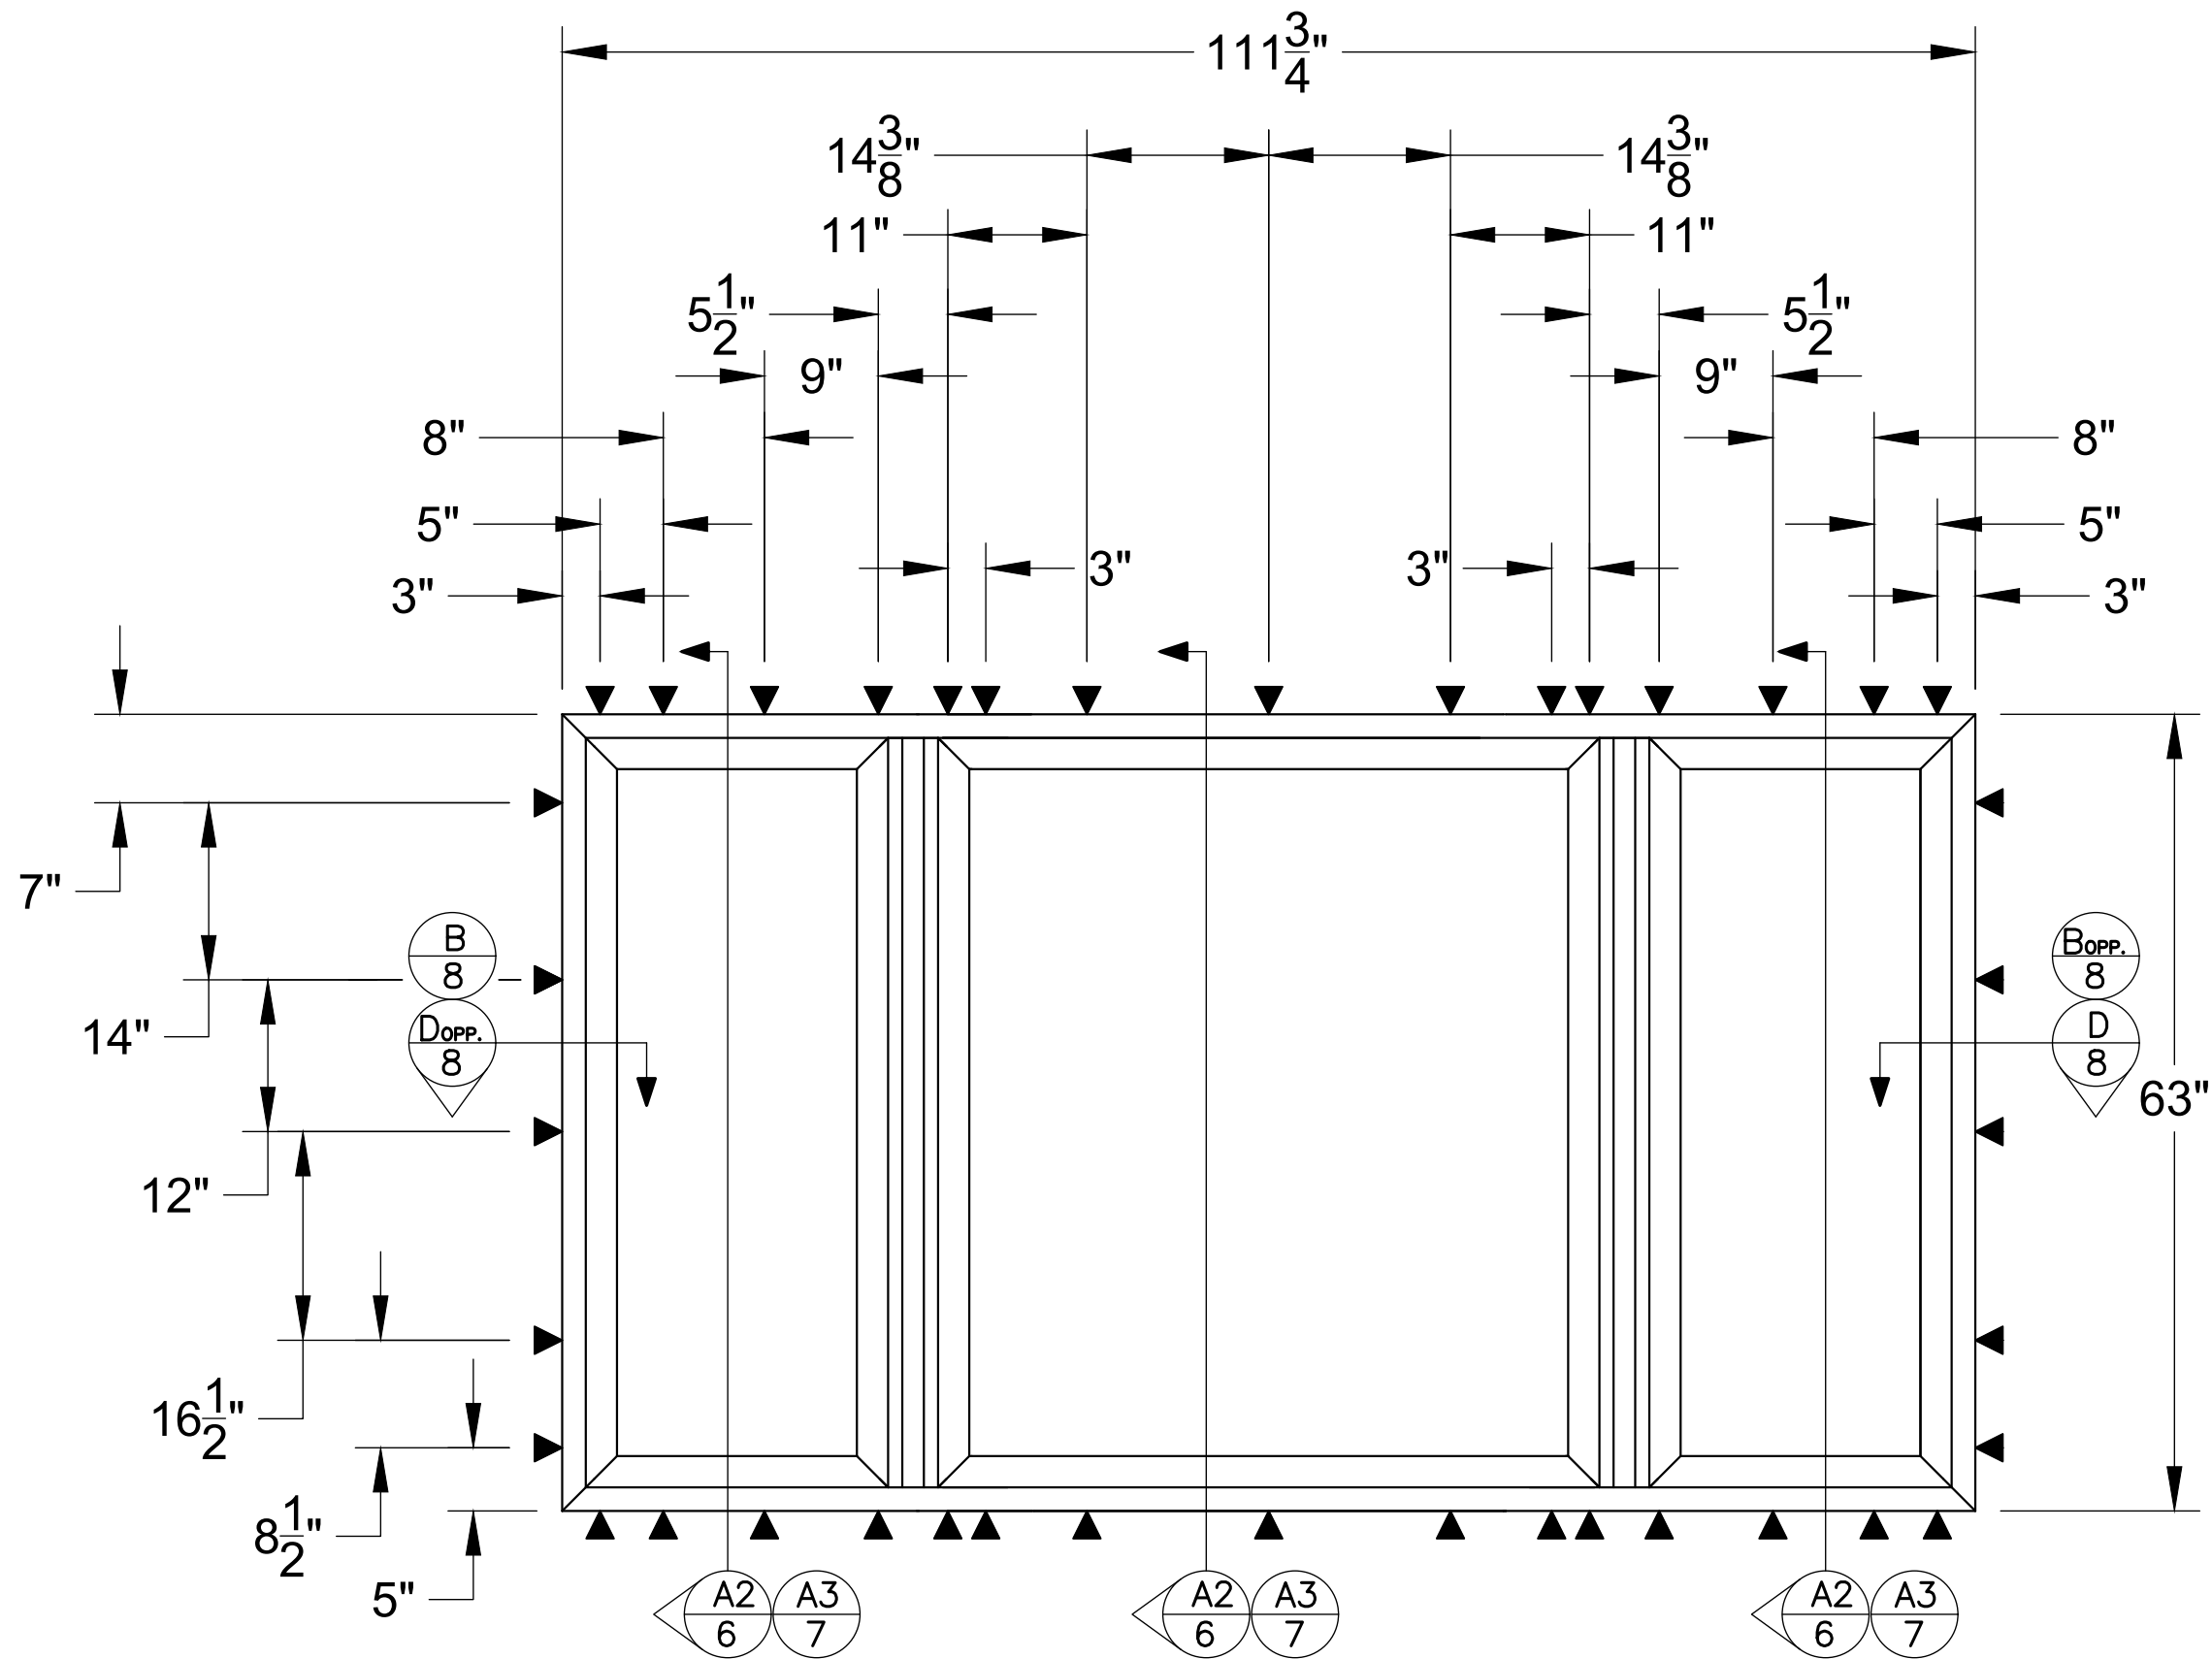

SERIES 5215 VINYL OUTSWING  
CASEMENT WINDOW  
EXTERIOR VIEW  
2X WOOD & STEEL STUD ANCHORAGE


- INSTALLATION NOTES:
1. HEAD AND SILL ANCHORAGE THE SAME.
  2. JAMB ANCHORAGE SAME.
  3. +/- 1" TOLERANCE ON ANCHOR LOCATION.
    - 3.1. SHEET METAL, WOOD AND TAPPING SCREW MINIMUM SPACING IS 2" OC.

REGENCY PLUS, INC.  
2000 LOCUST GAP HIGHWAY  
MT. CARMEL, PA 17851

| SERIES TECH 5215 VINYL XO OS CASEMENT WINDOW - LMI<br>ANCHORAGE DETAILS | DATE    | BY  | REVISION DESCRIPTION | REV. |
|-------------------------------------------------------------------------|---------|-----|----------------------|------|
|                                                                         | 7/28/26 | RJA | 2026 FBC UPDATE      | A    |
|                                                                         |         |     |                      |      |
|                                                                         |         |     |                      |      |

|                  |                |                |                |
|------------------|----------------|----------------|----------------|
| DATE:<br>2/10/26 | DWN BY:<br>RJA | CHK BY:<br>RJA | SCALE:<br>NONE |
|------------------|----------------|----------------|----------------|

ROBERT J. AMORUSO, P.E. #49752  
AMORUSO CONSULTING ENG., LLC  
FBPE REGISTRATION NO. 38327  
226 N NOVA RD, NO. 142  
ORMOND BEACH, FL 32174  
RJAENGPE@GMAIL.COM



Digitally signed  
by Robert J  
Amoruso  
Date: 2026.08.27  
08:47:44 -04'00'

|           |                       |
|-----------|-----------------------|
| PROJECT#: | ACE-2025-131/133      |
| DWG/REV:  | RPLS0088-FPAS, Rev. A |
| SHT:      | 4 of 11               |

| ANCHOR SCHEDULE                                                                                  |                     |                            |            |                                                                                                                  |                                                                           |                    |                                                                                    |
|--------------------------------------------------------------------------------------------------|---------------------|----------------------------|------------|------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|--------------------|------------------------------------------------------------------------------------|
| ANCHORING METHOD                                                                                 | SUBSTRATE           | SCREW HEAD TYPE            | SCREW SIZE | MANUFACTURER AND/OR SPECIFICATION (1)                                                                            | EMBEDMENT (IN)                                                            | EDGE DISTANCE (IN) | ANCHOR CAPACITIES BASED ON THE FOLLOWING SUBSTRATE STRENGTHS                       |
| THROUGH FRAME                                                                                    | CONCRETE            | HEX OR PAN HEAD PREFERRED. | 1/4"       | ITW TAPCONS                                                                                                      | 1-1/2"                                                                    | 1-1/2"             | MIN. 2500 PSI CONCRETE                                                             |
|                                                                                                  | MASONRY (BLOCK/CMU) | FLAT HEAD ACCEPTABLE.      | 1/4"       | ITW TAPCONS                                                                                                      | 1"                                                                        | 2"                 | ASTM C90 MED. WT. (DENSITY) > 117 PCF) MASONRY (CMU) MIN                           |
|                                                                                                  | WOOD                | PAN HEAD PREFERRED.        | NO. 14     | ANSI B18.6.1 (WOOD SCREW)                                                                                        | 1-1/2"                                                                    | 1"                 | WOOD WITH A MINIMUM SPECIFIC GRAVITY: 0.55 (HVHZ) OR 0.42 (NON-HVHZ)               |
|                                                                                                  |                     |                            | NO. 14     | ASME B18.6.4 (TAPPING SCREW)                                                                                     | 1-1/2"                                                                    | 1"                 |                                                                                    |
|                                                                                                  | STEEL STUD          | FLAT HEAD ACCEPTABLE.      | 1/4"       | ASME B18.6.4 (GRADE 5 TAPPING SCREW) Type AB Threads (requires pilot hole) or Self-Drilling (drill shaped point) | At least three full threads protrude into the interior of the steel stud. | 3/8"               | STEEL STUD, MIN. 20 GA. 33 MIL., 0.0329 INCH Fy = 33 KSI MIN. AND Fu = 45 KSI MIN. |
|                                                                                                  | NOTES:              |                            |            |                                                                                                                  |                                                                           |                    |                                                                                    |
| (1) ITW (ADVANCED THREADFORM TECHNOLOGY) TAPCONS WILL BE USED FOR CONCRETE/MASONRY INSTALLATION. |                     |                            |            |                                                                                                                  |                                                                           |                    |                                                                                    |

INSTALLATION NOTES:

1. APPROVED INSTALLATION SUBSTRATES INCLUDE THE FOLLOWING:

1.1. WOOD FRAMING,

1.2. STEEL STUD FRAMING, AND

1.3. CONCRETE AND/OR MASONRY.
2. 2X WOOD FRAMING, 1X OR 2X WOOD BUCK, METAL FRAMING AND CONCRETE/MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND CONCRETE/MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. 1X BUCK OVER CONCRETE/MASONRY IS OPTIONAL. WHEN 1X BUCK IS USED, INSTALLATION ANCHORS WILL PASS THROUGH WINDOW FRAME AND 1X BUCK INTO CONCRETE/MASONRY SUBSTRATE. WHEN USED, 1X BUCKS SHALL BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE AND IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD. DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
4. SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4".
5. SEE ANCHOR SCHEDULE ABOVE FOR ANCHOR TYPES AND SUBSTRATE REQUIREMENTS.
6. INTERIOR AND EXTERIOR FINISHES BY OTHERS. NOT SHOWN FOR CLARITY.
7. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED AND/OR SPECIFIED IN ACCORDANCE WITH ASTM E2112.

REGENCY PLUS, INC.  
2000 LOCUST GAP HIGHWAY  
MT. CARMEL, PA 17851

| SERIES TECH 5215 VINYL XO OS CASEMENT WINDOW - LMI ANCHORAGE DETAILS | DATE                 |                 |  |  |  |
|----------------------------------------------------------------------|----------------------|-----------------|--|--|--|
|                                                                      | BY                   | RJA             |  |  |  |
|                                                                      | REVISION DESCRIPTION | 2026 FBC UPDATE |  |  |  |
|                                                                      | REV.                 | A               |  |  |  |

|                  |                |                |                |
|------------------|----------------|----------------|----------------|
| DATE:<br>2/10/26 | DWN BY:<br>RJA | CHK BY:<br>RJA | SCALE:<br>NONE |
|------------------|----------------|----------------|----------------|

ROBERT J. AMORUSO, P.E. #49752  
AMORUSO CONSULTING ENG., LLC  
FBPE REGISTRATION NO. 38327  
226 N NOVA RD, NO. 142  
ORMOND BEACH, FL 32174  
RJAENGPE@GMAIL.COM




Digitally signed  
by Robert J  
Amoruso  
Date: 2026.08.27  
08:47:56 -04'00'



PROJECT#: ACE-2025-131/133

DWG/REV: RPLS0088-FPAS, Rev. A

SHT: 5 of 11

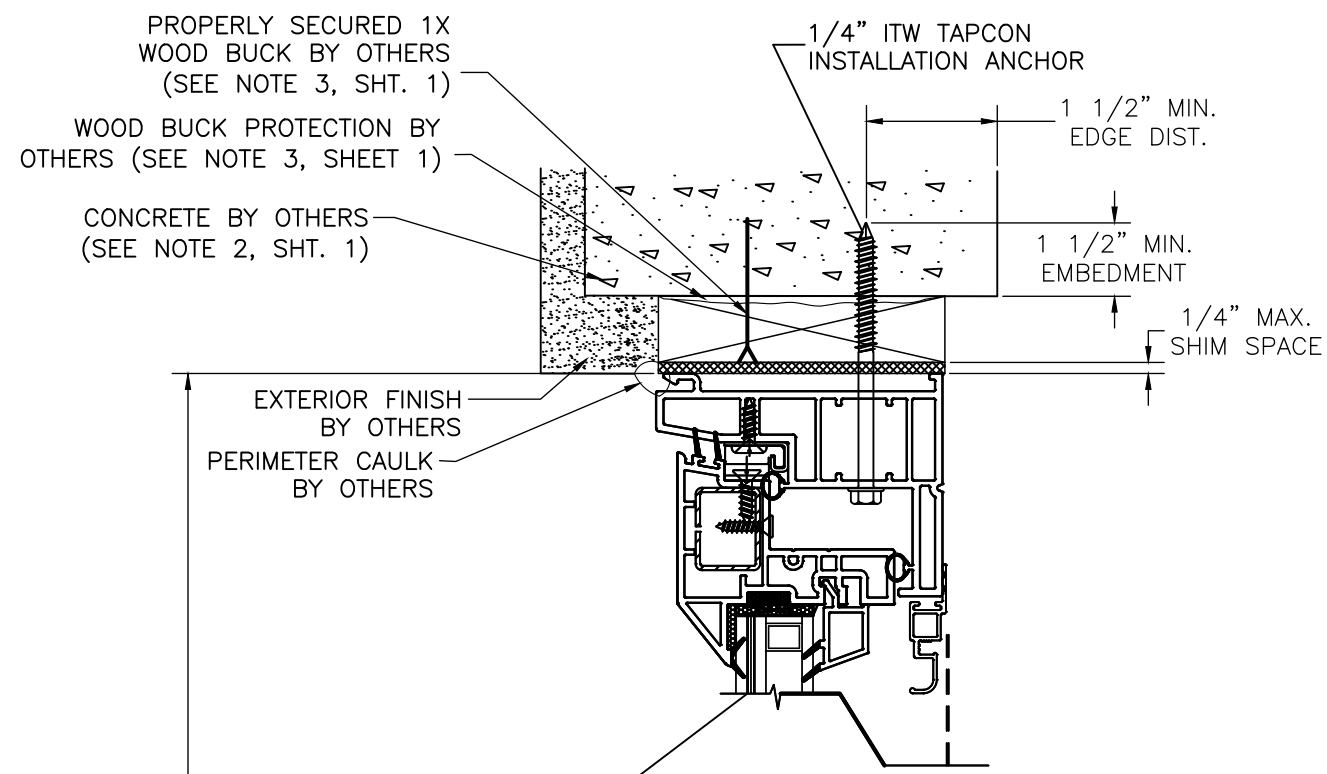

ANCHOR-TO-SUBSTRATE  
EDGE DISTANCES ARE  
TYPICAL AND  
MEASURED TO BOTH  
SIDES OF SUBSTRATE

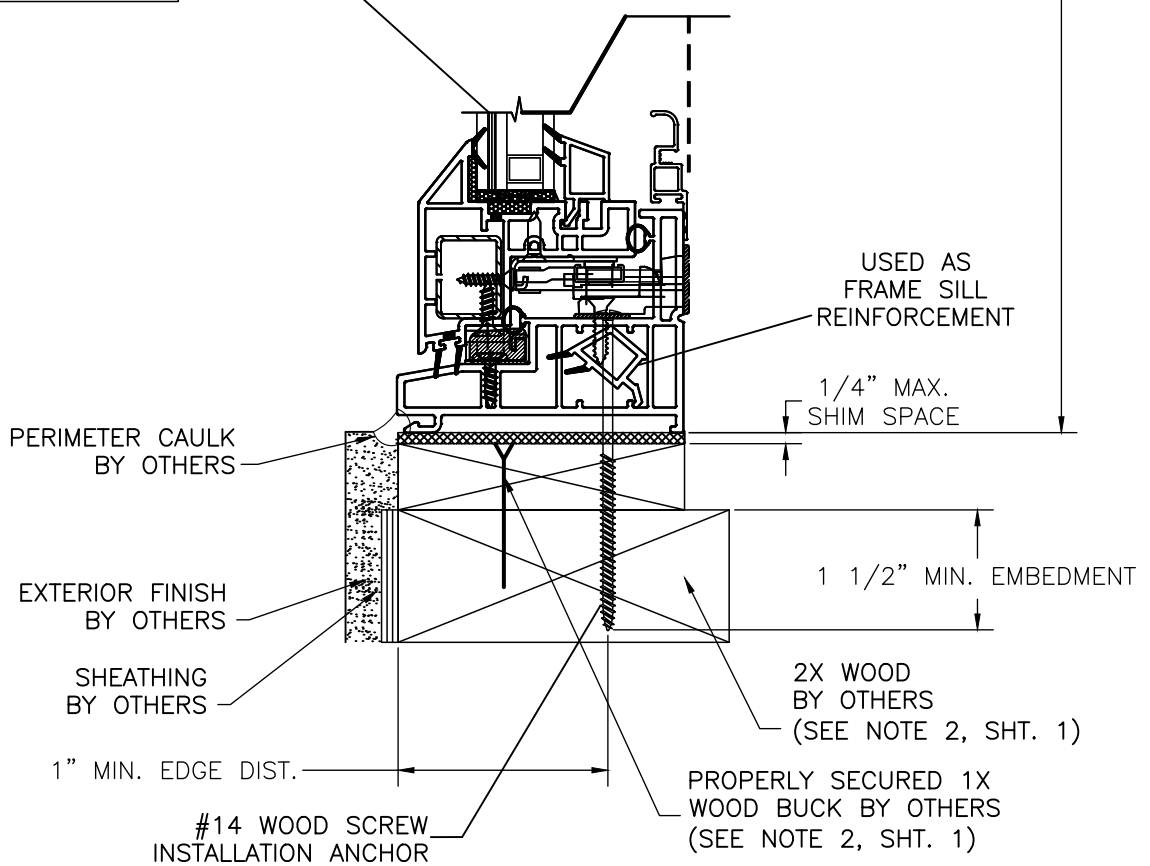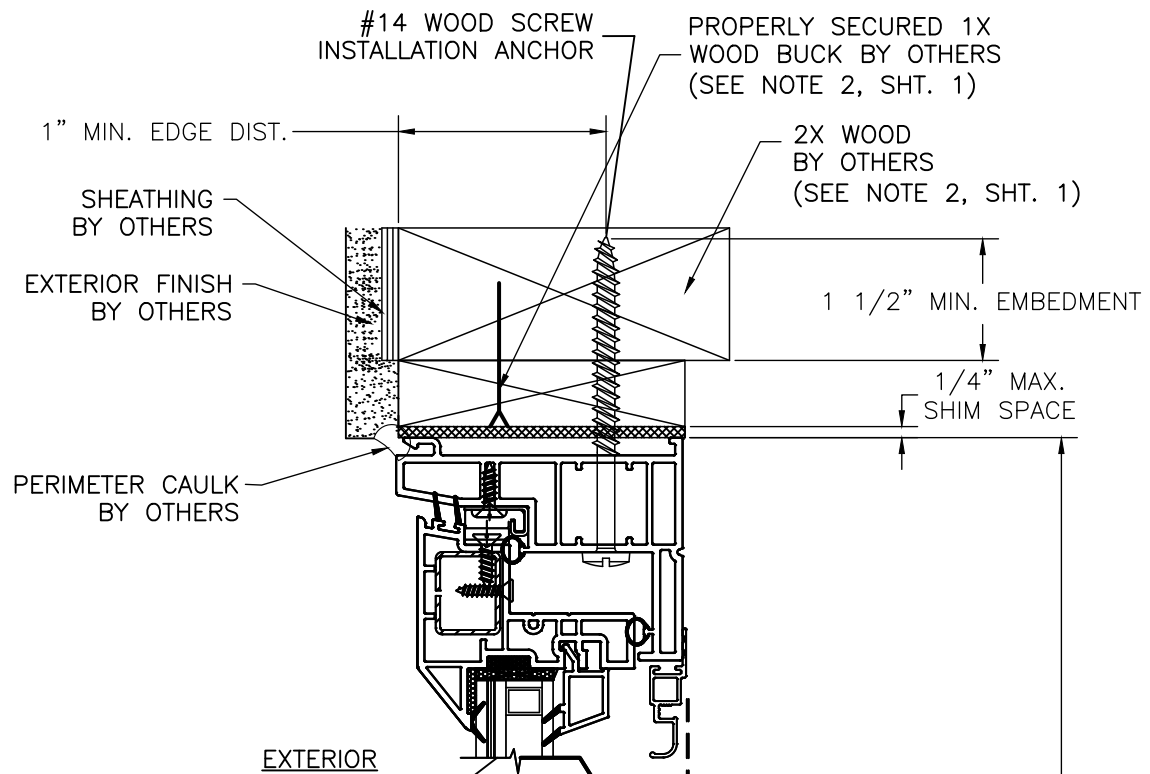

**A1 VERTICAL SECTION**  
CONCRETE SUBSTRATE


**A2 VERTICAL SECTION**  
WOOD SUBSTRATE

REGENCY PLUS, INC.  
2000 LOCUST GAP HIGHWAY  
MT. CARMEL, PA 17851

| SERIES TECH 5215 VINYL XOX OS CASEMENT WINDOW - LMI ANCHORAGE DETAILS |                      |     |         |  |
|-----------------------------------------------------------------------|----------------------|-----|---------|--|
| REV.                                                                  | REVISION DESCRIPTION | BY  | DATE    |  |
| A                                                                     | 2026 FBC UPDATE      | RJA | 7/28/26 |  |

|                  |                |                |                |
|------------------|----------------|----------------|----------------|
| DATE:<br>2/10/26 | DWN BY:<br>RJA | CHK BY:<br>RJA | SCALE:<br>NONE |
|------------------|----------------|----------------|----------------|

ROBERT J. AMORUSO, P.E. #49752  
AMORUSO CONSULTING ENG., LLC  
FBPE REGISTRATION NO. 38327  
226 N NOVA RD, NO. 142  
ORMOND BEACH, FL 32174  
RJAENGPE@GMAIL.COM




Digitally signed  
by Robert J  
Amoruso  
Date: 2026.08.27  
08:48:07 -04'00'


PROJECT#: ACE-2025-131/133

DWG/REV: RPLS0088-FPAS, Rev. A


SHT: 6 of 11

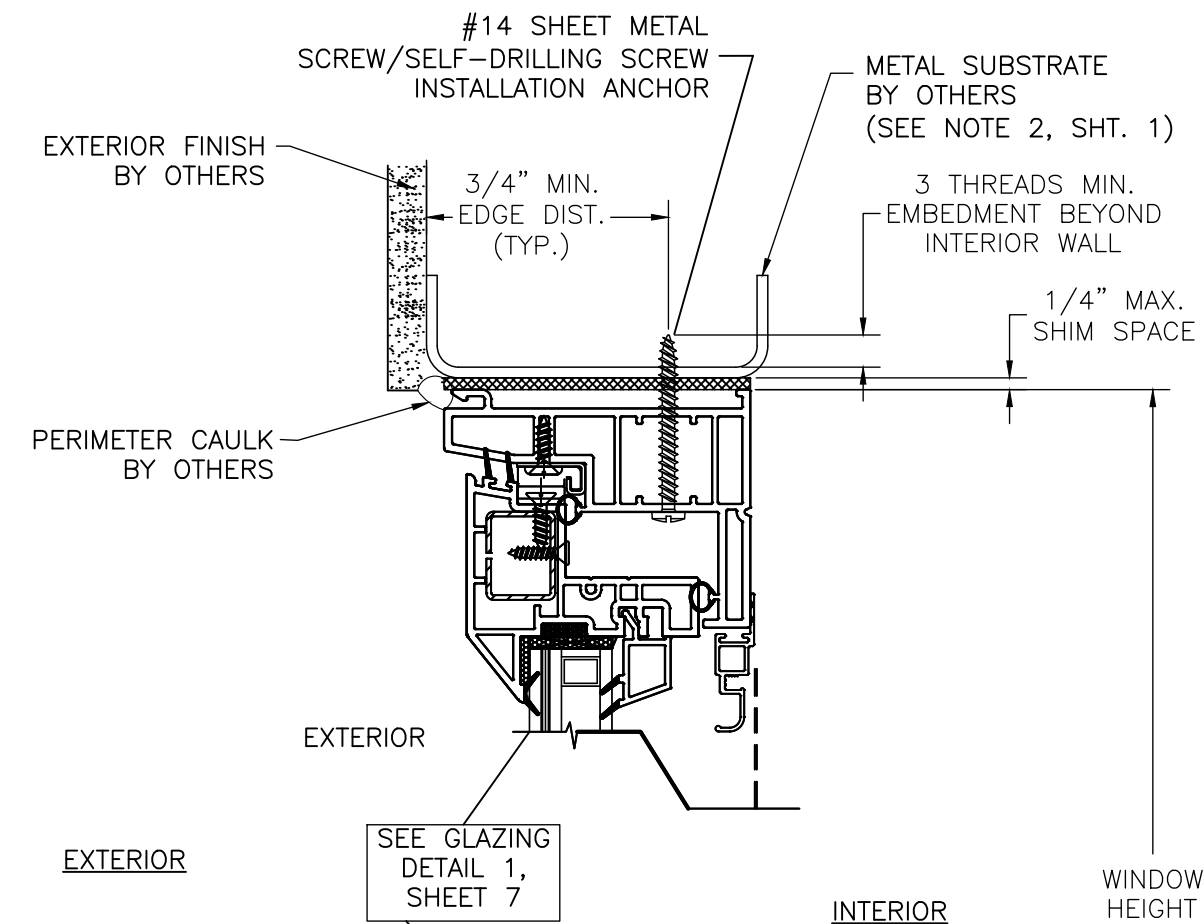

ANCHOR-TO-SUBSTRATE  
EDGE DISTANCES ARE  
TYPICAL AND  
MEASURED TO BOTH  
SIDES OF SUBSTRATE

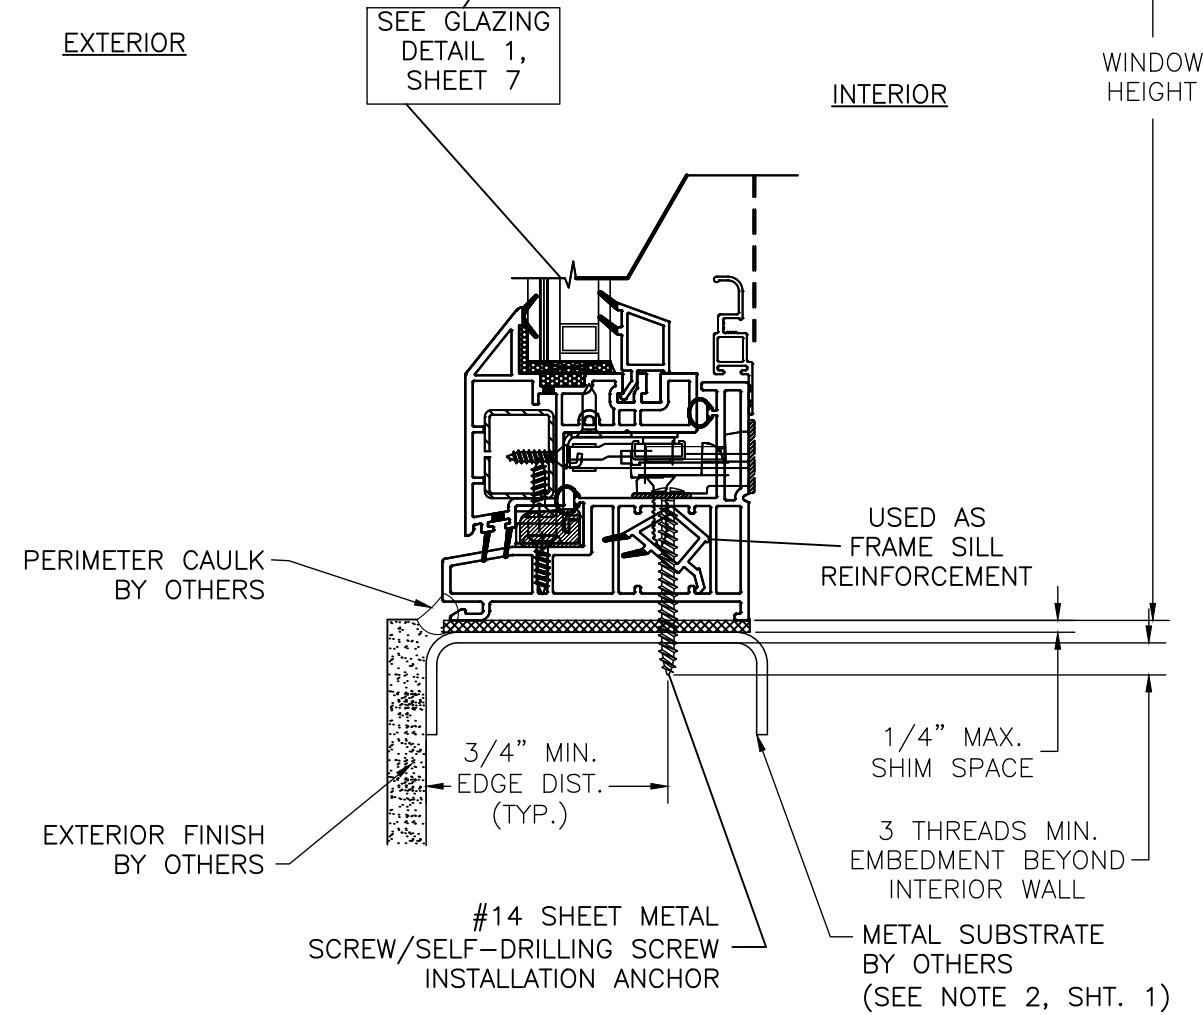

**A3 VERTICAL SECTION**  
METAL SUBSTRATE

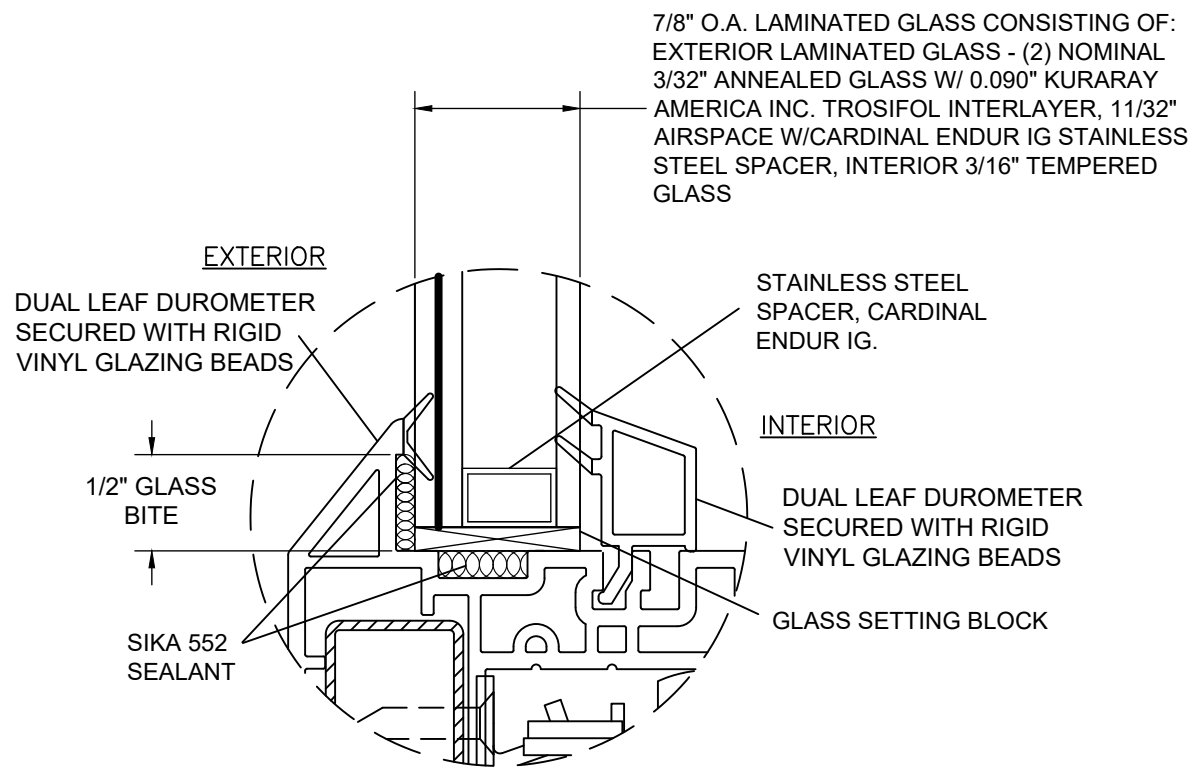

**GLAZING DETAIL 1**

REGENCY PLUS, INC.  
2000 LOCUST GAP HIGHWAY  
MT. CARMEL, PA 17851

| SERIES TECH 5215 VINYL XO OS CASEMENT WINDOW - LMI ANCHORAGE DETAILS |                      |     |         |  |
|----------------------------------------------------------------------|----------------------|-----|---------|--|
| REV.                                                                 | REVISION DESCRIPTION | BY  | DATE    |  |
| A                                                                    | 2026 FBC UPDATE      | RJA | 7/28/26 |  |

|                  |                |                |                |
|------------------|----------------|----------------|----------------|
| DATE:<br>2/10/26 | DWN BY:<br>RJA | CHK BY:<br>RJA | SCALE:<br>NONE |
|------------------|----------------|----------------|----------------|

ROBERT J. AMORUSO, P.E. #49752  
AMORUSO CONSULTING ENG., LLC  
FBPE REGISTRATION NO. 38327  
226 N NOVA RD, NO. 142  
ORMOND BEACH, FL 32174  
RJAENGPE@GMAIL.COM



Digitally signed  
by Robert J  
Amoruso  
Date: 2026.08.27  
08:48:20 -04'00'

PROJECT#: ACE-2025-131/133

DWG/REV: RPLS0088-FPAS, Rev. A

SHT: 7 of 11

| SERIES TECH 5215 VINYL XOX OS CASEMENT WINDOW - LMI ANCHORAGE DETAILS |                      |     |         |  |
|-----------------------------------------------------------------------|----------------------|-----|---------|--|
| REV.                                                                  | REVISION DESCRIPTION | BY  | DATE    |  |
| A                                                                     | 2026 FBC UPDATE      | RJA | 7/28/26 |  |

|       |         |         |     |         |     |        |      |
|-------|---------|---------|-----|---------|-----|--------|------|
| DATE: | 2/10/26 | DWN BY: | RJA | CHK BY: | RJA | SCALE: | NONE |
|-------|---------|---------|-----|---------|-----|--------|------|

ROBERT J. AMORUSO, P.E. #49752  
AMORUSO CONSULTING ENG., LLC  
FBPE REGISTRATION NO. 38327  
226 N NOVA RD, NO. 142  
ORMOND BEACH, FL 32174  
RJAENGPE@GMAIL.COM




Digitally signed  
by Robert J  
Amoruso  
Date: 2026.08.27  
08:48:32 -04'00'


PROJECT#: ACE-2025-131/133

DWG/REV: RPLS0088-FPAS, Rev. A

SHT: 8 of 11

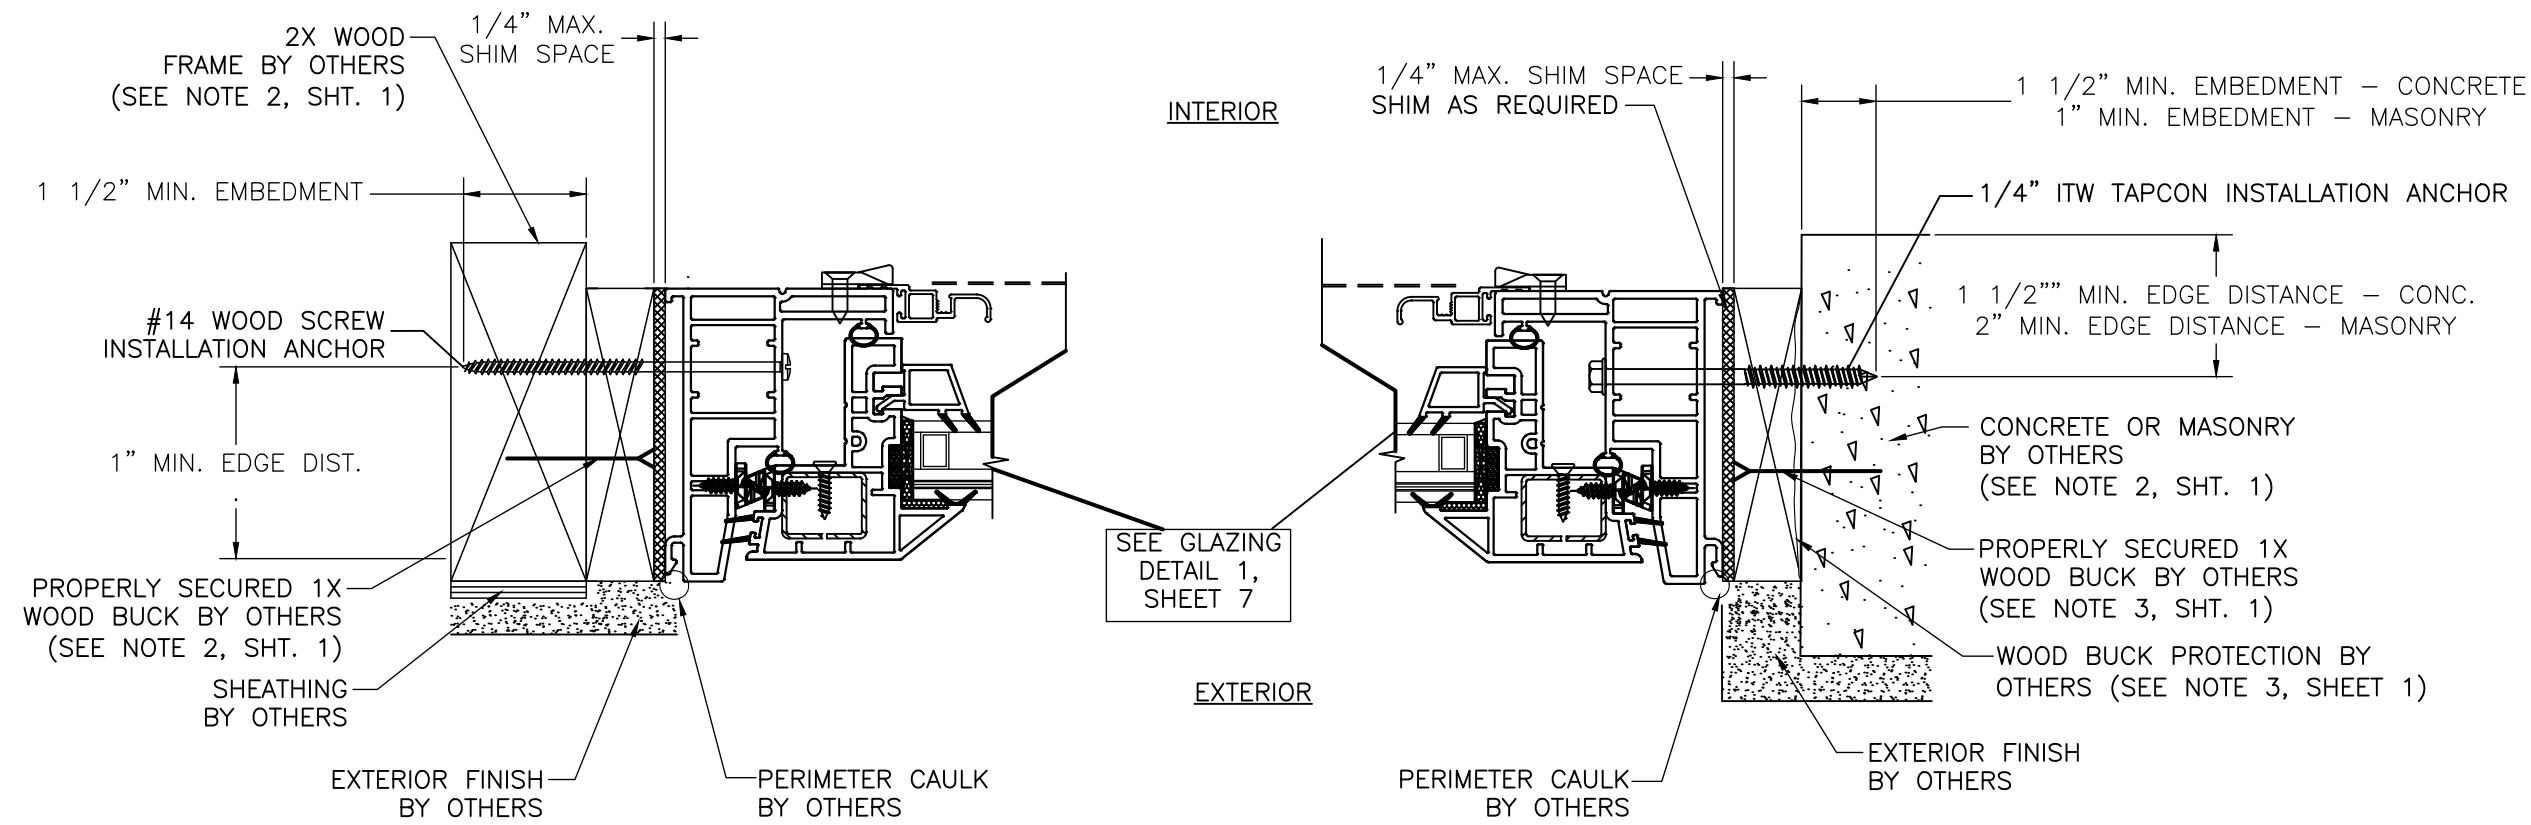

ANCHOR-TO-SUBSTRATE  
EDGE DISTANCES ARE  
TYPICAL AND  
MEASURED TO BOTH  
SIDES OF SUBSTRATE

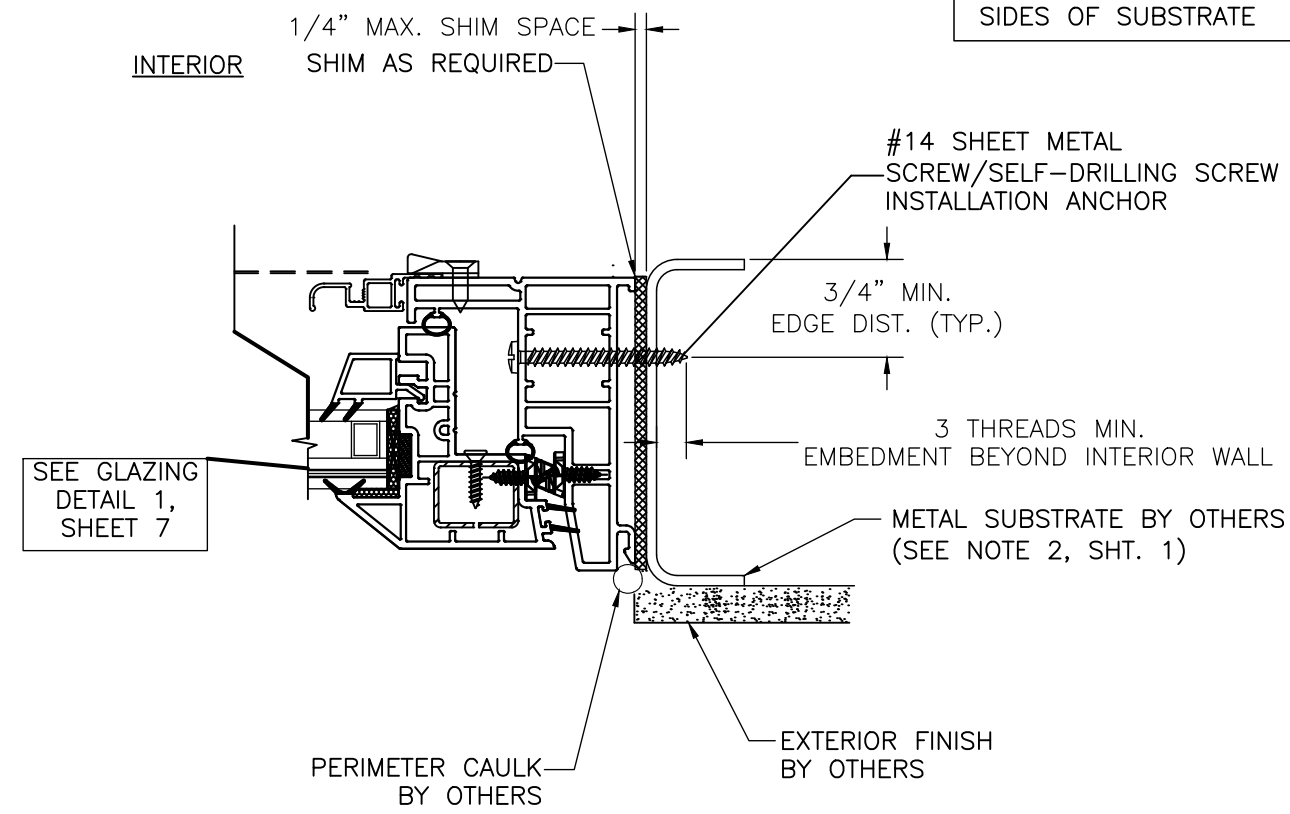

# SERIES 5215 VINYL XOX OUTSWING CASEMENT WINDOW

## COMPONENT PART NUMBERS OR DESCRIPTIONS (SEE BOM)

REGENCY PLUS, INC.  
2000 LOCUST GAP HIGHWAY  
MT. CARMEL, PA 17851

| SERIES TECH 5215 VINYL XOX OS CASEMENT WINDOW - LMI ANCHORAGE DETAILS | DATE                 | 7/28/26         |  |  |  |
|-----------------------------------------------------------------------|----------------------|-----------------|--|--|--|
|                                                                       | BY                   | RJA             |  |  |  |
|                                                                       | REVISION DESCRIPTION | 2026 FBC UPDATE |  |  |  |
| REV.                                                                  | A                    |                 |  |  |  |

|       |         |         |     |         |     |        |      |
|-------|---------|---------|-----|---------|-----|--------|------|
| DATE: | 2/10/26 | DWN BY: | RJA | CHK BY: | RJA | SCALE: | NONE |
|-------|---------|---------|-----|---------|-----|--------|------|





ROBERT J. AMORUSO, P.E. #49752  
AMORUSO CONSULTING ENG., LLC  
FBPE REGISTRATION NO. 38327  
226 N NOVA RD, NO. 142  
ORMOND BEACH, FL 32174  
RJAENGPE@GMAIL.COM



Digitally signed  
by Robert J  
Amoruso  
Date: 2026.08.27  
08:48:44 -04'00'


|           |                       |
|-----------|-----------------------|
| PROJECT#: | ACE-2025-131/133      |
| DWG/REV:  | RPLS0088-FPAS, Rev. A |
| SHT:      | 9 of 11               |

HORIZONTAL SECTION  
B-B

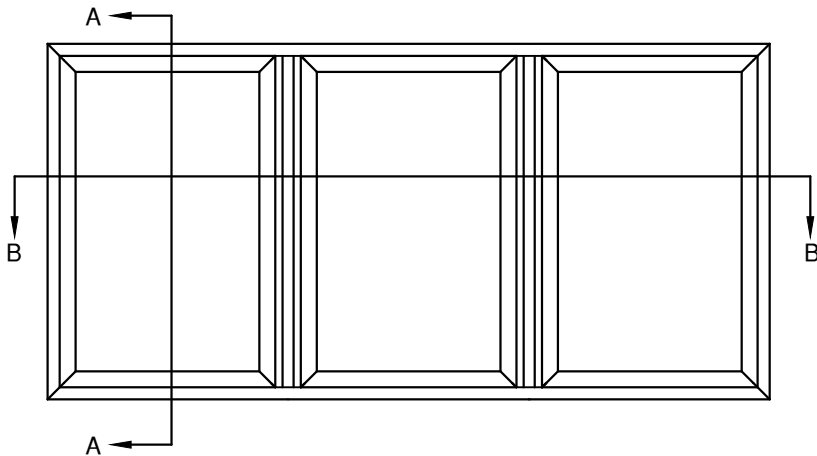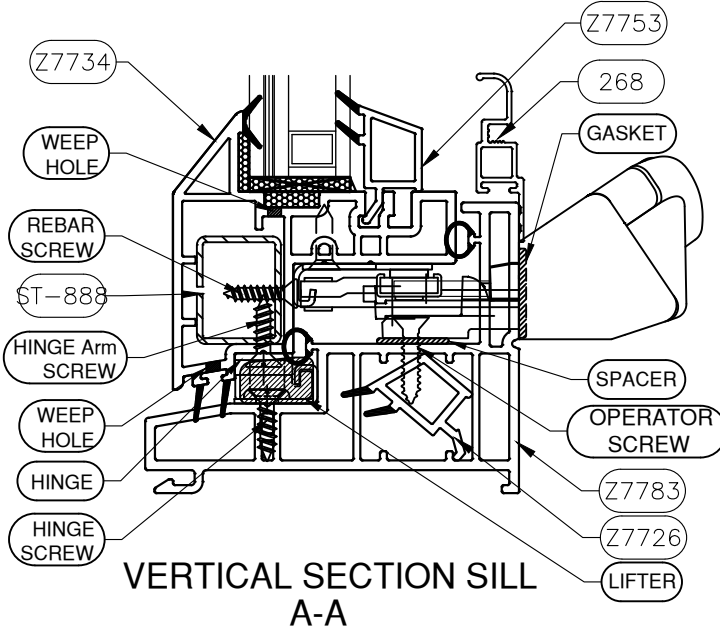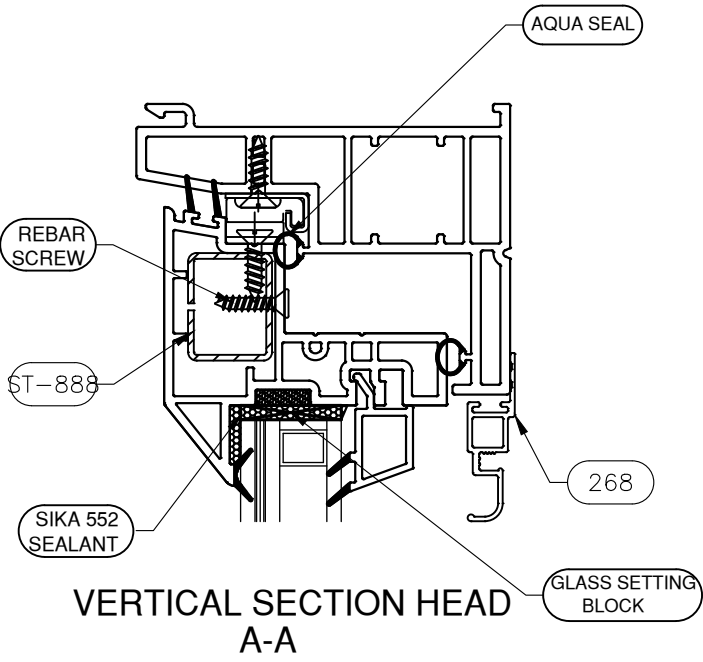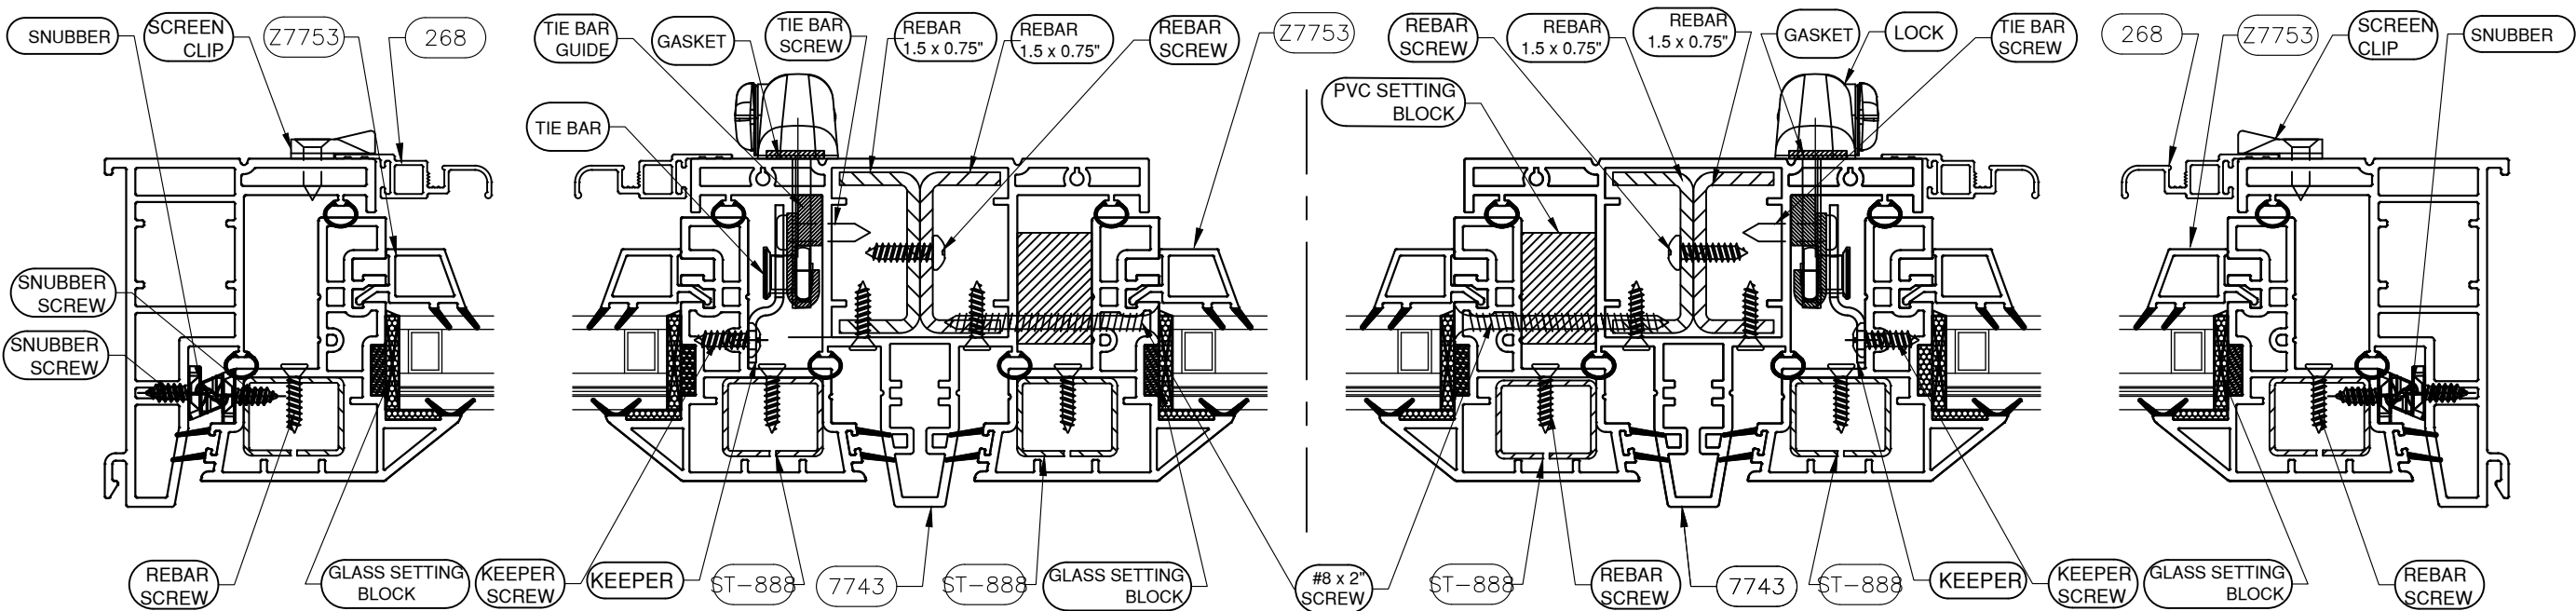


7783

MAIN FRAME  
0.085" TYP. WALL THICKNESS

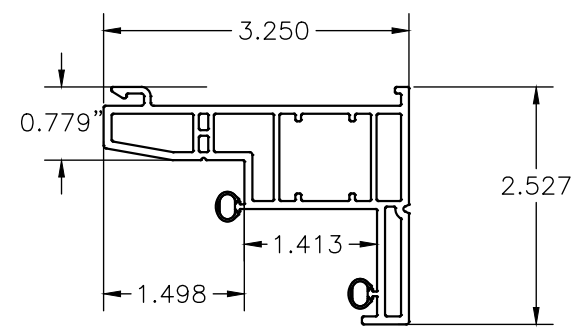


7734

SASH FRAME  
0.080" TYP. WALL THICKNESS

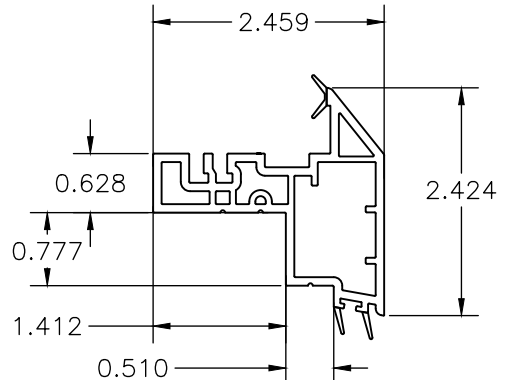


7753

GLAZING BEAD  
0.060" TYP. WALL THICKNESS




268

SCREEN FRAME  
0.045" TYP. WALL THICKNESS




ST-888

SASH REINFORCEMENT  
0.05" TYP. WALL THICKNESS  
GALVANIZED




7726

MASTER FRAME INSERT  
0.07" TYP. WALL THICKNESS

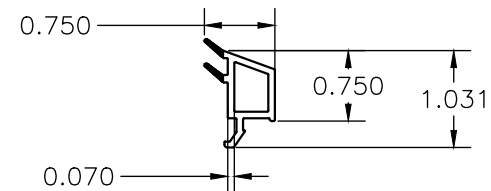


GS-1500750

MULLION REINFORCEMENT  
0.12" TYP. WALL THICKNESS  
HRS

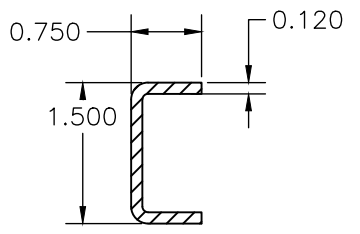


WELDED MITERED  
CORNER  
CONSTRUCTION

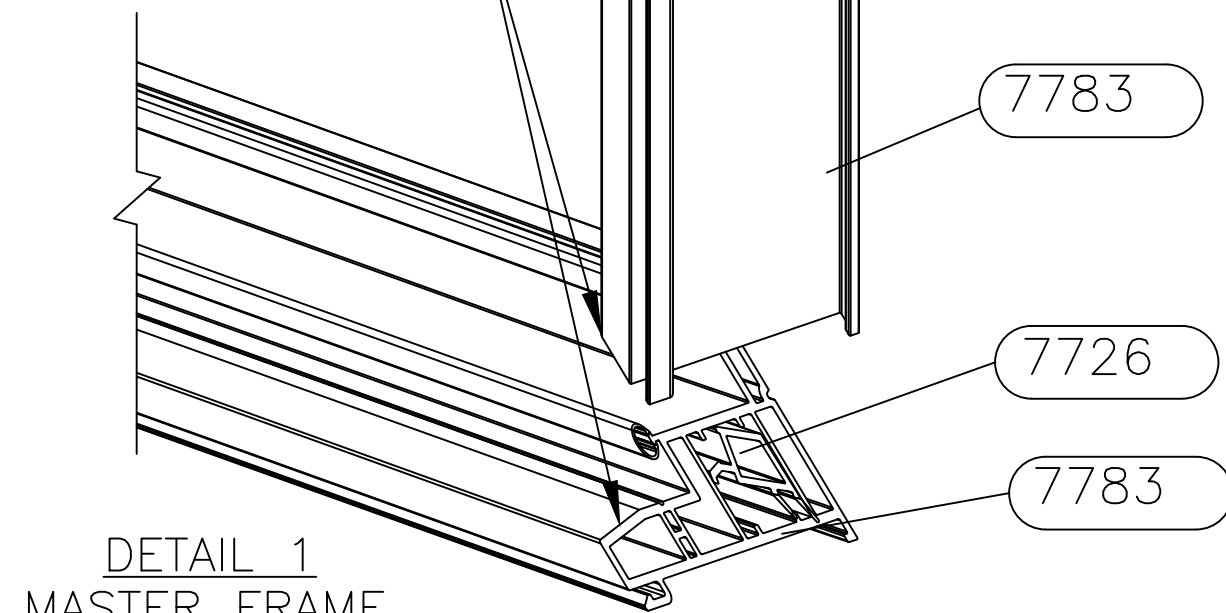

DETAIL 1  
MASTER FRAME  
CONSTRUCTION  
(SASH FRAME SIMILAR)

7743

T-MULLION 0.085" TYP.  
WALL THICKNESS

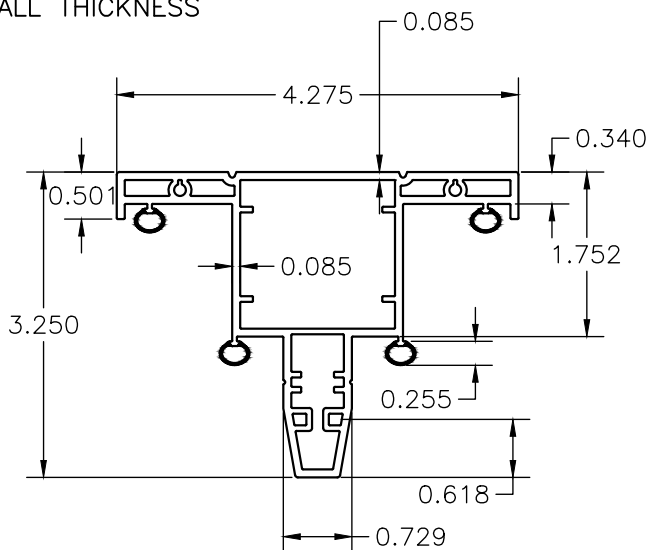

REGENCY PLUS, INC.  
2000 LOCUST GAP HIGHWAY  
MT. CARMEL, PA 17851

| SERIES TECH 5215 VINYL XO OS CASEMENT WINDOW - LMI ANCHORAGE DETAILS | DATE    | BY  | REVISION DESCRIPTION | REV. |
|----------------------------------------------------------------------|---------|-----|----------------------|------|
|                                                                      | 7/28/26 | RJA | 2026 FBC UPDATE      | A    |
|                                                                      |         |     |                      |      |
|                                                                      |         |     |                      |      |

|                  |                |                |                |
|------------------|----------------|----------------|----------------|
| DATE:<br>2/10/26 | DWN BY:<br>RJA | CHK BY:<br>RJA | SCALE:<br>NONE |
|------------------|----------------|----------------|----------------|

ROBERT J. AMORUSO, P.E. #49752  
AMORUSO CONSULTING ENG., LLC  
FBPE REGISTRATION NO. 38327  
226 N NOVA RD, NO. 142  
ORMOND BEACH, FL 32174  
RJAENGPE@GMAIL.COM



Digitally signed  
by Robert J  
Amoruso  
Date: 2026.08.27  
08:48:56 -04'00'

PROJECT#: ACE-2025-131/133

DWG/REV: RPLS0088-FPAS, Rev. A

SHT: 10 of 11

| Series Tech 5215 Impact Casement MD 3-Lite / Bill of Material |                                                                 |          |                      |
|---------------------------------------------------------------|-----------------------------------------------------------------|----------|----------------------|
| Part Numbers                                                  | Description                                                     | Quantity | Supplier             |
| IV White / 7783                                               | Master Frame (H)                                                | 2        | Vision Dominion      |
| IV White / 7783                                               | Master Frame (W)                                                | 2        | Vision Dominion      |
| IV White / 7734                                               | Sash Frame (Operating Sash) / (H)                               | 6        | Vision Dominion      |
| IV White / 7734                                               | Sash Frame (Operating Sash) / (W)                               | 6        | Vision Dominion      |
| IV White / 7743                                               | T-Mullion / (H)                                                 | 2        | Vision Dominion      |
| IV White / 7753                                               | Glazing Bead Stop (Operating Sash) / (H)                        | 4        | Vision Dominion      |
| IV White / 7753                                               | Glazing Bead Stop (Operating Sash) / (W)                        | 4        | Vision Dominion      |
| IV White / 7726                                               | Master Frame (W) Insert                                         | 2        | Vision Dominion      |
| O14764                                                        | Single Leg Frame New White (H)                                  | 4        | Mountain Ridge Metal |
| O14764                                                        | Single Leg Frame New White (W)                                  | 4        | Mountain Ridge Metal |
| 3024413                                                       | Fiberglass Screen Cloth Charcoal / 24" x 600'                   | 2        | Phifer               |
| EX-FLX-Q150-TPE-BK                                            | Screen Spline (H / W)                                           | 8        | Imperial Plastic USA |
| CK252X260                                                     | Aluminum Corner Keys                                            | 8        | Hygrade Metals       |
| ST-888-168-0.062                                              | Sash Frame (Operating Sash) / (H)                               | 6        | Hygrade Metals       |
| ST-888-168-0.062                                              | Sash Frame (Operating Sash) / (W)                               | 6        | Hygrade Metals       |
| ST-175-144-0.120                                              | T-Mullion / (H)                                                 | 4        | Rollform             |
| 8794352                                                       | Screen Clip Clear                                               | 8        | Ashland Hardware     |
| FB1383                                                        | 30PP12-18P50-9/16 X1 3/8 X 3 Foam Block                         | 4        | Lindenmeyr           |
| 02-MX0150010C2                                                | Accessory Parts Installation Translucent                        | 3        | Novagard Silicones   |
| 552 Sikaflex Black                                            | Wet Glaze (Operating Sash / Fixed Center Sash / Operating Sash) | 3        | Sika US              |
| 41215106-C/1"x2"x13mm                                         | Fixed Center Sash                                               | 20       | Sabic Polymershapes  |
| 12614.32                                                      | Handle Cover-L-White                                            | 1        | Amesbury /Truth      |
| 12616.32                                                      | Handle Cover-R-White                                            | 1        | Amesbury /Truth      |
| 14690.93                                                      | Casement Sash-LH-Bracket                                        | 1        | Amesbury /Truth      |
| 14691.93                                                      | Casement Sash-RH-Bracket                                        | 1        | Amesbury /Truth      |
| 14.97.00.071                                                  | Hinge-LH-Egress Impact Common Track                             | 2        | Amesbury /Truth      |
| 14.97.00.070                                                  | Hinge-RH-Egress Impact Common Track                             | 2        | Amesbury /Truth      |
| 14.97.00.203                                                  | Hinge-LH-Egress Impact                                          | 2        | Amesbury /Truth      |
| 14.97.00.204                                                  | Hinge-RH-Egress Impact                                          | 2        | Amesbury /Truth      |
| 21306                                                         | Casement Operator Red Cap                                       | 2        | Amesbury /Truth      |
| 22648                                                         | Sash Lifter                                                     | 2        | Amesbury /Truth      |
| 24.30.32.004                                                  | Encore Multi-Point Lock / Short / Gasket                        | 2        | Amesbury /Truth      |
| 32658                                                         | Encore Operator White Gasket                                    | 2        | Amesbury /Truth      |
| 23820                                                         | Encore Support Plate                                            | 2        | Amesbury /Truth      |
| 21544                                                         | Operator Spacer                                                 | 2        | Amesbury /Truth      |
| 32627.93                                                      | Encore Keeper LH                                                | 4        | Amesbury /Truth      |
| 32626.93                                                      | Encore Keeper RH                                                | 4        | Amesbury /Truth      |
| 33705                                                         | MP Tie Bar Guide                                                | 8        | Amesbury /Truth      |
| 38.94                                                         | Casement Tie Bar 38.9                                           | 2        | Amesbury /Truth      |
| 21642.92                                                      | Snubber Interlock                                               | 16       | Amesbury /Truth      |
| 19128.92                                                      | # 10-24 x 11/16" Self Tapping Machine / Lock Handle             | 4        | Amesbury /Truth      |
| 120520                                                        | # 8 x 2" Screw Tek / Setting Blocks / Fixed Center Section      | 16       | GLF Corporation      |
| 171859                                                        | # 8 x 5/8" Tek / Stud Bracket                                   | 40       | GLF Corporation      |
| 156466                                                        | # 10 x 2 1/2" Tek                                               | 6        | GLF Corporation      |
| 119977                                                        | # 8 x 1" Tek / Casement Operator                                | 12       | GLF Corporation      |
| 117595                                                        | # 6 x 5/8" Tek / Frame Center Section                           | 16       | GLF Corporation      |
| 117595                                                        | # 6 x 5/8" Tek / Sash Rebar (LH)                                | 4        | GLF Corporation      |
| 117595                                                        | # 6 x 5/8" Tek / Sash Rebar (RH)                                | 4        | GLF Corporation      |
| 117595                                                        | # 6 x 5/8" Tek / T-Mullion / (H/2)                              | 8        | GLF Corporation      |
| 117598                                                        | # 8 x 1" Tek / Flat Head SS Tiebar Guide                        | 12       | GLF Corporation      |
| 120145                                                        | # 8 x 1/2" Pan Head / Keeper Screws                             | 16       | GLF Corporation      |
| 127315                                                        | # 10 x 1" FLT Sharp Point / Operator Screws                     | 16       | GLF Corporation      |
| 116506                                                        | # 5 x 3/8" Tek / Screen Clips White                             | 8        | GLF Corporation      |
| 2NB-8K-0.125-032-064                                          | Glass Setting Blocks Fixed (W) Base                             | 4        | Frank Lowe           |
| 2NB-8K-0.125-032-064                                          | Glass Setting Blocks Sash (W) (RH /LH) Base                     | 4        | Frank Lowe           |
| Hurricane Lamineate Impact                                    | Operating Vent Sash E366 2.7mm / 0.9.0 PVB Interlayer IG        | 2        | Cardinal             |
| Hurricane Lamineate Impact                                    | Fixed Center Section Sash E366 2.7mm / 0.9.0 PVB Interlayer IG  | 1        | Cardinal             |

REGENCY PLUS, INC.  
2000 LOCUST GAP HIGHWAY  
MT. CARMEL, PA 17851

| SERIES TECH 5215 VINYL XO <sup>X</sup> OS CASEMENT WINDOW - LMI<br>ANCHORAGE DETAILS | DATE                 |                 |  |  |
|--------------------------------------------------------------------------------------|----------------------|-----------------|--|--|
|                                                                                      | 7/28/26              |                 |  |  |
|                                                                                      | BY                   | RJA             |  |  |
|                                                                                      | REVISION DESCRIPTION | 2026 FBC UPDATE |  |  |
| REV.                                                                                 | A                    |                 |  |  |

|                  |                |                |                |
|------------------|----------------|----------------|----------------|
| DATE:<br>2/10/26 | DWN BY:<br>RJA | CHK BY:<br>RJA | SCALE:<br>NONE |
|------------------|----------------|----------------|----------------|

ROBERT J. AMORUSO, P.E. #49752  
AMORUSO CONSULTING ENG., LLC  
FBPE REGISTRATION NO. 38327  
226 N NOVA RD, NO. 142  
ORMOND BEACH, FL 32174  
RJAENGPE@GMAIL.COM



Digitally signed  
by Robert J  
Amoruso  
Date: 2026.08.27  
08:49:09 -04'00'

|           |                       |
|-----------|-----------------------|
| PROJECT#: | ACE-2025-131/133      |
| DWG/REV:  | RPLS0088-FPAS, Rev. A |
| SHT:      | 11 of 11              |