



NOTE(S): DIMENSIONED VIEWS ARE TYPICAL FOR ALL CROSS SECTION DETAILS.

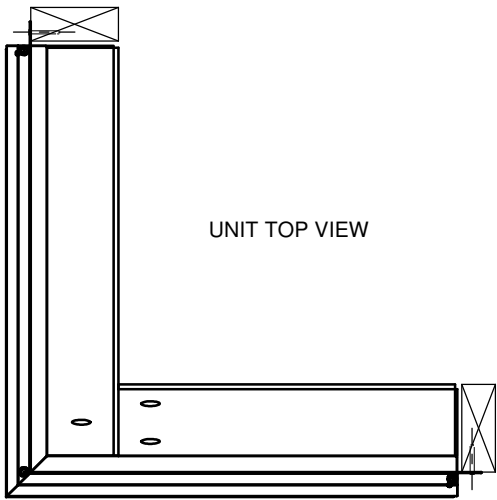


UNIT TOP VIEW

#6 NON-CORROSIVE SCREWS
1-1/2" MIN PENETRATION INTO FRAMING MEMBER
3" FROM CORNERS
8-10" ON CENTER THROUGH NAILING FIN
AROUND THE UNITS ENTIRE PERIMETER TYP


USE SILICONE SEALANT
AROUND ENTIRE PERIMETER
BETWEEN NAILING FIN &
WOOD BUCK BY OTHERS TYP

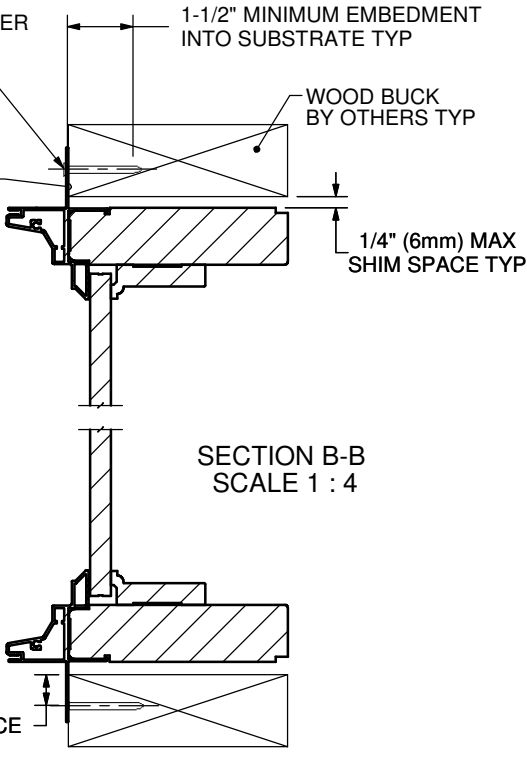

SECTION B-B
SCALE 1 : 4

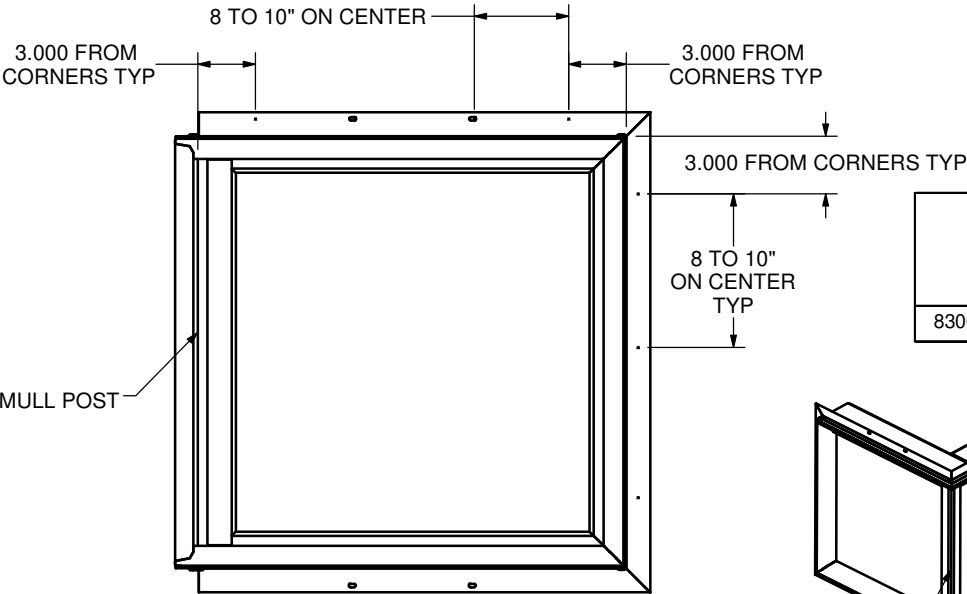

UNIT EXTERIOR SIDE VIEW



MULL POST

DESC.	MAX FRAME SIZE		MAX DAYLIGHT OPENING		DESIGN PRESSURE (psf)	FRAME MATERIAL
	WIDTH (IN.)	HEIGHT (IN.)	WIDTH (IN.)	HEIGHT (IN.)		
8306 DS CORNER	61/61	96	57.22	92.18	+/-50	WOOD, ALUMINUM

THIS SCHEDULE ADDRESSES ONLY THE FASTENERS REQUIRED TO ANCHOR THE WINDOW(S) TO ACHIEVE THE RATED DESIGN PRESSURE. THOROUGHLY READ AND FOLLOW MANUFACTURERS INSTALLATION INSTRUCTIONS RECEIVED WITH UNIT. THIS GUIDE DOES NOT ADDRESS THE SEALING CONSIDERATIONS THAT MAY ARISE IN DIFFERENT WALL CONDITIONS.

TOLERANCES UNLESS SPECIFIED:	
INCHES	ANGLE
.x ± .1"	xx ± 1°
.xx ± .03"	xx.x ± .5° (1/2°)
.xxx ± .015"	xx.xx ± .25° (1/4°)

Weather Shield
Windows & Doors

PRODUCTS: 8306		DRAWN BY: JLK/REF	DATE: 07/27/2015	TITLE: INSTALLATION INSTRUCTIONS	
				DWG NO.: 45-00690	REV .1
				SCALE : 1:1	SHEET NAME: Sheet1
				SHEET 1 OF 1	

DO NOT SCALE DRAWING

REV	DATE	DESCRIPTION	PCR NO.	ENG	PDR #:	10029	PROFILE #: