
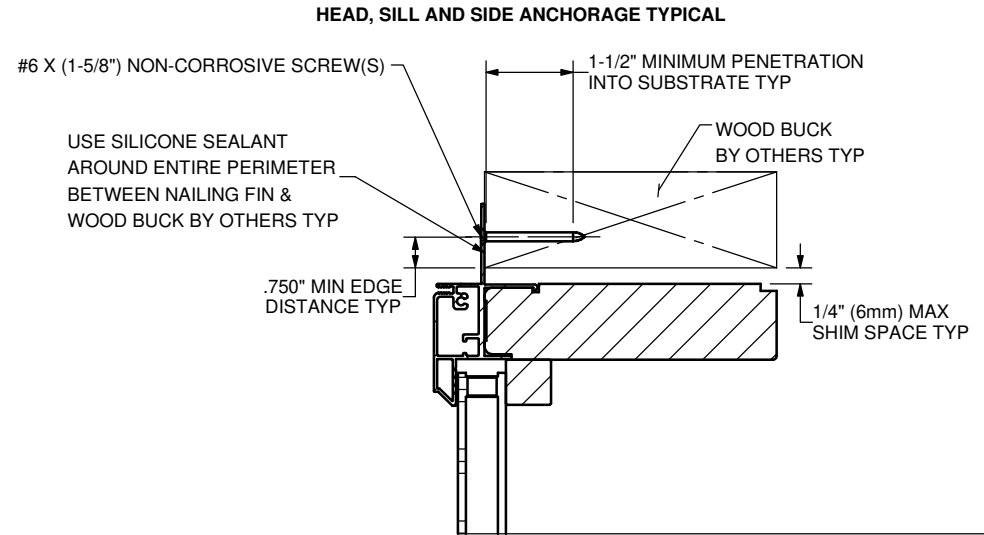


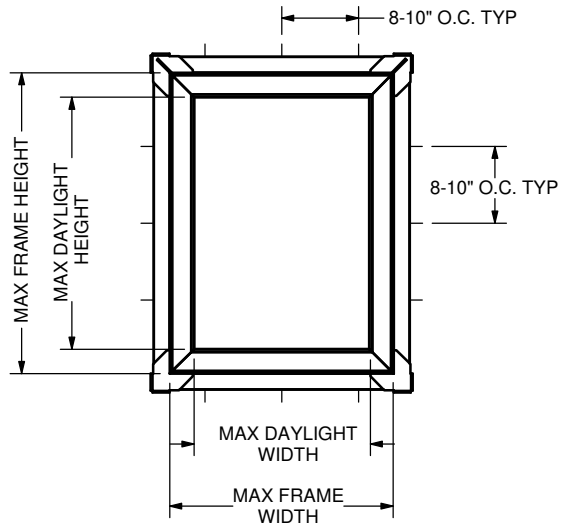

DESC.	MAX FRAME SIZE		MAX DAYLIGHT OPENING		DESIGN PRESSURE (psf)	FRAME MATERIAL
	WIDTH (IN.)	HEIGHT (IN.)	WIDTH (IN.)	HEIGHT (IN.)		
8312 DS	72	106	68.19	102.19	+/-40	WOOD, ALUMINUM
8312 DS	84.75	125.63	80.94	121.82	+/-50	WOOD, ALUMINUM
8312 DS	144.75	73.69	140.94	69.88	+/-50	WOOD, ALUMINUM
8307 DS	83.69	89.5	81.01	86.82	+/-65	WOOD, ALUMINUM
8307 DS	143.69	52.38	141.01	49.7	+/-80	WOOD, ALUMINUM
8306 DS TWIN	49.97	120	46.16	116.19	+/-60	WOOD, ALUMINUM

WEATHER SHIELD WINDOWS & DOORS

*8306, 8307, 8312 DIRECT SET
NAILING FIN INSTALLATION*

NOTE(S):

1. THESE UNITS HAVE BEEN TESTED, ANALYZED, HALLMARK CERTIFIED AND FBC APPROVED.

2. THIS SCHEDULE ADDRESSES ONLY THE FASTENERS REQUIRED TO ANCHOR THE WINDOW(S) TO ACHIEVE THE RATED DESIGN PRESSURE. THOROUGHLY READ AND FOLLOW MANUFACTURERS INSTALLATION INSTRUCTIONS RECEIVED WITH UNIT. THIS GUIDE DOES NOT ADDRESS THE SEALING CONSIDERATIONS THAT MAY ARISE IN DIFFERENT WALL CONDITIONS.

TOLERANCES UNLESS SPECIFIED:	
INCHES	ANGLE
.x ± .1"	xx ± 1°
.xx ± .03"	xx.x ± .5° (1/2°)
.xxx ± .015"	xx.xx ± .25° (1/4°)

Weather Shield
Windows & Doors

PRODUCTS:
8306, 8307, 8312

DRAWN BY:
JLK/REF

DATE:
09/09/2016

TITLE:
INSTALLATION

DWG NO.:
45-02505

REV
H

SCALE: 1:1 SHEET NAME: Sheet1 SHEET 1 OF 1

DO NOT SCALE DRAWING

					TYP. WALL THICKNESS:
					WT/FT:
					AREA:
					MAT:
					FINISH:
REV	DATE	DESCRIPTION	PCR NO.	ENG	PDR #:
					PROFILE #: