




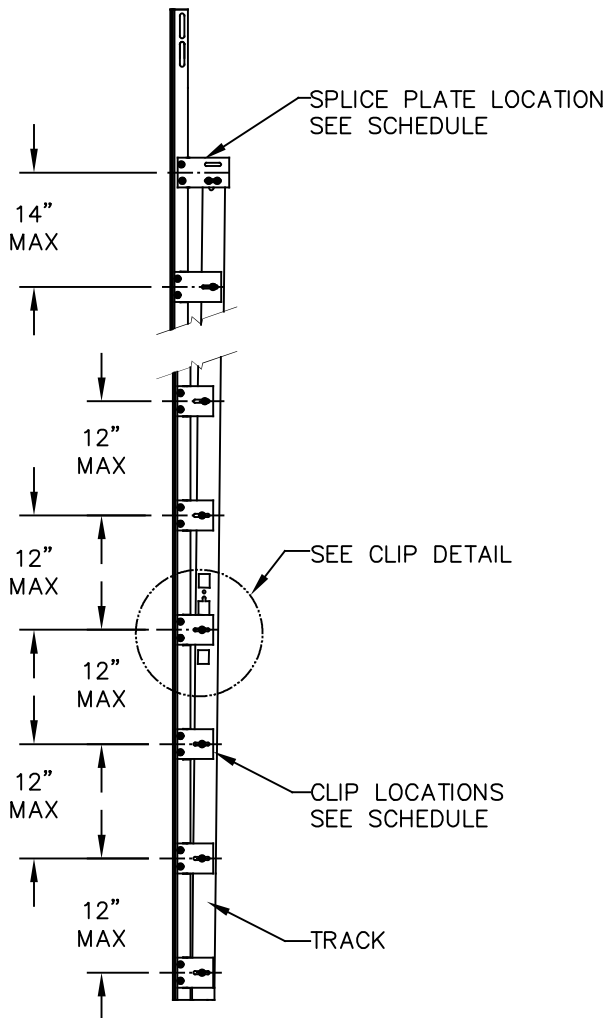


CLIPS TO BE EITHER RIVETED, BOLTED, OR WELDED. SEE DETAILS THIS PAGE.

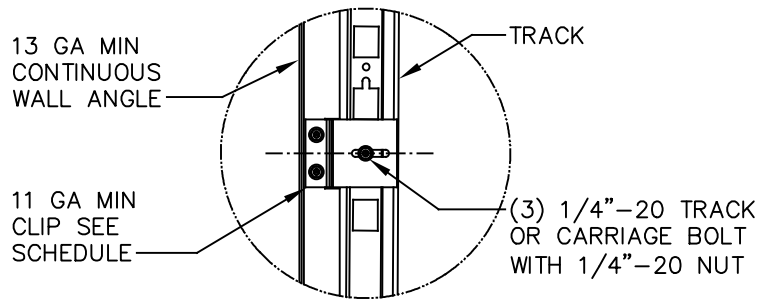

TYPICAL CLIP BOLTING DETAIL

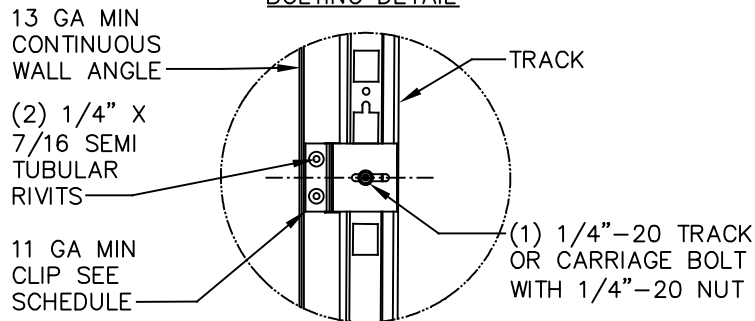

TYPICAL CLIP RIVETING DETAIL

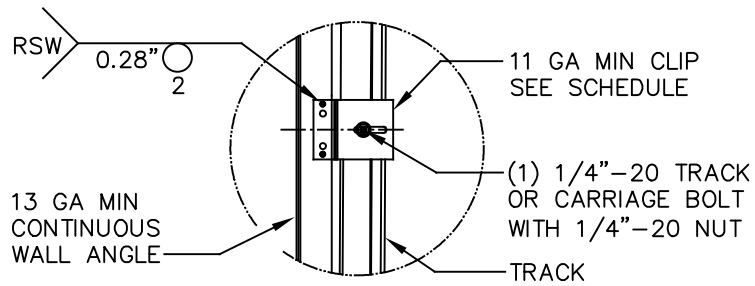

TYPICAL CLIP WELDING DETAIL

REVISIONS

P2 2 INCH TRACK-CLIPS-TEXAS WALL ANGLE 12 FOOT UPDATED BPJ 6/11/03

P3 UPDATED FORMAT. INCREASED ALLOWABLE PRESSURES TO +46.00/-52.00 PSF FOR ALL DOOR WIDTHS. CHANGED "TEXAS WALL ANGLE" TO "CONTINUOUS WALL ANGLE". ADDED SUBSTRATE MOUNTING DETAIL. CHANGED TO TITEN HD ANCHORS GRT 4/2/07

P4 CHANGED FORMAT. ADDED MODELS 9800 AND 8024 WITH OVERLAY TO TRACK CLIP SCHEDULE. GRT 8/21/07

P5 UPDATED MODELS LISTED IN CHARTS. UPDATED SPLICE & CLIP SCHEDULES. DLP 9/06/07

P6 UPDATE MOUNTING DETAIL DRAWINGS. GRT 10/05/07

P7 UPDATED CHARTS TO ELIMINATE THE USE OF THE #8 CLIP (REPLACED WITH #9 ACROSS THE BOARD). DLP 10/24/07


P8 UPDATED STEEL MOUNTING DETAIL MRB 04/11/08

P9 EXPANDED 1-1/2" TO 1-3/8" DOOR THICKNESS CHART UP TO 14' HIGH. GRT 12/11/08

P10 UPDATED TITLE BLOCK GRT 6/2/10

P11 UPDATED TITLE BLOCK. REMOVED CHART. GRT 11/15/13

P12 UPDATED TITLE BLOCK. CHANGED CONCRETE MIN STRENGTH. SPECIFIED SOUTHERN PINE IN WOOD JAMB DETAIL. JQ 8/11/20



PROFESSIONAL ENGINEER'S SEAL PROVIDED ONLY FOR VERIFICATION OF WINDLOAD CONSTRUCTION DETAILS.

Digitally signed by John E. Scates, P.E.
Date: 2020.08.12 07:58:37 -05'00'

JOHN E. SCATES, PE
2560 KING ARTHUR #124-54
LEWISVILLE, TX 75056
FL PE 51737
TX PE 56308/F-2203




DESIGN PRESSURE CHART	
MAX DOOR WIDTH	MAX PSF
9'-0"	+46.0 PSF / -52.0 PSF
16'-0"	+46.0 PSF / -52.0 PSF
18'-0"	+46.0 PSF / -52.0 PSF

Wayne Dalton

3395 ADDISON DRIVE
PENSACOLA, FLORIDA 32514
(850) 474-9890

	DATE	NAME
DRAWN	8/21/07	GRT
CHECKED	8/21/07	MRB
SHEET 1 OF 2		
DRAWING PART NO.	307494	REV. P12

TRACK SUPPLEMENT CHART

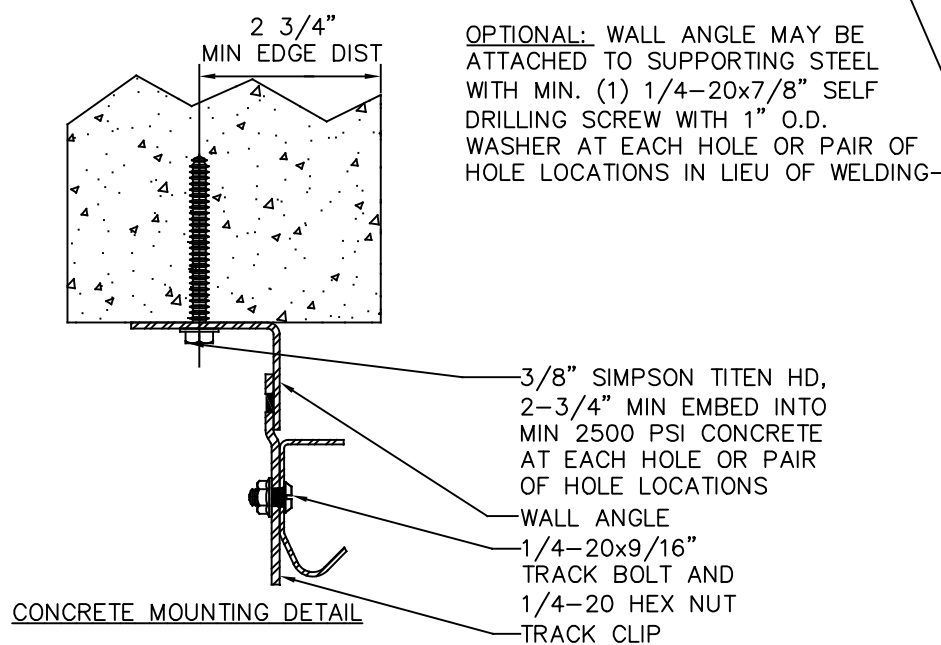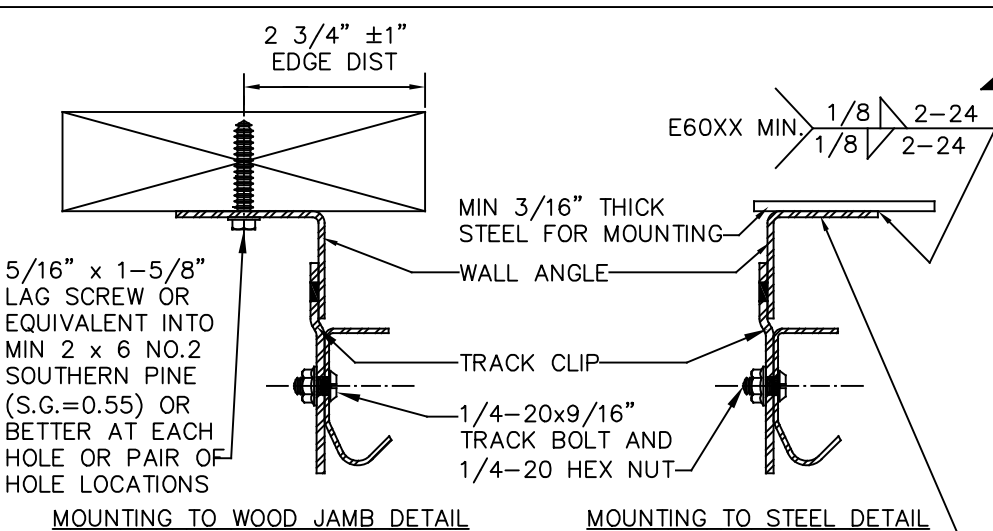

Digitally signed by John E. Scates, P.E.
Date: 2020.08.12 07:58:23 -05'00'

JOHN E. SCATES, PE
2560 KING ARTHUR #124-54
LEWISVILLE, TX 75056
FL PE 51737
TX PE 56308/F-2203

TRACK SUPPLEMENT CHART

REVISIONS	
P2 2 INCH TRACK-CLIPS-TEXAS WALL ANGLE 12 FOOT UPDATED BPJ 6/11/03	
P3 UPDATED FORMAT. INCREASED ALLOWABLE PRESSURES TO +46.00/-52.00 PSF FOR ALL DOOR WIDTHS. CHANGED "TEXAS WALL ANGLE" TO "CONTINUOUS WALL ANGLE". ADDED SUBSTRATE MOUNTING DETAIL. CHANGED TO TITEN HD ANCHORS GRT 4/2/07	
P4 CHANGED FORMAT. ADDED MODELS 9800 AND 8024 WITH OVERLAY TO TRACK CLIP SCHEDULE. GRT 8/21/07	
P5 UPDATED MODELS LISTED IN CHARTS. UPDATED SPLICE & CLIP SCHEDULES. DLP 9/06/07	
P6 UPDATE MOUNTING DETAIL DRAWINGS. GRT 10/05/07	
P7 UPDATED CHARTS TO ELIMINATE THE USE OF THE #8 CLIP (REPLACED WITH #9 ACROSS THE BOARD). DLP 10/24/07	
P8 UPDATED STEEL MOUNTING DETAIL MRB 04/11/08	
P9 EXPANDED 1-1/2" TO 1-3/8" DOOR THICKNESS CHART UP TO 14' HIGH. GRT 12/11/08	
P10 ADDED MODEL 8700. UPDATED TITLE BLOCK GRT 6/2/10	
P11 UPDATED TITLE BLOCK. REMOVED CHART. GRT 11/15/13	
P12 UPDATED TITLE BLOCK. CHANGED CONCRETE MIN STRENGTH. SPECIFIED SOUTHERN PINE IN WOOD JAMB DETAIL. JQ 8/11/20	

3395 ADDISON DRIVE
PENSACOLA, FLORIDA 32514
(850) 474-9890

	DATE	NAME
DRAWN	8/21/07	GRT
CHECKED	8/21/07	MRB
SHEET 2 OF 2		
DRAWING PART NO.	307494	REV. P12