




CLINE ALUMINUM DOORS, INC.
112 32nd AVENUE WEST, BRADENTON, FL 34205-8096
Telephone (800) 648-6736

**SERIES 200BE
FRP DOOR
OUTSWING
"IMPACT"**


GENERAL NOTES

- 1. This product has been evaluated and is in compliance with the 9th Edition (2026) Florida Building Code (FBC) structural requirements excluding the "High Velocity Hurricane Zone" (HVHZ).
- 2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
- 3. When used in areas requiring wind borne debris protection this product complies with FBC Sections 1609.1.2 & R301.2.1.2 and does not require an impact resistant covering. This product meets missile level "D" and includes Wind Zone 4 as defined in ASTM E 1996.
- 4. For 2x stud framing construction, anchoring of these units shall be the same as that shown for 2x buck masonry construction.
- 5. Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.

TABLE OF CONTENTS	
SHEET#	DESCRIPTION
1	Typical elevations, design pressures & general notes
2	Door panel details and glazing detail
3	Door panel details and glazing detail
4	Horizontal cross sections
5	Vertical cross sections
6	Buck and frame anchoring
7	Bill of materials and components

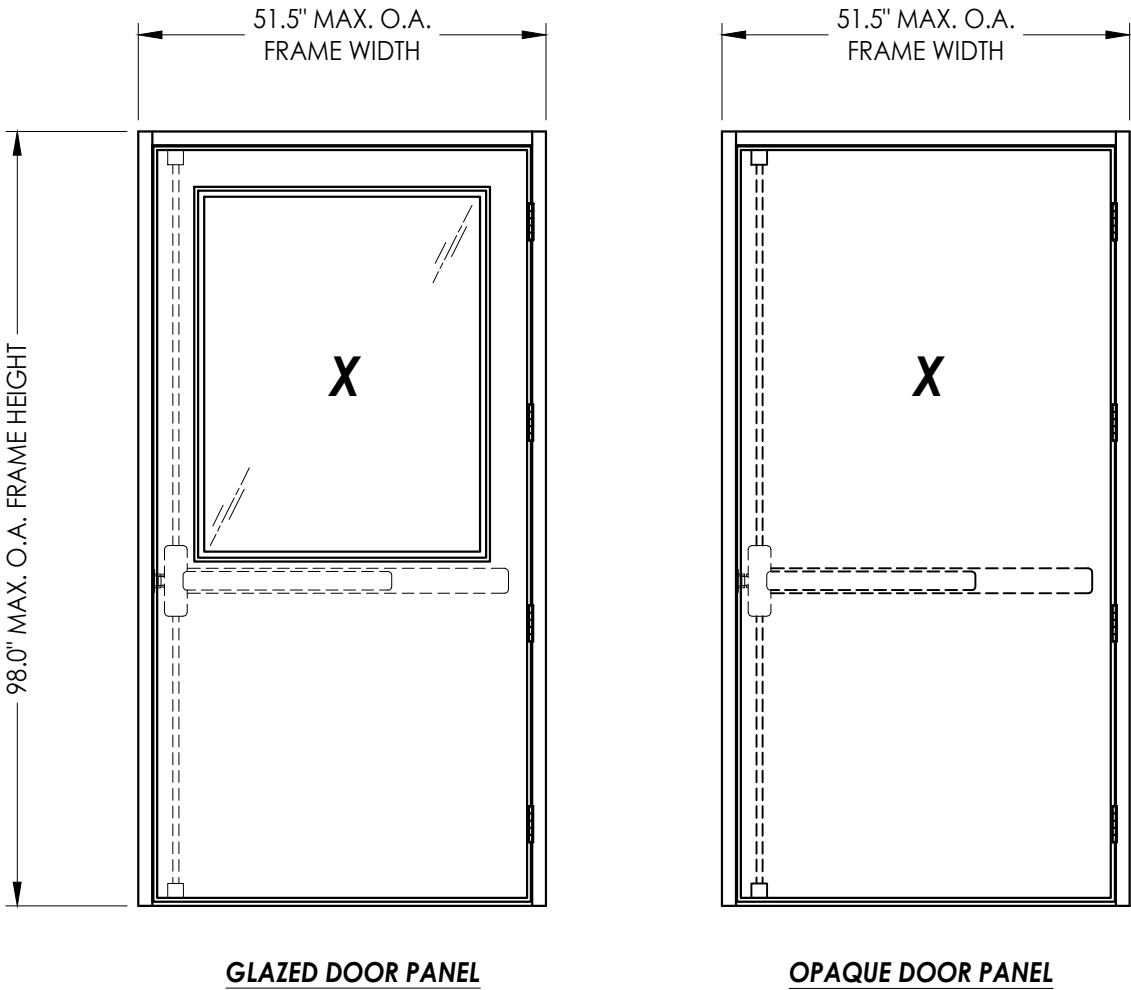

LOCK HARDWARE	MAX. FRAME DIMENSION	MAX. DOOR D.L.O. DIMENSION	DESIGN PRESSURE (PSF)	
			POSITIVE	NEGATIVE
CORBIN RUSSWIN FE5400S SERIES MULTI-POINT EXIT DEVICE	40.0" x 88.0"	22.63" X 32.63"	+90.0	-90.0
	51.5" x 98.0"	34.88" X 44.88"	+80.0	-80.0

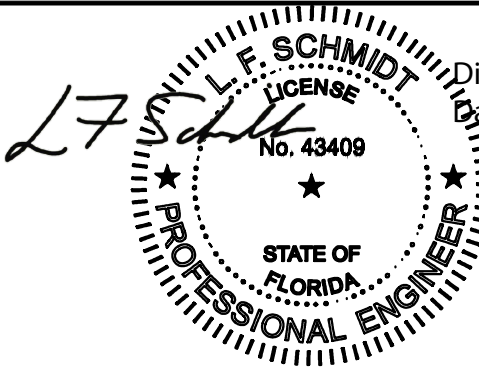

Digitally signed by Lyndon F Schmidt
Date: 2026.07.21 15:35:13 -04'00'

This item has been digitally signed and sealed by
L. F. Schmidt, P.E. on the date adjacent to the seal.
Printed copies of this document are not
considered signed and sealed and the signature
must be verified on any electronic copies.

THIS PRODUCT APPROVAL IS VALID
ONLY FOR THE STATE OF FLORIDA

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

CLINE DOORS

Part or Assembly:
TYPICAL ELEVATION, DESIGN
PRESSURES & GENERAL NOTES

6	7/02/26	UPDATE TO 9TH ED. (2026)	FBC	LFS
5	7/05/23	UPDATE TO 8TH ED. (2023)	FBC	LFS
4	8/11/20	UPDATE TO 7TH ED. (2020)	FBC	DAC
NO.	DATE			BY

REVISIONS

DATE: 9/5/13

SCALE: N.T.S.

DWG. BY: JK

CHK. BY: LFS





DRAWING NO.: FL-6336.5

SHEET 1 OF 7

Building Consultants, Inc.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

© 2013 R.W. BUILDING CONSULTANTS INC.

G:\2023 FBC Drawings 7-20-26\Cline Aluminum Doors\FL-6336 R12\FL-6336.5-8.dwg

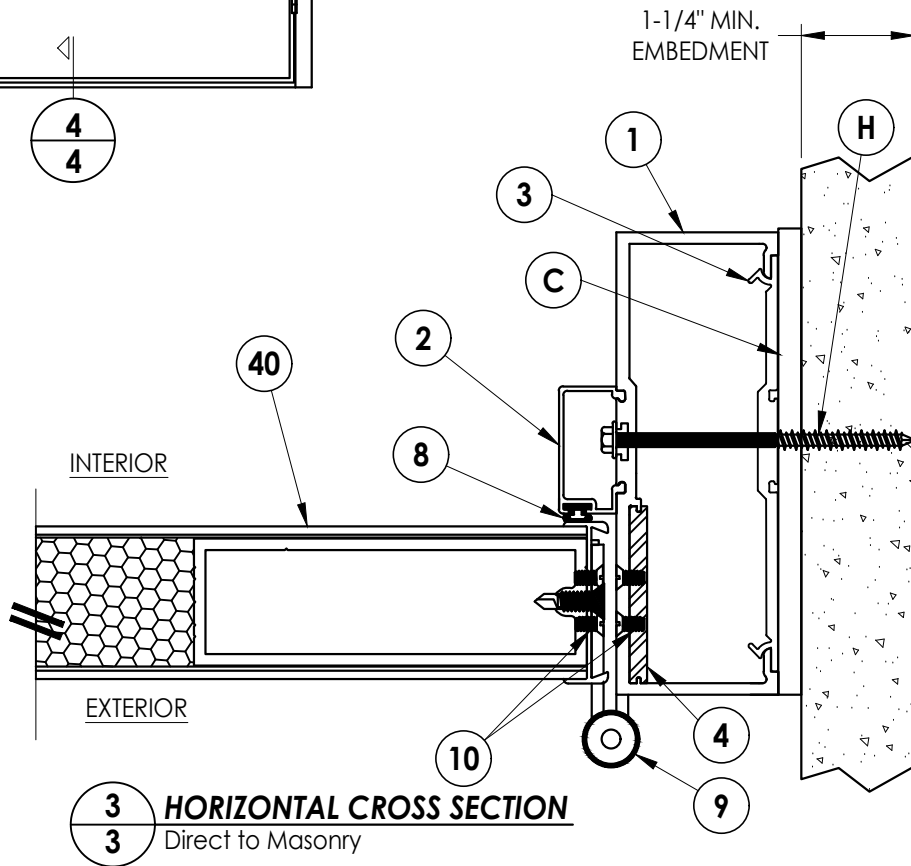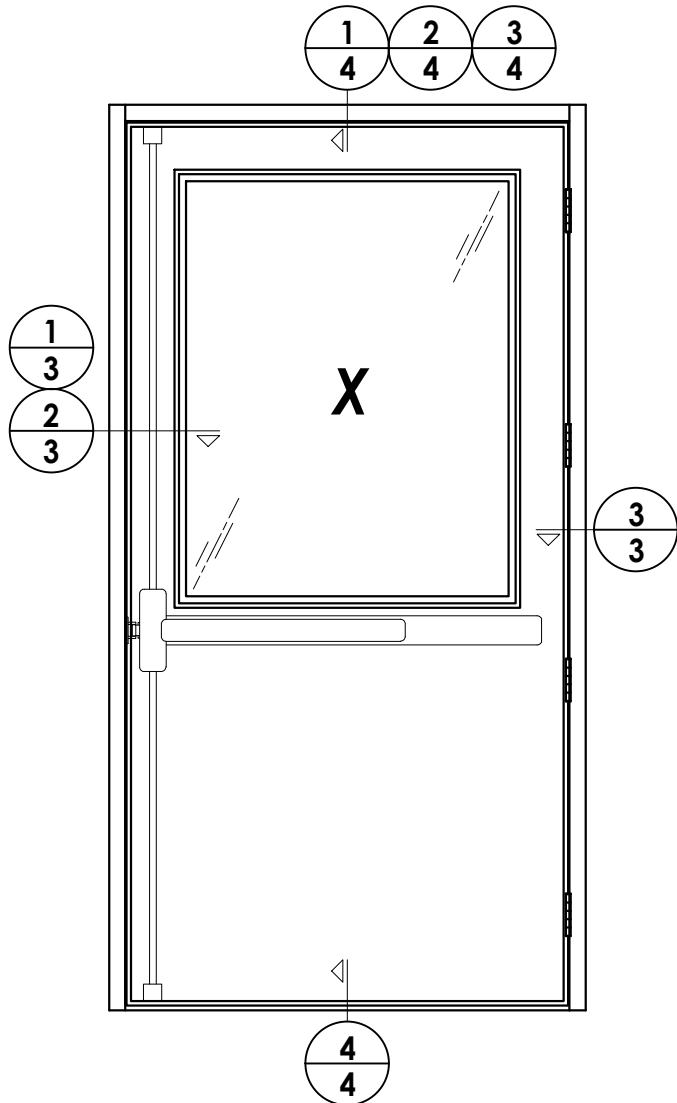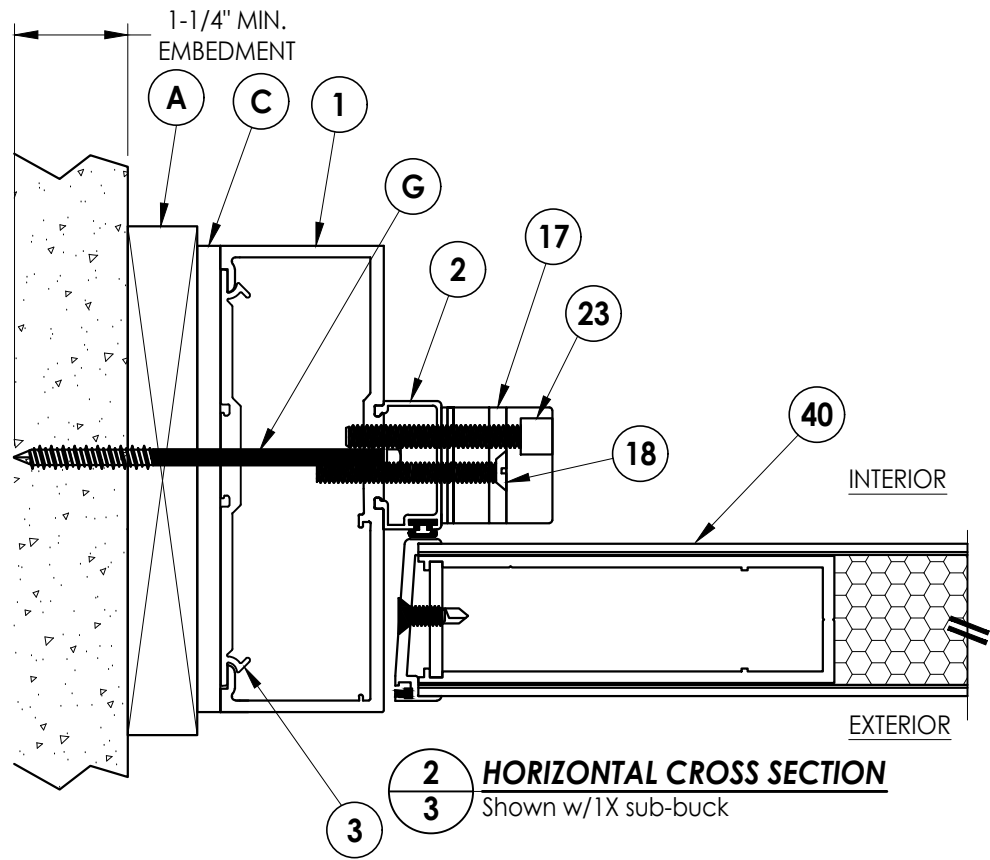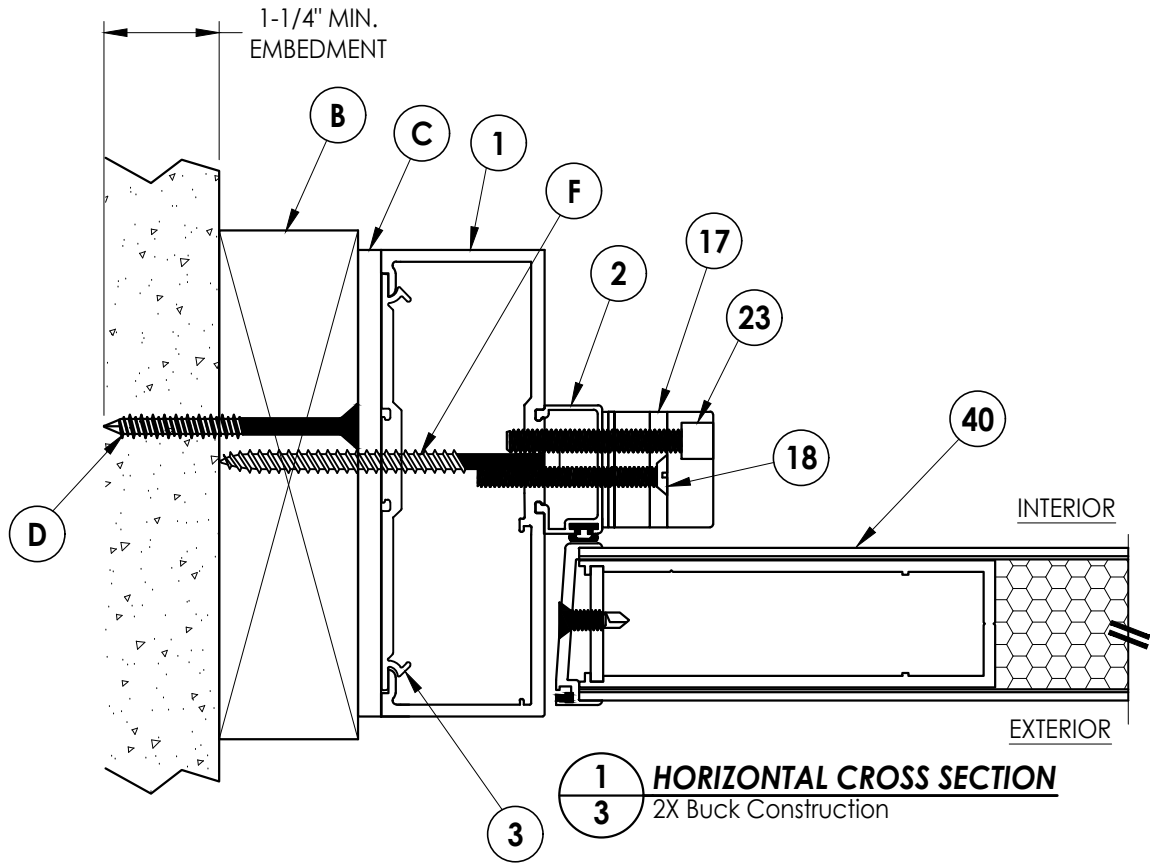

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: CLINE DOORS

PART OR ASSEMBLY:
HORIZONTAL CROSS SECTIONS

NO.	DATE	REVISIONS
6	7/02/26	UPDATE TO 9TH ED. (2026) FBC LFS
5	7/05/23	UPDATE TO 8TH ED. (2023) FBC LFS
4	8/11/20	UPDATE TO 7TH ED. (2020) FBC DAC
3		
2		
1		

DATE: 9/5/13

SCALE: N.T.S.

DWG. BY: JK


CHK. BY: LFS

DRAWING NO.:


FL-6336.5

SHEET 3 OF 7


G:\2023 FBC Drawings 7-20-26\Cline Aluminum Doors\FL-6336 R12\FL-6336.5-8.dwg

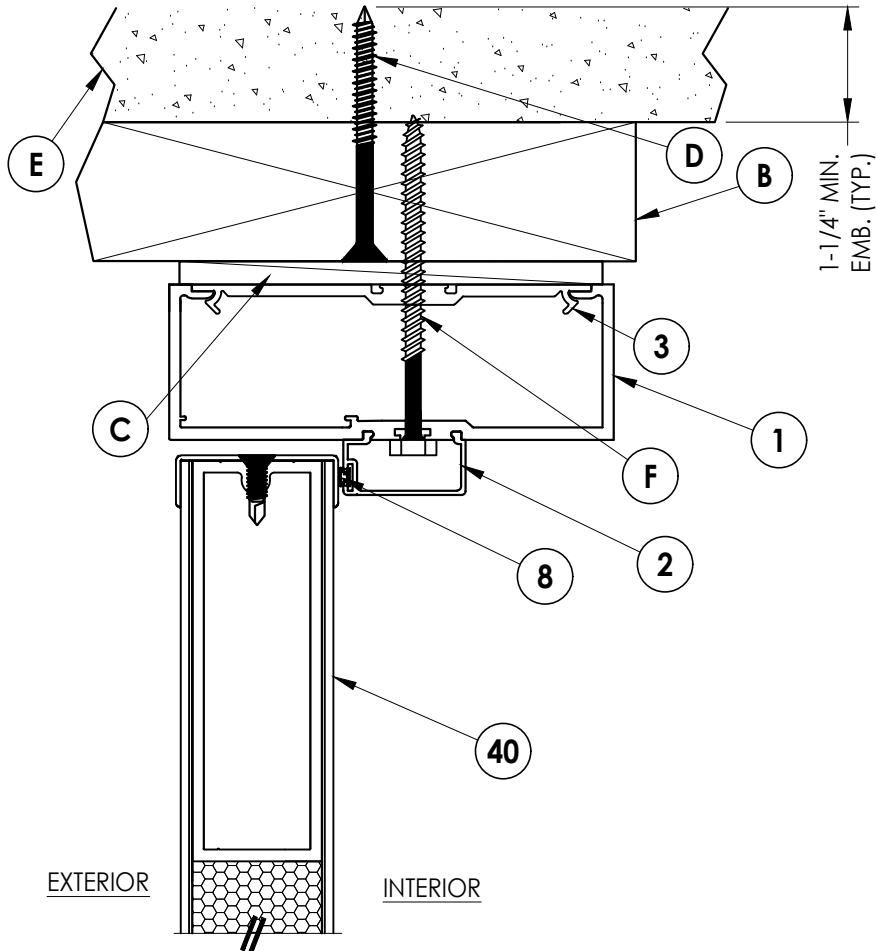


1
4 **VERTICAL CROSS SECTION**
2X Buck Construction

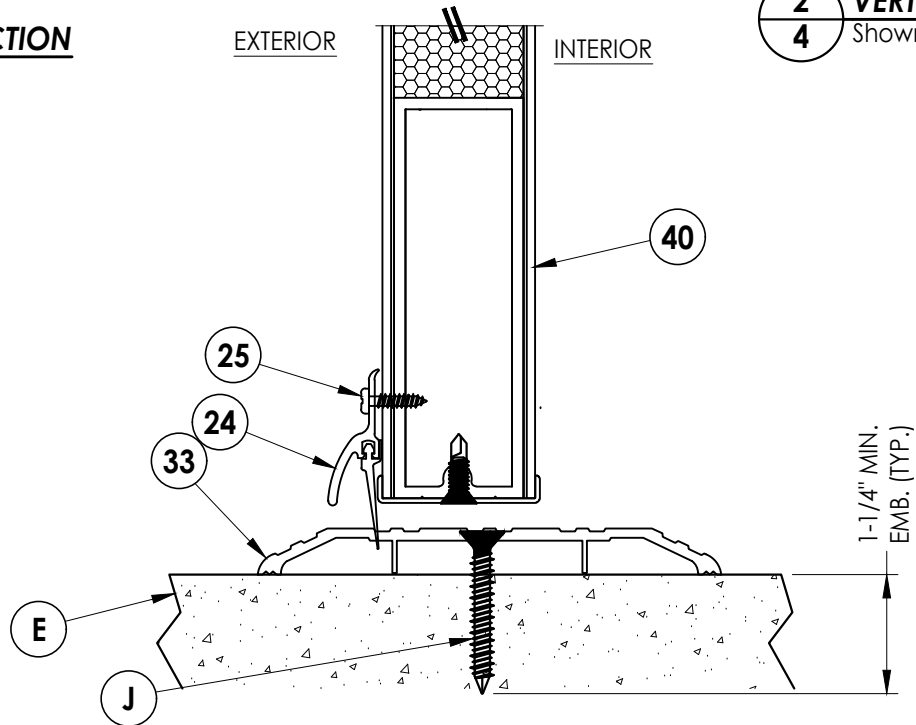

4
4 **VERTICAL CROSS SECTION**

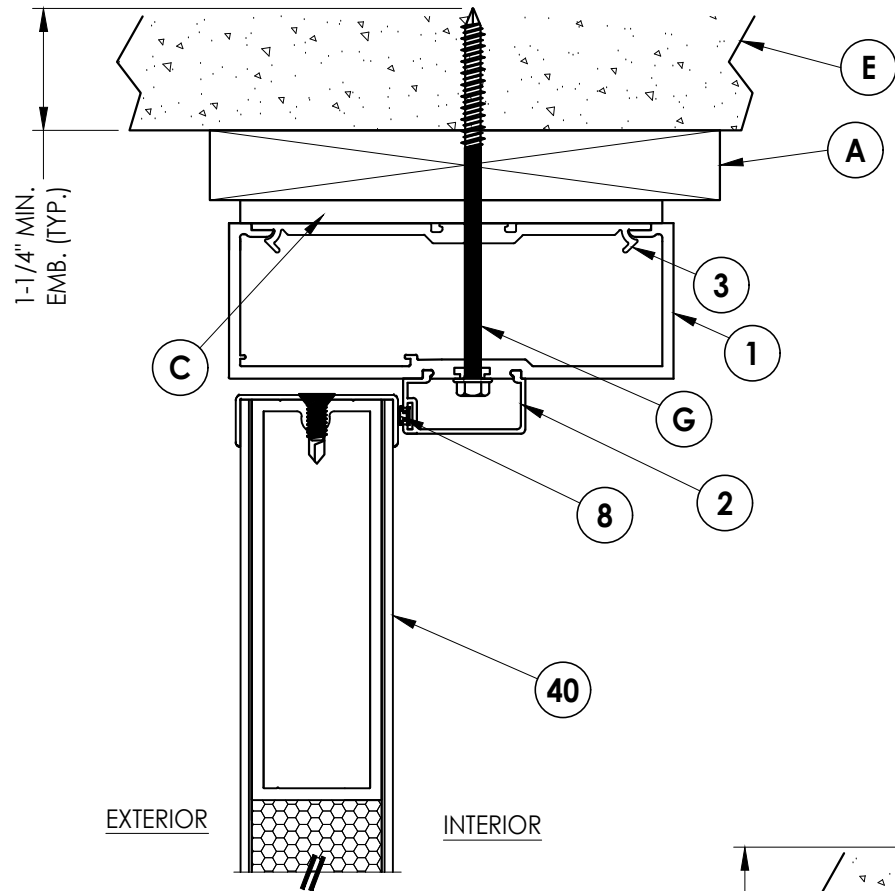

2
4 **VERTICAL CROSS SECTION**
Shown w/1X sub-buck

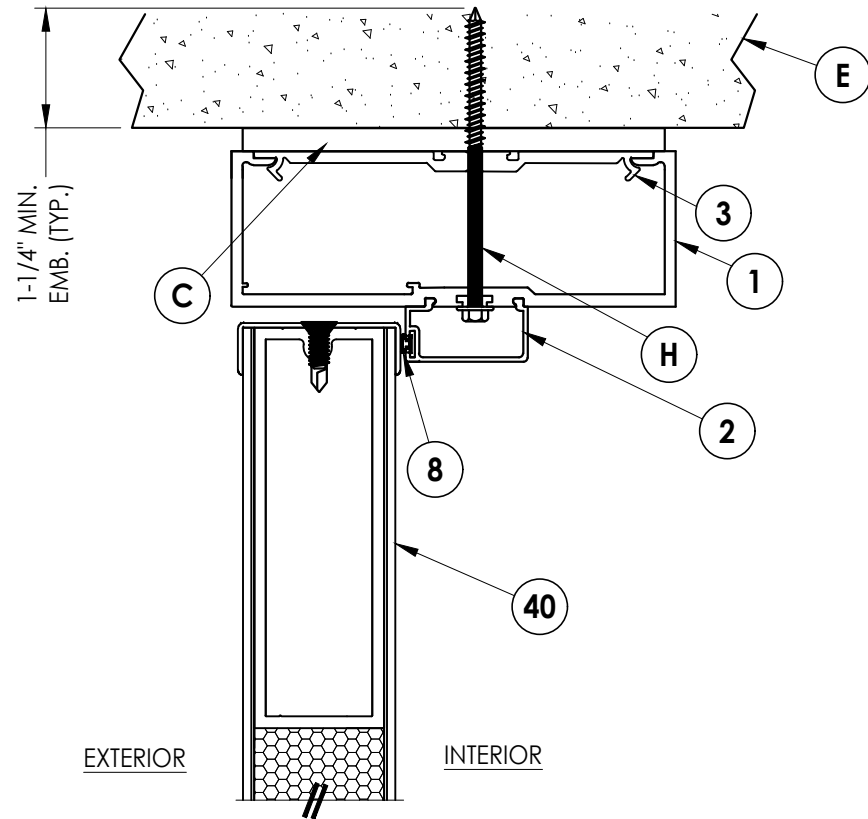

3
4 **VERTICAL CROSS SECTION**
Direct to Masonry

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: CLINE DOORS

PART OR ASSEMBLY:
VERTICAL CROSS SECTIONS

NO.	DATE	REVISIONS			
		BY	DATE	DESCRIPTION	DATE
6	7/02/26	UPDATE TO 9TH ED. (2026)	FBC	LFS	
5	7/05/23	UPDATE TO 8TH ED. (2023)	FBC	LFS	
4	8/11/20	UPDATE TO 7TH ED. (2020)	FBC	DAC	

DATE: 9/5/13

SCALE: N.T.S.

DWG. BY: JK


CHK. BY: LFS

DRAWING NO.:

FL-6336.5

SHEET 4 OF 7

G:\2023 FBC Drawings 7-20-26\Cline Aluminum Doors\FL-6336 R12\FL-6336.5-8.dwg

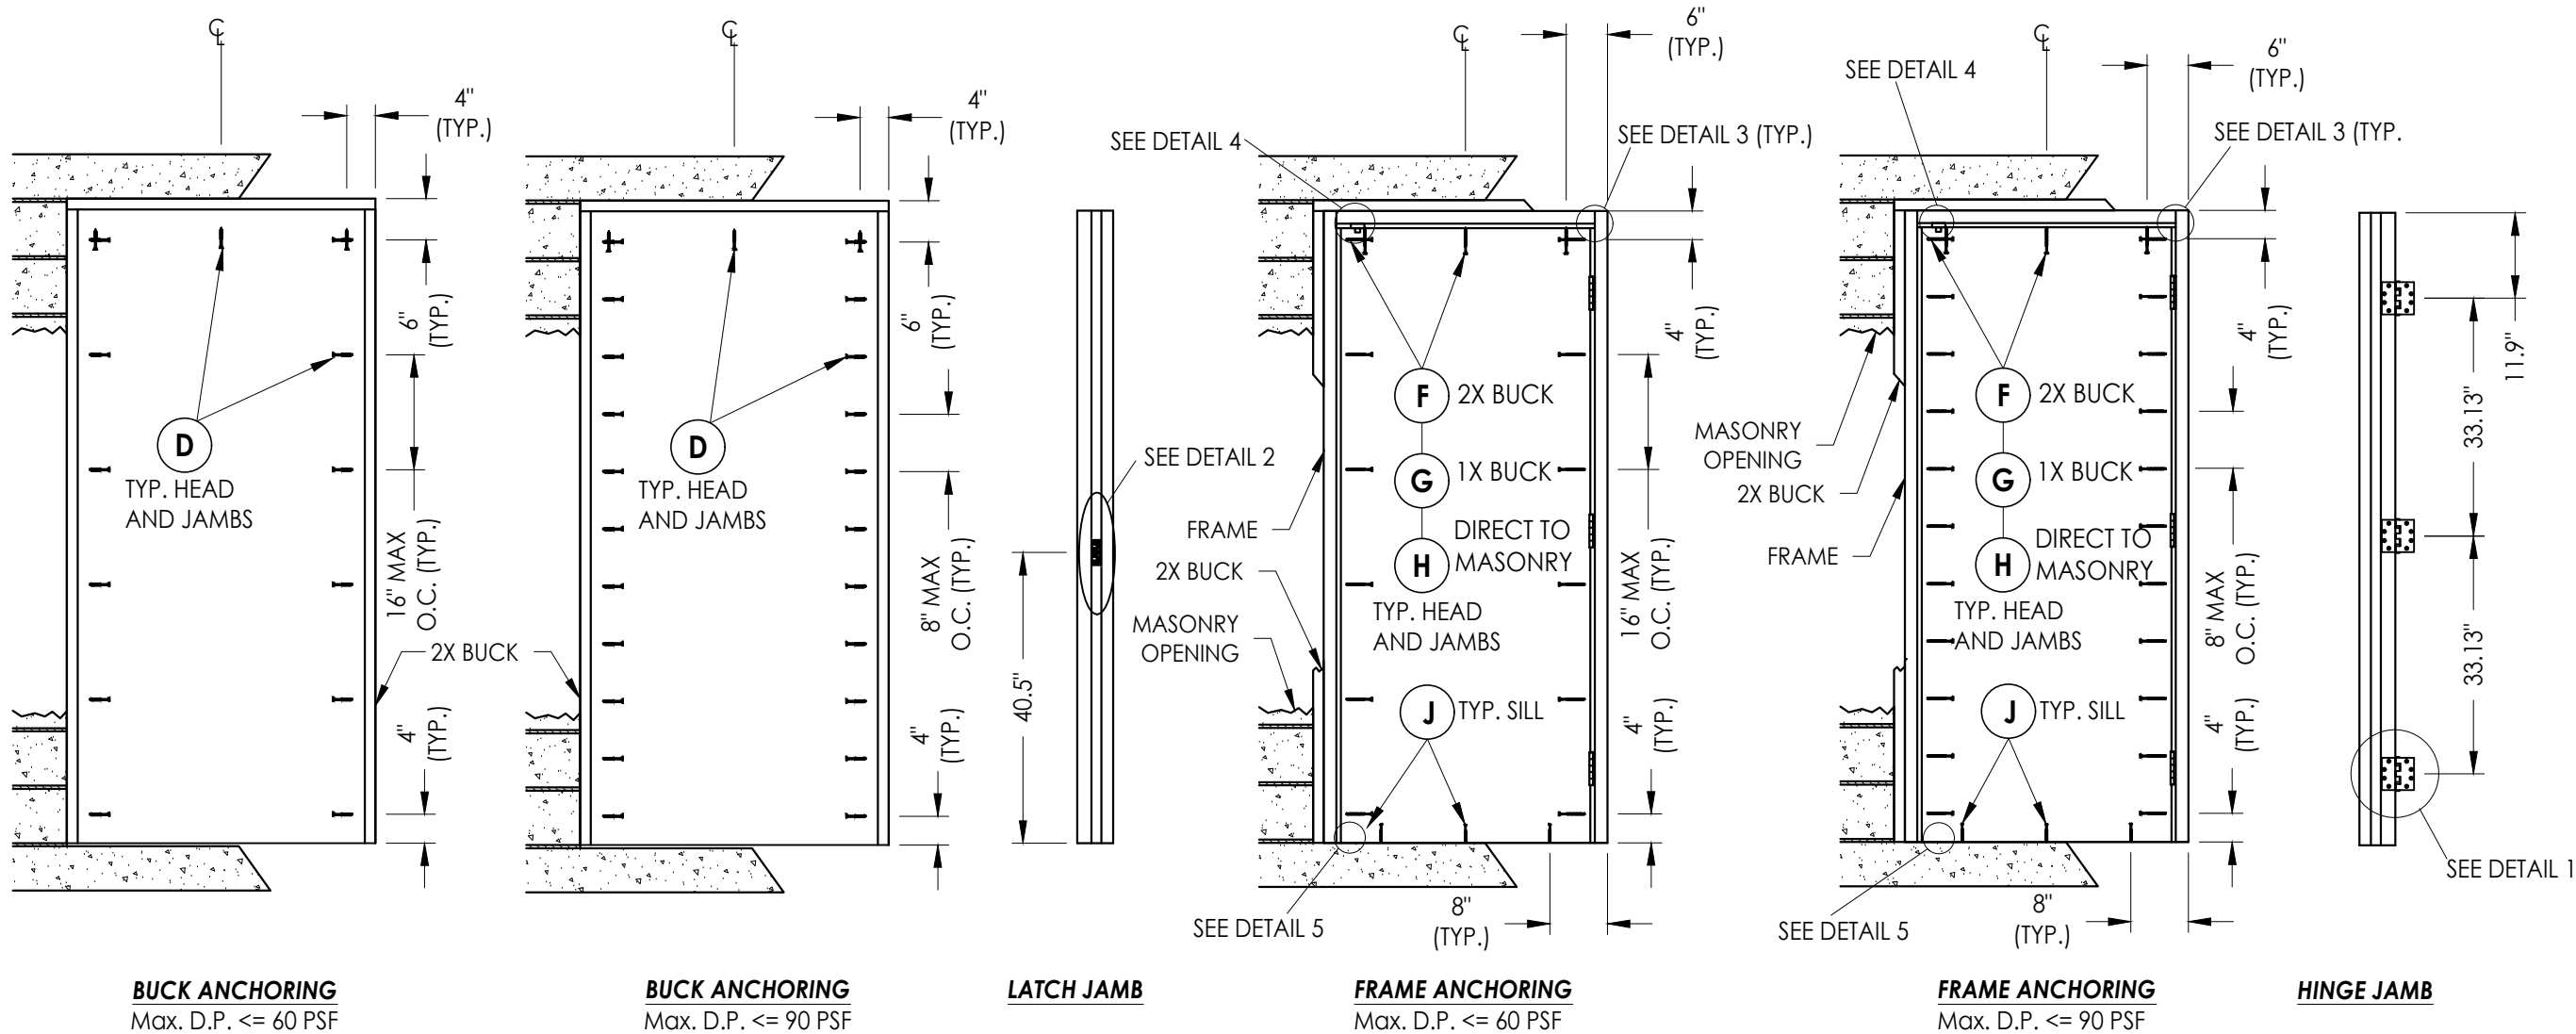


CONCRETE ANCHOR NOTES:

- Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
- Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
- Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW BUILDEX TAPCON®	1/4"	1-1/4"	2-1/2"	4"
DeWALT ULTRACON®	1/4"	1-1/4"	2-1/2"	4"
	3/16"	1-3/4"	2-1/2"	1-3/4"

WOOD SCREW INSTALLATION NOTES:

- Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

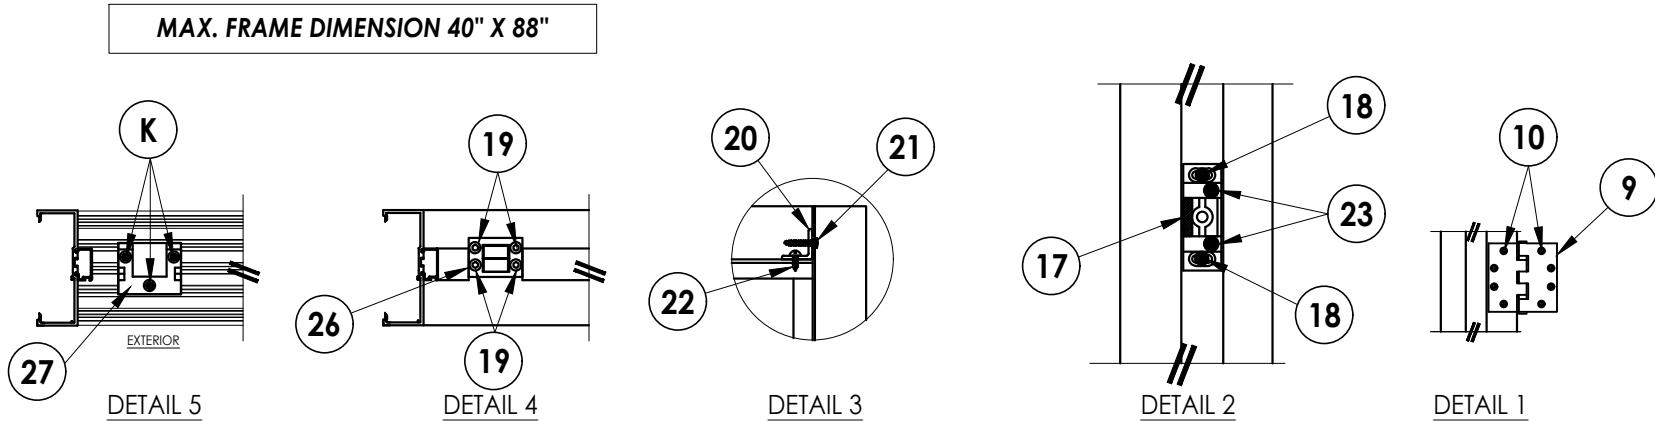

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

CLINE DOORS

PART OR ASSEMBLY:
BUCK AND FRAME ANCHORING

REVISIONS


NO.	DATE	BY	DESCRIPTION
6	7/02/26	UPDATE TO 9TH ED. (2026)	FBC LFS
5	7/05/23	UPDATE TO 8TH ED. (2023)	FBC LFS
4	8/11/20	UPDATE TO 7TH ED. (2020)	FBC DAC

DATE: 9/5/13
SCALE: N.T.S.
DWG. BY: JK
CHK. BY: LFS
DRAWING NO.: FL-6336.5
SHEET 5 OF 7

Building Consultants, Inc.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

© 2013 R.W. BUILDING CONSULTANTS INC.

G:\2023 FBC Drawings 7-20-26\Cline Aluminum Doors\FL-6336 R12\FL-6336.5-8.dwg

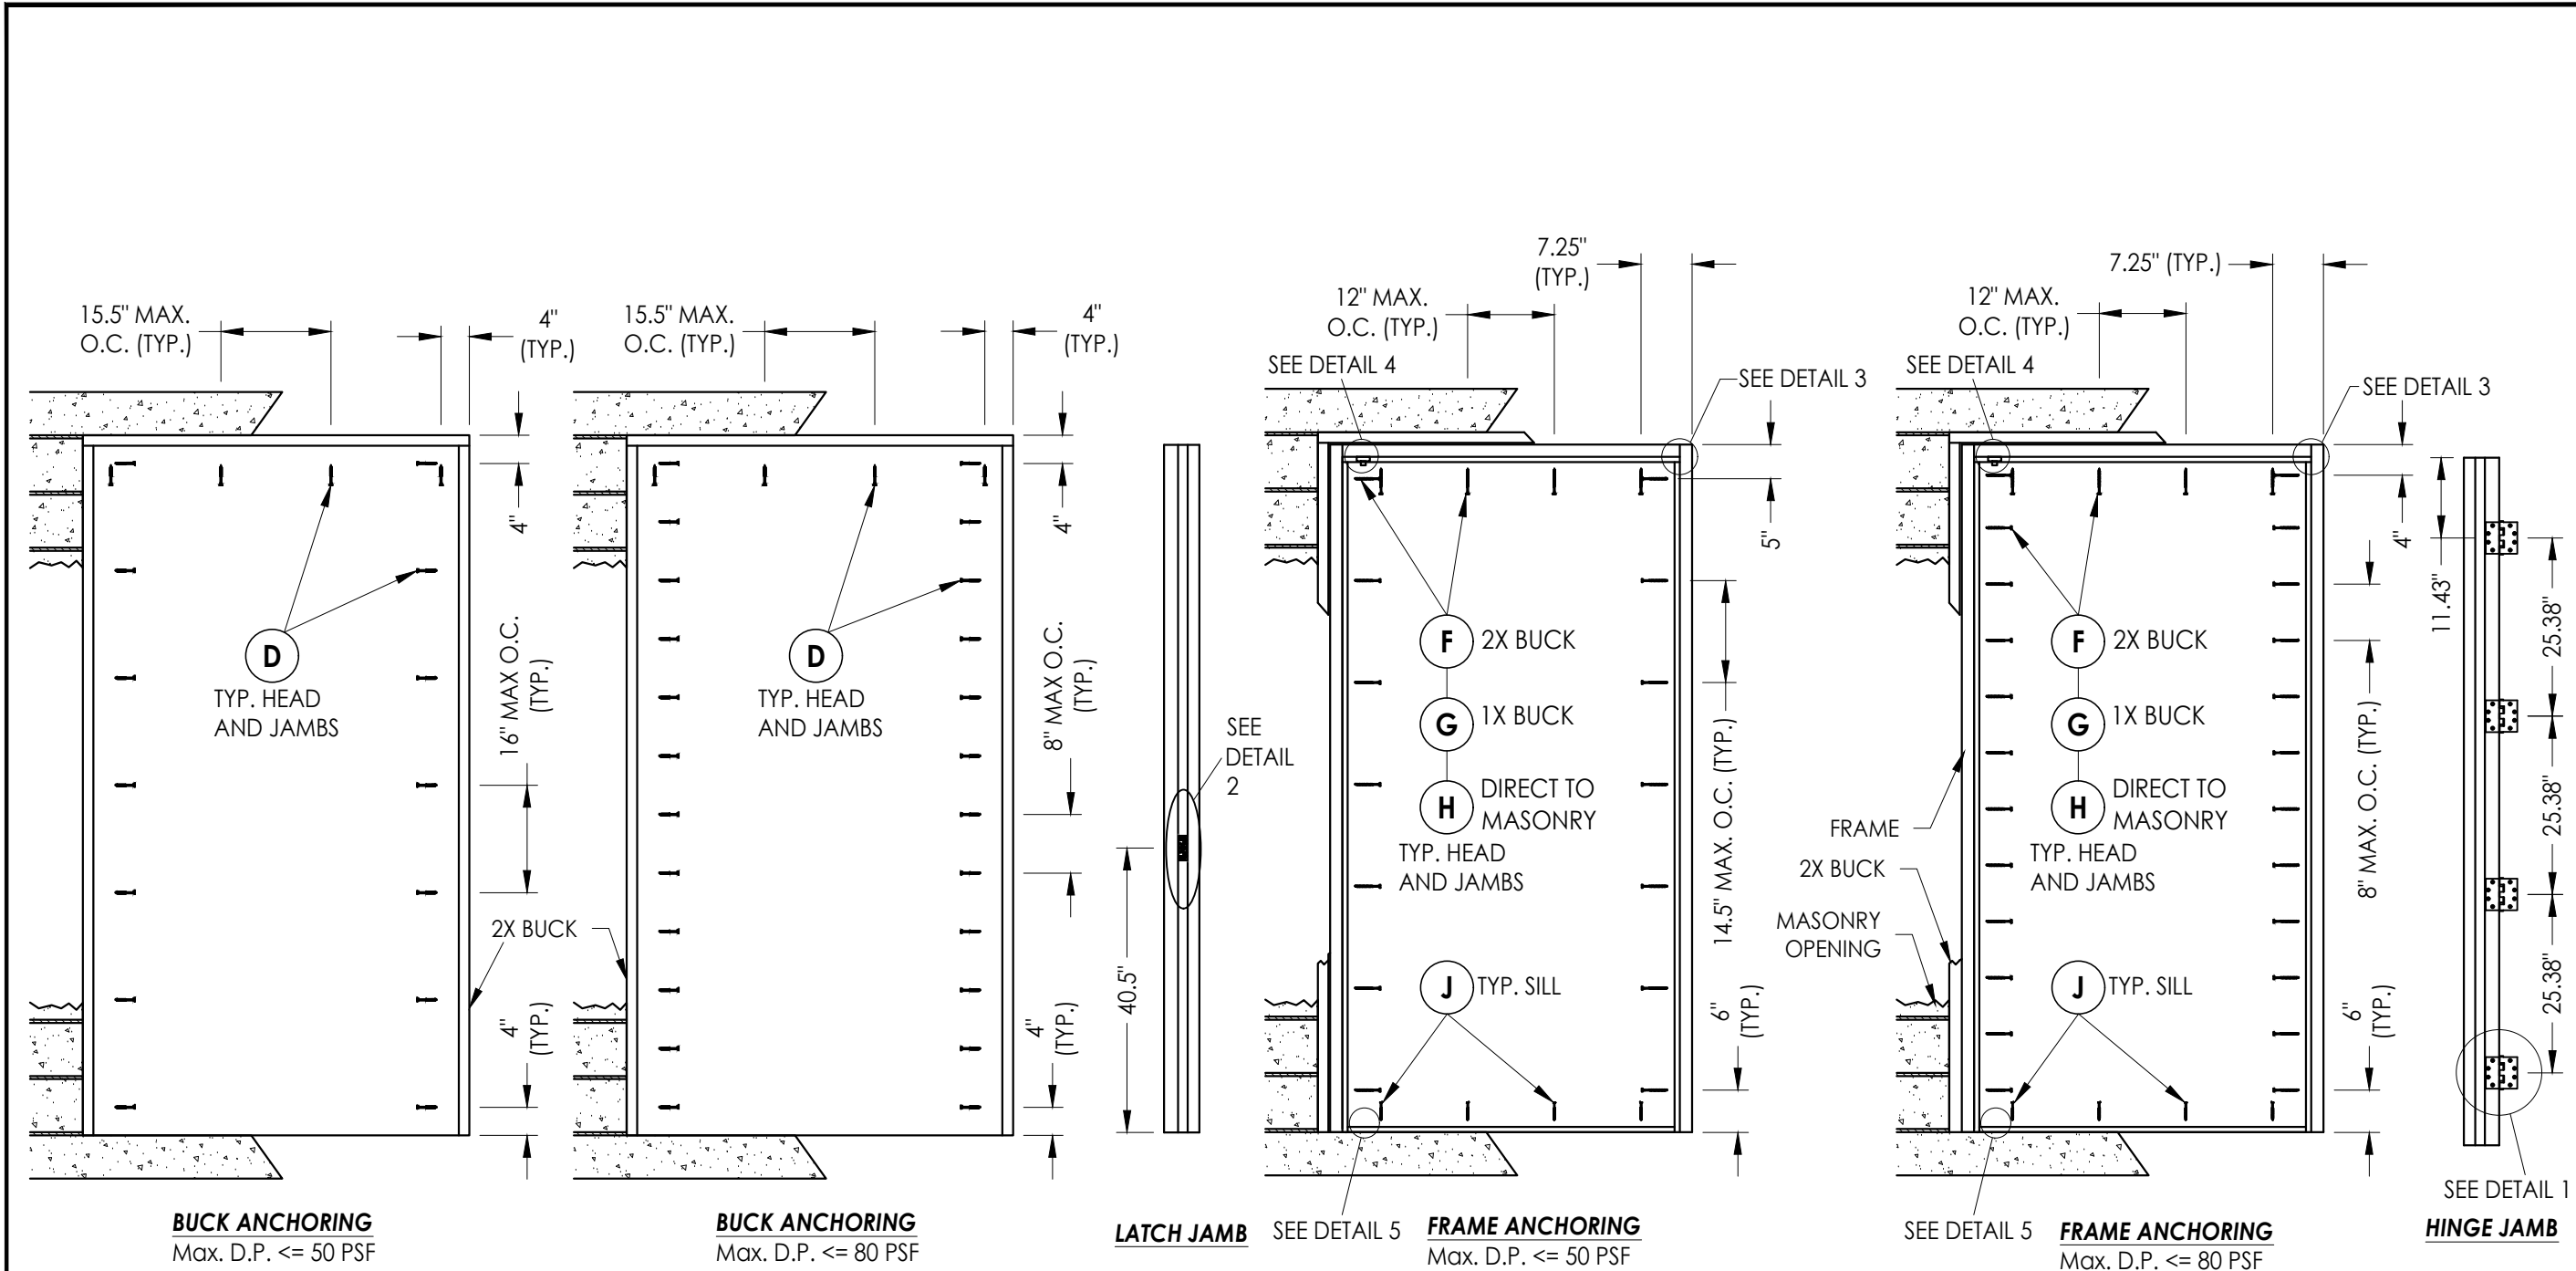

BUCK ANCHORING
Max. D.P. <= 50 PSF

BUCK ANCHORING
Max. D.P. <= 80 PSF

LATCH JAMB
SEE DETAIL 5

FRAME ANCHORING
Max. D.P. <= 50 PSF

FRAME ANCHORING
Max. D.P. <= 80 PSF

HINGE JAMB






CONCRETE ANCHOR NOTES:

- Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
- Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
- Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW BUILDDEX TAPCON®	1/4"	1-1/4"	2-1/2"	4"
DeWALT ULTRACON®	1/4"	1-1/4"	2-1/2"	4"
	3/16"	1-3/4"	2-1/2"	1-3/4"

WOOD SCREW INSTALLATION NOTES:

- Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

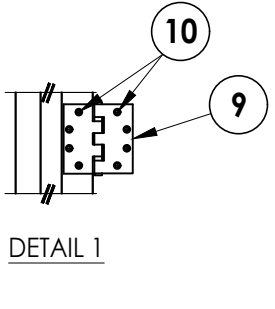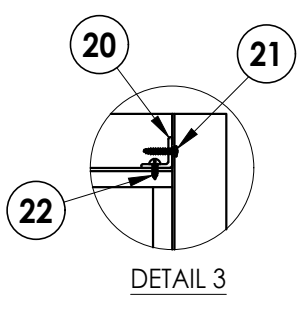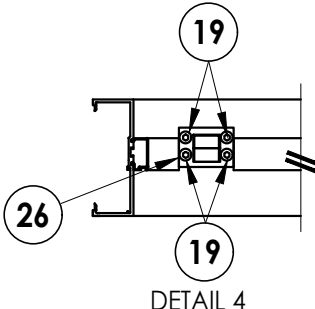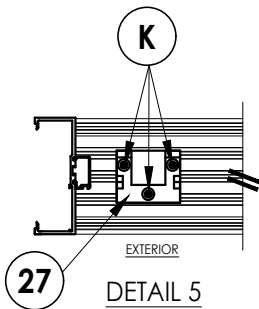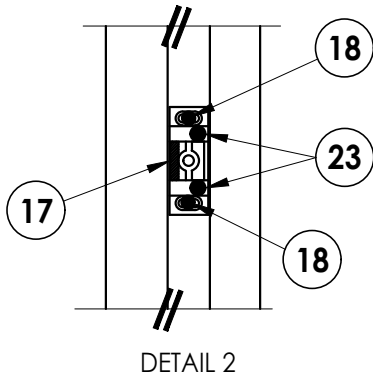

MAX. FRAME DIMENSION 51.5" X 98.0"

Documents Prepared By: Lyndon F. Schmidt
P.E. No. 43409

CLINE DOORS

PART OR ASSEMBLY: BUCK AND FRAME ANCHORING

REVISIONS

NO.	DATE	BY
6	7/02/26	UPDATE TO 9TH ED. (2026) FBC LFS
5	7/05/23	UPDATE TO 8TH ED. (2023) FBC LFS
4	8/11/20	UPDATE TO 7TH ED. (2020) FBC DAC


DATE: 9/5/13
SCALE: N.T.S.
DWG. BY: JK
CHK. BY: LFS
DRAWING NO.: FL-6336.5
SHEET 6 OF 7

BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

© 2013 R.W. BUILDING CONSULTANTS INC.

G:\2023 FBC Drawings 7-20-26\Cline Aluminum Doors\FL-6336 R12\FL-6336.5-8.dwg

BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL
A	1X BUCK SG >= 0.55	WOOD
B	2X BUCK SG >= 0.55	WOOD
C	1/4" MAX. SHIM SPACE	-
D	1/4" X 2-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301 OR HOLLOW BLOCK CONFORMING TO ASTM C90	CONCRETE
F	1/4" X 3-1/2" HH LAG SCREW (1.5" MIN. EMBEDMENT)	STEEL
G	1/4" X 4" HWH DeWALT OR ITW CONCRETE SCREW	STEEL
H	1/4" x 3-1/4" HWH DeWALT OR ITW CONCRETE SCREW	STEEL
J	1/4" x 1-3/4" HWH DeWALT OR ITW CONCRETE SCREW	STEEL
K	3/16" x 2-1/4" PFH DeWALT CONCRETE SCREW	STEEL
1	FRAME	ALUM 6063 T5
2	FRAME STOP	ALUM 6063 T5
3	5" SLIP PLATE	ALUM 6063 T5
4	HINGE REINFORCEMENT	ALUM
8	WOOL PILE WEATHERSTRIP	-
9	4-1/2" X 4-1/2" HINGE	STEEL
10	1/4 - 20 x 1/2" PFH MACHINE SCREW	STEEL
17	CENTER BOLT ROLLER STRIKE PLATE	STEEL
18	#12-24 X 2" FH MACHINE SCREW	STEEL
19	1/4 - 20 x 1" PFH MACHINE SCREW	STEEL
20	CORNER REINFORCEMENT (1" X 1" X 1/8" X 4.75" LONG ANGLE)	ALUM
21	#10 X 1" PPH SMS	STEEL
22	#10 X 1/2" PPH SMS	STEEL
23	#8 X 2" CAP SCREW	STEEL
24	DOOR SWEEP (PEMKO 345AV)	-
25	#6 X 5/8" PPH SMS	STEEL
26	TOP LATCH STRIKE HOUSING	STEEL
27	BOTTOM BOLT STRIKE PLATE	STEEL
32	ADA THRESHOLD (PEMKO 171A)	ALUM
40	DOOR PANEL (SEE DOOR PANEL DETAILS)	-

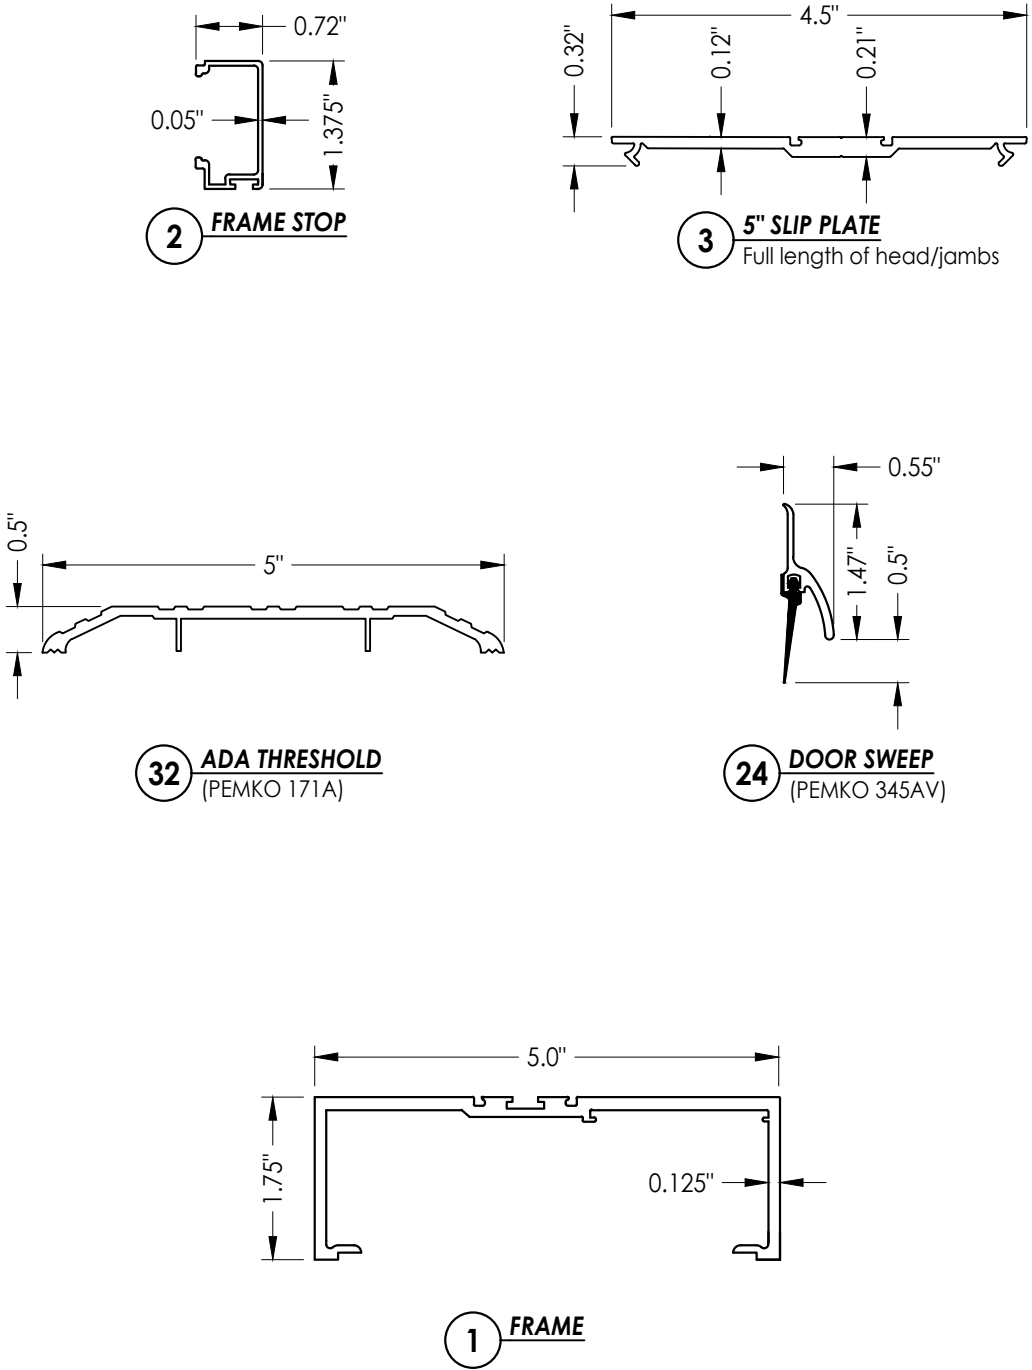

Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409		BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813	
PRODUCT: CLINE DOORS		PART OR ASSEMBLY: BILL OF MATERIALS & COMPONENTS	
		LFS	BY
		FBC	
6	7/02/26	UPDATE TO 9TH ED. (2026)	FBC
5	7/05/23	UPDATE TO 8TH ED. (2023)	FBC
4	8/11/20	UPDATE TO 7TH ED. (2020)	FBC
NO.	DATE		
REVISIONS			
DATE: 9/5/13			
SCALE: N.T.S.			
DWG. BY: JK			
CHK. BY: LFS			
DRAWING NO.: FL-6336.5			
SHEET 7 OF 7			