

THESE WINDOWS ARE RATED FOR SMALL MISSILE IMPACT.
F.B.C. HVHZ APPROVED IMPACT RESISTANT SHUTTERS REQUIRED FOR
INSTALLATIONS UP TO 30 FT. GRADE.
SHUTTERS NOT REQD. FOR INSTALLATIONS ABOVE 30 FT. OF GRADE.

SERIES-150 (S.M.I.)
ALUMINUM SINGLE HUNG WINDOW

DESIGN LOAD RATINGS FOR THESE WINDOWS TO BE AS PER
CHARTS SHOWN ON SHEET 2.

APPROVAL APPLIES TO SINGLE UNITS OR SIDE BY SIDE
COMBINATIONS OF S.H./S.H. OR SINGLE HUNG WITH OTHER
WINDOW TYPES IN MODULES OF TWO OR MORE WINDOWS USING
F.B.C. HVHZ APPROVED MULLIONS IN BETWEEN.

LOWER DESIGN PRESSURE FROM WINDOWS OR MULLION APPROVAL
WILL APPLY TO ENTIRE SYSTEM.

THIS PRODUCT HAS BEEN DESIGNED AND TESTED TO COMPLY WITH THE
REQUIREMENTS OF THE FLORIDA BUILDING CODE INCLUDING HIGH VELOCITY
HURRICANE ZONE (HVHZ).

1BY OR 2BY WOOD BUCKS & BUCK FASTENERS BY OTHERS, MUST BE
DESIGNED AND INSTALLED ADEQUATELY TO TRANSFER APPLIED PRODUCT LOADS
TO THE BUILDING STRUCTURE.


ANCHORS SHALL BE CORROSION RESISTANT, SPACED AS SHOWN ON DETAILS
AND INSTALLED PER MANUF'S INSTRUCTIONS. SPECIFIED EMBEDMENT TO BASE
MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO.

A LOAD DURATION INCREASE IS USED IN DESIGN OF ANCHORS INTO WOOD ONLY.
ALL SHIMS TO BE HIGH IMPACT, NON-METALLIC AND NON-COMPRESSIBLE.

MATERIALS INCLUDING BUT NOT LIMITED TO STEEL/METAL SCREWS, THAT
COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE
REQUIREMENTS OF THE FLORIDA BLDG. CODE & ADOPTED STANDARDS.

THIS PRODUCT APPROVAL IS GENERIC AND DOES NOT PROVIDE INFORMATION
FOR A SITE SPECIFIC PROJECT, i.e. LIFE SAFETY OF THIS PRODUCT, ADEQUACY
OF STRUCTURE RECEIVING THIS PRODUCT AND SEALING AROUND OPENING FOR
WATER INFILTRATION RESISTANCE ETC.
CONDITIONS NOT SHOWN IN THIS DRAWING ARE TO BE ANALYZED SEPARATELY,
AND TO BE REVIEWED BY BUILDING OFFICIAL.

DESIGN LOAD SHOWN ARE BASED ON 'ALLOWABLE STRESS DESIGN (ASD)'.

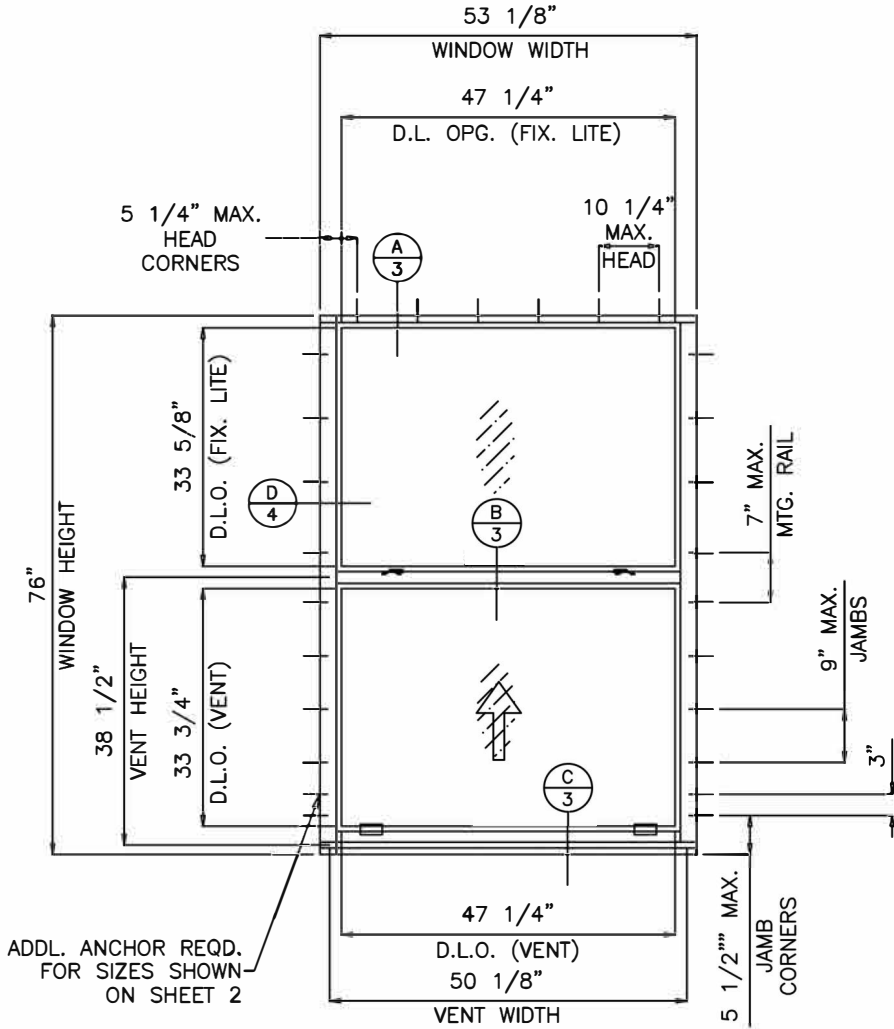

TYPICAL ELEVATION
(TESTED UNIT)



JAVAD AHMAD PE, inc
7875 NW 12th St., Suite 102 Doral,
FL 33126
Ph: (305) 424-8001
support@ja-pe.com

CONSULTING • STRUCTURAL DESIGN • FACADES • BUILDING ENVELOPE • SYSTEM DESIGN • PRODUCT APPROVALS

MA	BS
drawn by:	check by:
JA-1206-25	04/15/2025
drawing no.	date:
REVISION	
No.	DATE
DESCRIPTION	
BY	

SERIES 150: ECO-GUARD ALUMINUM SINGLE HUNG WINDOW
(S.M.I.)
SMALL MISSILE IMPACT RATED



ECO WINDOW SYSTEMS, LLC.
8502 N.W. 80th ST. MEDLEY, FL 33166
TEL. (305) 885-5299 FAX. (305) 885-5902



SEALED: 04-15-2025

FL#40096.6

01

01 of 07

Equal Lites Windows													
Design Load Capacity - PSF													
Glass Types 'G1' & 'G2'		Window Height (in.)											
		38-3/8" (4)		50-5/8" (6)		63" (6)		76" (8)		84" (10)		96" (12)	
Window Width (in.)	19-1/8"	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0
	26-1/2"	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0
	30"	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0
	42"	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0
	48"	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0
	53-1/8"	+80.0	-135.0	+80.0	-135.0*	+80.0	-133.7*	+80.0	-131.4*				


* ADDL. ANCHORS REQD. AT JAMB ENDS
FOR THIS SIZE AND LOAD ONLY.

Unequal Lites Windows													
Design Load Capacity - PSF													
Glass Types 'G1' & 'G2'		Window Height (in.)											
		38-3/8" (4)		50-5/8" (6)		63" (6)		76" (8)		84" (10)		96" (12)	
Window Width (in.)	19-1/8"	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0
	26-1/2"	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0		
	30"	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0		
	42"	+80.0	-135.0	+80.0	-135.0	+80.0	-135.0						
	48"	+80.0	-135.0	+80.0	-135.0								
	53-1/8"	+80.0	-135.0	+80.0	-135.0*								

* ADDL. ANCHORS REQD. AT JAMB ENDS
FOR THIS SIZE AND LOAD ONLY.


NO. IN PARENTHESIS INDICATE NO.
OF ANCHORS PER JAMB.

FOR SIZES NOT SHOWN, ROUND UP
TO THE NEXT AVAILABLE WIDTH OR
HEIGHT DIMENSION SHOWN ON THE
TABLE.

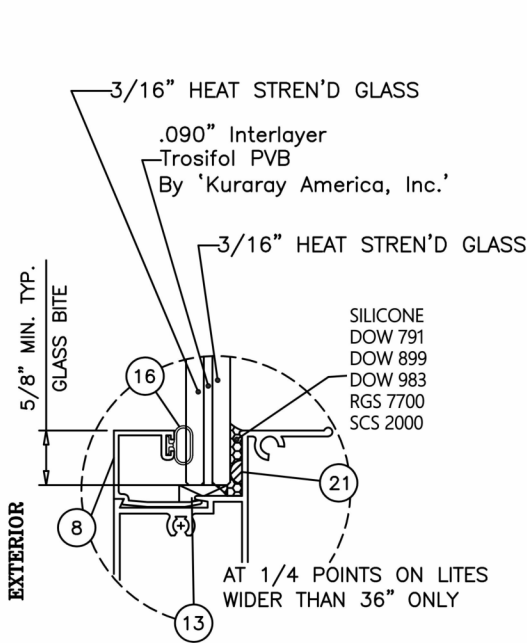

GLASS TYPE 'G1'


7/16" OVERALL LAM. GLASS

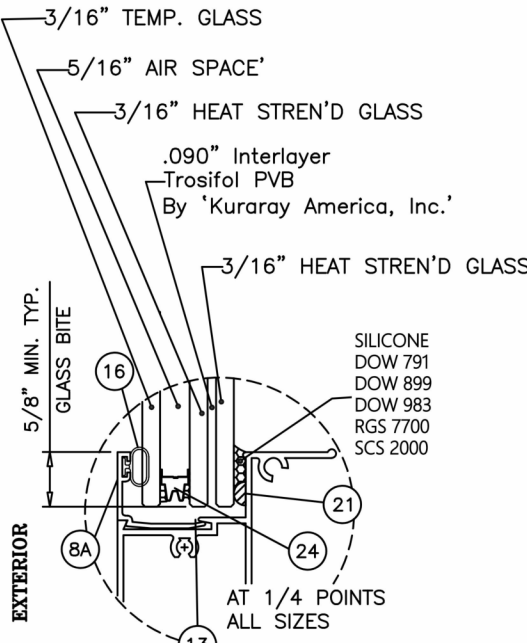


GLASS TYPE 'G2'

15/16" OVERALL INSUL. LAM. GLASS

GLAZING OPTIONS

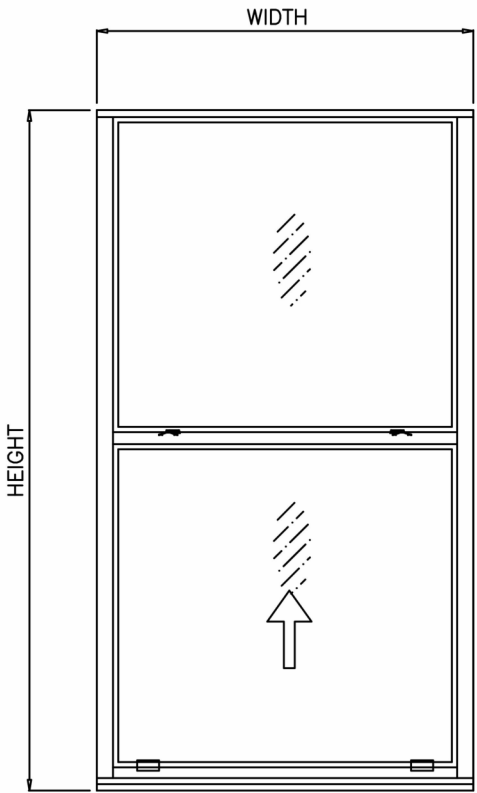

EQUAL LITES

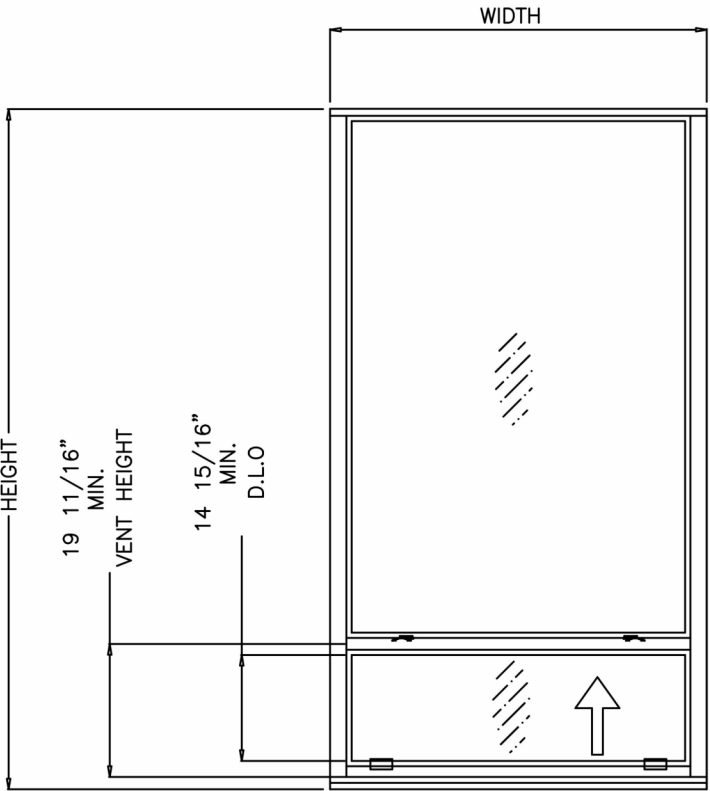

UNEQUAL LITES (ORIEL TYPE)

NOTE:
GLASS CAPACITIES ON THIS SHEET ARE
BASED ON ASTM E1300-16 (3 SEC. GUSTS)



JAVAD AHMAD PE, inc

7875 NW 12th St., Suite 102 Doral,
FL 33126

Ph: (305) 424-8001

support@ja-pe.com

CONSULTING • STRUCTURAL DESIGN • FACADES • BUILDING ENVELOPE • SYSTEM DESIGN • PRODUCT APPROVALS

drawing no.	date:	JA-1206-25	04/15/2025	MA	BS	drawn by:	check by:	REVISION			
								No.	DATE	BY	DESCRIPTION

SERIES 150: ECO-GUARD ALUMINUM SINGLE HUNG WINDOW
(S.M.I.)
SMALL MISSILE IMPACT RATED





ECO WINDOW SYSTEMS, LLC.
8502 N.W. 80th ST. MEDLEY, FL 33166
TEL. (305) 885-5299 FAX. (305) 885-5902




SEALED: 04-15-2025

FL#40096.6


WINDOW HEIGHT
EXTERIOR

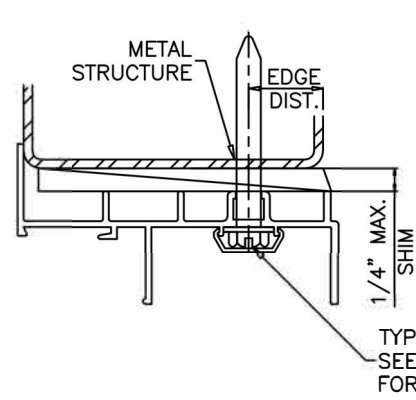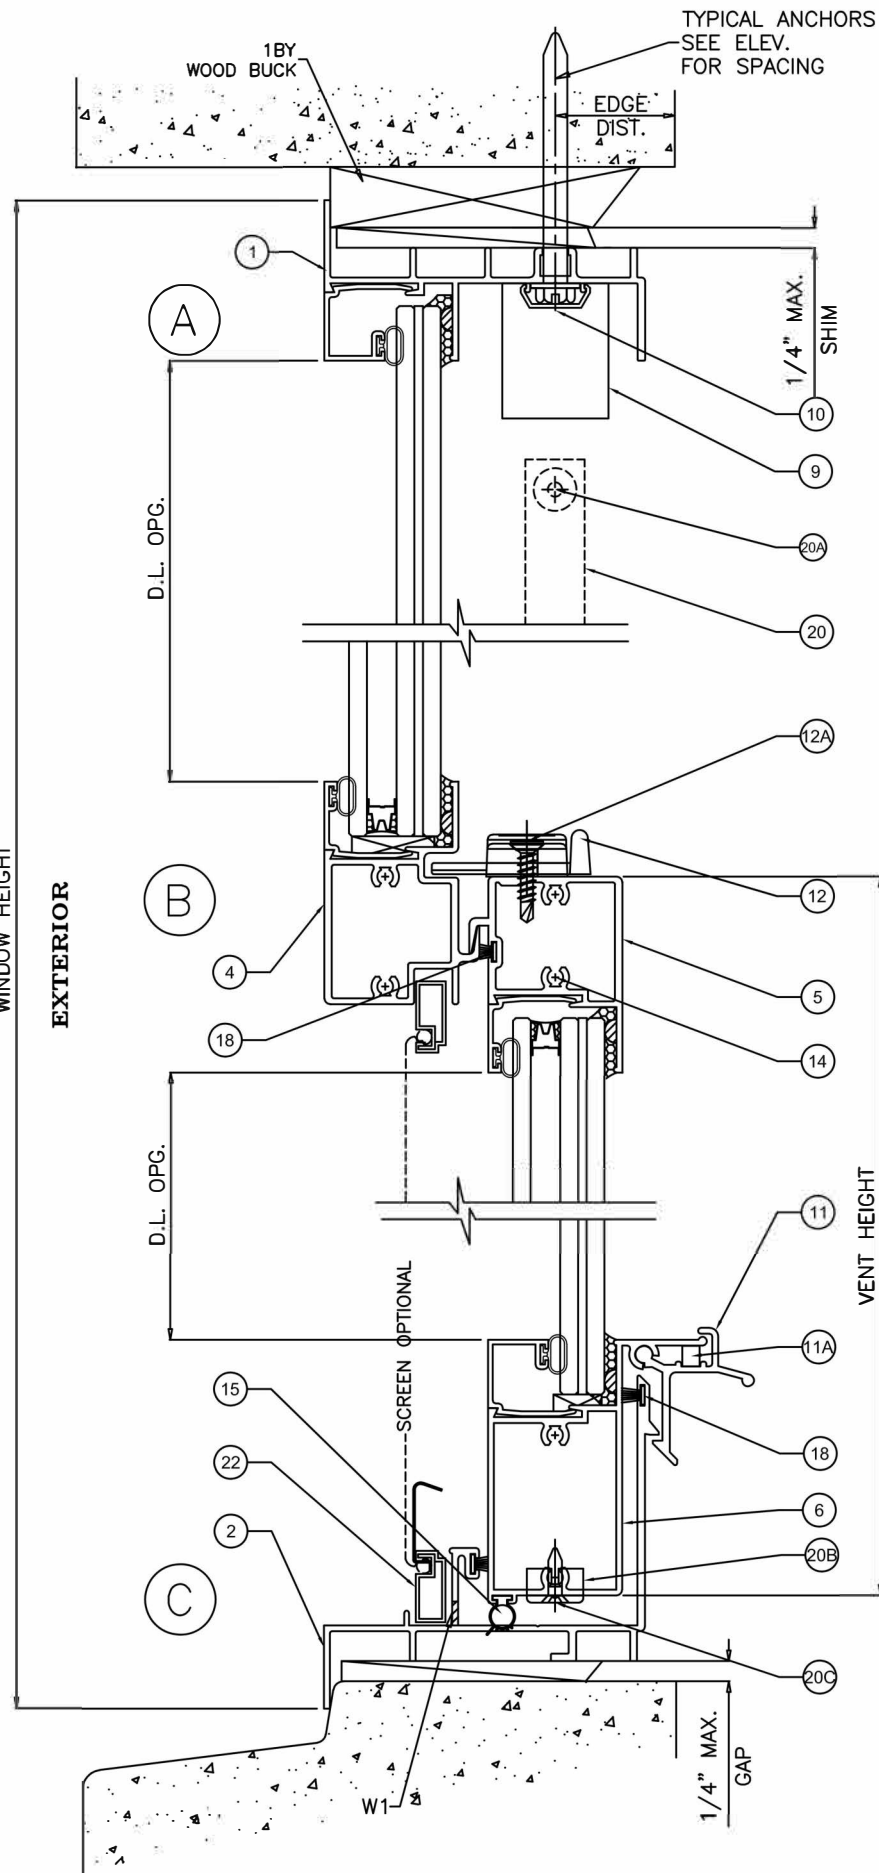

TYPICAL ANCHORS
SEE ELEV.
FOR SPACING

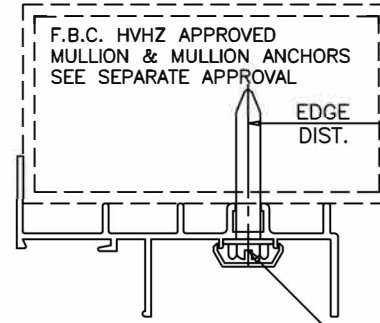

TYPICAL ANCHORS
SEE ELEV.
FOR SPACING

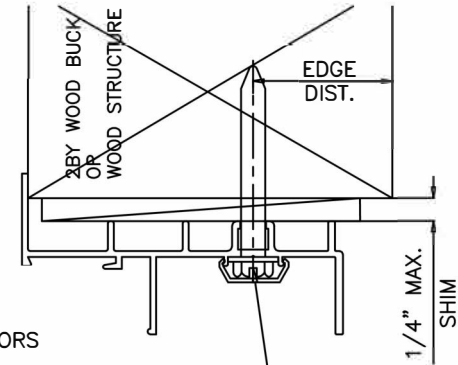

TYPICAL ANCHORS
SEE ELEV.
FOR SPACING

WEEPHOLES:


W1 = 1/4" X 3/4" WEEPHOLES AT 12-1/2"
FROM EACH END.

WOOD BUCKS AND METAL STRUCTURE NOT BY 'ECO WDW'.
MUST SUSTAIN LOADS IMPOSED BY GLAZING SYSTEM AND
TRANSFER THEM TO THE BUILDING STRUCTURE.

TYPICAL ANCHORS: SEE ELEV. FOR SPACING

Anchor Type	Frame Member	Substrate	Min. Edge Distance	Min. Embedment or Metal Thickness
1/4" DeWalt UltraCon +	All	Southern Pine (SG = 0.55)	1"	1-1/2"
	All	Thru 1BY Buck into Concrete (min. 3 ksi)	2-1/2"	1-1/4"
	Jambs	Thru 1BY Buck into Hollow or Filled Block (ASTM C90, min. 2 ksi)	2-1/2"	1-1/4"
	All	Concrete (min. 3ksi)	2-1/2"	1-1/4"
	Jambs	Hollow or Filled Block (ASTM C90, min. 2 ksi)	2-1/2"	1-1/4"
#14 SMS or Self Drilling Screws (Gr. 2)	All	F.B.C. Approved Mullions	3/4"	(3) Threads min. beyond metal thickness
	Head/Jambs	Aluminum 1/8" Thk. Min. (6063-T5)	3/4"	(3) Threads min. beyond metal thickness
	Head/Jambs	Steel 1/8" Thk. Min. (min. 36 ksi)	3/4"	(3) Threads min. beyond metal thickness

1. STEEL IN CONTACT WITH ALUMINUM TO BE PLATED OR PAINTED
2. ALL ANCHOR HEAD TYPES ARE ACCEPTABLE
3. SILL MEMBER IS APPROVED TO BE USED AS UNANCHORED

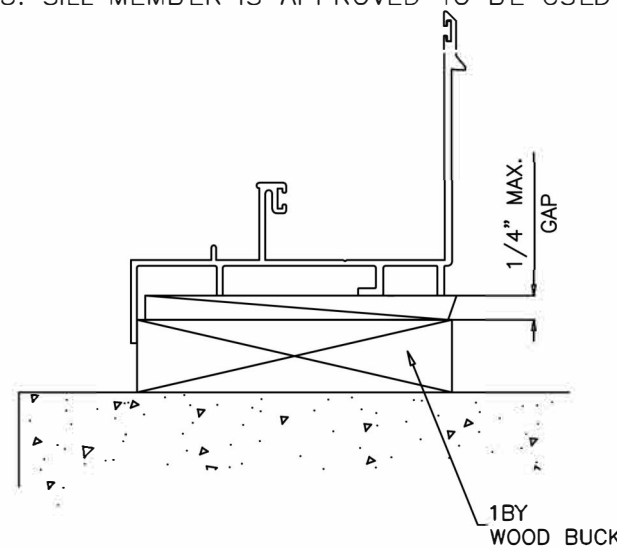

FL#40096.6



JAVAD AHMAD PE, inc

7875 NW 12th St., Suite 102 Doral,
FL 33126

Ph: (305) 424-8001

support@ja-pe.com

CONSULTING • STRUCTURAL DESIGN • FACADES • BUILDING ENVELOPE • SYSTEM DESIGN • PRODUCT APPROVALS

drawing no.	date:	JA-1206-25	04/15/2025	MA	BS	REVISION		
						No.	DATE	DESCRIPTION

SERIES 150: ECO-GUARD ALUMINUM SINGLE HUNG WINDOW
(S.M.I.)
SMALL MISSILE IMPACT RATED






ECO WINDOW SYSTEMS, LLC.
8502 N.W. 80th ST. MEDLEY, FL 33166
TEL. (305) 885-5299 FAX. (305) 885-5902














SEALED: 04-15-2025

03

03 of 07

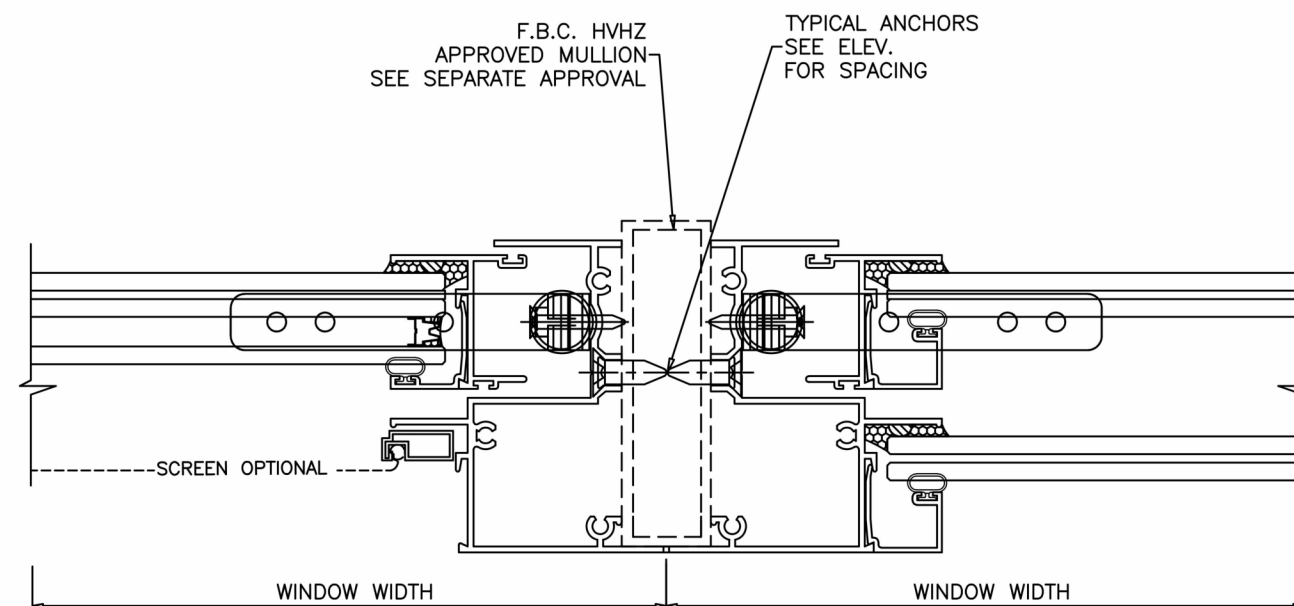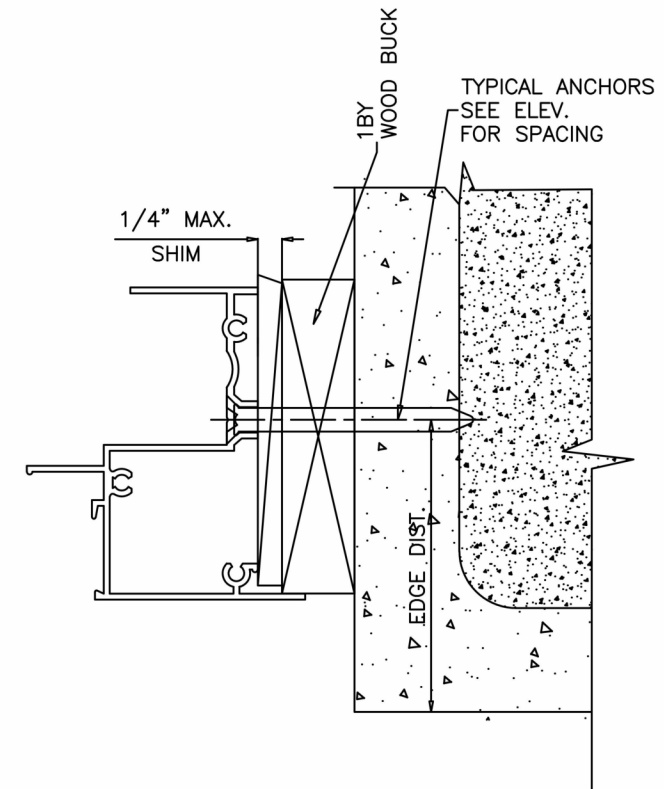

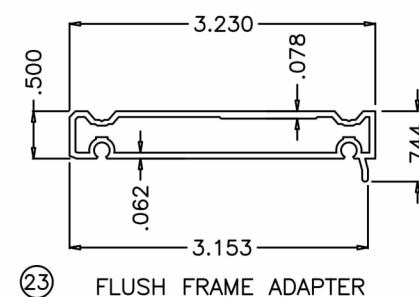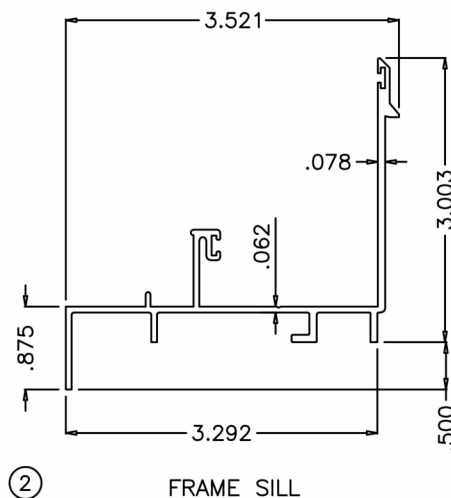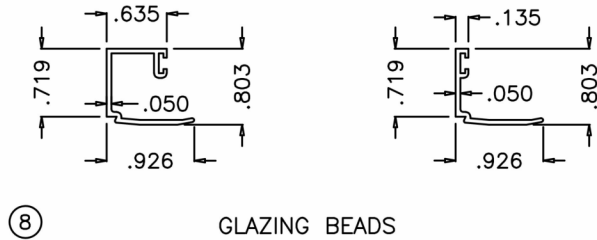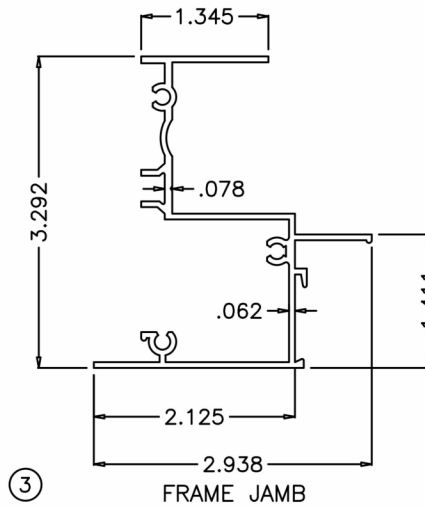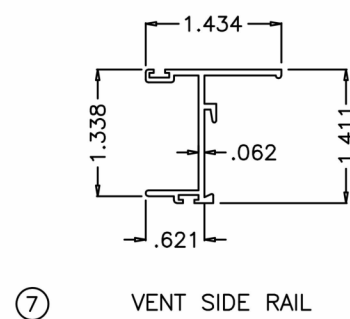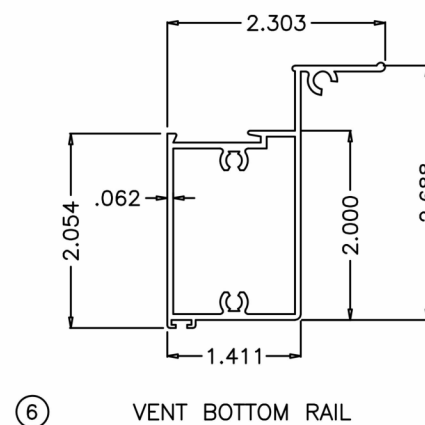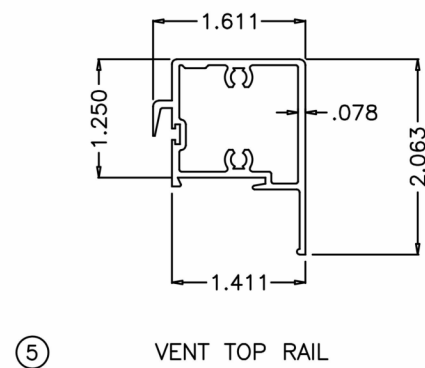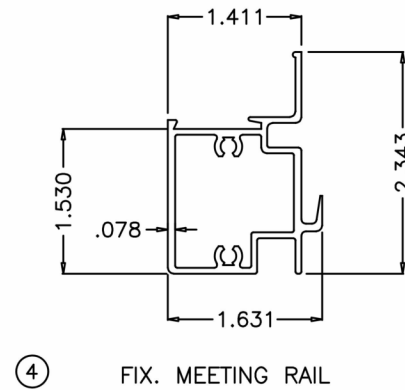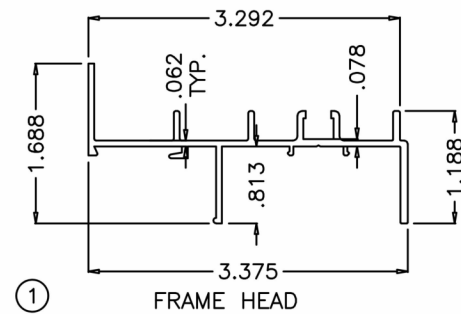

ITEM #	PART #	QUANTITY	DESCRIPTION	MATERIAL	MANF./SUPPLIER/REMARKS
1	E151	1	FRAME HEAD	6063-T6	-
2	E152	1	FRAME SILL	6063-T6	-
3	E153	2	FRAME JAMB	6063-T6	-
4	E154	1	FIXED MTG. RAIL	6063-T6	-
5	E155	1	VENT TOP RAIL	6063-T6	-
6	E156	1	VENT BOTTOM RAIL	6063-T6	-
7	E157	2	VENT SIDE RAIL	6063-T6	-
8	E159	AS REQD.	GLAZING BEAD (LAM. GLASS)	6063-T6	-
8A	E158	AS REQD.	GLAZING BEAD (INSUL. LAM. GLASS)	6063-T6	-
9	FY116	2/VENT	SASH STOP	6063-T5	-
10	E162	AS REQD.	SCREW COVER	6063-T6	-
11	FY113	2/VENT	SPRING LOADED LATCH, AT 6" FROM ENDS	6063-T6	-
11A	-	1/LATCH	LATCH SPRING	ST STEEL	-
12	SL203P	2/VENT	SWEEP LATCH, AT 12" FROM ENDS	ZAMAK	SULLIVAN & ASSOC.
12A	#8 X 5/8"	2/LATCH	LATCH INST. SCREWS	ST STEEL	FH SMS
13	-	AS REQD.	SETTING BLOCK	EPDM	DUROMETER 80±5 SHORE A
14	#10 X 1"	AS REQD.	FRAME & VENT ASSEMBLY SCREWS	CRS	PH SMS
14A	#10 X 1-1/4"	2/CORNER	FLUSH FRAME ADAPTER FASTENERS	CRS	FH SMS
15	E207	AS REQD.	BOTTOM RAIL SEAL - SERIES 101	NEOPRENE	ULTRAFAB
16	TR.3020	AS REQD.	GLAZING BEAD BULB	SANTOPRENE	TECHNO RUBBER
17	E163	2/VENT	SASH TOP GUIDE	DERLIN	M&M PLATICS
18	W23181	AS REQD.	FIN SEAL W'STRIPPPING	-	ULTRAFAB
19	E164	4/VENT	SASH SIDE GUIDE	DERLIN	M&M PLASTICS
19A	#6 X 3/8"	1/GUIDE	SASH GUIDE INST. SCREW	CRS	OH SMS TYPE B
20	F210	2/VENT	SASH BALANCE	-	SUPERBOOST BY BSI
20A	#8 X 1"	1/BALANCE	BALANCE INST. SCREW	ST STEEL	FH SMS
20B	21B02 UEK	1/BALANCE	BALANCE BRACKET	STEEL	CALDWELL
20C	#8 X 1/2"	2/BRACKET	BRACKET FASTENER	ST. STEEL	PH SMS
21	-	AS REQD.	GLASS SPACER	SILICONE	FRANK LOWE
22	-	1	5/16" BOX SCREEN	-	OPTIONAL
23	E161	-	FLUSH FRAME ADAPTER	6063-T6	OPTIONAL
24	-	-	INSUL. GLASS SPACER	VARIOUS	VARIOUS



JAVAD AHMAD PE, inc

7875 NW 12th St., Suite 102 Doral,
FL 33126

Ph: (305) 424-8001

support@ja-pe.com


CONSULTING • STRUCTURAL DESIGN • FACADES • BUILDING ENVELOPE • SYSTEM DESIGN • PRODUCT APPROVALS

drawing no.	JA-1206-25	drawn by:	MA
date:	04/15/2025	check by:	BS
REVISION			
No.	DATE	BY	DESCRIPTION

**SERIES 150: ECO-GUARD ALUMINUM SINGLE HUNG WINDOW
(S.M.I)**




ECO WINDOW SYSTEMS, LLC.
8502 N.W. 80th ST. MEDLEY, FL 33166
TEL. (305) 885-5299 FAX. (305) 885-5902




SEALED: 04-15-2025

FL#40096.6

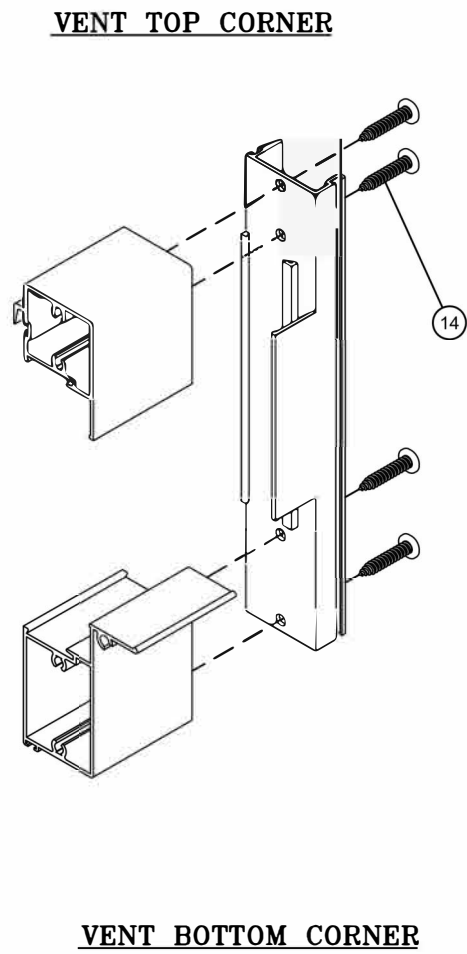


FRAME TOP CORNER

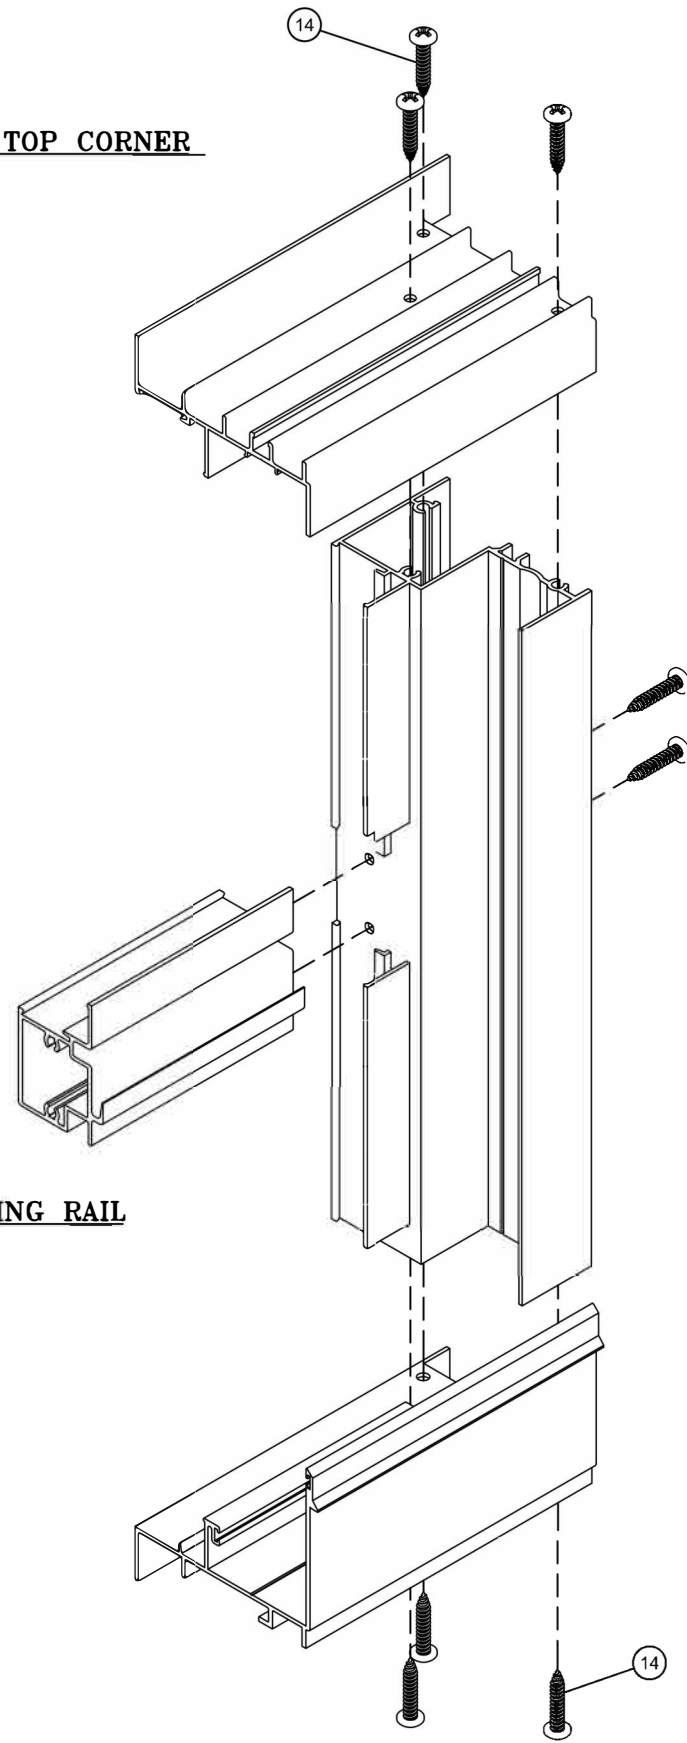

MEETING RAIL

FRAME BOTTOM CORNER

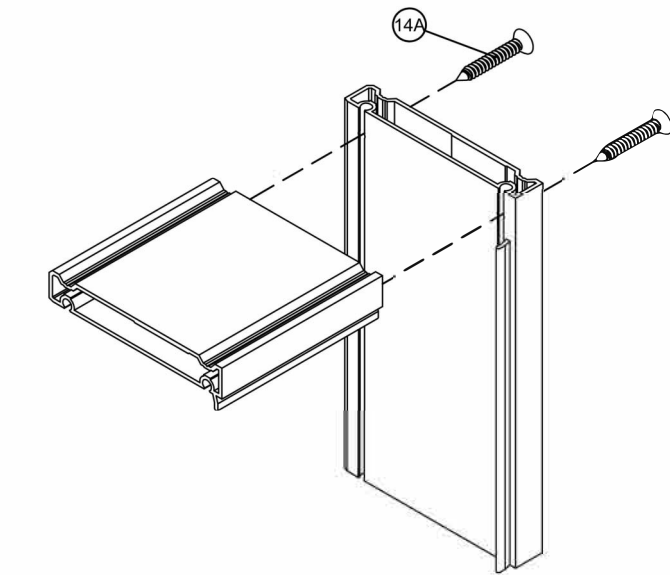

FLUSH FRAME ADAPTER CORNER

FL#40096.6



JAVAD AHMAD PE, inc
7875 NW 12th St., Suite 102 Doral,
FL 33126
Ph: (305) 424-8001
support@ja-pe.com

CONSULTING • STRUCTURAL DESIGN • FAÇADES • BUILDING ENVELOPE • SYSTEM DESIGN • PRODUCT APPROVALS

drawing no.	JA-1206-25	drawn by:	MA
date:	04/15/2025	check by:	BS
REVISION			
No.	DATE	BY	DESCRIPTION

SERIES 150: ECO-GUARD ALUMINUM SINGLE HUNG WINDOW
(S.M.I.)
SMALL MISSILE IMPACT RATED



ECO WINDOW SYSTEMS, LLC.
8502 N.W. 80th ST. MEDLEY, FL 33166
TEL. (305) 885-5299 FAX. (305) 885-5902



SEALED: 04-15-2025