


c:\users\daniel\buildit\rago\building drops, inc\building drops landing - documents\common\projects\ph tech, inc\fbc-24-1237 - fbc submittal - fl40256 s-3200s-4200 fixed transom window - revision\dwgs\pht005.dwg
1/10/2025 3:20 PM

P.H. TECH CORP

S-3200/S-4200 FIXED TRANSOM WINDOW (NON-HVHZ)(NON-IMPACT)

GENERAL NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH THE CURRENT FLORIDA BUILDING CODE (FBC), **EXCLUDING** HVHZ AND HAS BEEN EVALUATED ACCORDING TO THE FOLLOWING:
 - AAMA/WDMA/CSA 101/I.S.2/A440-11/17
2. ADEQUACY OF THE EXISTING STRUCTURAL CONCRETE/MASONRY, 2X AND METAL STUD FRAMING AS A MAIN WIND FORCE RESISTING SYSTEM CAPABLE OF WITHSTANDING AND TRANSFERRING APPLIED PRODUCT LOADS TO THE FOUNDATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
3. 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO THE STRUCTURE. BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
4. THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.
5. APPROVED IMPACT PROTECTIVE SYSTEM **IS REQUIRED** TO PROTECT THIS PRODUCT IN AREAS REQUIRING IMPACT RESISTANCE.
6. FRAME MATERIAL: UPVC
7. GLASS SHALL MEET THE REQUIREMENTS OF ASTM E1300. SEE GLAZING DETAIL ON SHEET 1.
8. DESIGNATION "O" INDICATES FIXED PANEL.

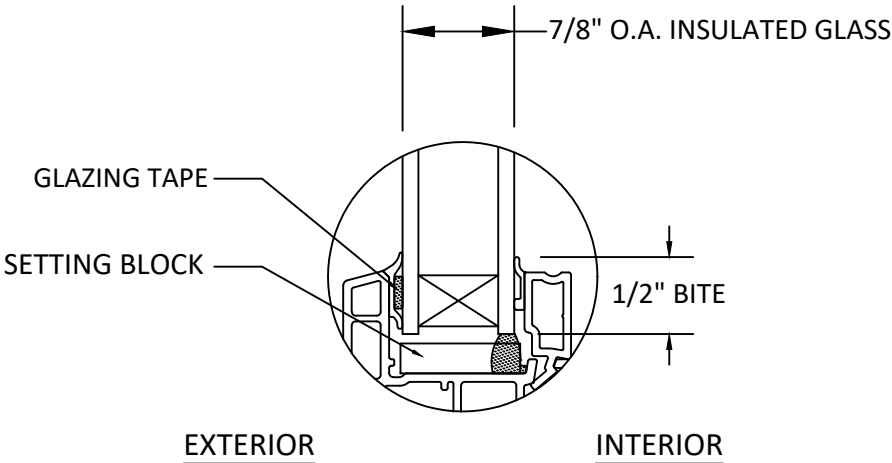

GLAZING DETAIL

GLAZING NOTES:

1. GLASS TYPE SHALL COMPLY WITH ASTM E1300 & FBC SAFETY GLAZING REQUIREMENTS.
2. SETTING BLOCKS TO BE LOCATED AT 1/4 SPAN LENGTH FOR GLASS WIDER THAN 36" AS PER FBC CHAPTER 24.
3. SETTING BLOCK DUROMETER HARDNESS OF 70-90 (SHORE A) AS REFERENCED IN FBC CHAPTER 24.
4. GLASS TYPE SHALL COMPLY WITH APPLICABLE GLAZING REQUIREMENTS PER CHAPTER 24 OF THE FBC.

TABLE OF CONTENTS	
SHEET	SHEET DESCRIPTION
1	GENERAL NOTES AND GLAZING DETAIL
2	ELEVATION AND ANCHOR LAYOUT
3	ELEVATION AND ANCHOR LAYOUT
4	VERTICAL SECTIONS
5	HORIZONTAL SECTIONS
6	ANCHOR DETAILS, ANCHOR SCHEDULE AND INSTALLATION NOTES

DESIGN PRESSURE TABLE		
DESIGN PRESSURE	FRAME SIZES	MISSILE IMPACT RATING
+100/-100 PSF	59.06" x 70.87"	NON - IMPACT
+60/-60 PSF	112" x 68.11"	
+65/-65 PSF	108" x 72"	



P.H. TECH CORP
724 BRICKWORKS DRIVE
LEETSDALE, PA 15056
418-833-3231

TITLE: S-3200/S-4200 FIXED TRANSOM WINDOW (NON-HVHZ)(NON-IMPACT)
GENERAL NOTES AND GLAZING DETAIL

PREPARED BY: BUILDING DROPS, INC.
1900 NE MIAMI CT, SUITE 2-15
MIAMI, FL 33132
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com

BUILDING DROPS

REMARKS	BY	DATE

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

Digitally signed by **Hernando F. Norero, P.E.**
Reason: I am approving this document
Date: 2025.01.23 13:46:02 -0500



FL40256

DATE: 01.08.25


DWG. BY: DB
CHK. BY: HFN

SCALE: NTS


DWG. #: PHT005

SHEET
1
OF 6

c:\users\danielbuitrago\building drops, inc\building drops landing - documents\projects\ph tech, inc\fbc-24-1237 - fbc submittal - fl40256 s-3200s-4200 fixed transom window - revision\dwgs\pht005.dwg 1/10/2025 3:20 PM

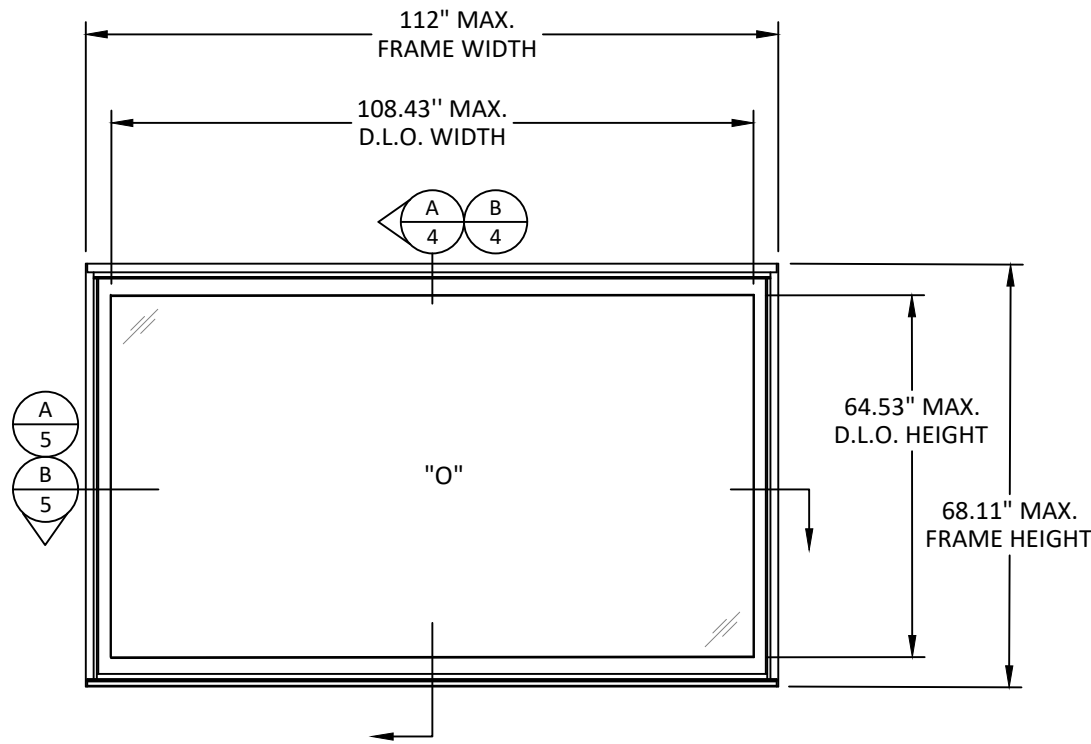


ELEVATION
FIXED WINDOW

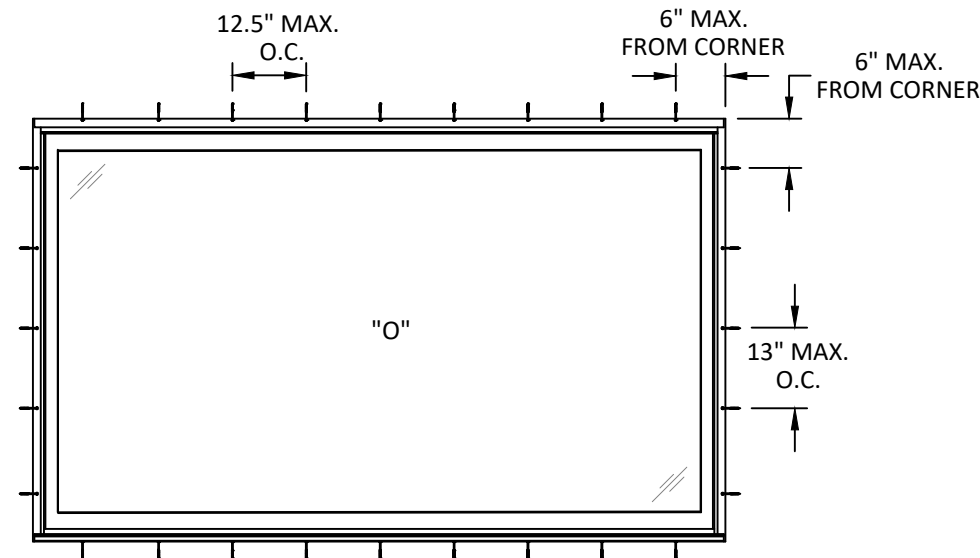


ANCHOR LAYOUT
FIXED WINDOW
STRAP ANCHOR

NOTE:
FOR MORE ANCHOR INFORMATION (INSTALLATION TYPE, SPACING, QUANTITY, ANCHOR TYPE, QUALIFIED SUBSTRATES) SEE SHEET 6.

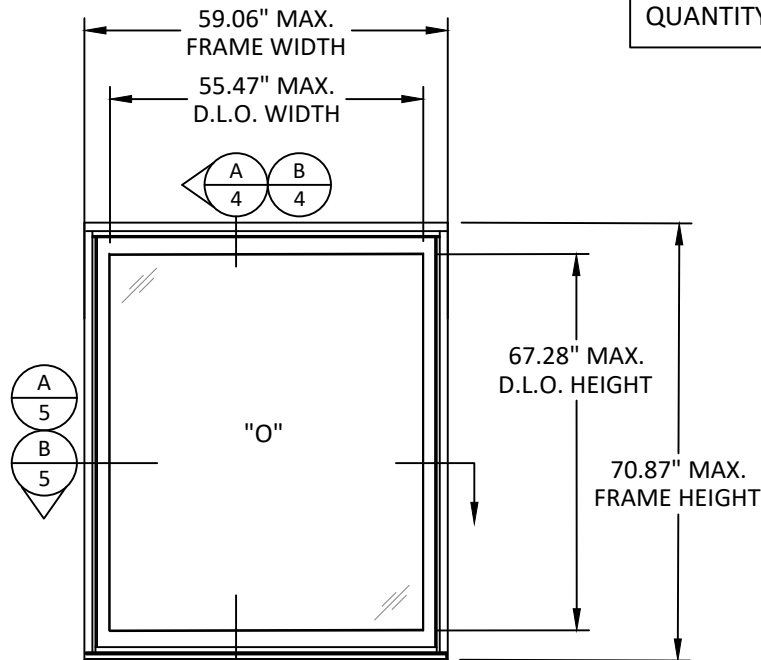

ELEVATION
FIXED WINDOW

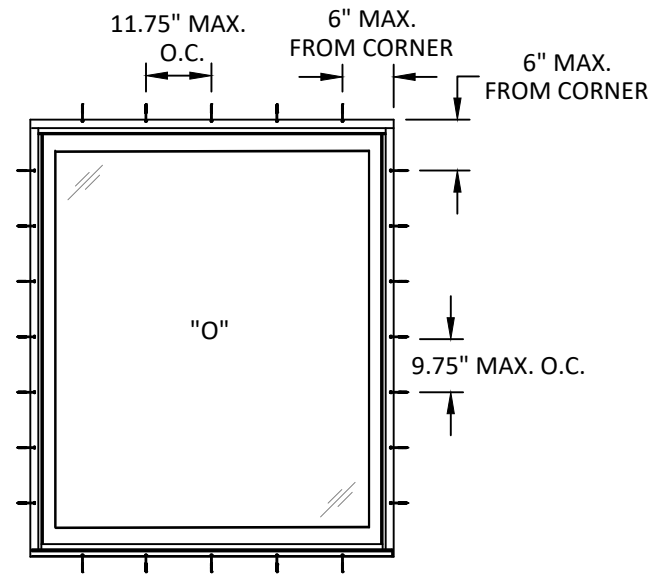

ANCHOR LAYOUT
FIXED WINDOW
STRAP ANCHOR



P.H. TECH CORP
724 BRICKWORKS DRIVE
LEETSDALE, PA 15056
418-833-3231


TITLE: S-3200/S-4200 FIXED
TRANSON WINDOW
(NON-HVHZ)(NON-IMPACT)
ELEVATION AND ANCHOR LAYOUT

PREPARED BY:
BUILDING DROPS, INC.
1900 NE MIAMI CT, SUITE 2-15
MIAMI, FL 33132
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

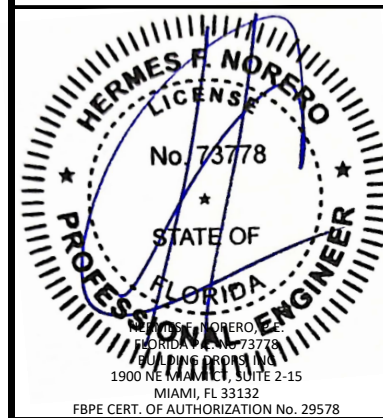


FL40256


DATE:	01.08.25
DWG. BY:	DB
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	PHT005

SHEET
2
OF 6

c:\users\danielbuitrago\building drops, inc\building drops, inc\projects\ph tech, inc\fbc-24-1237 - fbc submittal - fl40256 s-3200s-4200 fixed transom window - revision\dwgs\pht005.dwg 1/10/2025 3:20 PM

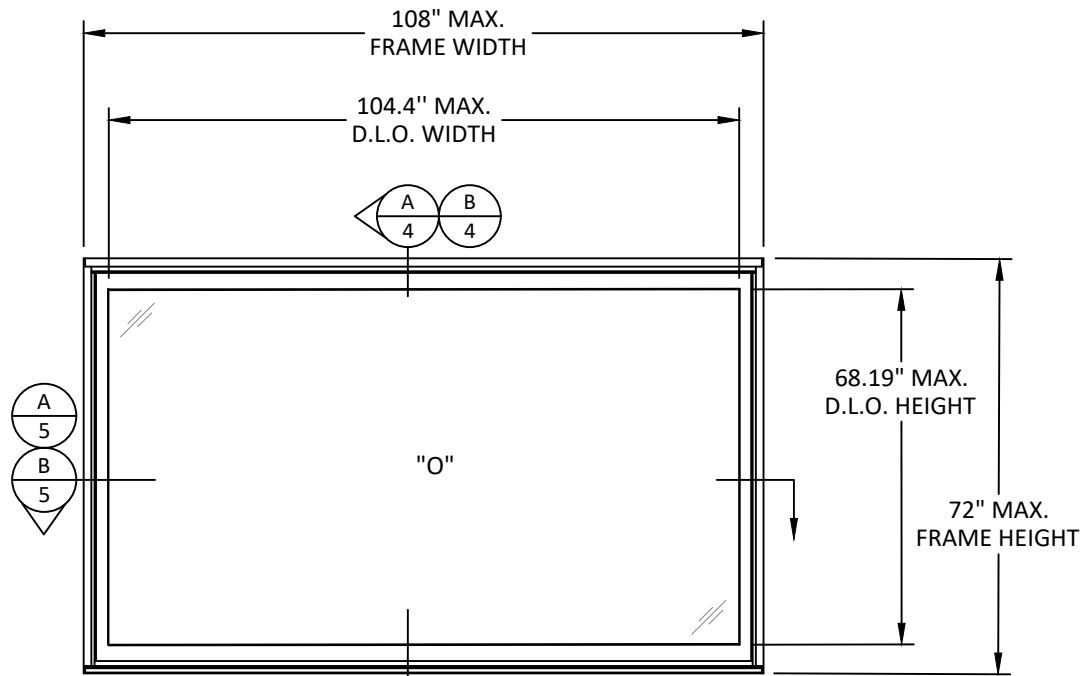

ELEVATION
FIXED WINDOW

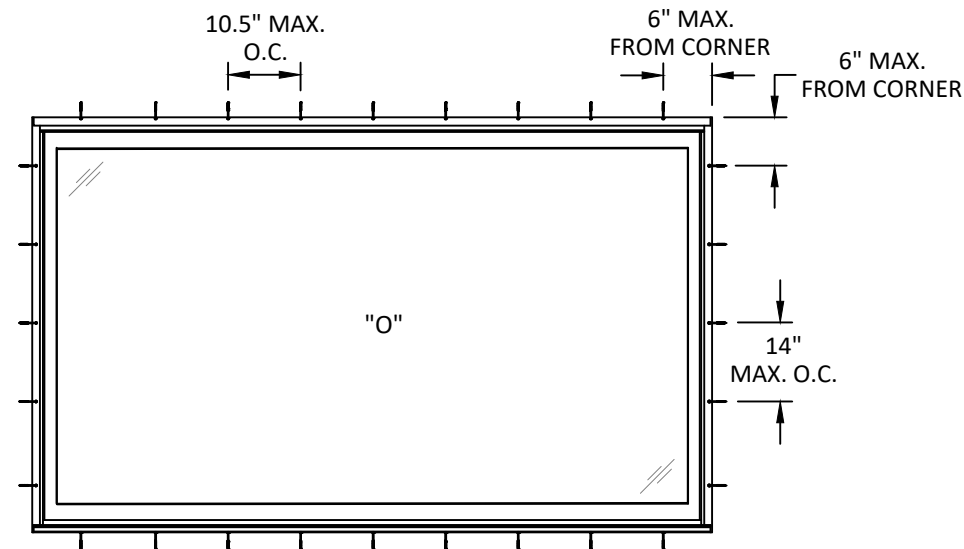

ANCHOR LAYOUT
FIXED WINDOW
STRAP ANCHOR

NOTE:

FOR MORE ANCHOR INFORMATION (INSTALLATION TYPE, SPACING, QUANTITY, ANCHOR TYPE, QUALIFIED SUBSTRATES) SEE SHEET 6.



P.H. TECH CORP
724 BRICKWORKS DRIVE
LEETSDALE, PA 15056
418-833-3231


TITLE: S-3200/S-4200 FIXED
TRANSOM WINDOW
(NON-HVHZ)(NON-IMPACT)
ELEVATION AND ANCHOR LAYOUT

PREPARED BY:
BUILDING DROPS, INC.
1900 NE MIAMI CT, SUITE 2-15
MIAMI, FL 33132
PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE



THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

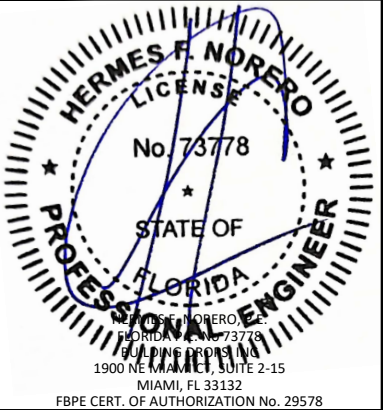

FL40256

DATE:	01.08.25
DWG. BY:	CHK. BY:
DB	HFN
SCALE:	NTS
DWG. #:	PHT005
SHEET	3



c:\users\danielbuitrago\building drops, inc\building drops landing - documents\project\ph tech, inc\fbc-24-1237 - fbc submittal - fl40256 s-3200s-4200 fixed transom window - revision\dwgs\pht005.dwg 1/10/2025 3:20 PM

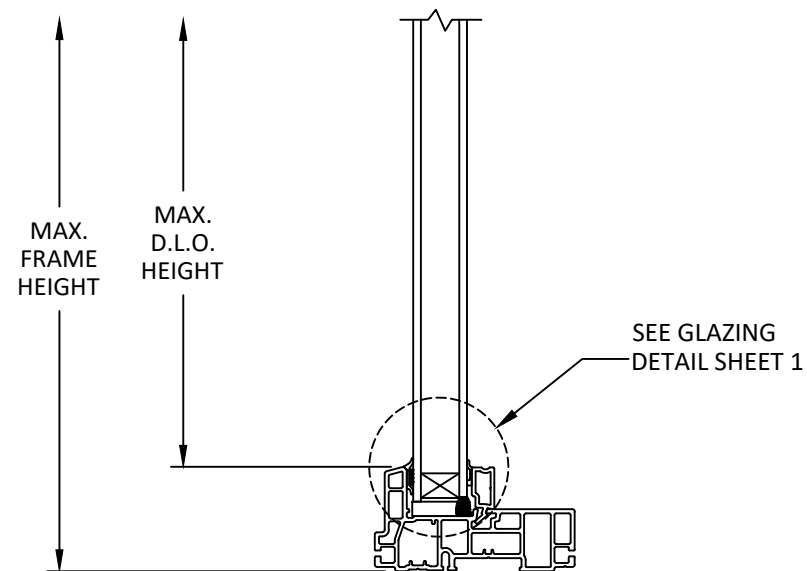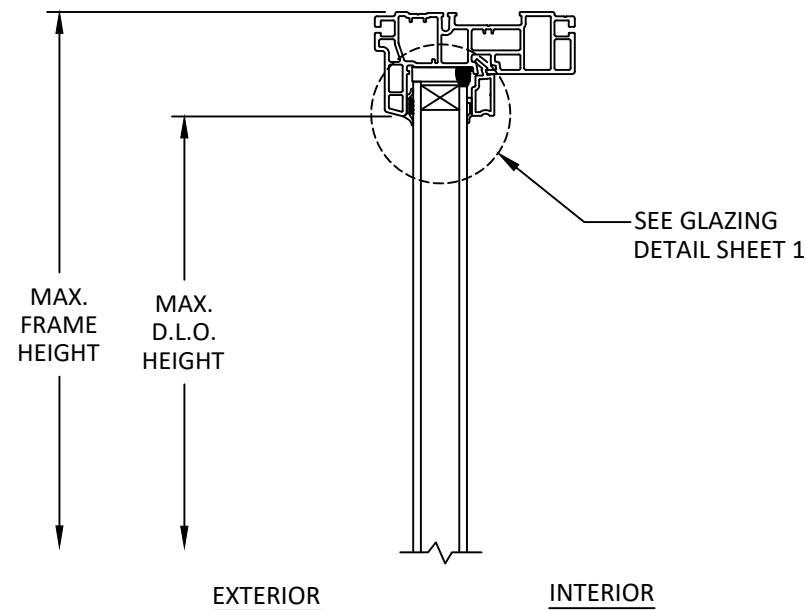

A
4

VERTICAL SECTION

S-3200

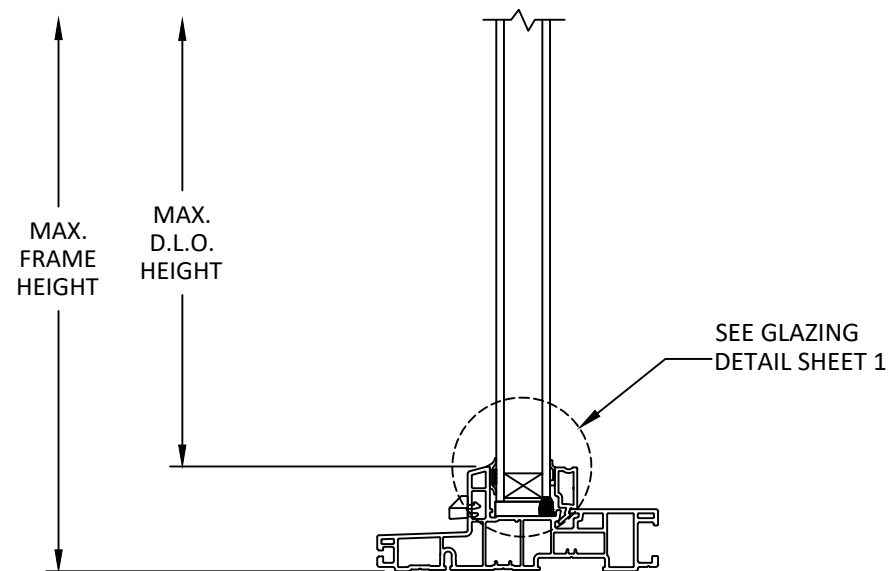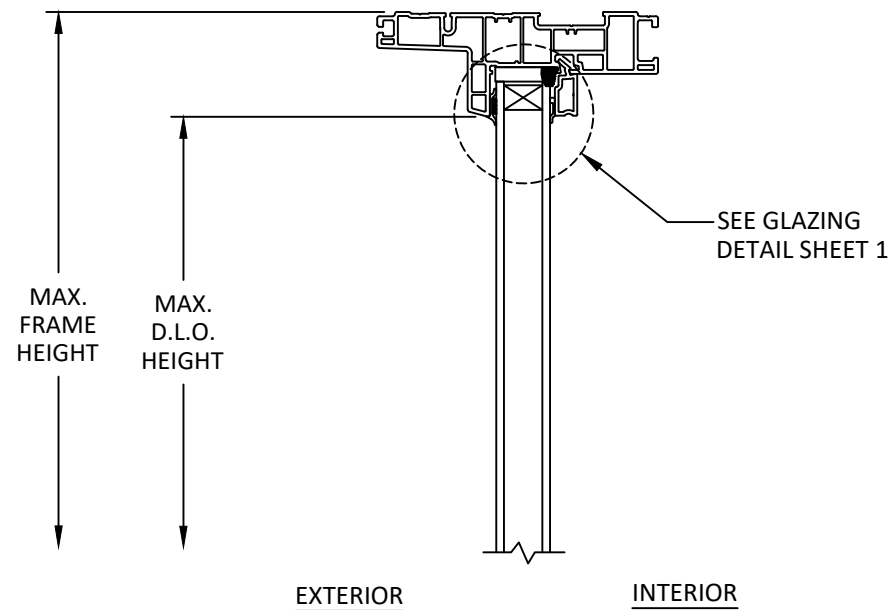

B
4

VERTICAL SECTION

S-4200



P.H. TECH CORP
724 BRICKWORKS DRIVE
LEETSDALE, PA 15056
418-833-3231

TITLE: S-3200/S-4200 FIXED
TRANSON WINDOW
(NON-HVHZ)(NON-IMPACT)

VERTICAL SECTIONS


PREPARED BY: BUILDING DROPS, INC.

1900 NE MIAMI CT, SUITE 2-15
MIAMI, FL 33132
PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

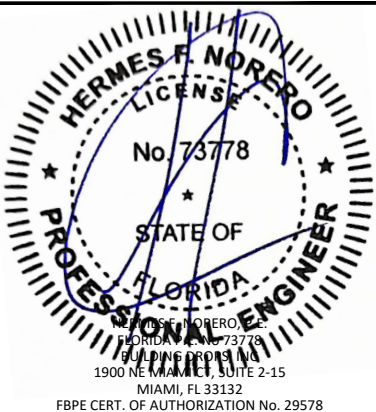

FL40256

DATE: 01.08.25

DWG. BY:
DB

CHK. BY:
HFN

SCALE: NTS


DWG. #: PHT005

SHEET


4

OF 6

c:\users\danielbuitrago\building drops, inc\building drops landing - documents\common\projects\ph tech, inc\fbc-24-1237 - fbc submittal - fl40256 s-3200s-4200 fixed transom window - revision\dwgs\pht005.dwg 1/10/2025 3:20 PM

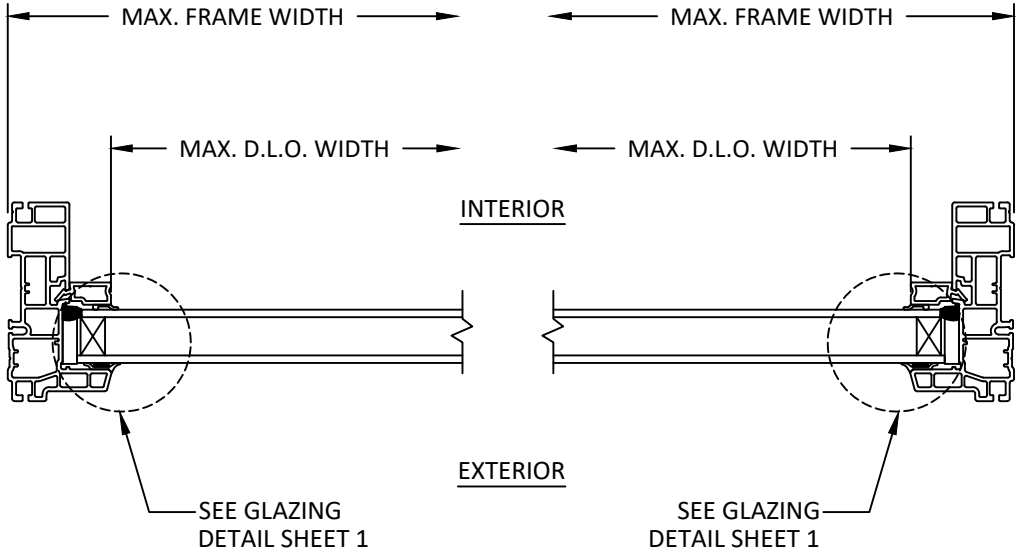

A
5 **HORIZONTAL SECTION**
S-3200

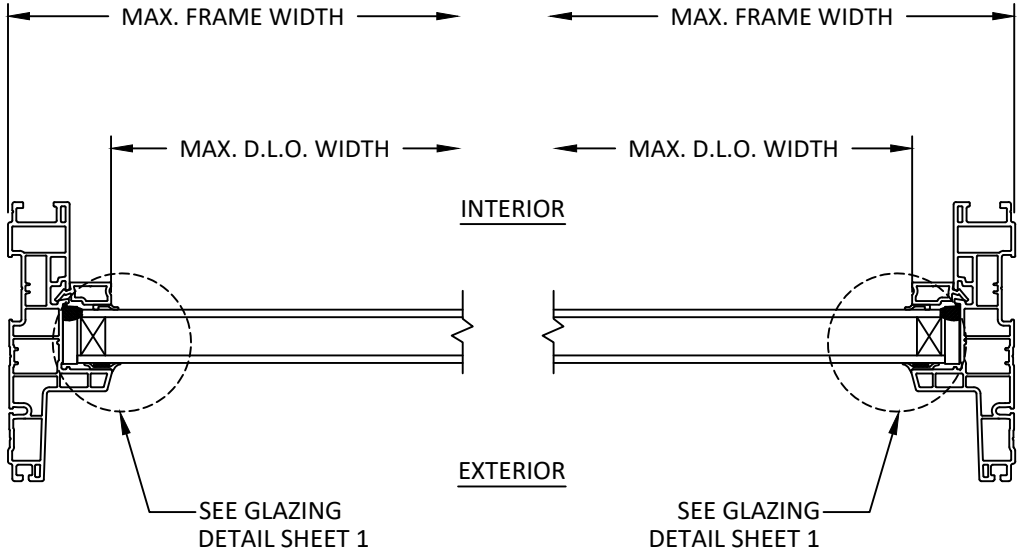

B
5 **HORIZONTAL SECTION**
S-4200



P.H. TECH CORP
724 BRICKWORKS DRIVE
LEETSDALE, PA 15056
418-833-3231

TITLE: S-3200/S-4200 FIXED
TRANSOM WINDOW
(NON-HVHZ)(NON-IMPACT)

HORIZONTAL SECTIONS


PREPARED BY: BUILDING DROPS, INC.

1900 NE MIAMI CT, SUITE 2-15
MIAMI, FL 33132
PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE


THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

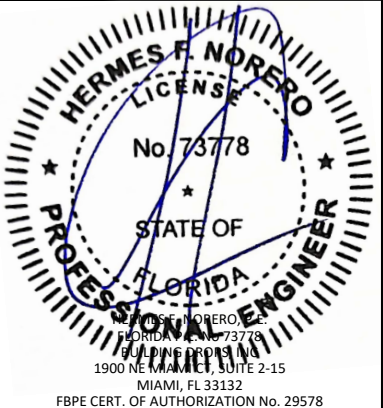


FL40256	
DATE: 01.08.25	
DWG. BY: DB	CHK. BY: HFN
SCALE: NTS	
DWG. #: PHT005	
SHEET	

5

c:\users\danielbuitrago\building drops, inc\building drops landing - documents\common\projects\ph tech, inc\fbc-24-1237 - fbc submittal - fl40256 s-3200s-4200 fixed transom window - revision\dwgs\pht005.dwg 1/10/2025 3:20 PM

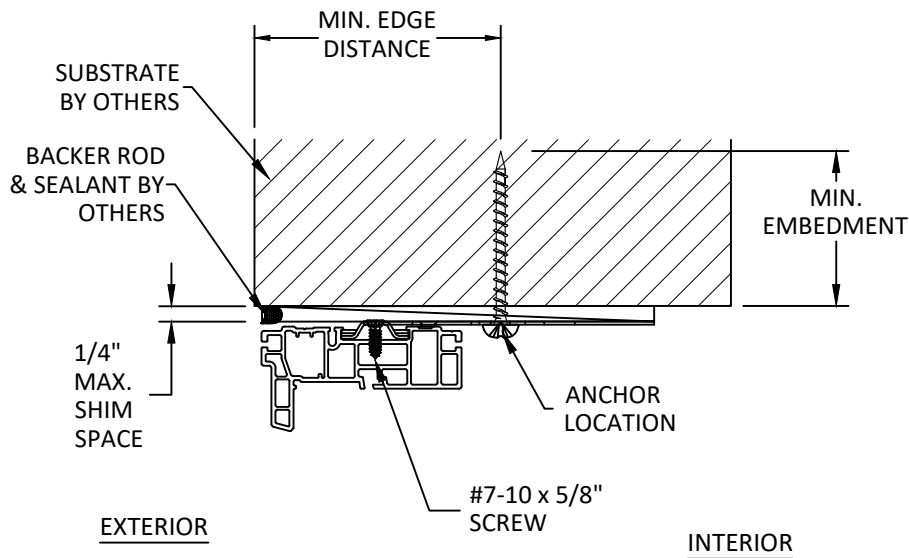

A
6
ANCHOR DETAIL
S-3200
STRAP ANCHOR

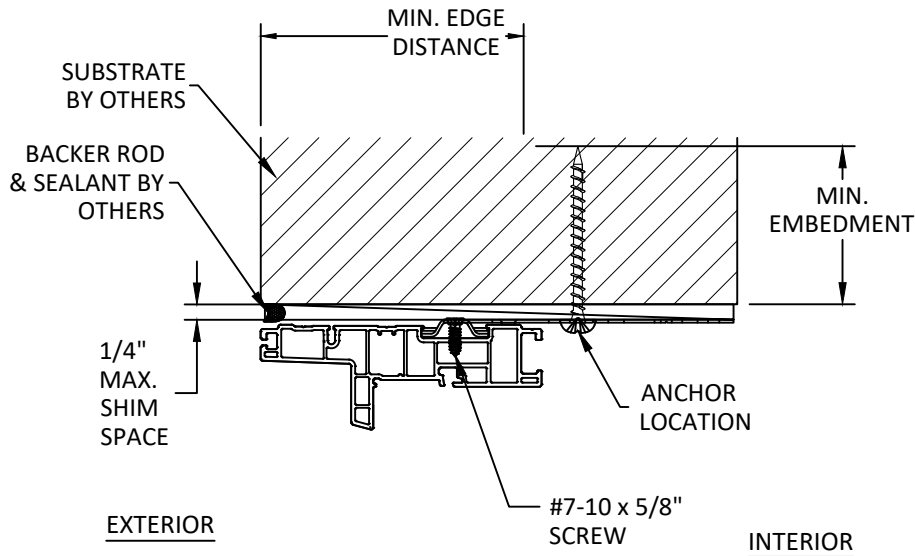

B
6
ANCHOR DETAIL
S-4200
STRAP ANCHOR

HEAD SHOWN, SILL,
& JAMB SIMILAR

INSTALLATION NOTES:

- (1) INSTALLATION ANCHOR IS REQUIRED AT EACH ANCHOR LOCATION SHOWN.
- FOR MASONRY OR CONCRETE OPENINGS, A 1X WOOD BUCK MAY BE USED (OPTIONAL) AS LONG AS THE MINIMUM EMBEDMENT AND EDGE DISTANCE REQUIREMENTS ARE STILL MET WITHIN THE CORRESPONDING HOST SUBSTRATE. SEE GENERAL NOTE #3 ON SHEET 1 FOR MORE INFORMATION.
- THE NUMBER OF INSTALLATION ANCHORS DEPICTED IS THE MINIMUM NUMBER OF ANCHORS TO BE USED FOR PRODUCT INSTALLATION OF THE MAXIMUM SIZE LISTED.
- INSTALL INDIVIDUAL INSTALLATION ANCHORS WITHIN A TOLERANCE OF $\pm 1/2$ INCH THE DEPICTED LOCATION & SPACING IN THE ANCHOR LAYOUT DETAILS (I.E., WITHOUT CONSIDERATION OF TOLERANCES). TOLERANCES ARE NOT CUMULATIVE FROM ONE INSTALLATION ANCHOR TO THE NEXT.
- SHIM AS REQUIRED AT EACH ANCHOR LOCATION WHERE SPACE BETWEEN PRODUCT AND STRUCTURE IS 1/16 INCH OR GREATER. MAXIMUM ALLOWABLE SHIM STACK IS NOT TO EXCEED 1/4 INCH. ALL SHIMS ARE TO BE LOADED BEARING, HIGH DENSITY PLASTIC OR BETTER.
- MINIMUM EMBEDMENT AND EDGE DISTANCE EXCLUDE WALL FINISHES, INCLUDING BUT NOT LIMITED TO STUCCO, FOAM, BRICK VENEER, AND SIDING.
- INSTALLATION ANCHORS AND ASSOCIATED HARDWARE MUST BE MADE OF CORROSION RESISTANT MATERIAL OR HAVE A CORROSION RESISTANT COATING.
- FOR HOLLOW BLOCK AND GROUT FILLED BLOCK, DO NOT INSTALL INSTALLATION ANCHORS INTO MORTAR JOINTS. EDGE DISTANCE IS MEASURED FROM FREE EDGE OF BLOCK OR EDGE OF MORTAR JOINT INTO FACE SHELL OF BLOCK.
- INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS, AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BY THE ANCHOR MANUFACTURER.

ANCHOR SCHEDULE				
METHOD	SUBSTRATE	ANCHOR	MIN. EMBEDMENT	MIN. EDGE DISTANCE
STRAP ANCHOR	2X WOOD MIN. S.G.= 0.55	#8 WOOD SCREW	1.50"	0.75"
	GROUT FILLED CMU PER ASTM C-90 W/ MIN. f'c=2,000 PSI	3/16 ITW TAPCON (CARBON OR STAINLESS STEEL)	1.00"	2.50"
	CONCRETE W/ MIN. f'c = 3,000 PSI		1.25"	2.50"
	METAL: 18 GAUGE STEEL, MIN. Fy = 33 KSI ALUMINUM: 1/8" MIN., 6063-T5	#8-32 GR. 5 SMS OR SELF-DRILLING SCREW	3 THREADS MIN PENETRATION BEYOND METAL	0.75"



P.H. TECH CORP
724 BRICKWORKS DRIVE
LEETSDALE, PA 15056
418-833-3231

TITLE: S-3200/S-4200 FIXED
TRANSOM WINDOW
(NON-HVHZ)(NON-IMPACT)
ANCHOR DETAILS, ANCHOR SCHEDULE AND
INSTALLATION NOTES

PREPARED BY:


BUILDING DROPS, INC.

1900 NE MIAMI CT, SUITE 2-15
MIAMI, FL 33132
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

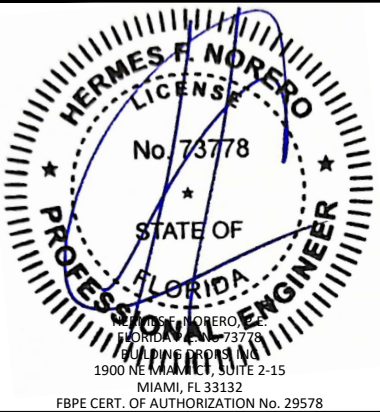

FL40256

DATE: **01.08.25**

DWG. BY:
DB

CHK. BY:
HFN

SCALE: **NTS**

DWG. #: **PHT005**

SHEET

6

OF 6