


PH TECH CORP

S-8750 FIXED TRANSOM WINDOW

(NON-HVHZ)(NON-IMPACT)

GENERAL NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH THE CURRENT FLORIDA BUILDING CODE (FBC), **EXCLUDING** HVHZ AND HAS BEEN EVALUATED ACCORDING TO THE FOLLOWING:
- AAMA/WDMA/CSA 101/I.S.2/A440-11/17
2. ADEQUACY OF THE EXISTING STRUCTURAL CONCRETE/MASONRY, 2X AND METAL STUD FRAMING AS A MAIN WIND FORCE RESISTING SYSTEM CAPABLE OF WITHSTANDING AND TRANSFERRING APPLIED PRODUCT LOADS TO THE FOUNDATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
3. 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO THE STRUCTURE. BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
4. THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.
5. APPROVED IMPACT PROTECTIVE SYSTEM **IS REQUIRED** TO PROTECT THIS PRODUCT IN AREAS REQUIRING IMPACT RESISTANCE.
6. FRAME MATERIAL: UPVC
7. GLASS SHALL MEET THE REQUIREMENTS OF ASTM E1300. SEE GLAZING DETAILS ON SHEET 1.
8. DESIGNATIONS "X", "O" STAND FOR THE FOLLOWING:
- X: OPERABLE PANEL
- O: FIXED PANEL

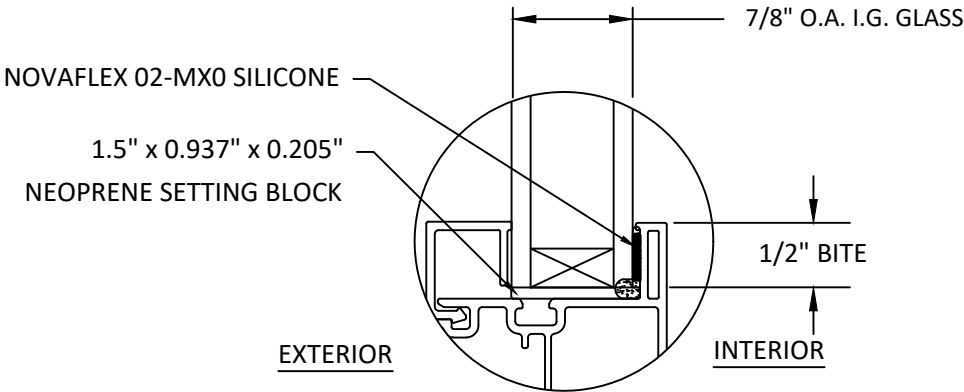

GLAZING DETAIL A

TABLE OF CONTENTS	
SHEET	SHEET DESCRIPTION
1	GENERAL NOTES AND GLAZING DETAILS
2	ELEVATION AND ANCHOR LAYOUT
3	VERTICAL SECTIONS & HORIZONTAL
4	ANCHOR DETAILS, ANCHOR SCHEDULE AND INSTALLATION NOTES

DESIGN PRESSURE TABLE		
DESIGN PRESSURE	FRAME SIZES	MISSILE IMPACT RATING
+60/-60 PSF	59.06" x 59.06"	NON - IMPACT
+100/-100 PSF	115.43" x 35.91"	

GLAZING NOTES:

- GLASS TYPE SHALL COMPLY WITH ASTM E1300 & FBC SAFETY GLAZING REQUIREMENTS.
- SETTING BLOCKS TO BE LOCATED AT 1/4 SPAN LENGTH FOR GLASS WIDER THAN 36" AS PER FBC CHAPTER 24.
- SETTING BLOCK DUROMETER HARDNESS OF 70-90 (SHORE A) AS REFERENCED IN FBC CHAPTER 24.
- GLASS TYPE SHALL COMPLY WITH APPLICABLE GLAZING REQUIREMENTS PER CHAPTER 24 OF THE FBC



PH TECH CORP.
724 BRICKWORKS DRIVE
LEETSDALE, PA 15056
418-833-3231

TITLE: PH TECH CORP
S-8750 FIXED TRANSOM WINDOW
(NON-HVHZ)(NON-IMPACT)
GENERAL NOTES AND GLAZING DETAILS


PREPARED BY:
BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

Digitally signed by Hermes F Norero
Reason: I am approving this document
Date: 2021.12.13 11:19:16 -0500

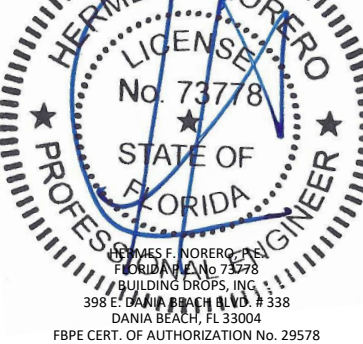

FL40262

DATE: 09.21.21

DWG. BY:
AC

CHK. BY:
SM


SCALE: NTS

DWG. #: PHT006


SHEET

1


OF 4

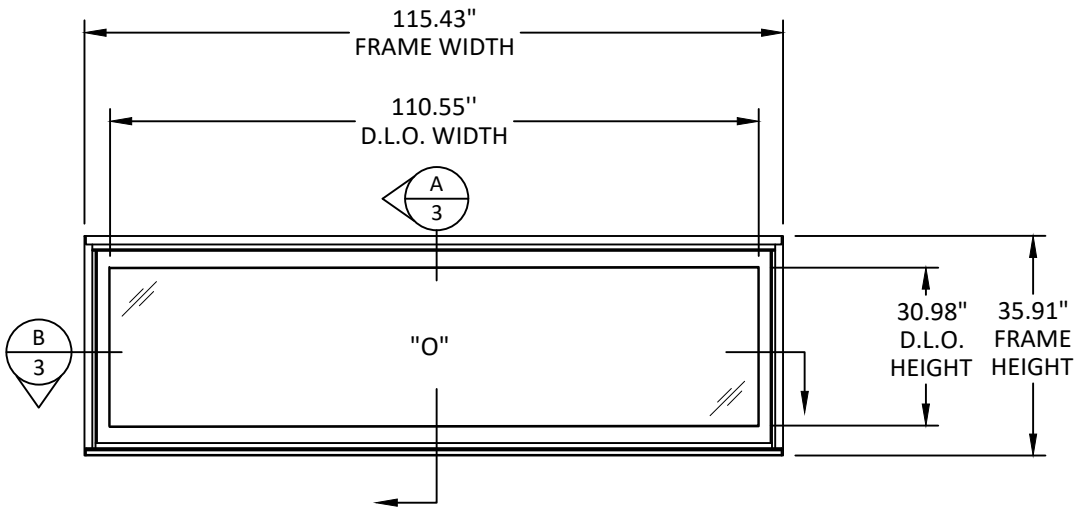


ELEVATION
FIXED TRANSOM

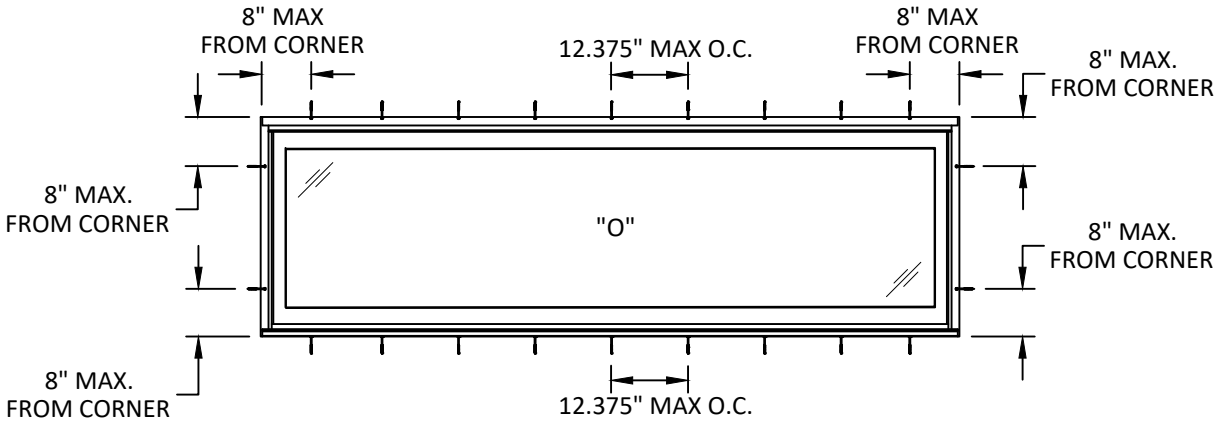

ANCHOR LAYOUT
FIXED TRANSOM
STRAP ANCHOR

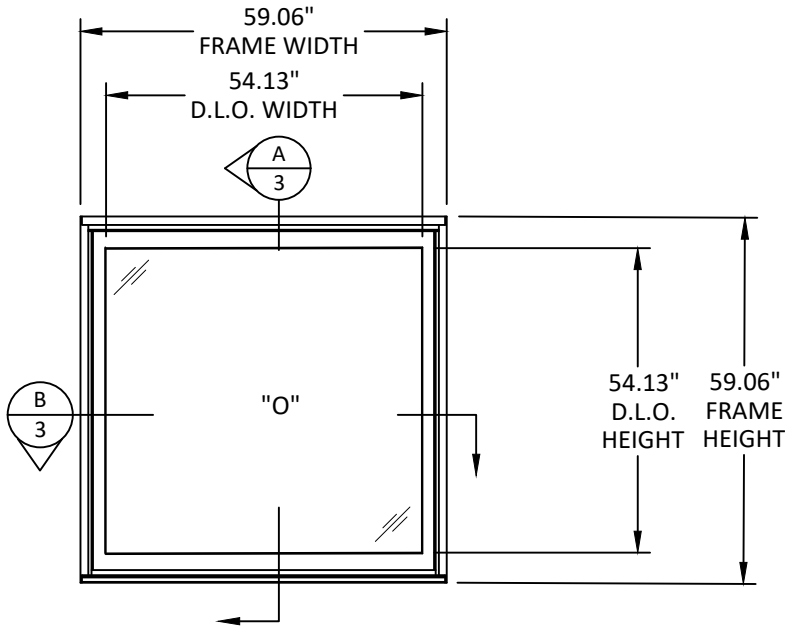

ELEVATION
FIXED WINDOW

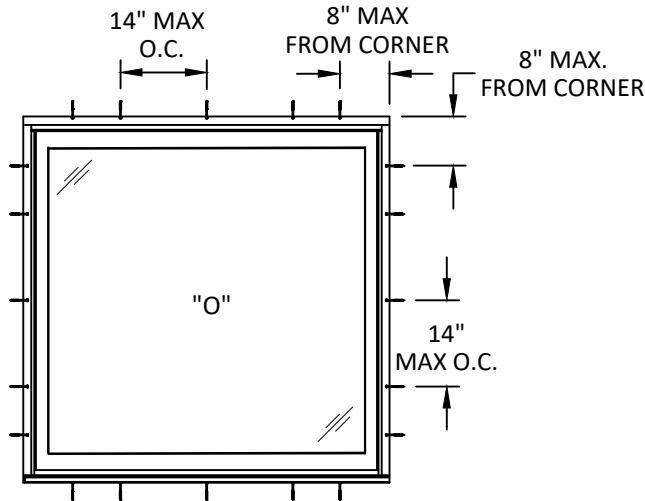

ANCHOR LAYOUT
FIXED WINDOW
STRAP ANCHOR

NOTE:
FOR MORE ANCHOR INFORMATION (INSTALLATION TYPE, SPACING, QUANTITY, ANCHOR TYPE, QUALIFIED SUBSTRATES) SEE SHEET 4.



PH TECH CORP.
724 BRICKWORKS DRIVE
LEETSDALE, PA 15056
418-833-3231


TITLE: PH TECH CORP
S-8750 FIXED TRANSOM WINDOW
(NON-HVHZ)(NON-IMPACT)
ELEVATION AND ANCHOR LAYOUT

PREPARED BY:
BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com




REMARKS	BY	DATE

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

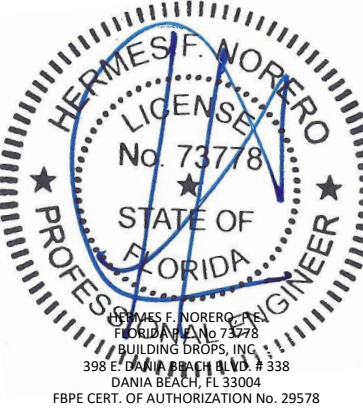


FL40262	
DATE: 09.21.21	
DWG. BY: AC	CHK. BY: SM
SCALE: NTS	
DWG. #: PHT006	
SHEET	

s:\projects\ph tech, inc\fb-21-0908 - fbc submittal - s-7500, s-8750.dwg series s-8750\ph006 .dwg 11/15/2021 3:13 PM

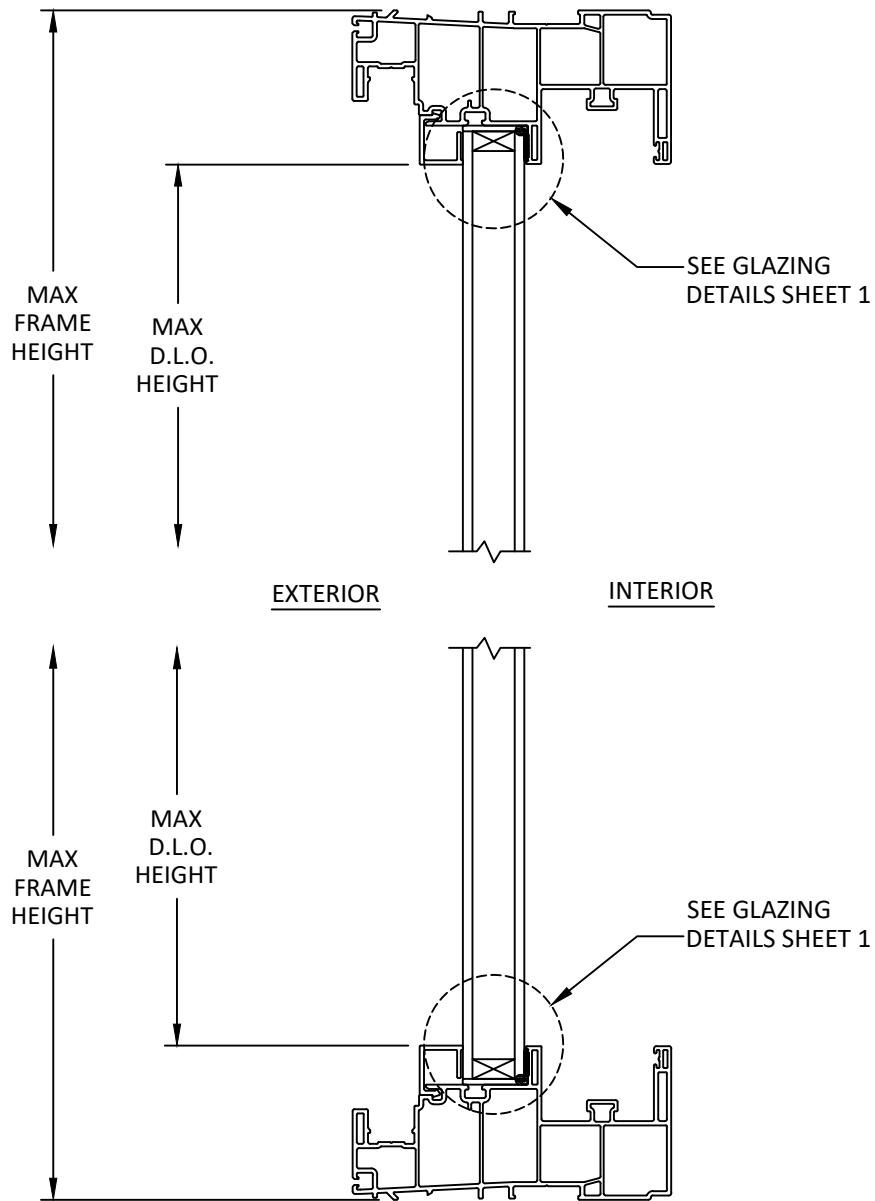

A
3

VERTICAL SECTION

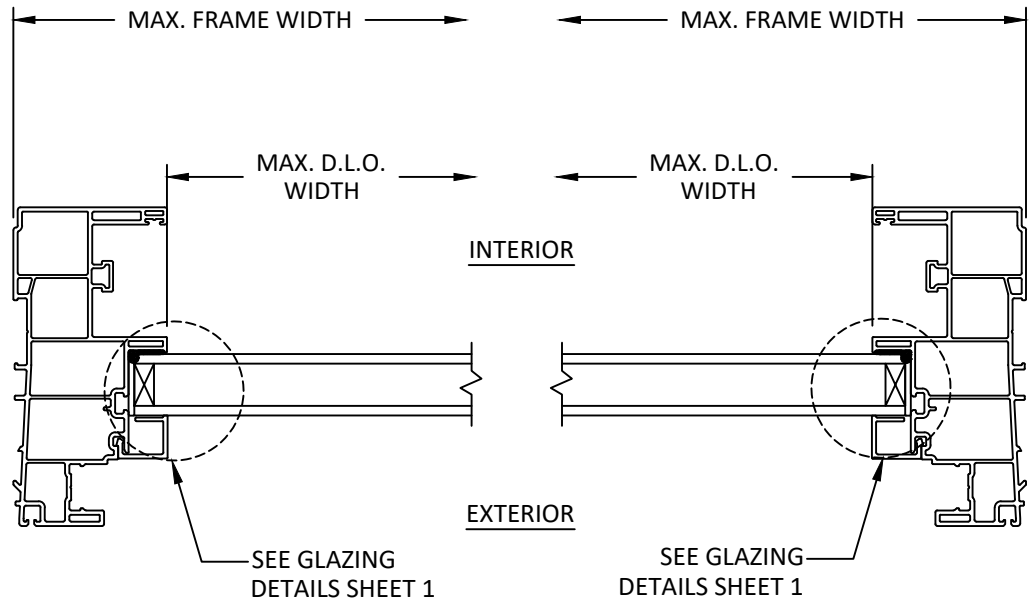

B
3

HORIZONTAL SECTION



PH TECH CORP.
724 BRICKWORKS DRIVE
LEETSDALE, PA 15056
418-833-3231

TITLE: PH TECH CORP
S-8750 FIXED TRANSOM WINDOW
(NON-HVHZ)(NON-IMPACT)

VERTICAL & HORIZONTAL SECTIONS


PREPARED BY:



BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com

REMARKS	BY	DATE

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

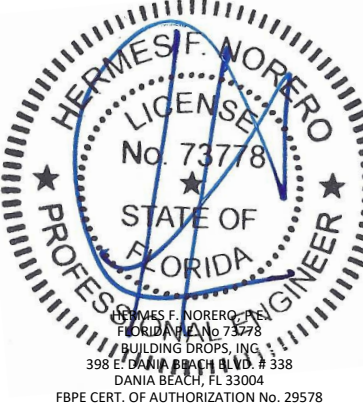


FL40262	
DATE: 09.21.21	
DWG. BY: AC	CHK. BY: SM
SCALE: NTS	
DWG. #: PHT006	
SHEET	

3

11/15/2021 3:13 PM

s:\projects\ph tech, inc\fb-21-0908 - fbc submittal - s-7500, s-8750,8770, s-8375, s-8385, s-8500, s-4200, s-8750.dwg\series s-8750\pht006 - dwg

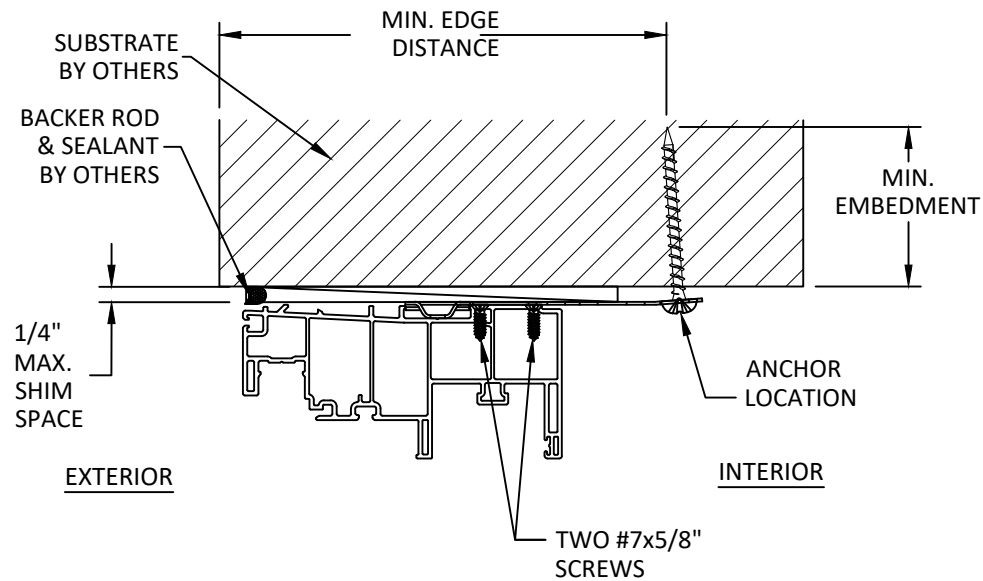


A
4

ANCHOR DETAIL

STRAP ANCHOR

HEAD, SILL,
& JAMB SIMILAR

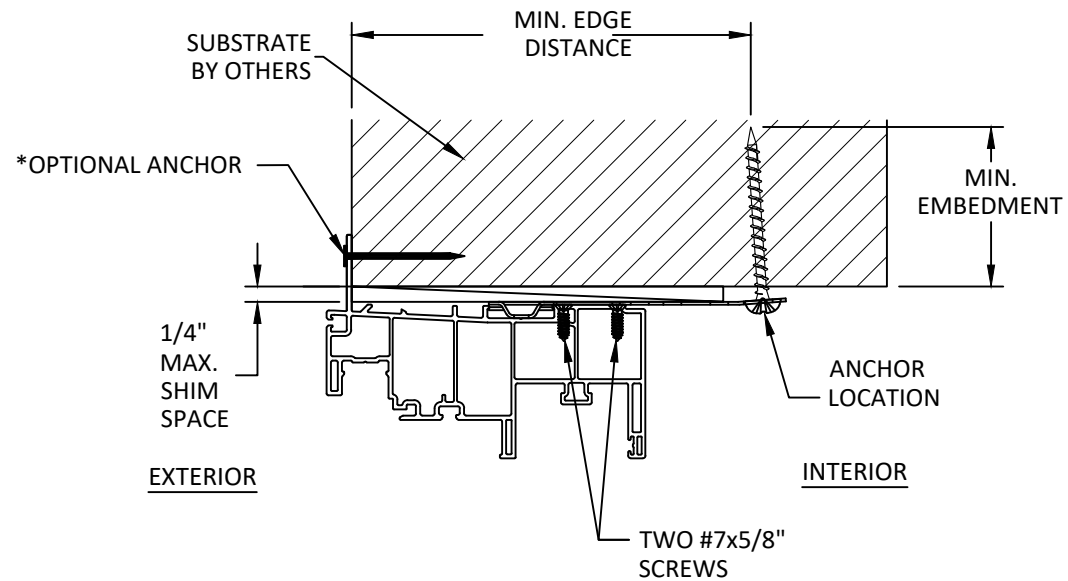

B
4

ANCHOR DETAIL

OPTIONAL NAIL FIN

NOTE :
NAIL FIN IS OPTIONAL IN ADDITION
TO THE STRAP ANCHOR

FOR NAIL FIN INSTALLATION:
USE #11 GALVANIZED STEEL NAILS,
#6D GALVANIZED STEEL NAILS, OR
#6 WOOD SCREWS
8" FROM FIN CORNERS
10.875" O.C.

INSTALLATION NOTES:

- ONE (1) INSTALLATION ANCHOR IS REQUIRED AT EACH ANCHOR LOCATION SHOWN.
- FOR MASONRY OR CONCRETE OPENINGS, A 1X WOOD BUCK MAY BE USED (OPTIONAL) AS LONG AS THE MINIMUM EMBEDMENT AND EDGE DISTANCE REQUIREMENTS ARE STILL MET WITHIN THE CORRESPONDING HOST SUBSTRATE. SEE GENERAL NOTE #3 ON SHEET 1 FOR MORE INFORMATION.
- THE NUMBER OF INSTALLATION ANCHORS DEPICTED IS THE MINIMUM NUMBER OF ANCHORS TO BE USED FOR PRODUCT INSTALLATION OF THE MAXIMUM SIZE LISTED.
- INSTALL INDIVIDUAL INSTALLATION ANCHORS WITHIN A TOLERANCE OF $\pm 1/2$ INCH THE DEPICTED LOCATION & SPACING IN THE ANCHOR LAYOUT DETAILS (I.E., WITHOUT CONSIDERATION OF TOLERANCES). TOLERANCES ARE NOT CUMULATIVE FROM ONE INSTALLATION ANCHOR TO THE NEXT.
- SHIM AS REQUIRED AT EACH ANCHOR LOCATION WHERE SPACE BETWEEN PRODUCT AND STRUCTURE IS $\frac{1}{16}$ INCH OR GREATER. MAXIMUM ALLOWABLE SHIM STACK IS NOT TO EXCEED 1/4 INCH. ALL SHIMS ARE TO BE LOADED BEARING, HIGH DENSITY PLASTIC OR BETTER.
- MINIMUM EMBEDMENT AND EDGE DISTANCE EXCLUDE WALL FINISHES, INCLUDING BUT NOT LIMITED TO STUCCO, FOAM, BRICK VENEER, AND SIDING.
- INSTALLATION ANCHORS AND ASSOCIATED HARDWARE MUST BE MADE OF CORROSION RESISTANT MATERIAL OR HAVE A CORROSION RESISTANT COATING.
- FOR HOLLOW BLOCK AND GROUT FILLED BLOCK, DO NOT INSTALL INSTALLATION ANCHORS INTO MORTAR JOINTS. EDGE DISTANCE IS MEASURED FROM FREE EDGE OF BLOCK OR EDGE OF MORTAR JOINT INTO FACE SHELL OF BLOCK.
- INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS, AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BY THE ANCHOR MANUFACTURER.

ANCHOR SCHEDULE				
METHOD	SUBSTRATE	ANCHOR	MIN. EMBEDMENT	MIN. EDGE DISTANCE
STRAP ANCHOR	2X WOOD MIN. S.G. = 0.55	#8 WOOD SCREW	1.500	1.500
	GROUT FILLED CMU PER ASTM C-90 W/ MIN. $f'c=2,000$ PSI	3/16 ITW TAPCON (CARBON OR STAINLESS STEEL)	1.000	2.500
	CONCRETE W/ MIN. $f'c = 3,000$ PSI		1.250	2.500
	METAL: 18 GAUGE STEEL, MIN. $F_y = 33$ KSI	#8-32 GR. 5 SMS OR SELF-DRILLING SCREW	3 THREADS MIN PENETRATION BEYOND METAL	0.750



PH TECH CORP.
724 BRICKWORKS DRIVE
LEETSDALE, PA 15056
418-833-3231

TITLE: PH TECH CORP
S-8750 FIXED TRANSOM WINDOW
(NON-HVHZ)(NON-IMPACT)
ANCHOR DETAILS, ANCHOR SCHEDULE AND
INSTALLATION NOTES


PREPARED BY:



BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com

REMARKS	BY	DATE

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

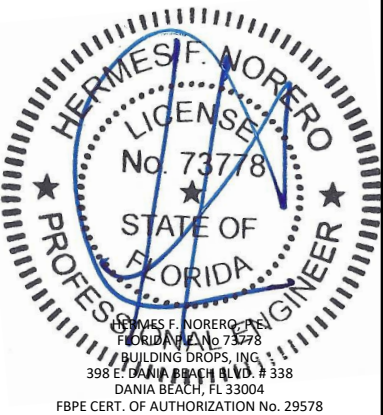

FL40262

DATE: 09.21.21

DWG. BY:
AC

CHK. BY:
SM

SCALE: NTS

DWG. #: PHT006

SHEET

4

OF 4