

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
D	ADD CLIP INSTALLATION	11/21/18	R.L.

NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE INCLUDING THE HVHZ.
2. WOOD FRAMING AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. 1X BUCK OVER MASONRY/CONCRETE IS OPTIONAL.
4. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1-1/2" UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
5. WHERE WOOD BUCK THICKNESS IS 1-1/2" OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS.
6. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
7. BUCKS SHALL EXTEND BEYOND UNIT FRAME INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
8. FOR FIN INSTALLATION SHIM AS NEEDED. FOR FRAME INSTALLATION SHIM AS REQUIRED AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4".
9. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
10. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
11. FRAME MATERIAL: MAHOGANY.
12. UNITS MUST BE GLAZED PER ASTM E1300, SEE SHEET 2 FOR GLASS DETAILS.
13. APPROVED IMPACT PROTECTIVE SYSTEM IS NOT REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.
14. FOR ANCHORING INTO WOOD FRAMING OR 2X BUCK USE #10 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.

15. FOR ANCHORING INTO MASONRY/CONCRETE USE 3/16" TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
16. FOR ANCHORING INTO METAL STRUCTURE USE #10 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
17. ALL FASTENERS TO BE CORROSION RESISTANT.
18. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:

A. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42

B. CONCRETE: MINIMUM COMPRESSIVE STRENGTH OF 2,000 PSI.

C. MASONRY: HOLLOW/FILLED BLOCK PER ASTM C90 WITH Fm=2,000PSI MINIMUM.

D. METAL STRUCTURE: STEEL 18GA (.048") FY=33KSI/FU=52KSI OR ALUMINUM 6063-T5 FU=30KSI .048" THICK MINIMUM
19. GEOMETRIC SHAPES ARE ALSO APPROVED. APPROVED GEOMETRIC SHAPES DIMENSIONS SHALL NOT EXCEED INSCRIBED DIMENSIONS OF APPROVED RECTANGULAR ASSEMBLY SHOWN IN SHEET 2.

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2	ELEVATION AND GLAZING DETAIL
3	CROSS SECTIONS AND B.O.M.
4 - 11	INSTALLATION DETAILS
12 -13	COMPONENTS

REILLY WINDOWS & DOORS

901 BURMAN BLVD.

CALVERTON, NY 11933

C01 WOOD CASEMENT WINDOW

LARGE AND SMALL MISSILE IMPACT - HVHZ

NOTES

DRAWN:

R.L.

DWG NO.

08-00285

REV

D

SCALE

NTS

DATE

10/17/07

SHEET

1

OF


13

L. ROBERTO LOMAS P.E.

208 7th Ave, INDIALANTIC, FL 32903


434-688-0609 rllomas@lrlomaspe.com

SIGNED: 07/20/2026

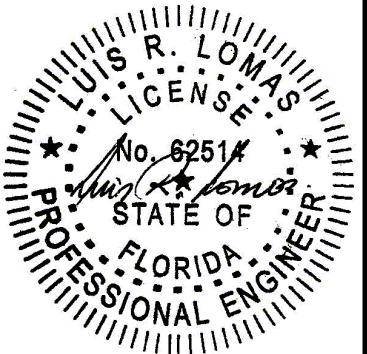

Luis R. Lomas P.E.

FL No.: 62514

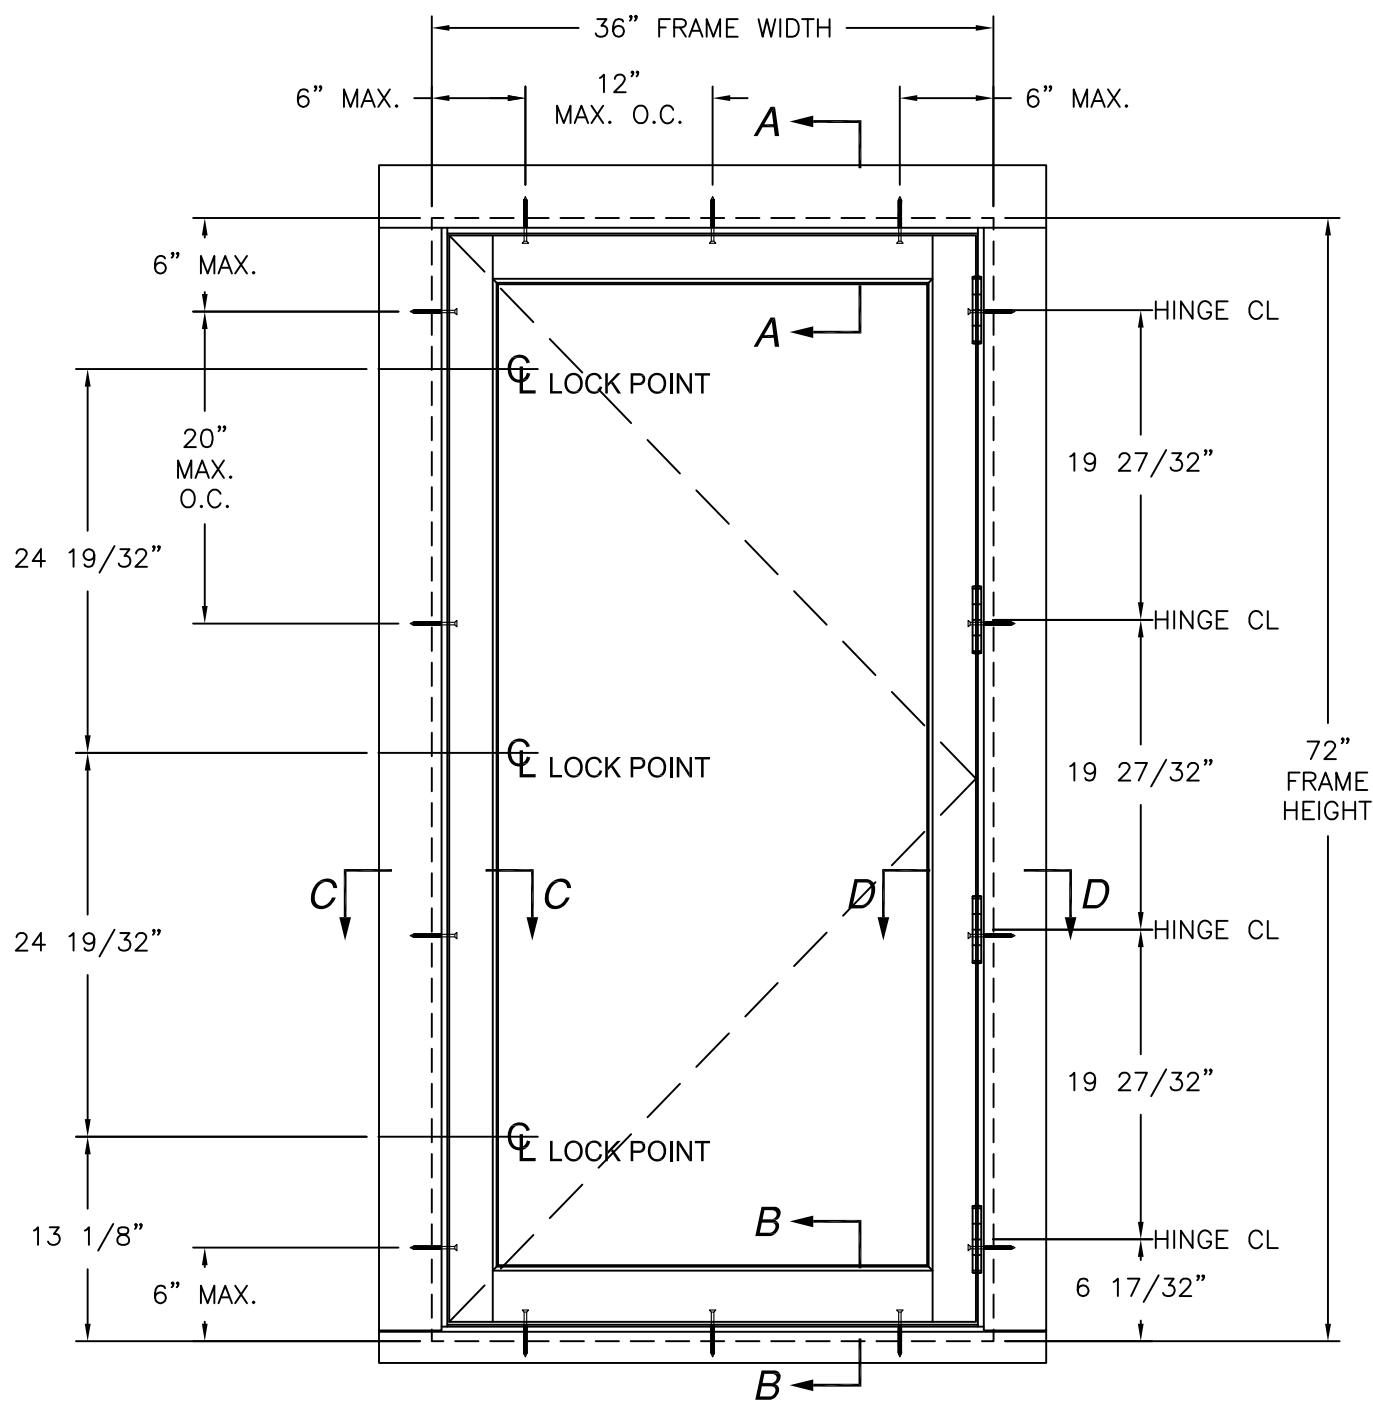

C01 CASEMENT
EXTERIOR VIEW


DESIGN PRESSURE RATING	IMPACT RATING
±60.0PSF	LARGE AND SMALL MISSILE IMPACT

MISSILE LEVEL D, WIND ZONE 4 AND HVHZ
36" X 72" UNIT SHOWN. OTHER SIZES APPROVED AS LONG AS
FRAME AREA DOES NOT EXCEED 18.0 FT²

HARDWARE SCHEDULE	
A.	(1) ROTO LOCK HANDLE OPERATOR, 4" FROM HINGE JAMB ON SILL
B.	(1) QUARTER TURN LOCK, 6" FROM SILL ON LOCK JAMB
C.	(3) MOBILE LOCK BAR WITH KEEPERS ON LOCK STILE
D.	(4) BUTT HINGES ON HINGE JAMB

- NOTES:
1. PANEL SIZE: 33 3/4" X 70"
2. D.L.O.: 27 3/8" X 62 7/8"

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
D	ADD CLIP INSTALLATION	11/21/18	R.L.

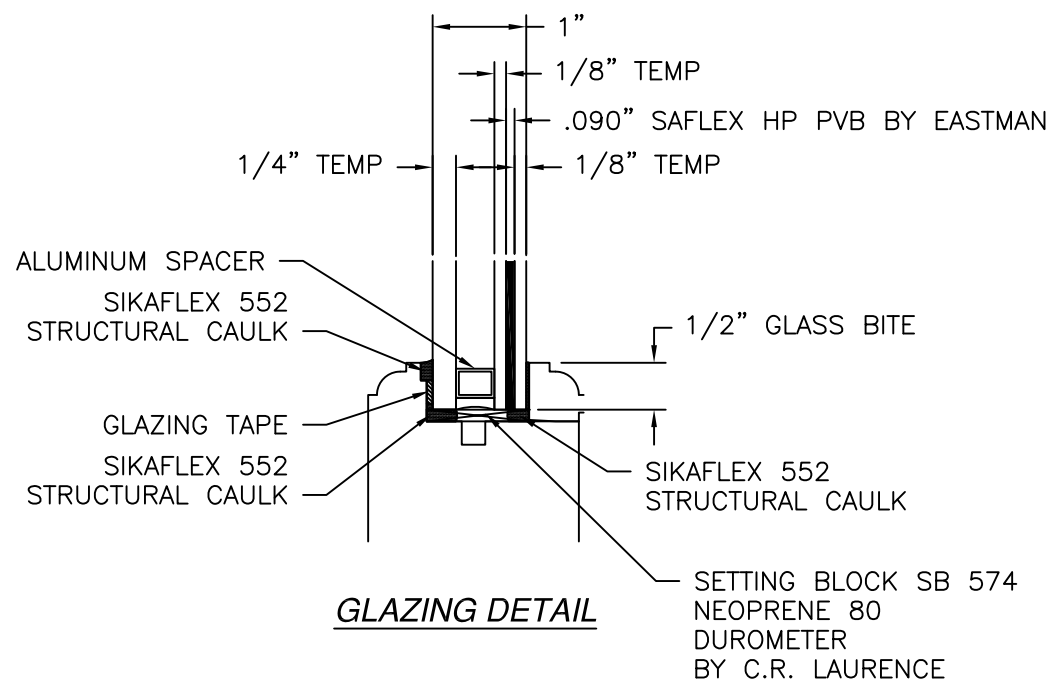

GLAZING DETAIL

SIGNED: 07/20/2026

REILLY WINDOWS & DOORS
901 BURMAN BLVD.
CALVERTON, NY 11933

C01 WOOD CASEMENT WINDOW
LARGE AND SMALL MISSILE IMPACT – HVHZ
ELEVATION AND GLAZING DETAIL


DRAWN: R.L.	DWG NO. 08-00285	REV D
SCALE NTS	DATE 10/17/07	SHEET 2 OF 13

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com


Professional Engineer
Luis R. Lomas
No. 62514
STATE OF FLORIDA

Luis R. Lomas P.E.
FL No.: 62514

PARTS LIST		
NO.	PART NUMBER	DESCRIPTION
1	BC1.1	BOX COVER, MAHOGANY
2	BC2.1	BOX COVER, MAHOGANY
3	BC.7	BOX COVER SUPPORT, MAHOGANY
4	B2.6	HEAD STILE, MAHOGANY
5	B2.62	HEAD RAIL/STILE, MAHOGANY
6	B3.12	BOTTOM RAIL, MAHOGANY
7	CA4	CASING, MAHOGANY
8	GSB	GLASS STOP, MAHOGANY
9	JS1.1	JAMB STOP, MAHOGANY
10	JS1.5	JAMB STOP, MAHOGANY
11	JS2.1B	JAMB STOP, MAHOGANY
12	JS.8	JAMB STOP BLOCK, MAHOGANY
13	J6.5	JAMB HEAD, MAHOGANY
14	J6.5A	JAMB LEG, MAHOGANY
15	SL6.5	SILL, MAHOGANY
16	SN1.2B	SILL NOSING, MAHOGANY
17	WS24-10164	WEATHERSTRIP, RCT
18	OP06-7800-0	LOCK HANDLE OPERATOR, ROTO-FRANK
19	GF370	G7 LOCKBAR
20	GT554	LOCKBAR GUIDE
21	125P-PBA	BUTTED HINGES 4 1/2 x 4 1/2, MERIT
22	552	STRUCTURAL CAULK, SIKAFLEX
23	6116-WH	1/16" SINGLE SIDED GLAZING TAPE, LAMATEK

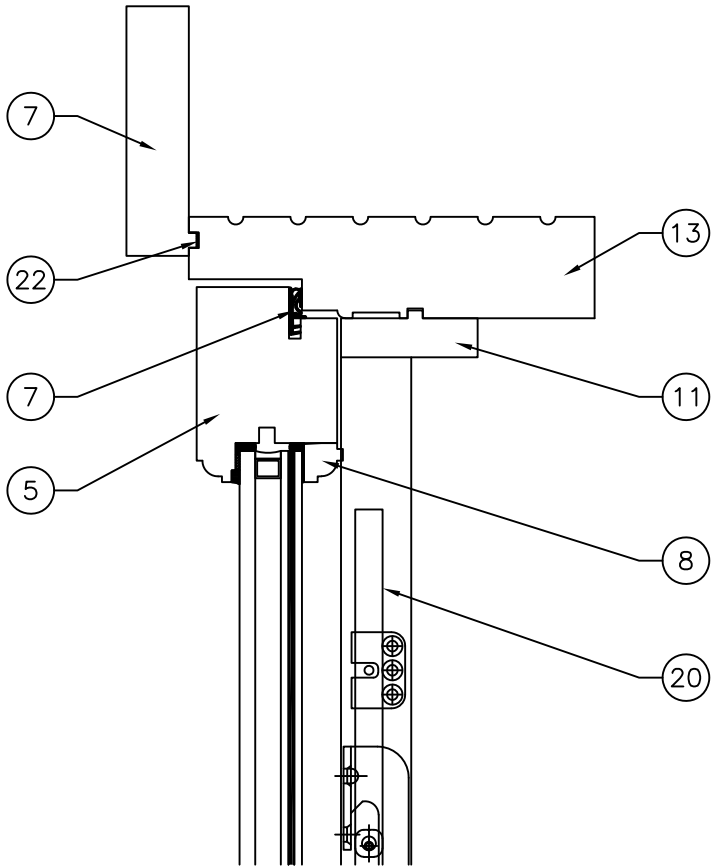


SECTION A-A

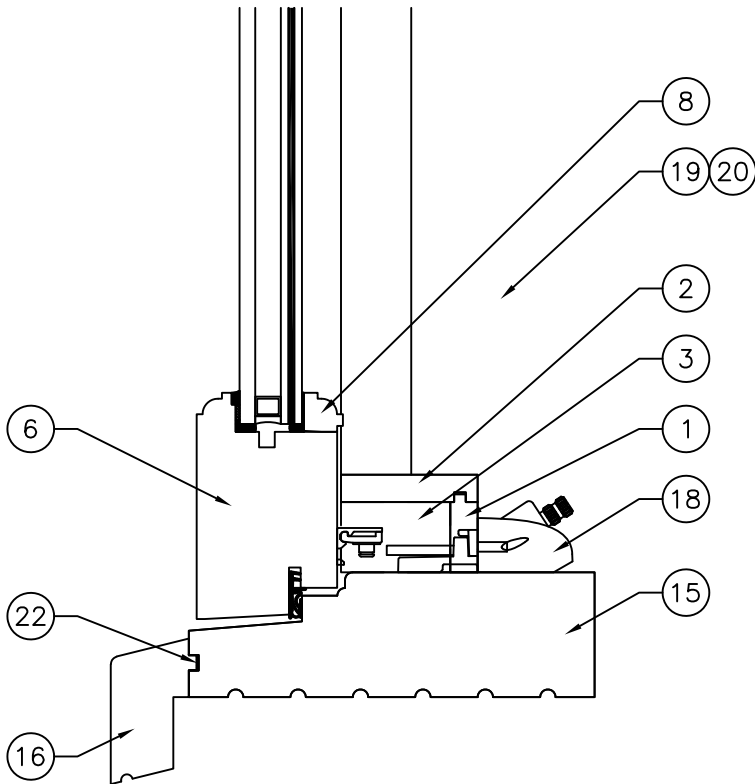

SECTION B-B

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
D	ADD CLIP INSTALLATION	11/21/18	R.L.

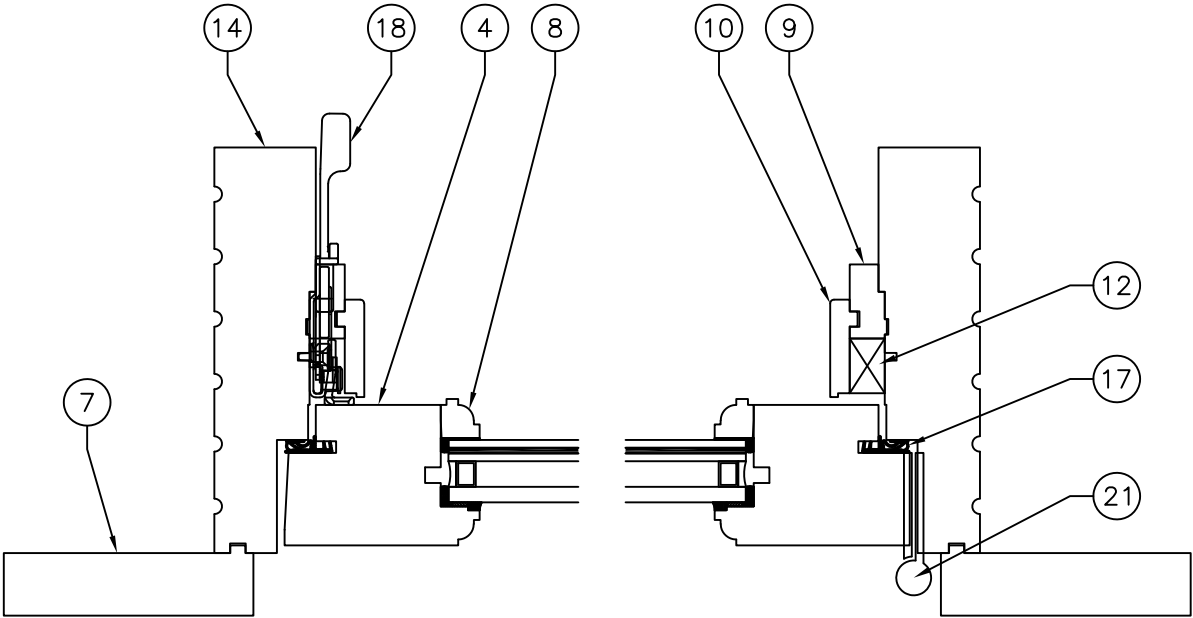

SECTION C-C

SECTION D-D


REILLY WINDOWS & DOORS
901 BURMAN BLVD.
CALVERTON, NY 11933

C01 WOOD CASEMENT WINDOW
LARGE AND SMALL MISSILE IMPACT - HVHZ
CROSS SECTIONS AND B.O.M.

DRAWN: R.L.	DWG NO. 08-00285	REV D
SCALE NTS	DATE 10/17/07	SHEET 3 OF 13



L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 07/20/2026

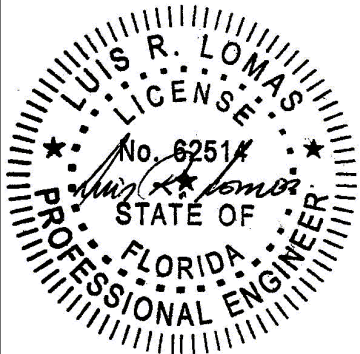

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
D	ADD CLIP INSTALLATION	11/21/18	R.L.

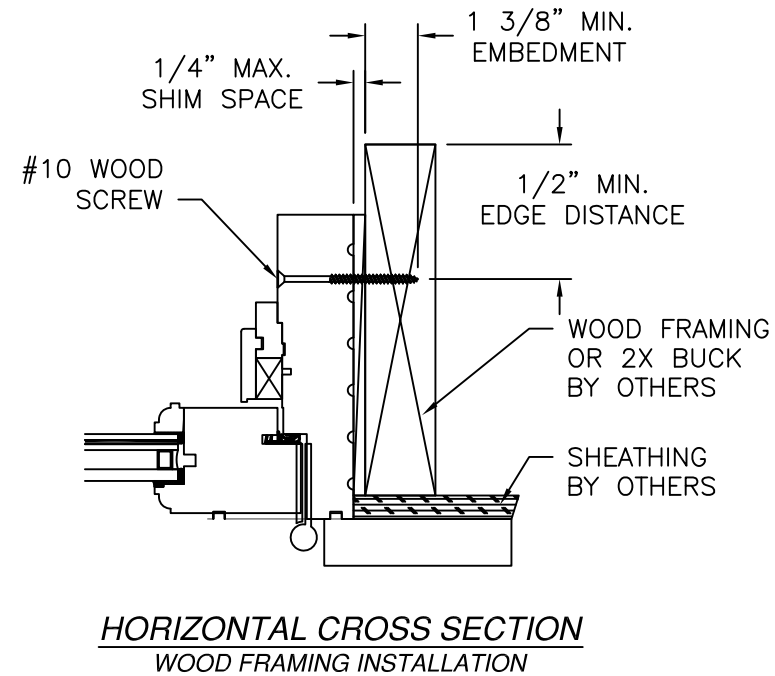
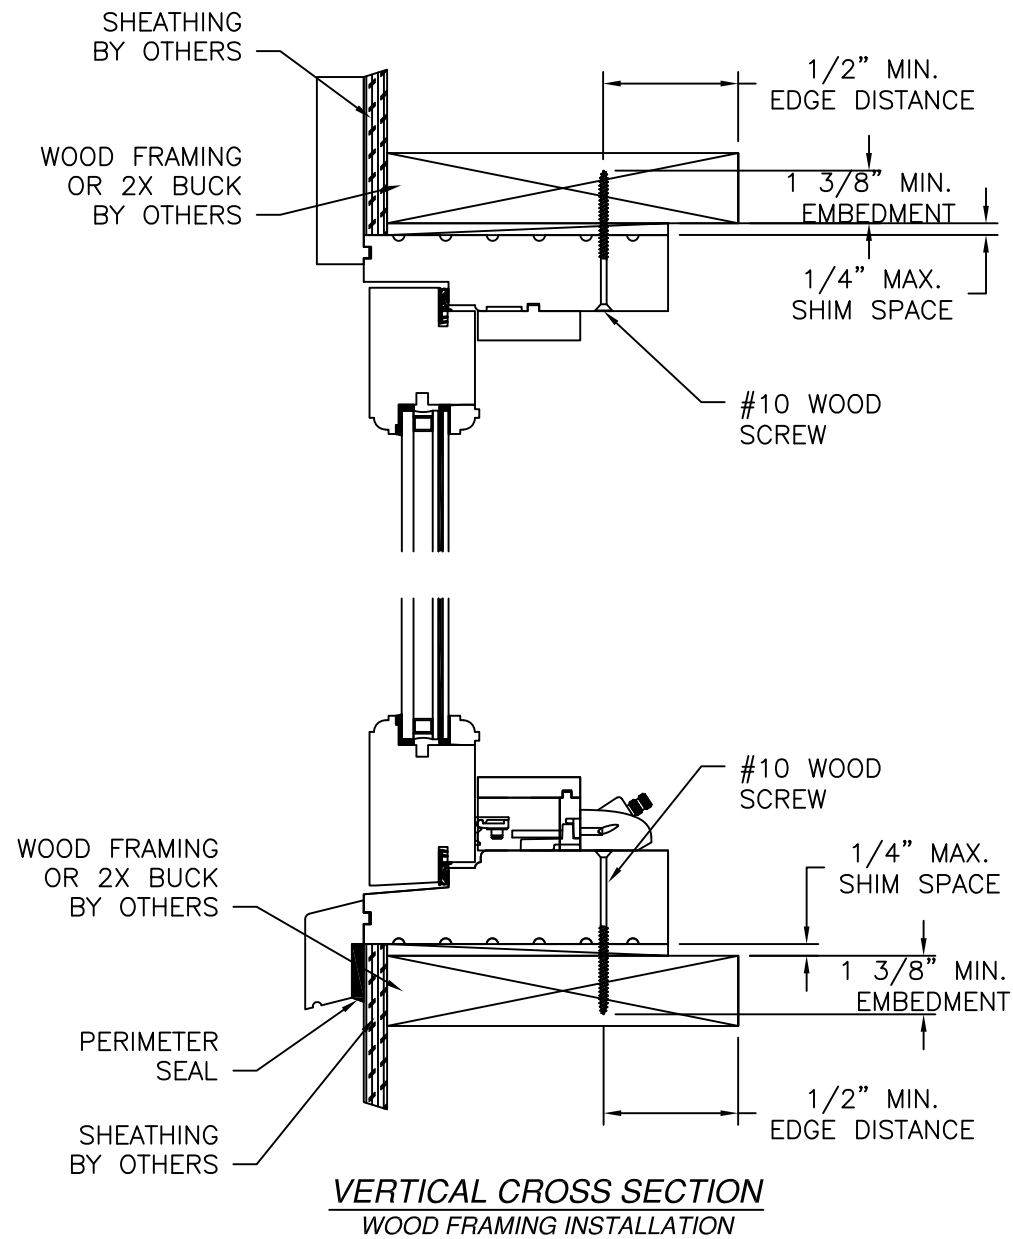


- NOTES:
- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


SIGNED: 07/20/2026

REILLY WINDOWS & DOORS 901 BURMAN BLVD. CALVERTON, NY 11933			
C01 WOOD CASEMENT WINDOW LARGE AND SMALL MISSILE IMPACT – HVHZ FRAME INSTALLATION DETAILS			
DRAWN: R.L.	DWG NO. 08-00285	REV D	
SCALE NTS	DATE 10/17/07	SHEET 4 OF 13	
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com			Luis R. Lomas P.E. FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
D	ADD CLIP INSTALLATION	11/21/18	R.L.

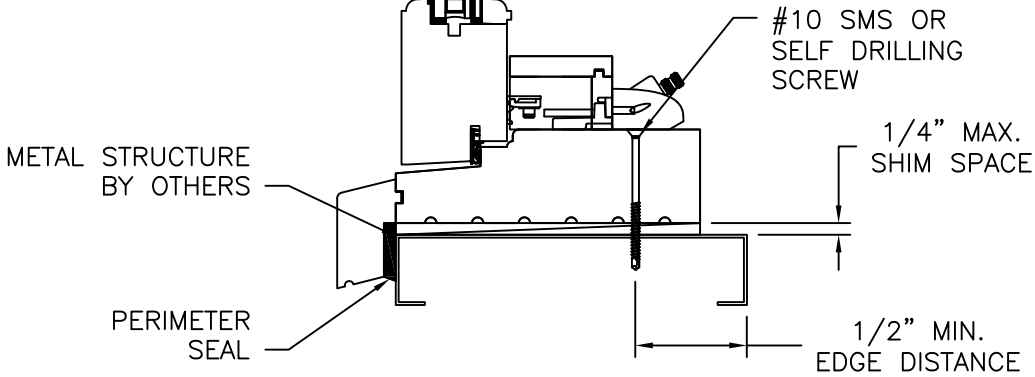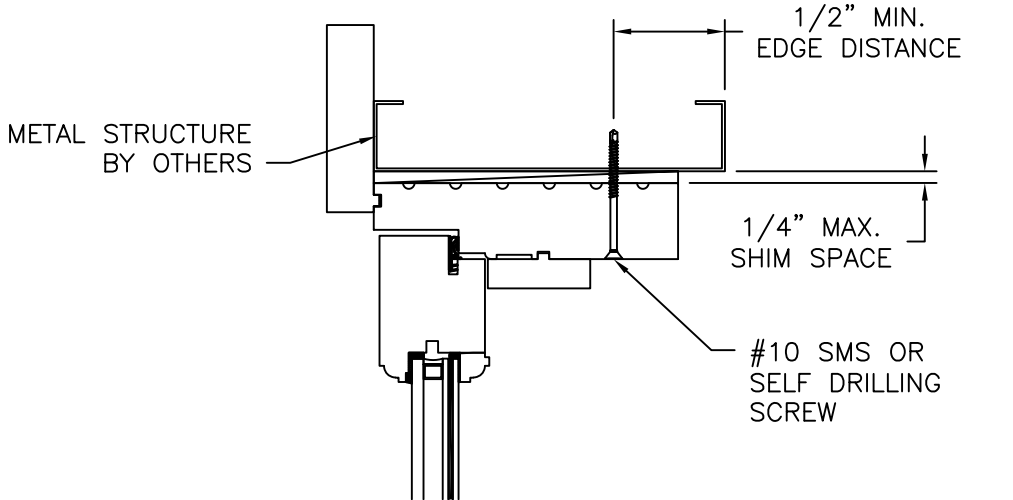

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

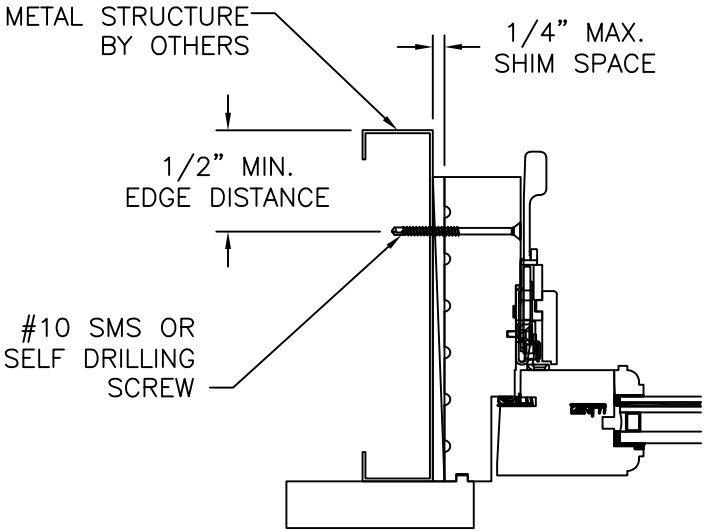

HORIZONTAL CROSS SECTION
METAL STRUCTURE INSTALLATION

- NOTES:
- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 07/20/2026

REILLY WINDOWS & DOORS
901 BURMAN BLVD.
CALVERTON, NY 11933

C01 WOOD CASEMENT WINDOW
LARGE AND SMALL MISSILE IMPACT – HVHZ
FRAME INSTALLATION DETAILS

DRAWN:
R.L.

DWG NO.
08-00285


REV
D

SCALE
NTS

DATE
10/17/07



SHEET
5 OF 13

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

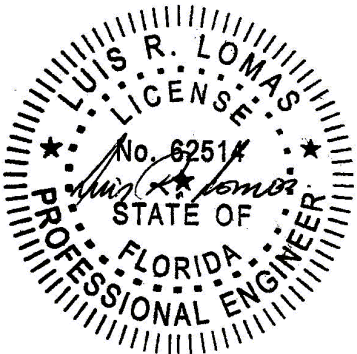

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
D	ADD CLIP INSTALLATION	11/21/18	R.L.

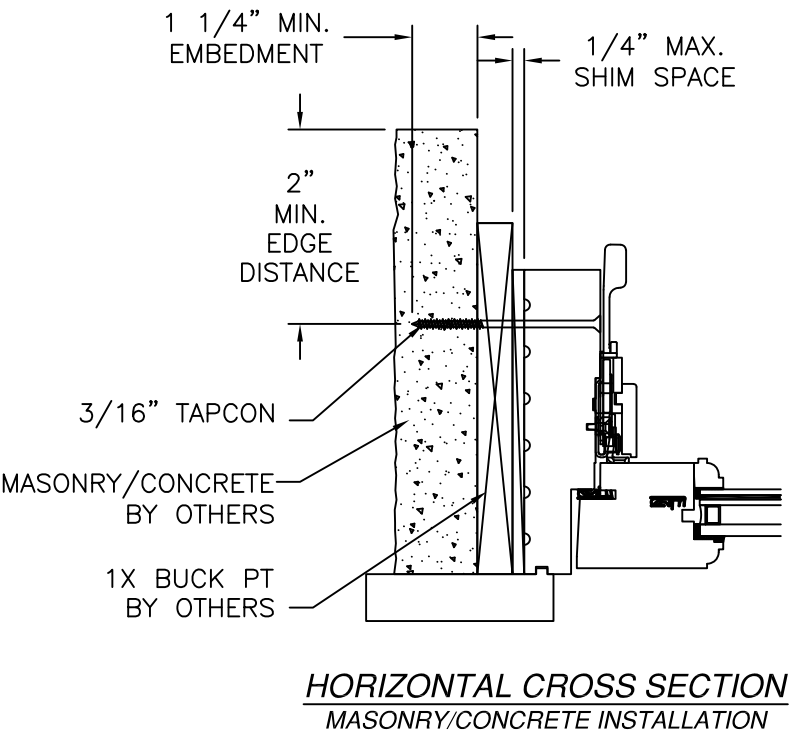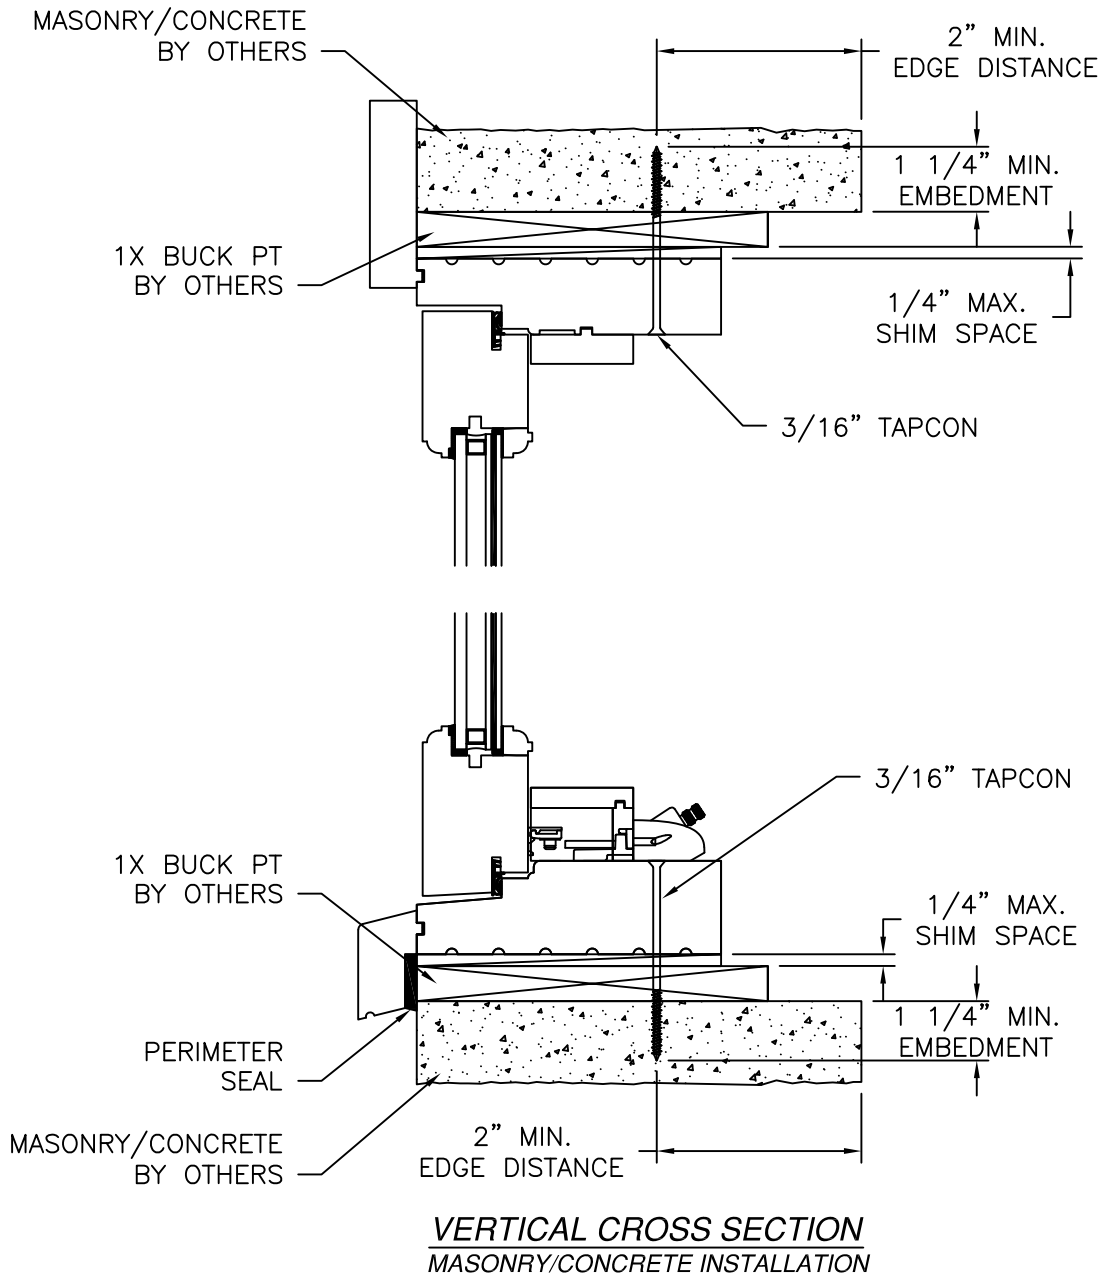

- NOTES:
- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 07/20/2026

REILLY WINDOWS & DOORS
901 BURMAN BLVD.
CALVERTON, NY 11933

C01 WOOD CASEMENT WINDOW
LARGE AND SMALL MISSILE IMPACT – HVHZ
FRAME INSTALLATION DETAILS

DRAWN:
R.L.

DWG NO.
08-00285


REV
D

SCALE
NTS

DATE
10/17/07




SHEET
6 OF 13

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

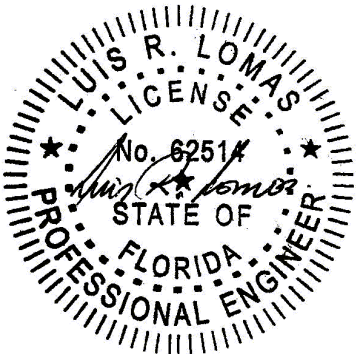

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
D	ADD CLIP INSTALLATION	11/21/18	R.L.

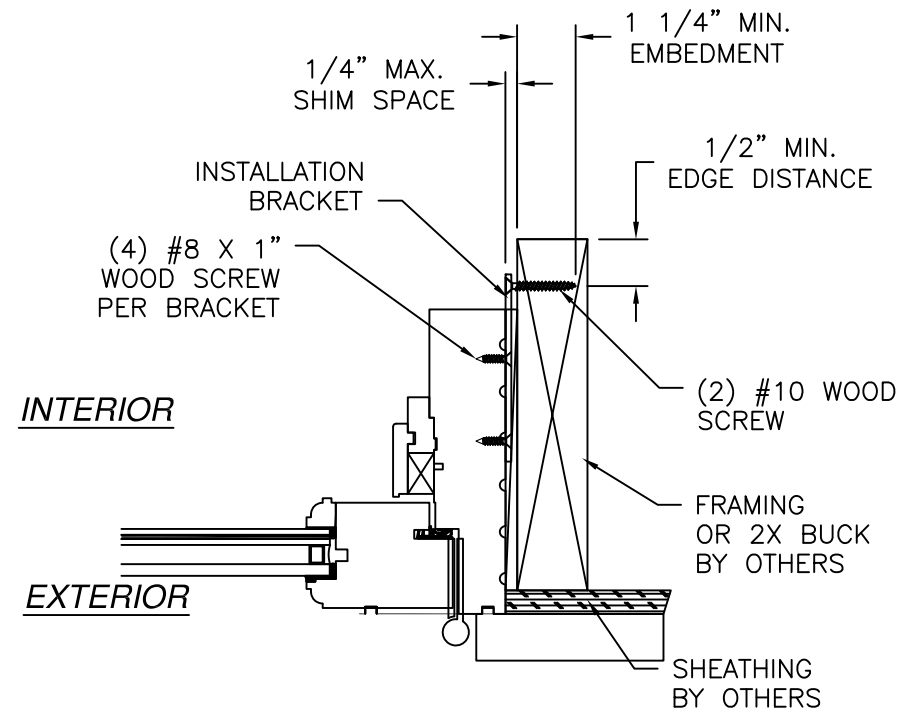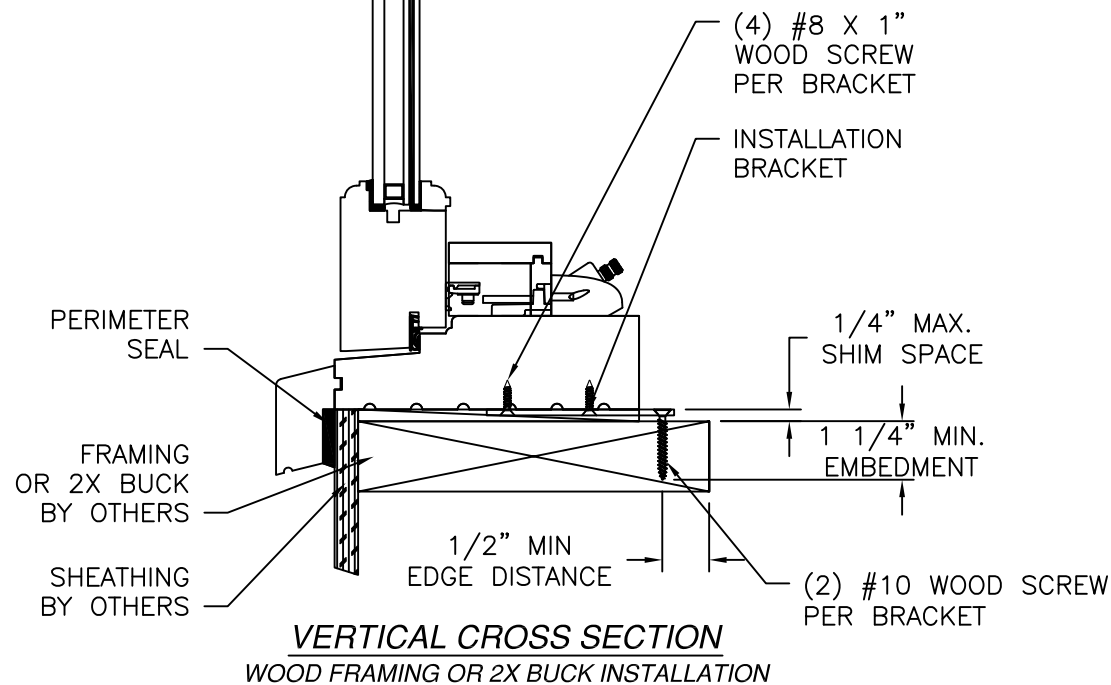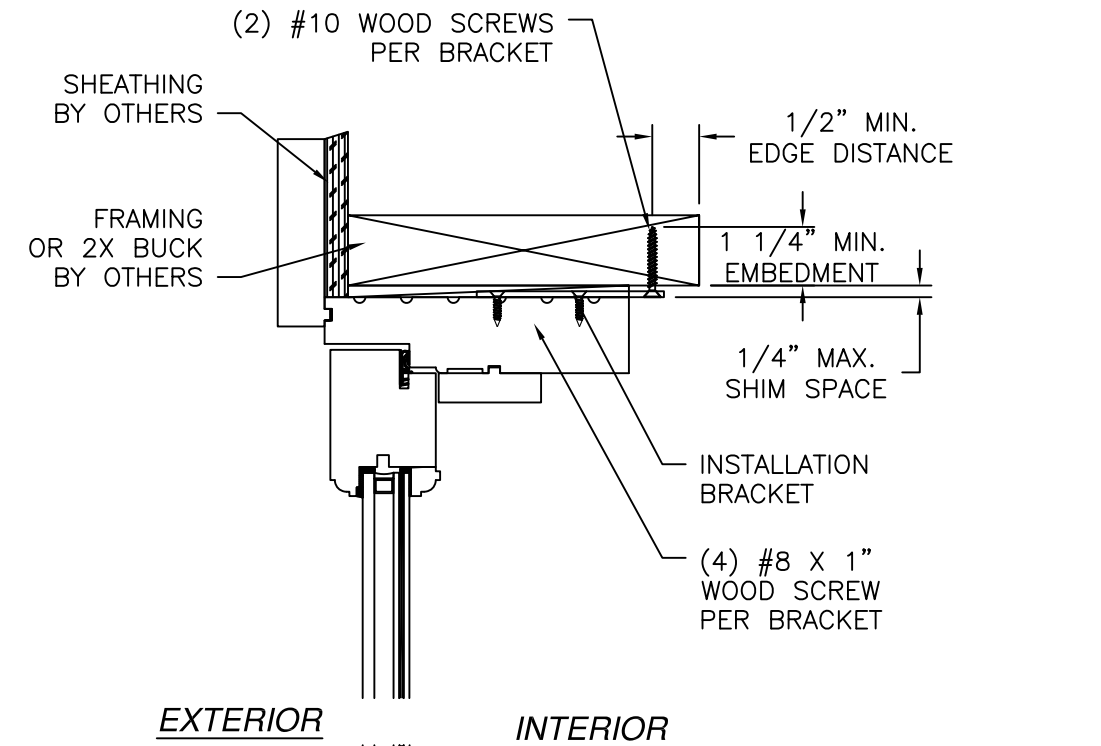

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION




- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 07/20/2026

REILLY WINDOWS & DOORS 901 BURMAN BLVD. CALVERTON, NY 11933			
C01 WOOD CASEMENT WINDOW LARGE AND SMALL MISSILE IMPACT – HVHZ INSTALLATION DETAILS W/CLIP			
DRAWN: R.L.	DWG NO. 08-00285	REV D	
SCALE NTS	DATE 10/17/07	SHEET 7 OF 13	
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com			

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
D	ADD CLIP INSTALLATION	11/21/18	R.L.

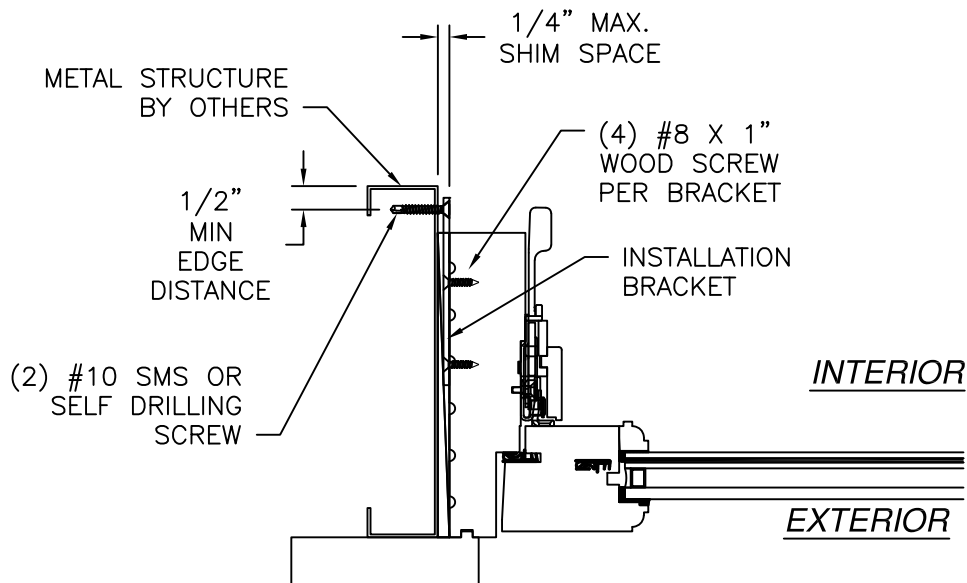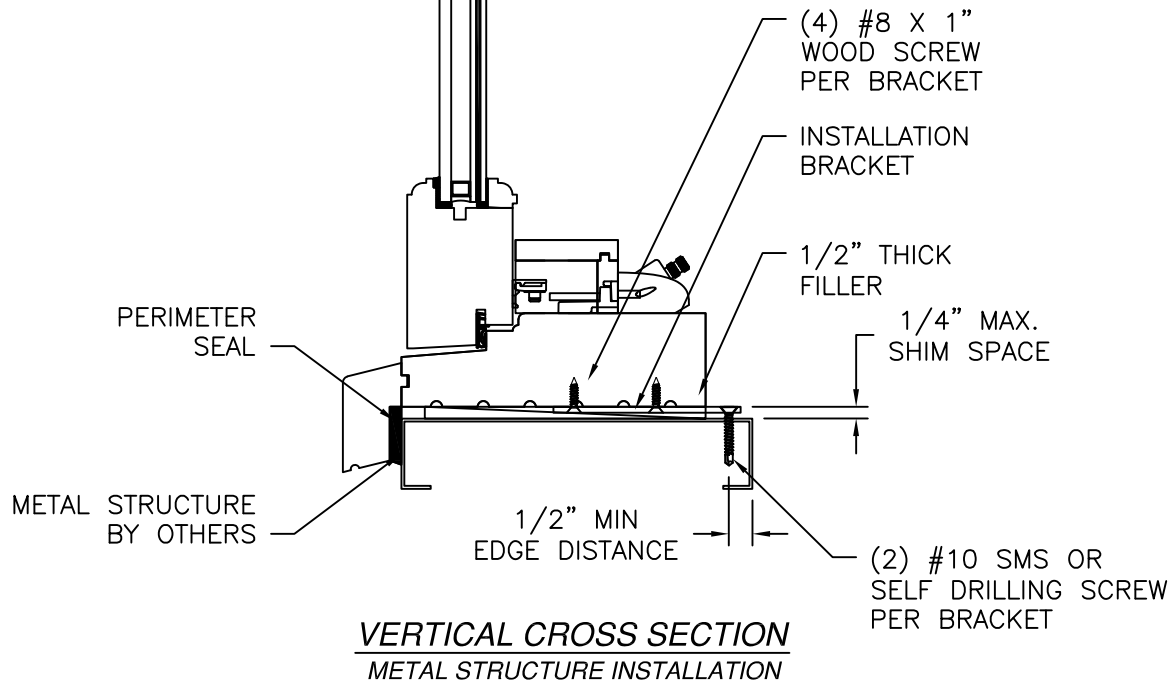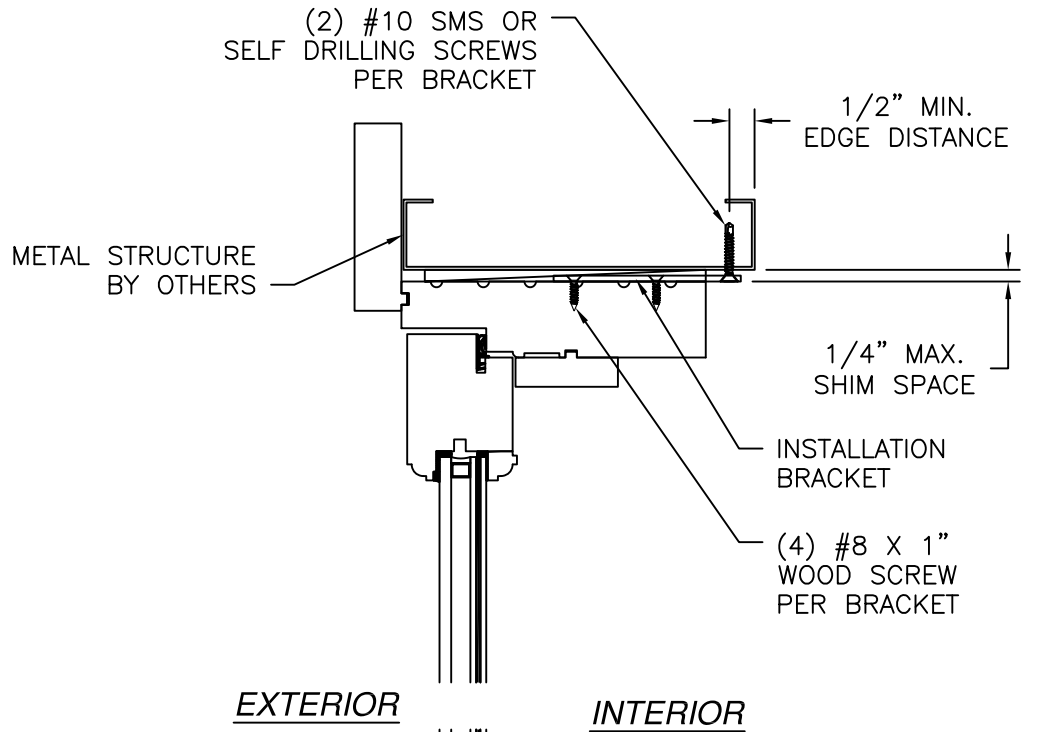

JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION

- NOTES:
- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 07/20/2026

REILLY WINDOWS & DOORS
901 BURMAN BLVD.
CALVERTON, NY 11933

C01 WOOD CASEMENT WINDOW
LARGE AND SMALL MISSILE IMPACT – HVHZ
INSTALLATION DETAILS W/CLIP

DRAWN:
R.L.

DWG NO.
08-00285


REV
D

SCALE
NTS

DATE
10/17/07




SHEET
8 OF 13

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

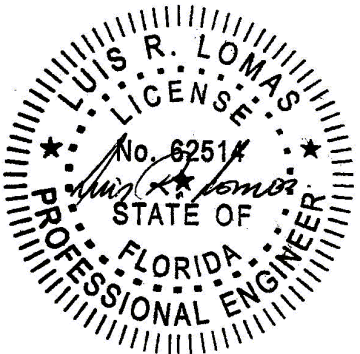

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
D	ADD CLIP INSTALLATION	11/21/18	R.L.

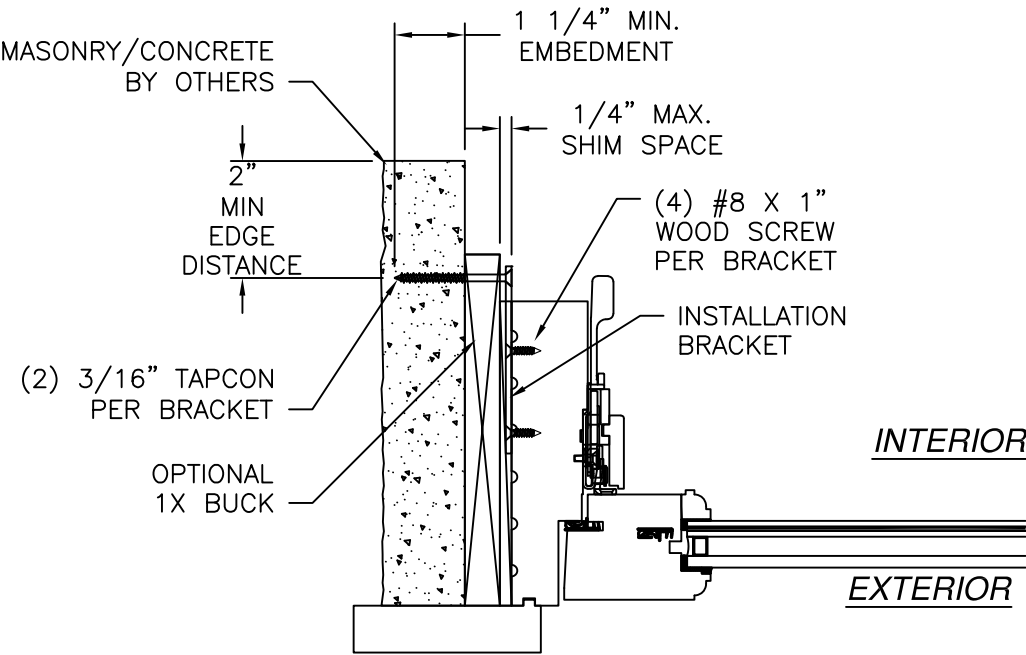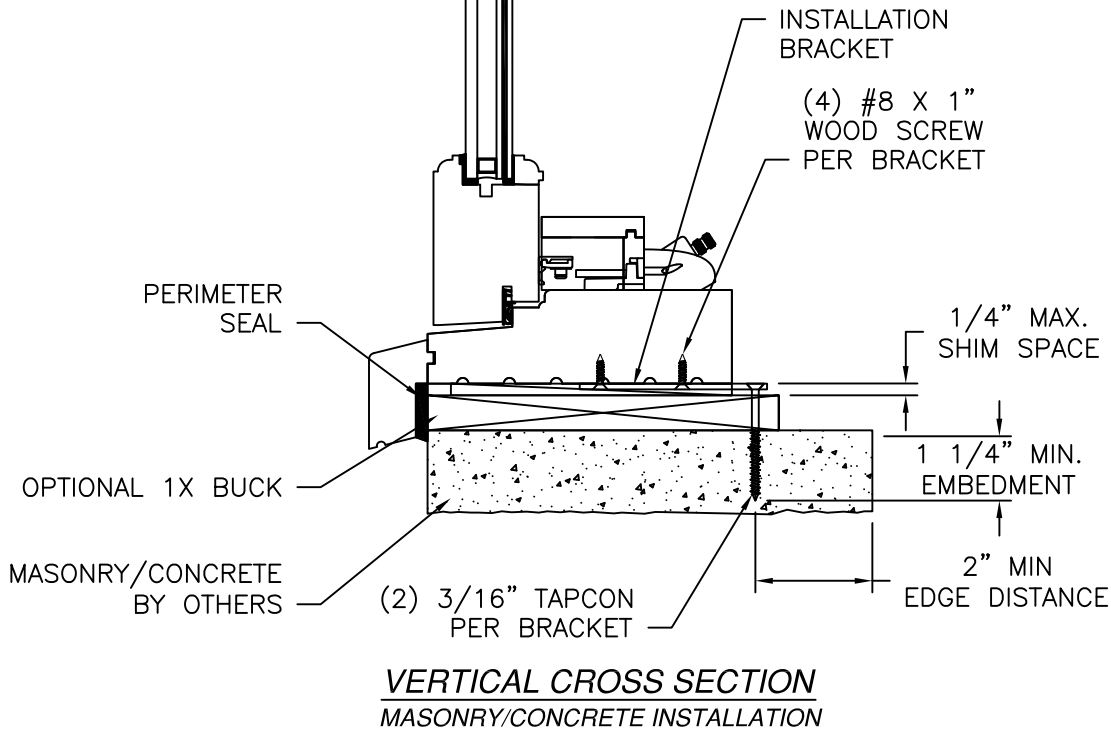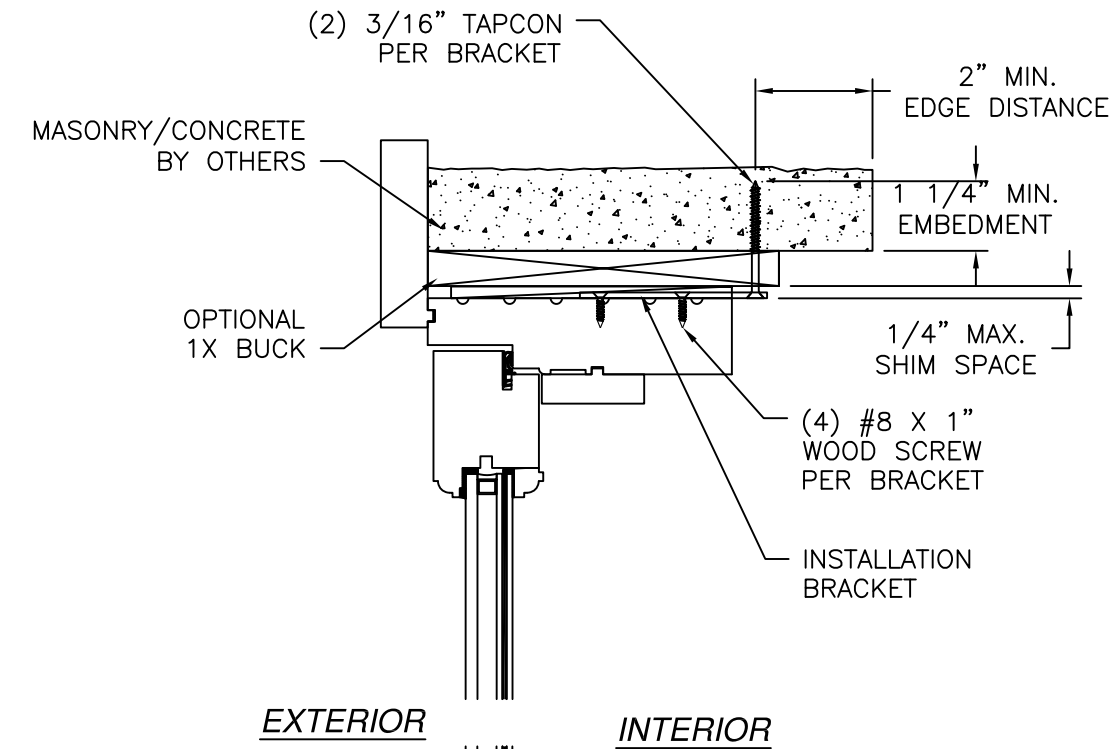

JAMB INSTALLATION DETAIL
MASONRY/CONCRETE INSTALLATION

- NOTES:
- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 07/20/2026

REILLY WINDOWS & DOORS
901 BURMAN BLVD.
CALVERTON, NY 11933

C01 WOOD CASEMENT WINDOW
LARGE AND SMALL MISSILE IMPACT – HVHZ
INSTALLATION DETAILS W/CLIP

DRAWN:
R.L.

DWG NO.
08-00285


REV
D

SCALE
NTS

DATE
10/17/07



SHEET
9 OF 13

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

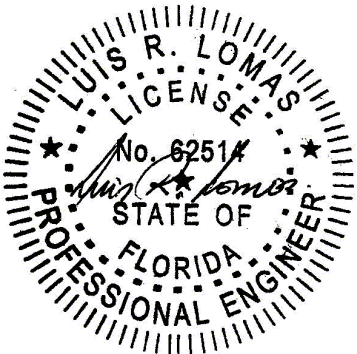


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
D	ADD CLIP INSTALLATION	11/21/18	R.L.

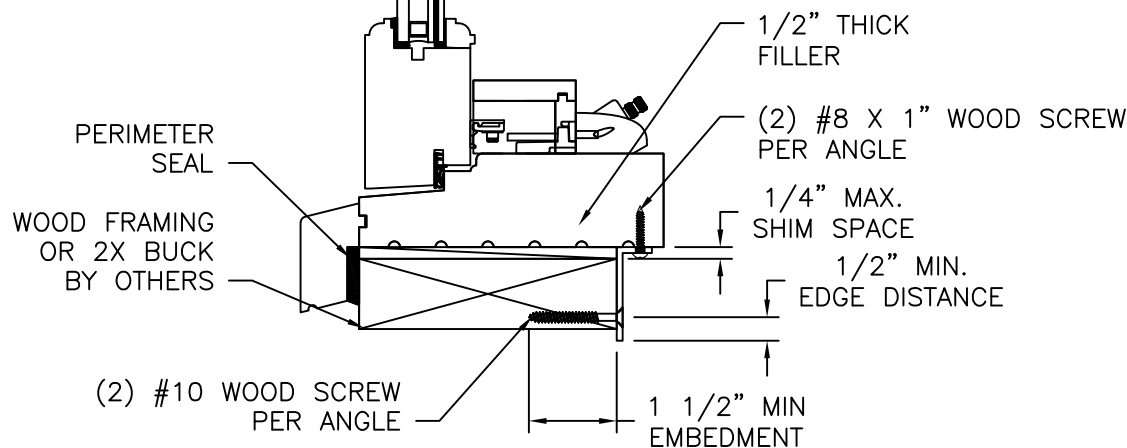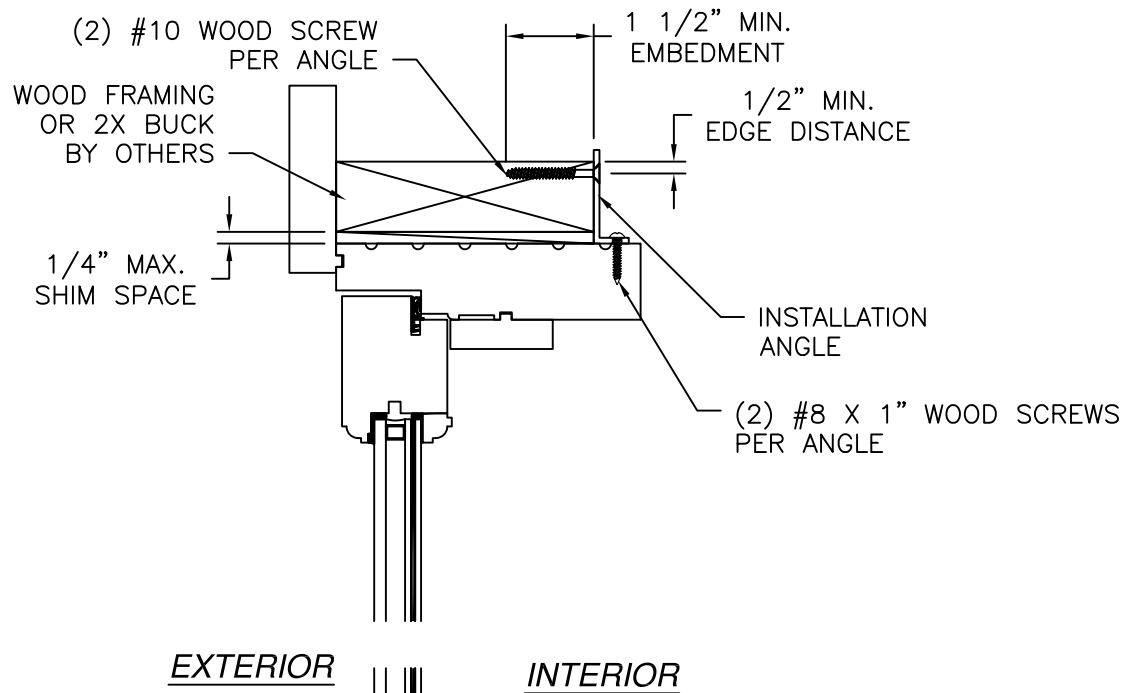

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

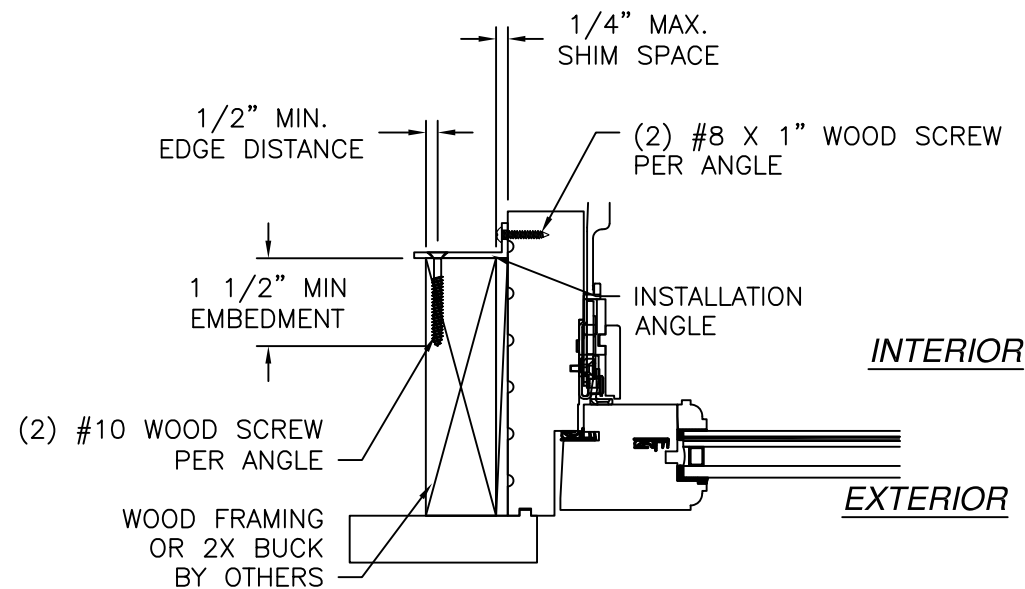


JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

- NOTES:
- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


SIGNED: 07/20/2026

REILLY WINDOWS & DOORS 901 BURMAN BLVD. CALVERTON, NY 11933		
C01 WOOD CASEMENT WINDOW LARGE AND SMALL MISSILE IMPACT – HVHZ INSTALLATION DETAILS W/ANGLE		
DRAWN: R.L.	DWG NO. 08-00285	REV D
SCALE NTS	DATE 10/17/07	SHEET 10 OF 13
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

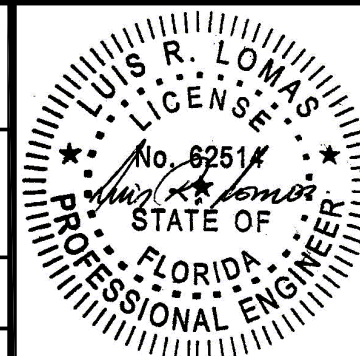


Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
D	ADD CLIP INSTALLATION	11/21/18	R.L.

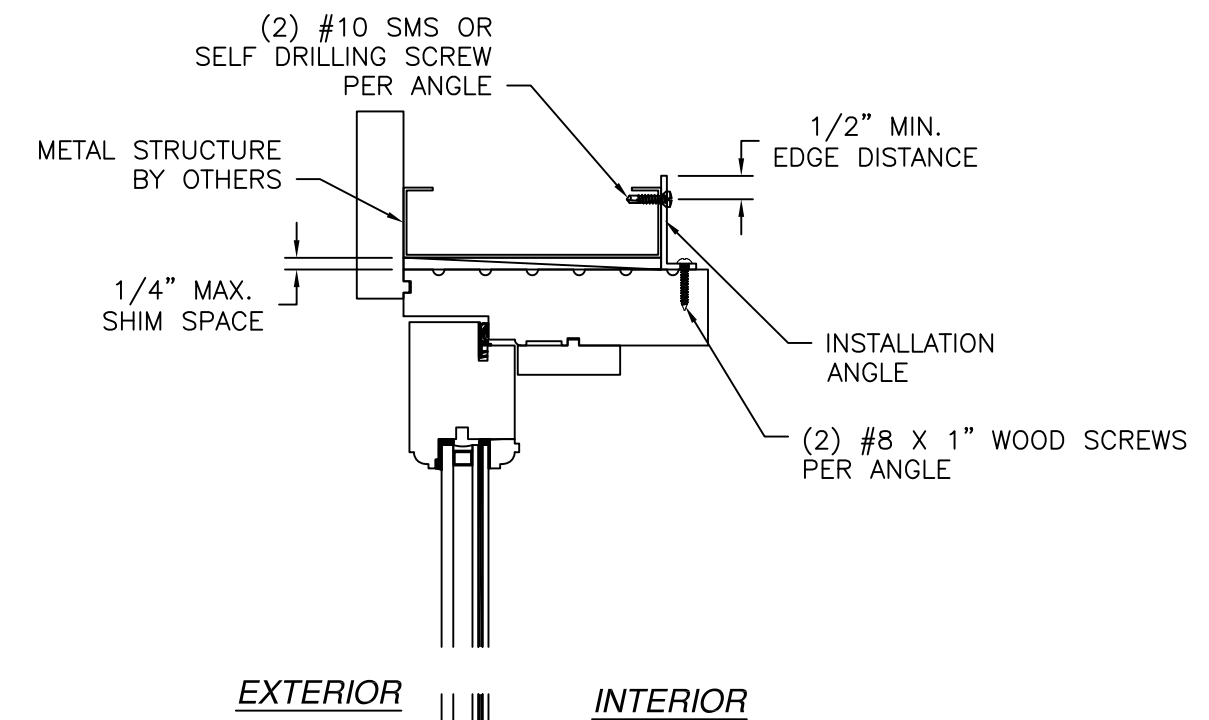

EXTERIOR INTERIOR

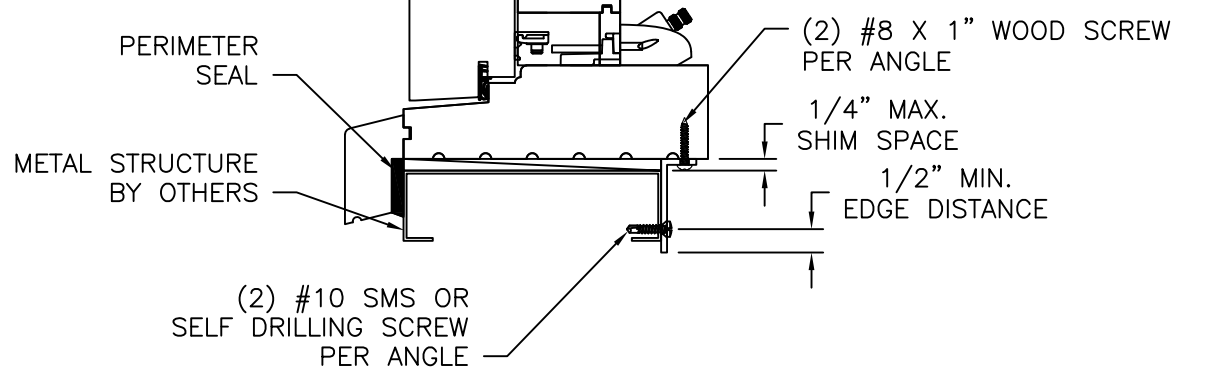

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

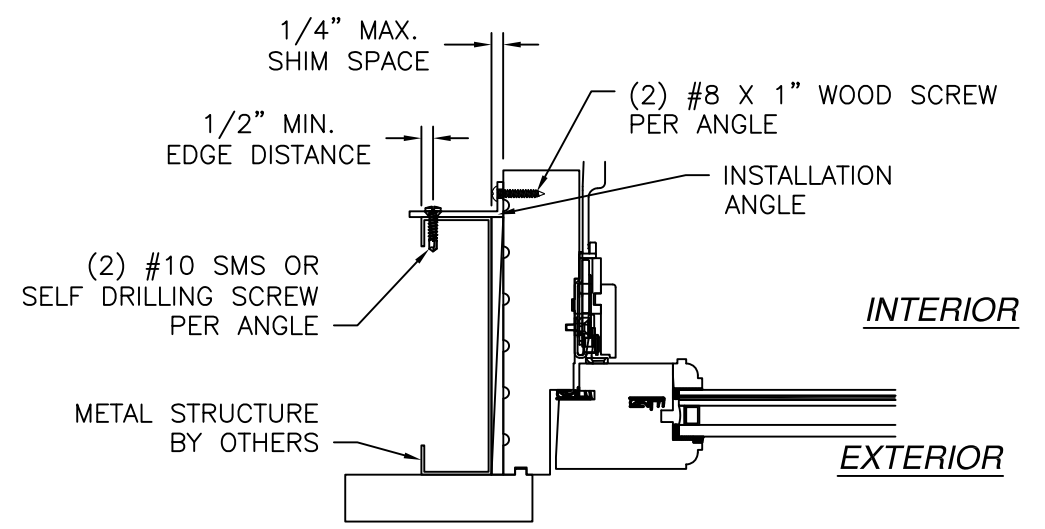

JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION


- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 07/20/2026


REILLY WINDOWS & DOORS 901 BURMAN BLVD. CALVERTON, NY 11933		
C01 WOOD CASEMENT WINDOW LARGE AND SMALL MISSILE IMPACT – HVHZ INSTALLATION DETAILS W/ANGLE		
DRAWN: R.L.	DWG NO. 08-00285	REV D
SCALE NTS	DATE 10/17/07	SHEET 11 OF 13
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

Luis R. Lomas P.E.
 FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
D	ADD CLIP INSTALLATION	11/21/18	R.L.

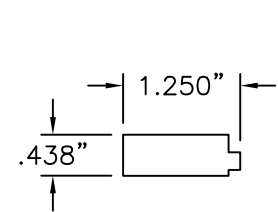


① BOX COVER
MAHOGANY

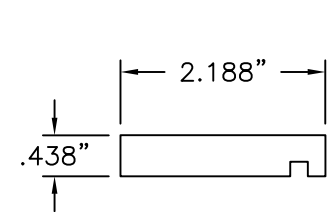


② BOX COVER
MAHOGANY

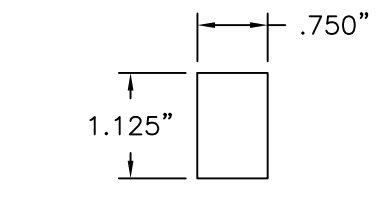


③ BOX COVER SUPPORT
MAHOGANY

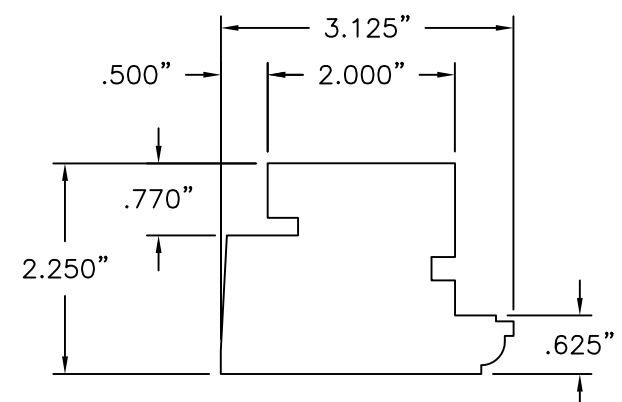


④ HEAD STILE
MAHOGANY

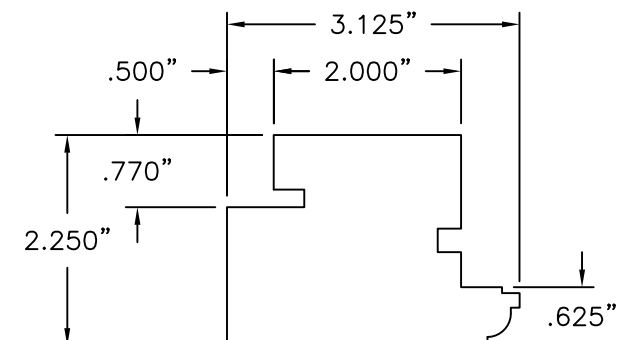


⑤ HEAD RAIL/STILE
MAHOGANY

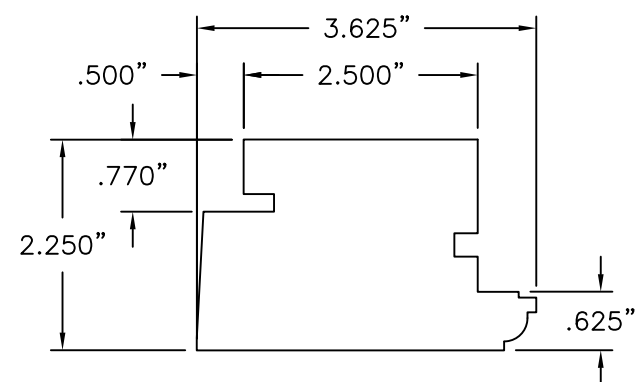


⑥ BOTTOM RAIL
MAHOGANY

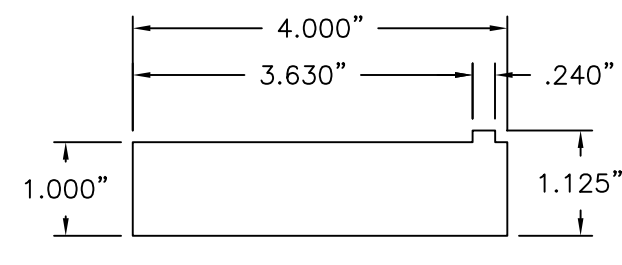


⑦ CASING
MAHOGANY

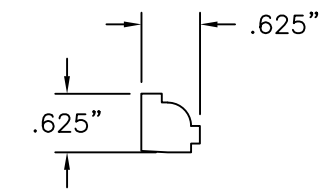


⑧ GLASS STOP
MAHOGANY

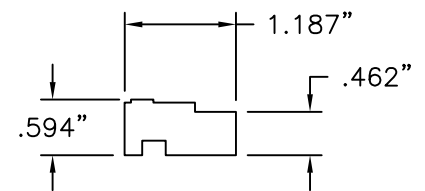


⑨ JAMB STOP
MAHOGANY

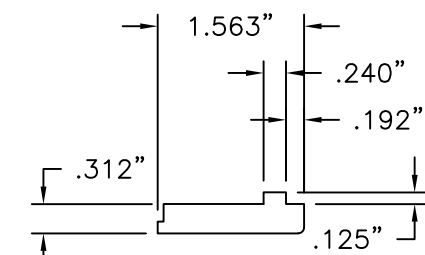


⑩ JAMB STOP
MAHOGANY

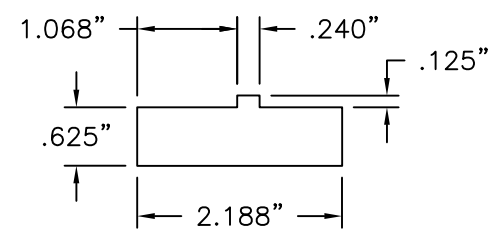


⑪ JAMB STOP
MAHOGANY

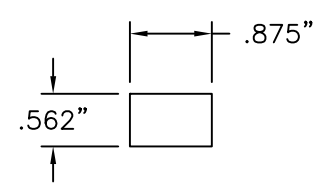


⑫ JAMB STOP BLOCK
MAHOGANY

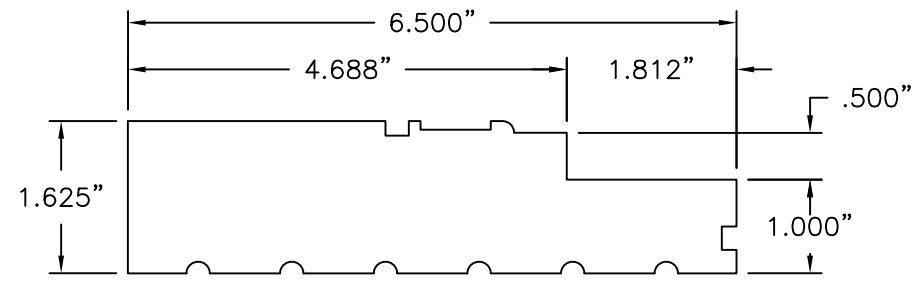


⑬ JAMB HEAD
MAHOGANY

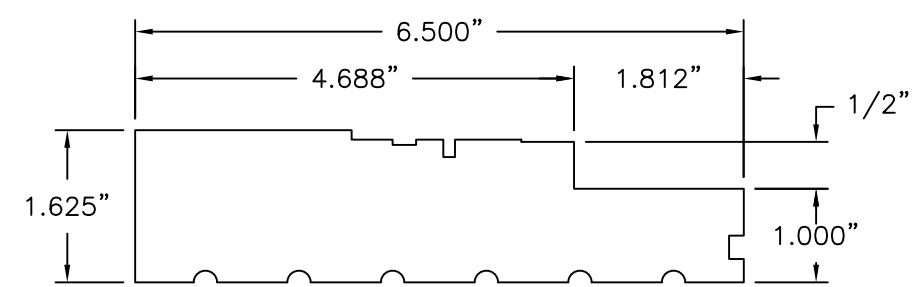

⑭ JAMB LEG
MAHOGANY

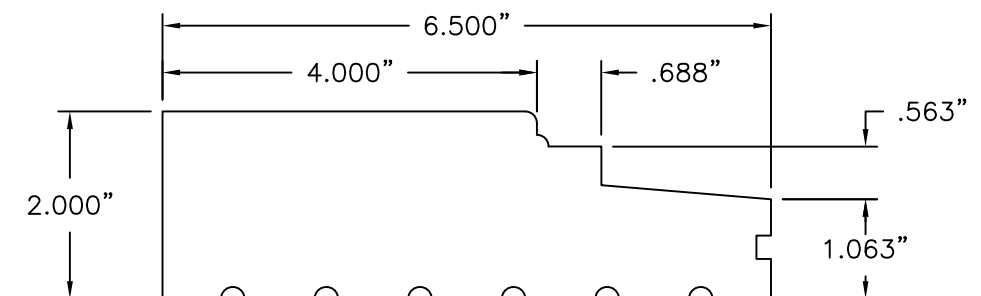

⑮ SILL
MAHOGANY

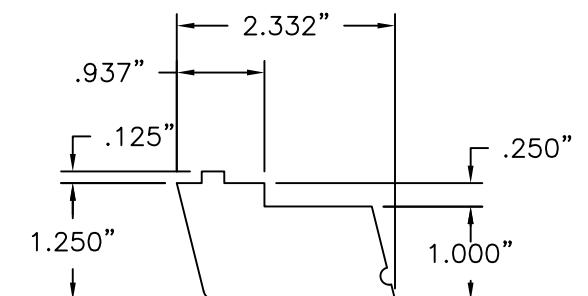

⑯ SILL NOSING
MAHOGANY

SIGNED: 07/20/2026


REILLY WINDOWS & DOORS

901 BURMAN BLVD.
CALVERTON, NY 11933

C01 WOOD CASEMENT WINDOW
LARGE AND SMALL MISSILE IMPACT - HVHZ
COMPONENTS


DRAWN: R.L.	DWG NO. 08-00285	REV D
SCALE NTS	DATE 10/17/07	SHEET 12 OF 13

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@rlomaspe.com

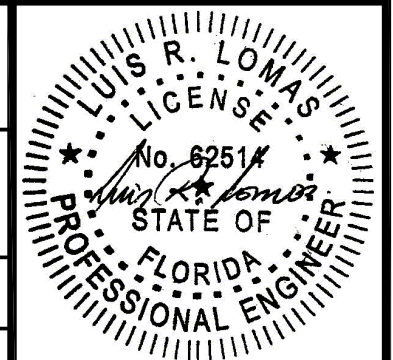

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
D	ADD CLIP INSTALLATION	11/21/18	R.L.

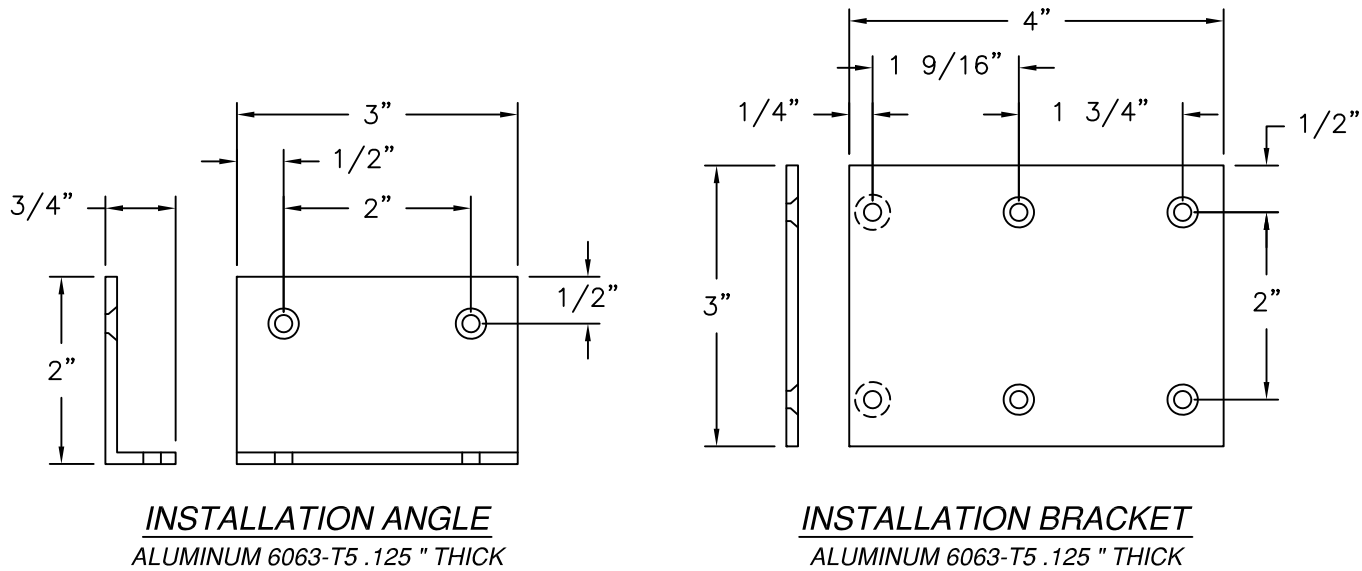

19 MOBILE LOCK
BAR

SIGNED: 07/20/2026

REILLY WINDOWS & DOORS 901 BURMAN BLVD. CALVERTON, NY 11933		
C01 WOOD CASEMENT WINDOW LARGE AND SMALL MISSILE IMPACT – HVHZ COMPONENTS		
DRAWN: R.L.	DWG NO. 08-00285	REV D
SCALE NTS	DATE 10/17/07	SHEET 12 OF 13
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

Luis R. Lomas P.E.
FL No.: 62514