



American Test Lab, Inc.
1656 Calvert Road, Brevard, N. C. 28712
Phone (828) 884-3700 Fax (828) 884-3710
Web www.atlnc.com E-Mail atli@citcom.net

ATLNC # 1013.01-14

Report Date: 11/25/14

Dade Certification # 13-0122.01
FBC Organizational # TST 1555
IAS Certification # TL-423

Test Dates: 10/13/14

Test Requested By:

Frank Krech
Madison Industries Inc.
Conyers, GA,
Telephone 770-483-4401 Fax 770-785-7967

Test Standard:

ASTM E 1592-05

Test Conditions: 70-75 degrees F

Specimens A, B, C, 10' purlin spacing

Description of product tested:

Specimen A, B, C 20 gauge (.036") Metal Roof Panels over W8 x 13 purlins as shown in Madison Industries Drawing A-1.2

Configuration: Specimens Mounted in steel test chamber
Specimens A, B, C (2 spans, 4 panels wide)

Description of Units:

Panel Construction- .036" steel roof panels 16" wide x 324" long with 3" interlocking standing seams per Drawing A-1.2

Purlin Construction- W8 x 13 I Beams

Purlin Spacing- 2 spans 120" OC with 42" overhang as shown in drawing.


Screws and Method of Attachment-

Purlins- Panels were attached to the purlins with a 1/4" stainless steel bolt and a Deck Clip at each deck rib, alternating the position of the bolt and Deck Clip as shown in Drawing A-1.2

Panel Standing Seams- Overlaps were 16" OC and panels were joined with (2) # 14 x 3/4" Type AB fasteners at equal spacing between purlins per Drawing A-1.2

Purlin Attachment- Each purlin was attached to the chamber.

Indicator Locations

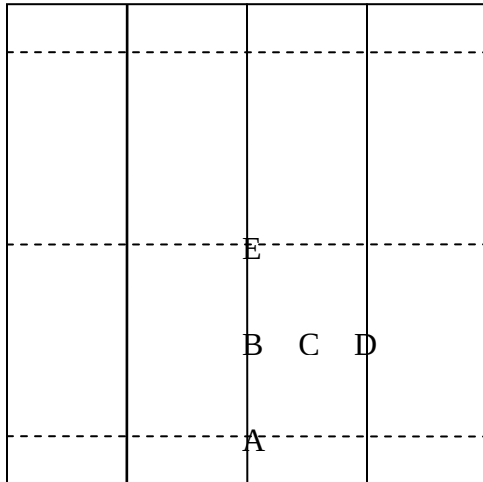

STATIC AIR PRESSURE

ASTM E1592

Specimen A

Deflections in inches

Deflection Locations


Pressure Increments psf Positive	Time (sec)	End Purlin Rib A	Mid- Span B	Mid-Span C	Mid-span D	Span End Purlin Rib E	Total panel deflection
30	60	.03	.13	.41	.13	.02	.41
40	60	.05	.19	.54	.18	.02	.54
60	60	.07	.33	.76	.28	.05	.76
80	60	.10	.46	.98	.40	.08	.98
90	60	.11	.53	1.09	.47	.10	1.09
100	60	.13	.61	1.21	.55	.13	1.21
110	60	.14	.70	1.36	.65	.17	1.36
120	60	.16	.79	1.49	.75	.21	1.49
130	60	.18	.92	1.62	.82	.25	1.62

Perm Set in inches

Deflection Locations

Pressure Increments psf Positive	Time (sec)	End Purlin Rib A	Mid- Span B	Mid-Span C	Mid-span D	Span End Purlin Rib E	Total panel perm set
30	60	0	0	0	0	0	0
40	60	.01	.02	.02	0	0	.02
60	60	.02	.05	.04	.02	.01	.04
80	60	.03	.08	.08	.05	.02	.08
90	60	.04	.11	.11	.07	.03	.11
100	60	.05	.13	.15	.10	.05	.15
110	60	.05	.16	.20	.14	.08	.20
120	60	.07	.21	.26	.19	.11	.26
130	60	.08	.29	.34	.24	.14	.34

Positive Side Graph

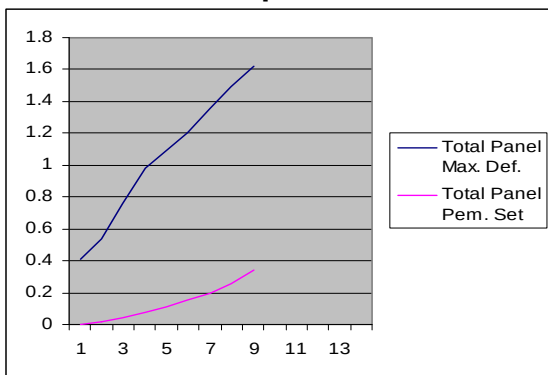

Note: Specimen failed at 140 psf 5 seconds into test. Specimen failed at center purlin. Deck clips bent and bolt pulled through right center rib.

Specimen B

Deflections in inches


Deflection Locations

Pressure Increments psf Positive	Time (sec)	End Purlin Rib A	Mid- Span B	Mid-Span C	Mid-span D	Span End Purlin Rib E	Total panel deflection
30	60	.03	.14	.41	.13	.02	.41
40	60	.04	.19	.53	.18	.03	.53
60	60	.06	.30	.76	.29	.05	.76
80	60	.08	.42	.97	.40	.08	.97
90	60	.09	.49	1.08	.46	.10	1.08
100	60	.10	.56	1.19	.52	.12	1.19
110	60	.11	.65	1.29	.59	.15	1.29
120	60	.12	.74	1.41	.67	.18	1.41
130	60	.13	.82	1.52	.75	.20	1.52

Perm Set in inches

Deflection Locations							
Pressure Increments psf Positive	Time (sec)	End Purlin Rib A	Mid- Span B	Mid-Span C	Mid-span D	Span End Purlin Rib E	Total panel perm set
30	60	.01	.01	.01	.01	0	.01
40	60	.01	.02	.02	.01	0	.02
60	60	.01	.04	.04	.02	.01	.04
80	60	.02	.06	.07	.05	.02	.07
90	60	.03	.08	.10	.07	.04	.10
100	60	.03	.11	.13	.09	.05	.13
110	60	.03	.14	.16	.12	.07	.16
120	60	.04	.18	.21	.16	.10	.21
130	60	.04	.21	.25	.19	.12	.25

Positive Side Graph

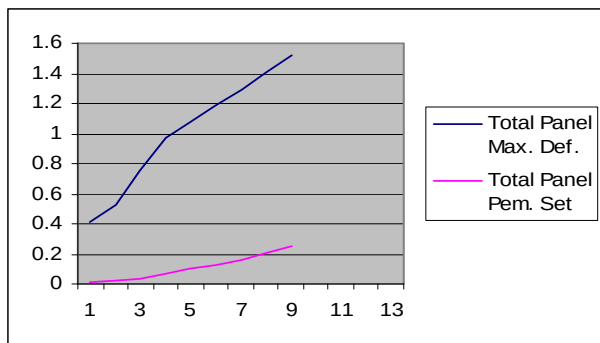

Note: Specimen failed at 140 psf 35 seconds into test. Specimen failed at center purlin. Deck Clips bent and bolt pulled through right center rib.

Specimen C

Deflections in inches

Deflection Locations


Pressure Increments psf Positive	Time (sec)	End Purlin Rib A	Mid- Span B	Mid-Span C	Mid-span D	Span End Purlin Rib E	Total panel deflection
30	60	.02	.13	.40	.13	.01	.40
40	60	.03	.19	.55	.18	.02	.55
60	60	.05	.29	.74	.26	.04	.74
80	60	.07	.43	.95	.36	.06	.95
90	60	.08	.50	1.06	.42	.07	1.06
100	60	.09	.58	1.17	.48	.09	1.17
110	60	.10	.68	1.27	.55	.10	1.27
120	60	.11	.76	1.38	.63	.12	1.38
130	60	.12	.87	1.54	.72	.14	1.54

Perm Set in inches

Deflection Locations

Pressure Increments psf Positive	Time (sec)	End Purlin Rib A	Mid- Span B	Mid-Span C	Mid-span D	Span End Purlin Rib E	Total panel perm set
30	60	0	.01	0	0	0	0
40	60	0	0	.01	.01	0	.01
60	60	.01	.03	.03	.02	.01	.03
80	60	.10	.07	.06	.07	.01	.06
90	60	.01	.09	.09	.05	.02	.09
100	60	.01	.12	.11	.07	.03	.11
110	60	.02	.16	.15	.12	.03	.15
120	60	.02	.18	.19	.13	.05	.19
130	60	.02	.24	.26	.17	.06	.26

Positive Side Graph

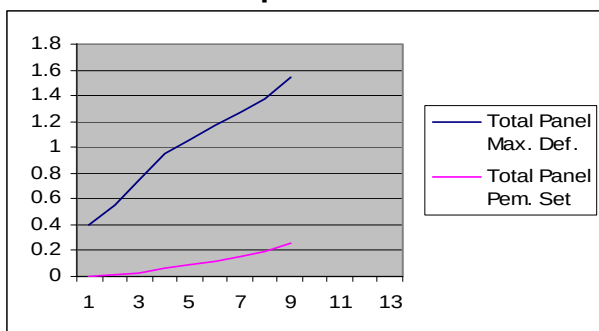

Note: Specimen failed at 135 psf. Specimen failed at center purlin, Deck Clips bent and bolt pulled through left center rib.

Tensile Test
ASTM E8

Test Results

Specimen	Dimensions (inches)	Area (sq. inches)	Peak Force (lbs)	Yield Stress (psi)	Ultimate Stress (psi)	Elongation (%)
A	.502 x .032	.016	1300	62,270	80,914	22
B	.502 x .032	.016	1302	63,409	81,057	22
C	.502 x .032	.016	1304	63,540	81,182	22

Note: 2 mil polyethylene film was used for the tests, it is the opinion of the undersigned that it had no influence on the results of the test.

Observers-


Keith Owen / ATL
Keith Owen Jr, Samuel Poplin / ATL
Larry Bauman / Madison Industries
David W. Johnson, P.E.

Keith Owen, Lab Director
American Test Lab, Inc.

Keith Owen
11/25/14

All Tests Witnessed and Certified by:

David Johnson P. E.
1656 Calvert Rd.
Brevard, NC 28712
Florida P.E. # 61915

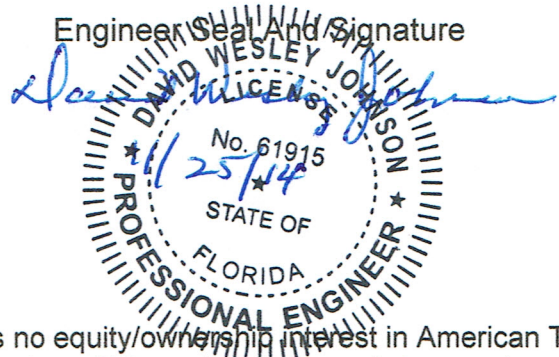

Certificate of Independence: The witnessing engineer has no equity/ownership interest in American Test Lab of North Carolina, Madison Industries or their parts vendors. Witnessing engineer is in complete compliance of Florida Statute 9B-72, Section 72.110.

Disclaimer

ATL and its staff have no equity/ownership interest in any product tested or installed. This test report was prepared by American Test Lab, North (ATL) for the exclusive use of the above named client; it does not constitute certification of this product. The results are for that particular specimen tested and does not imply the quality of similar or identical products manufactured or installed from specifications identical to the tested product. ATL is a testing lab and assumes that all information provided by the client is accurate and does not guarantee or warranty any product tested or installed. This report may not be reproduced except in full, and only under expressed permission from American Test Lab or Madison Industries. Reproduced reports in hard copy must be labeled "Copy".